



SUPERIOR
Hays,
Kansas

**DUAL
INDUCTION
LOG**

Company HERMAN L. LOEB, LLC.
Well PANNING # 19
Field PRITCHARD NORTH
County BARTON
State KANSAS

Company HERMAN L. LOEB, LLC
Well PANNING # 19
Field PRITCHARD NORTH
County BARTON State KANSAS

Location: API # : 15-009-25655-0000
SEC 19 TWP 20S RGE 13W
GROUND LEVEL Elevation 1885
Log Measured From KELLY BUSHING 9' A.G.L.
Drilling Measured From KELLY BUSHING
Elevation
K.B. 1894
D.F. 1892
G.L. 1885

Date	2/18/12		
Run Number	ONE		
Depth Driller	3600		
Depth Logger	3600		
Bottom Logged Interval	3598		
Top Log Interval	0		
Casing Driller	8 5/8" @ 792'		
Casing Logger	792'		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 5500 PPM	
Density / Viscosity	9.2/56		
pH / Fluid Loss	11.5/7.6		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.00 @ 50F		
Rmt @ Meas. Temp	0.75 @ 50F		
Rmc @ Meas. Temp	1.20 @ 50F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	0.45 @ 112F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	112F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	JEFF GRONIEWEG		
Witnessed By	JON CHRISTENSEN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments



THANK YOU FOR USING SUPERIOR WELL SERVICE HAYS, KANSAS (785) 628-6395
DIRECTIONS
GREAT BEND, KS - 5 MILES SOUTH ON HWY 281 TO RD 50
3 MILES WEST TO RD 20 - 1/2 MILE NORTH - EAST INTO



0	Gamma Ray (GAPI)	150
-100	SP (mV)	100


0	RLL3 (Ohm-m)	50
0	RILD (Ohm-m)	50

1000	CILD (mmho/m)	0
------	---------------	---


50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

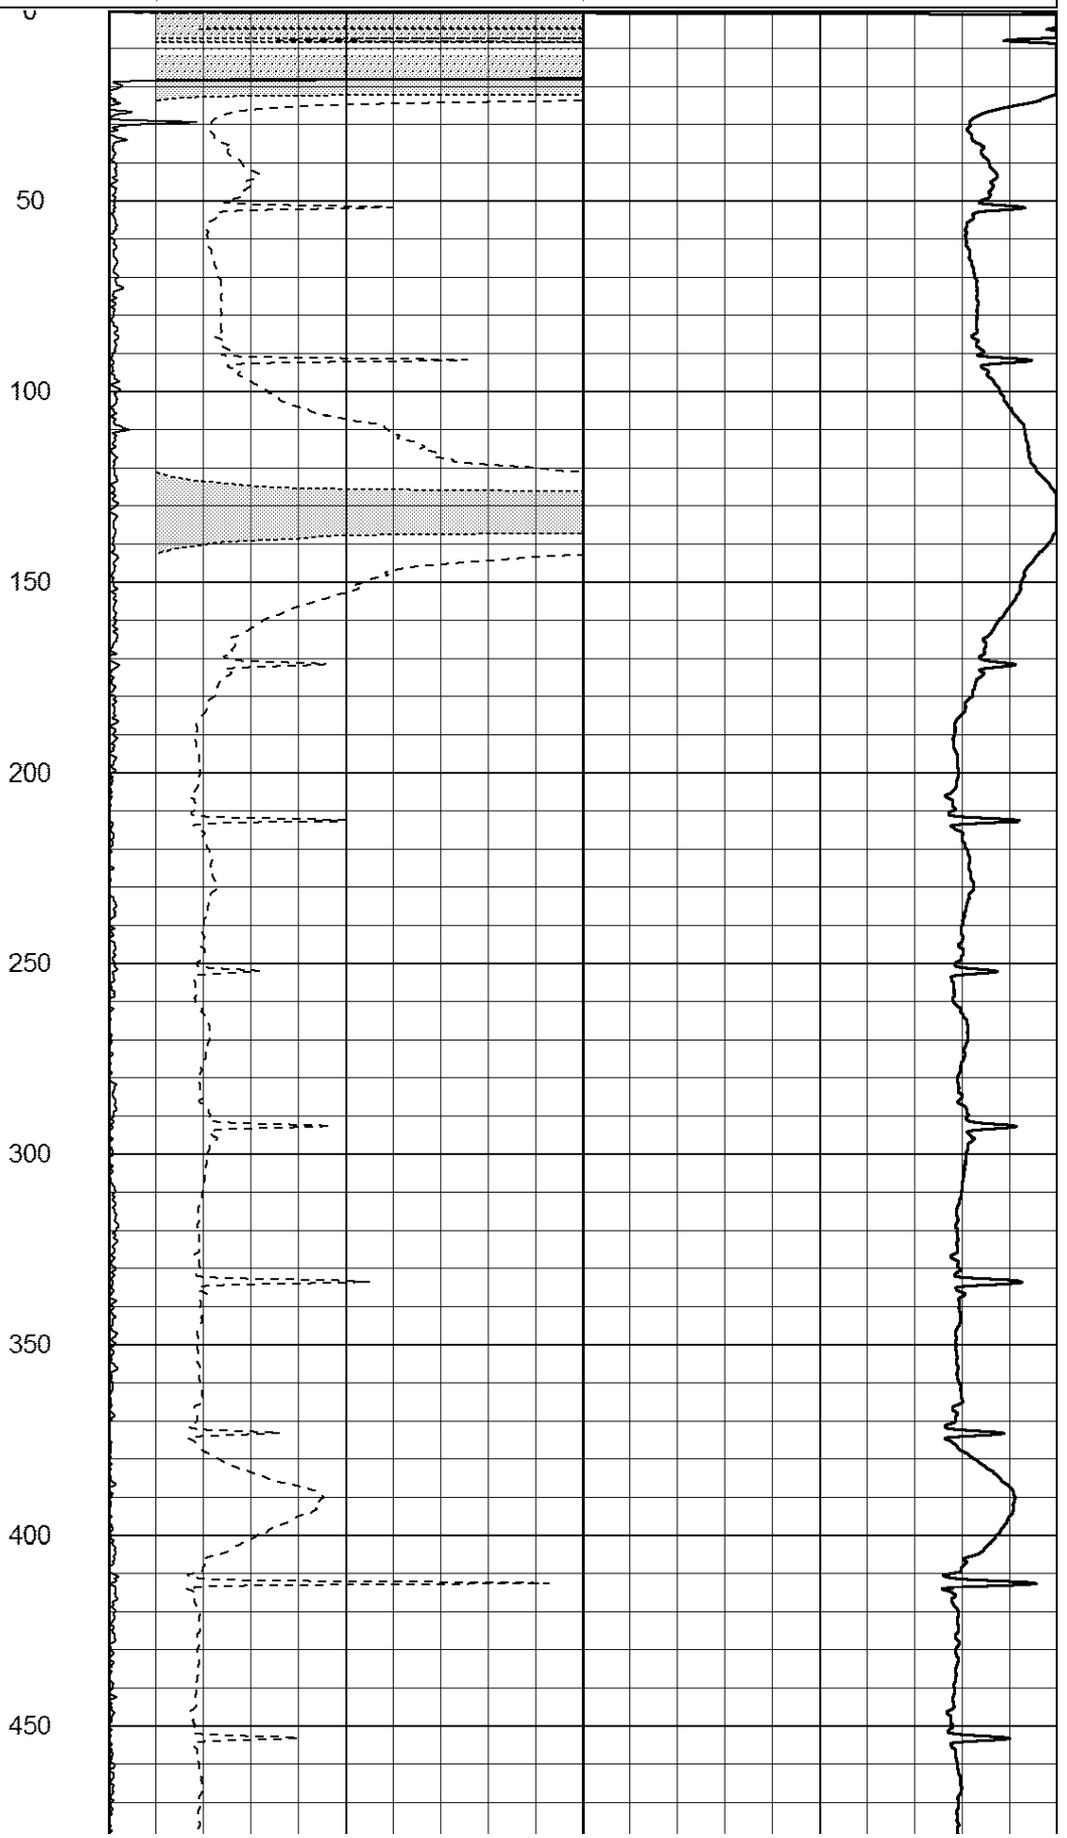
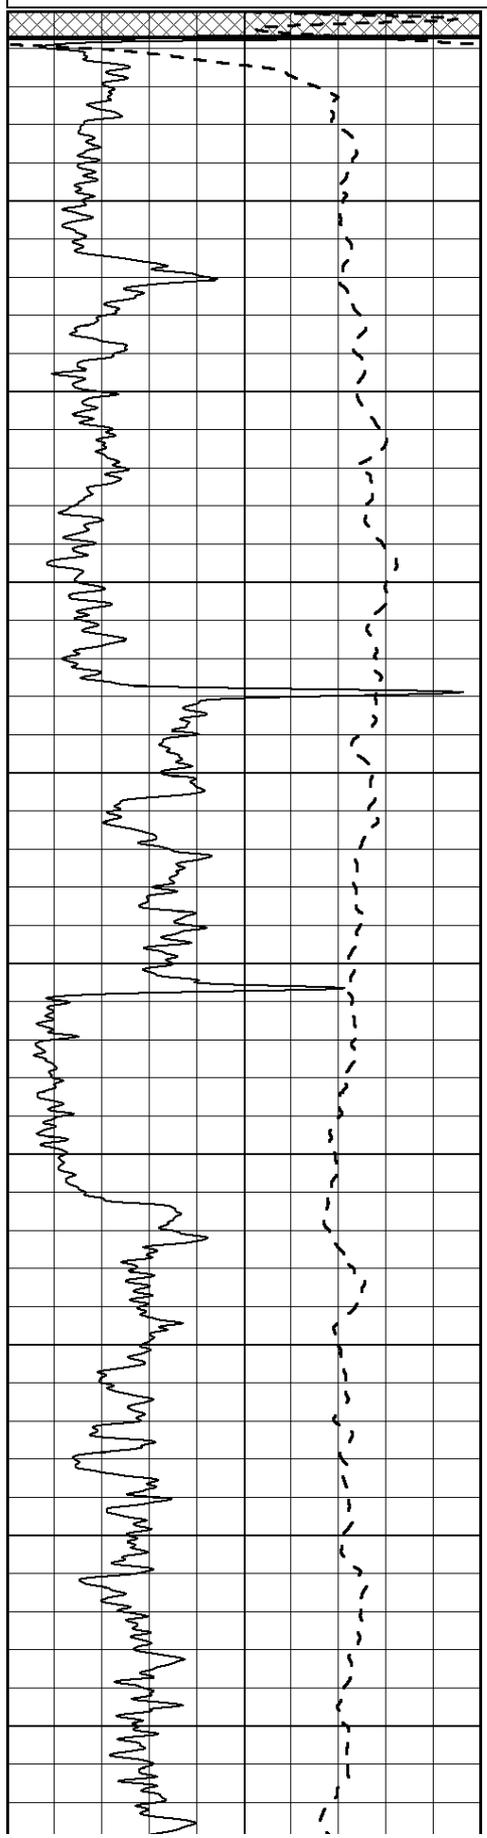


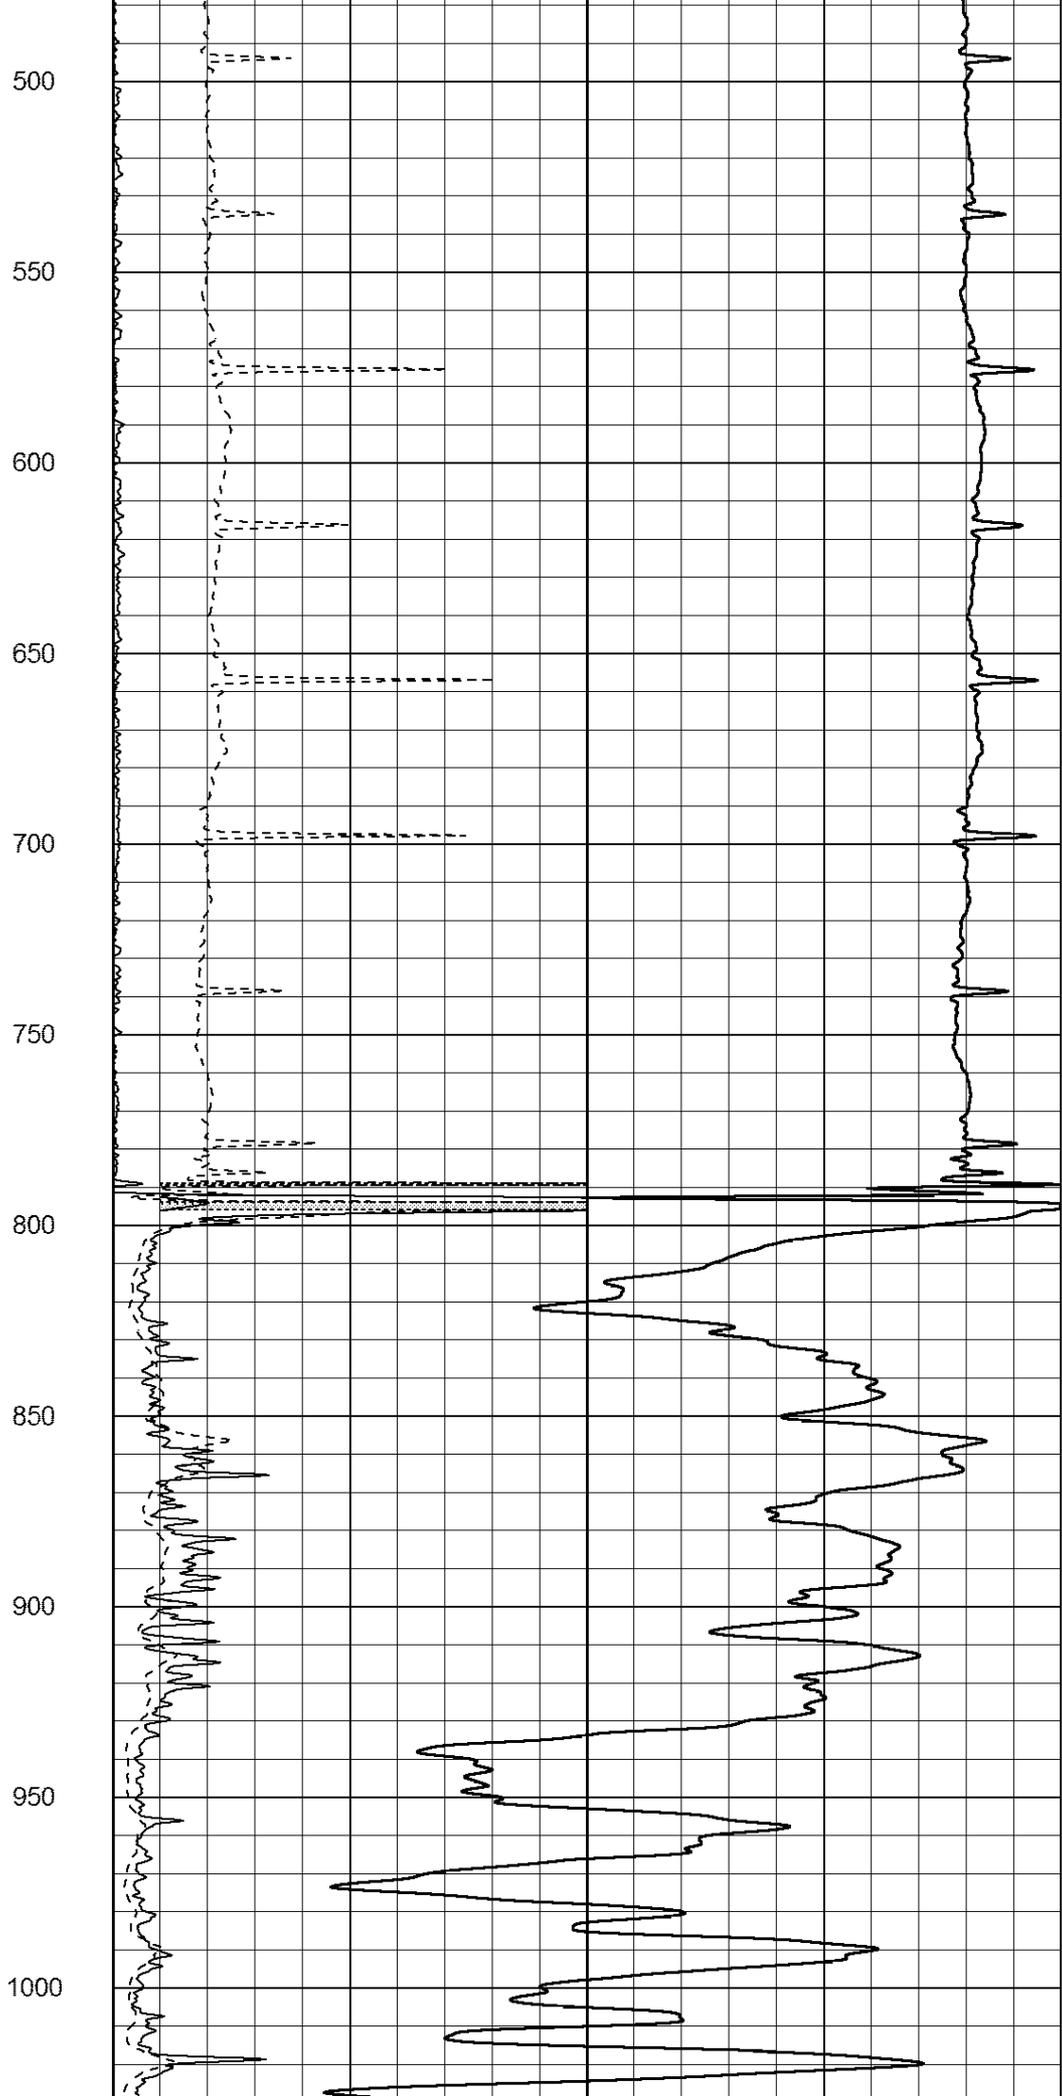
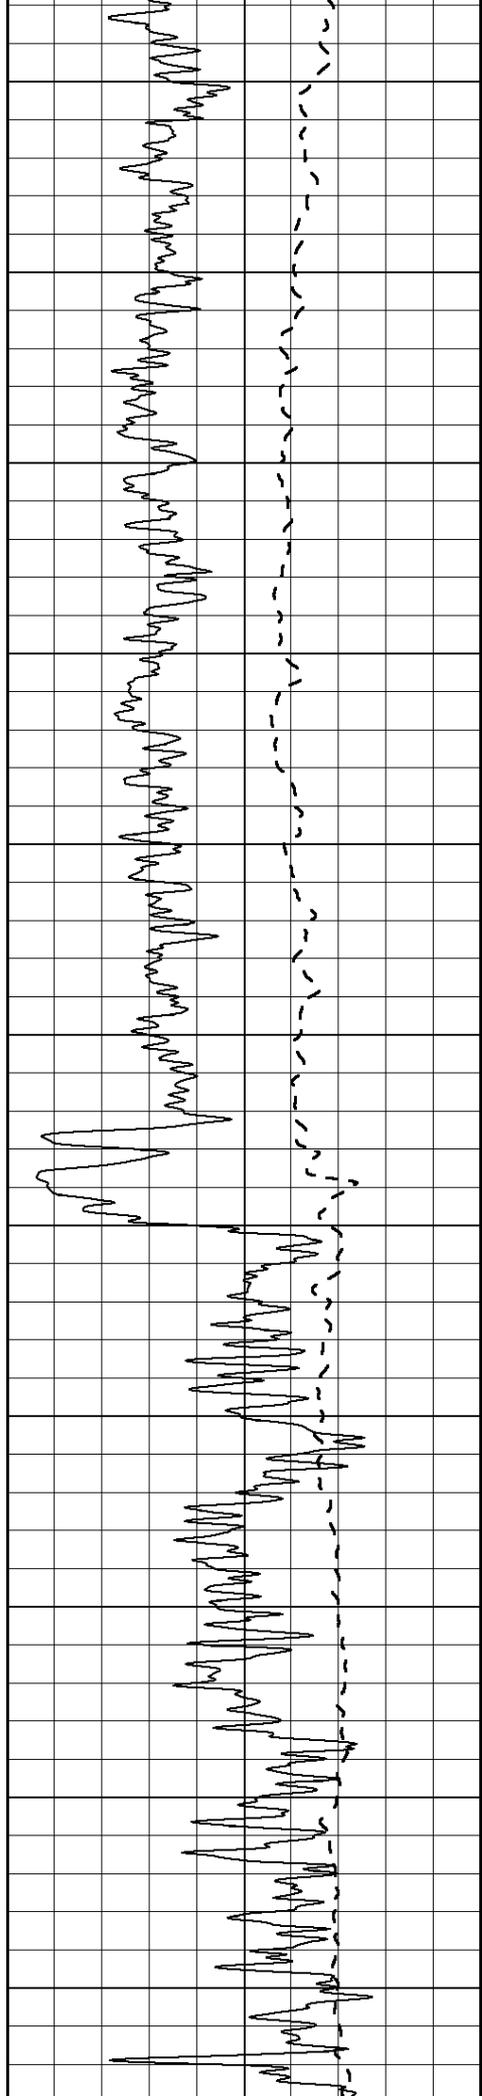


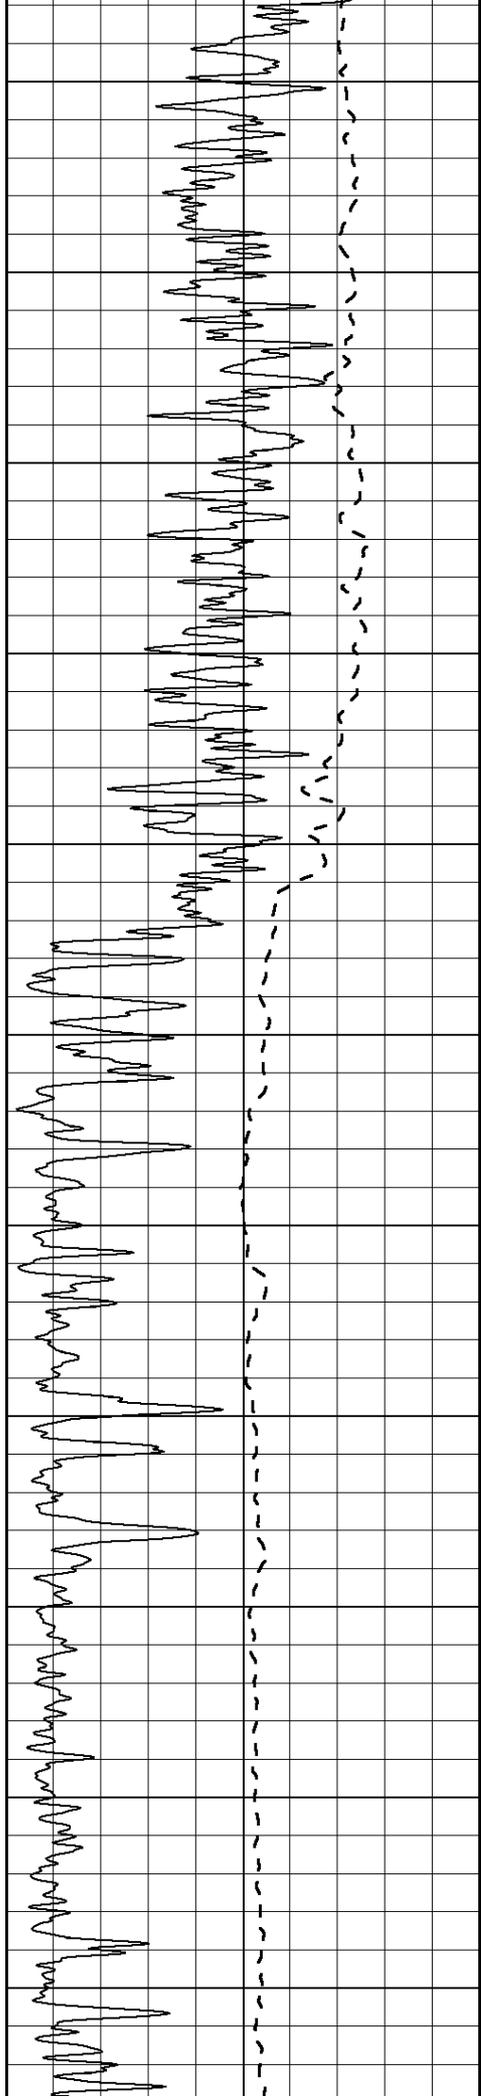


1050
1100
1150
1200
1250
1300
1350
1400
1450
1500
1550

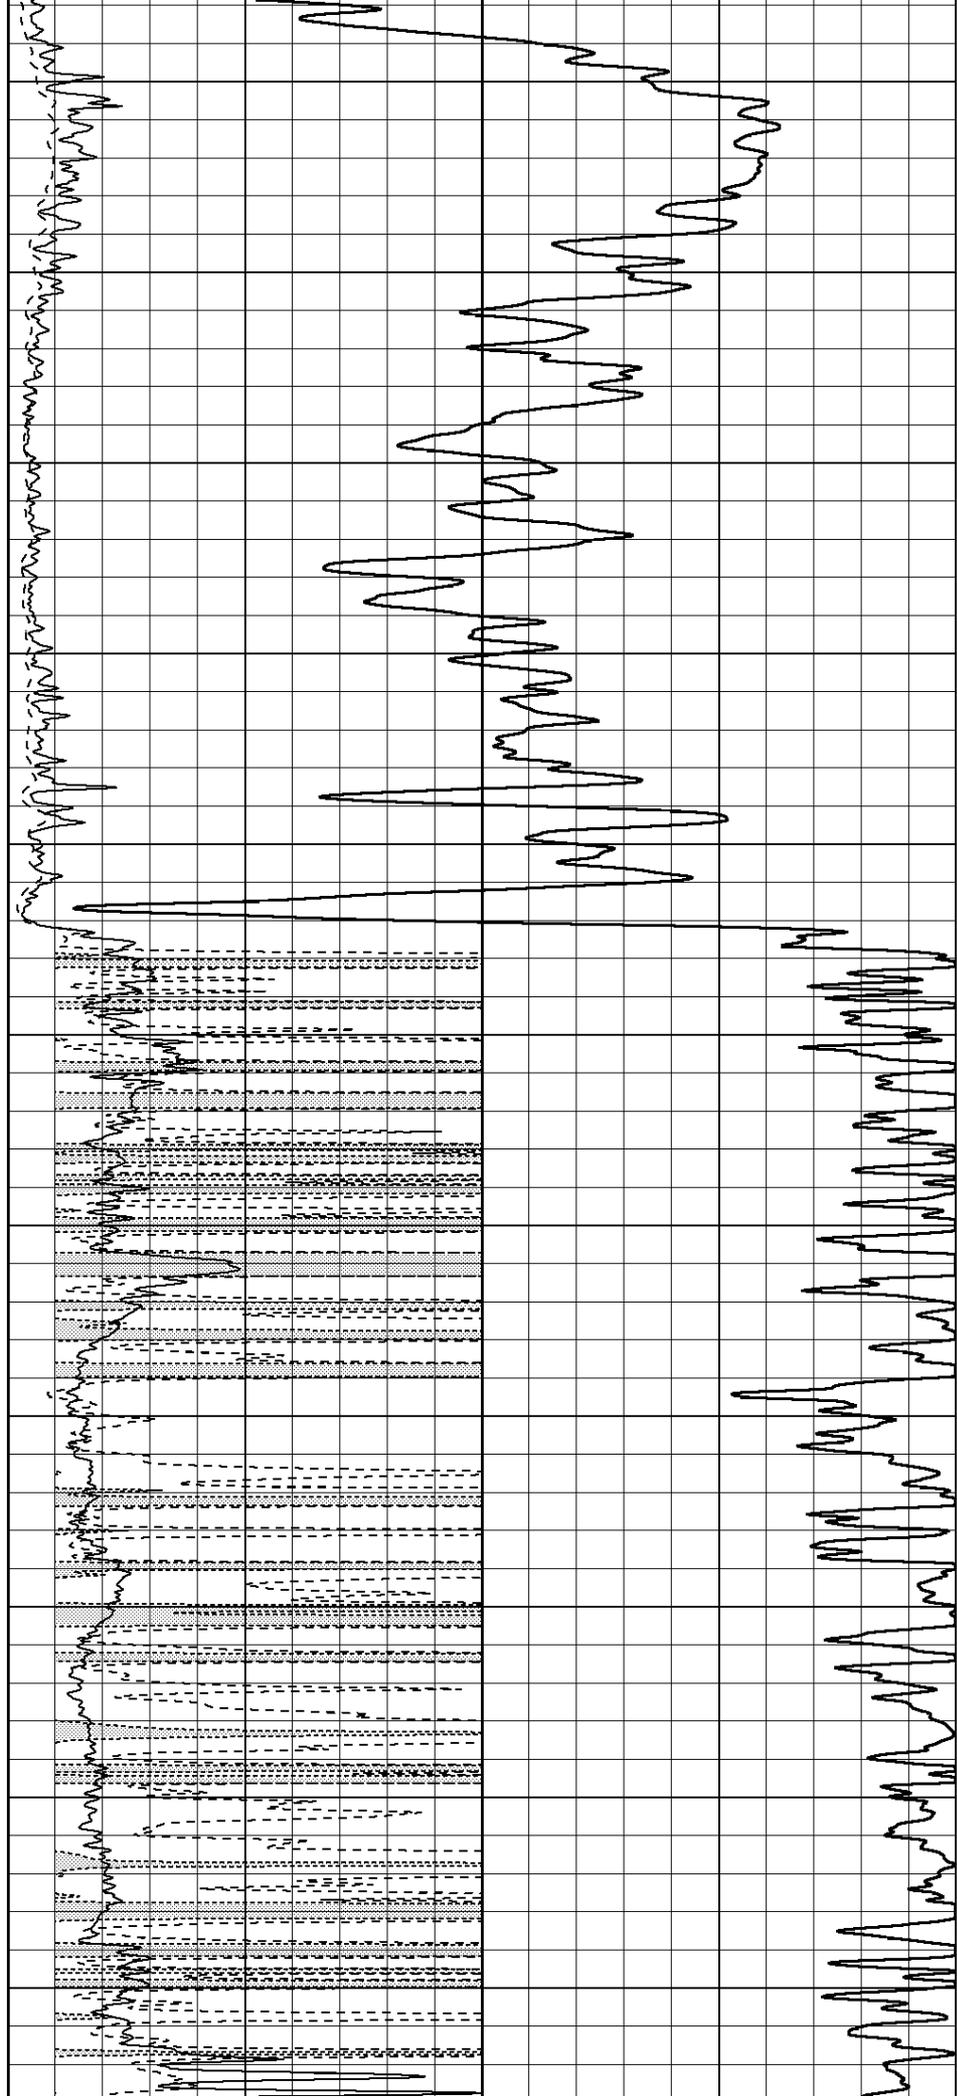

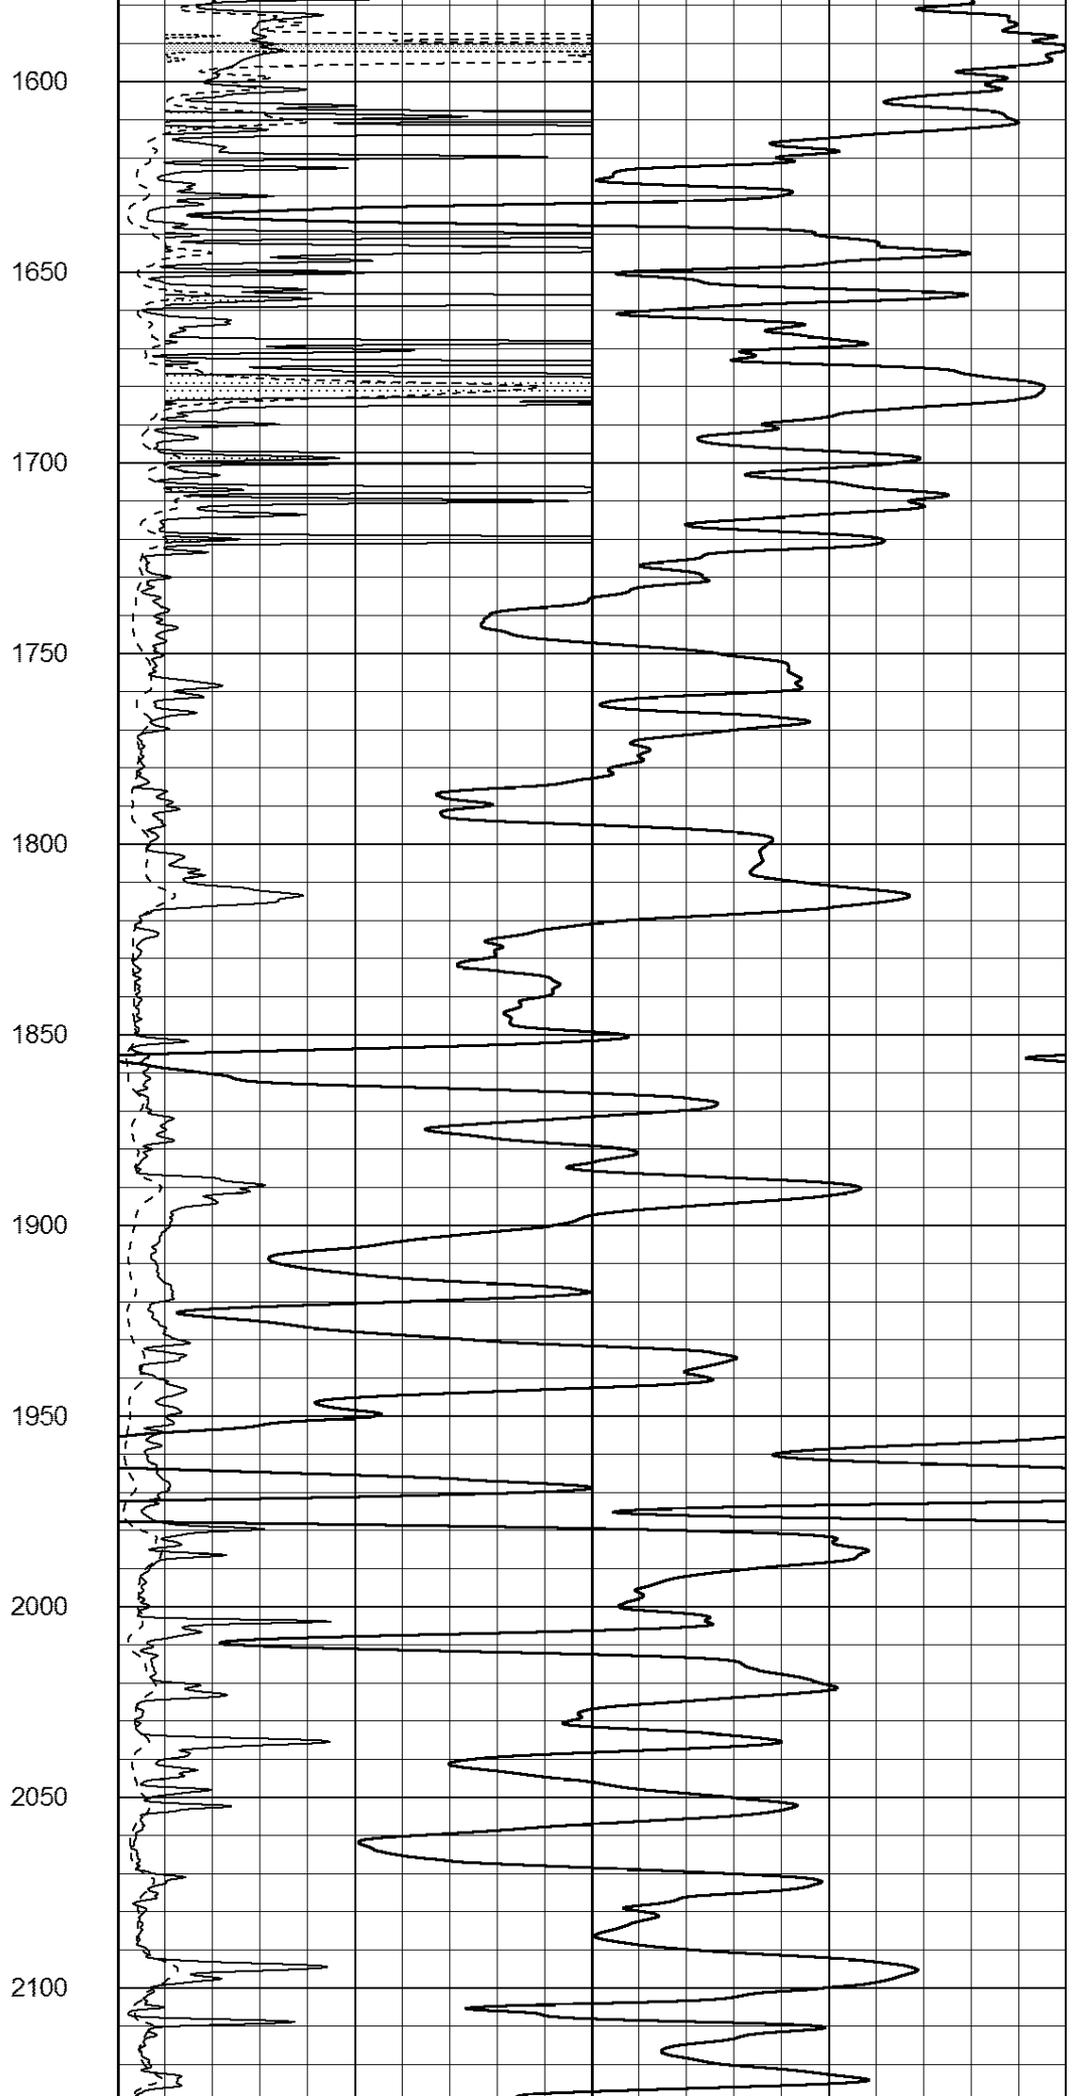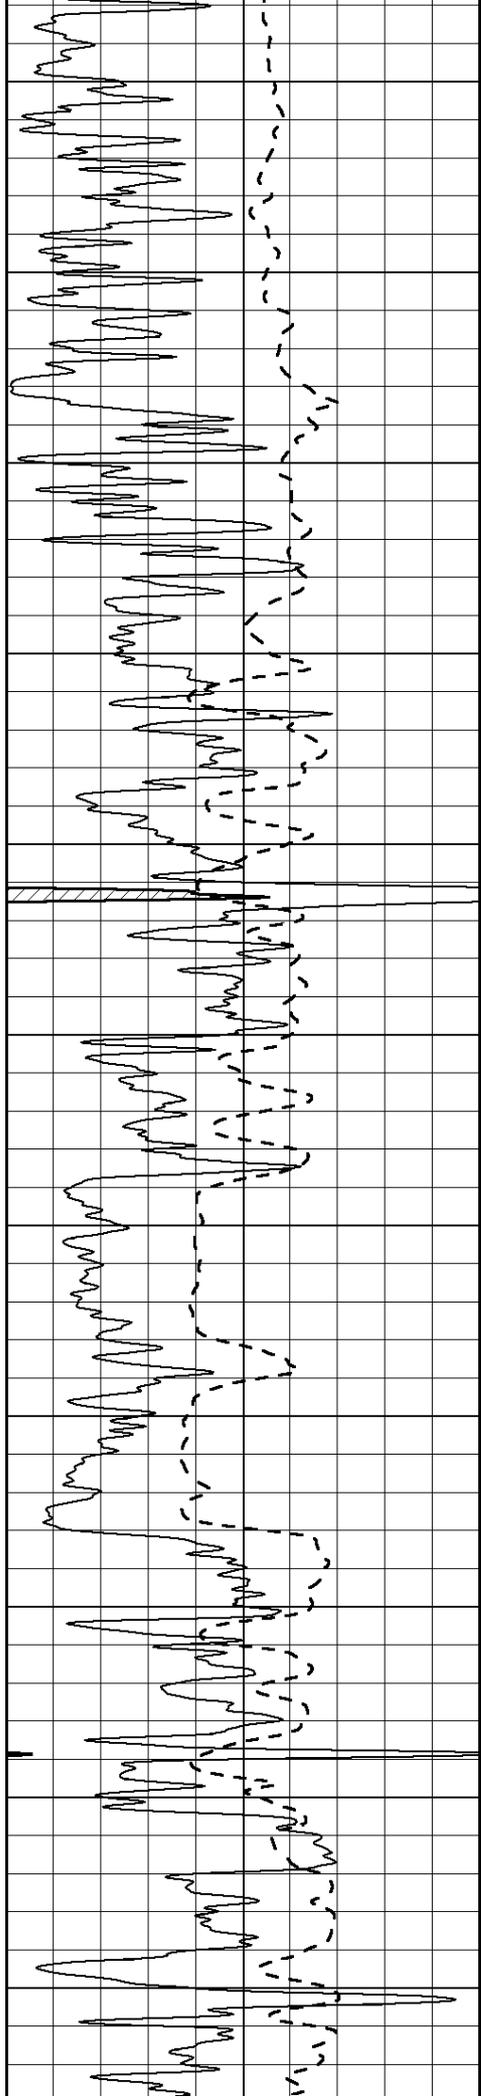

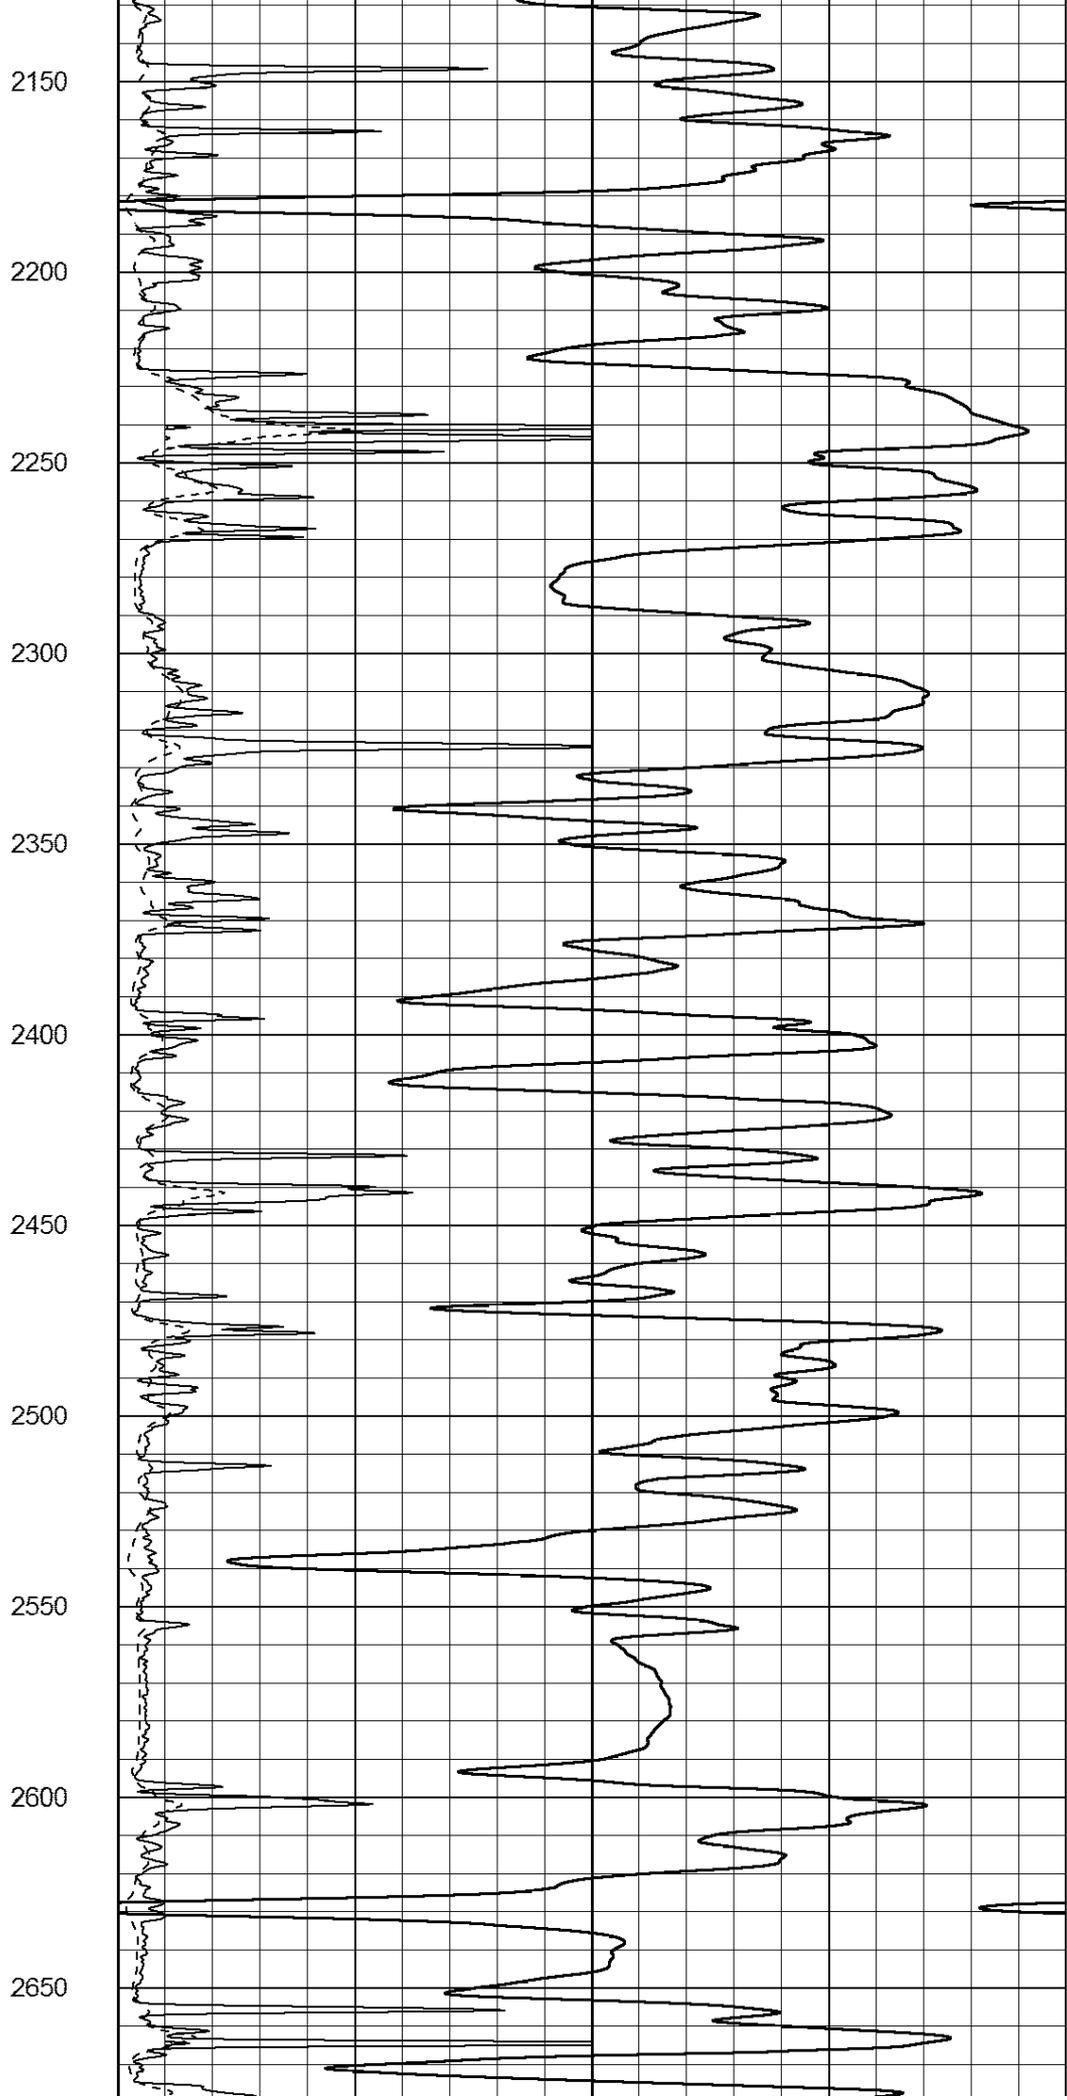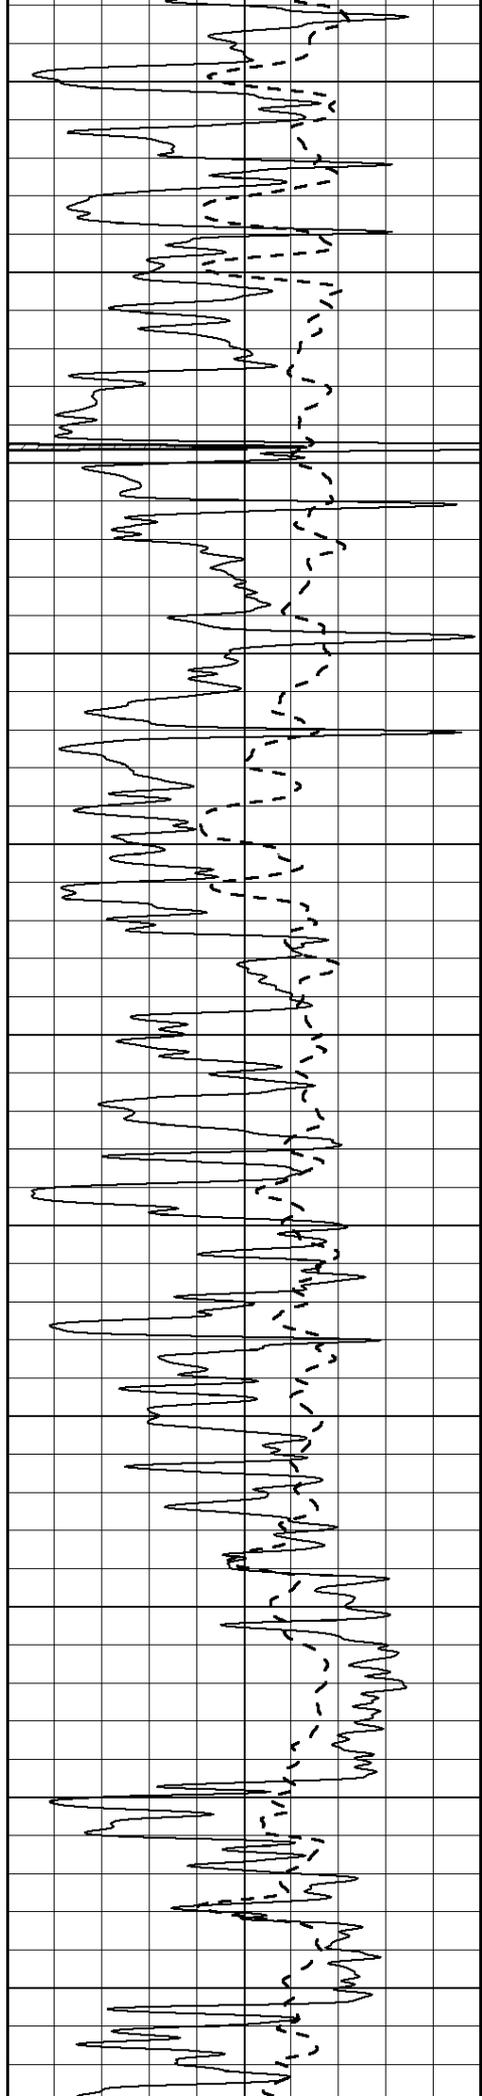

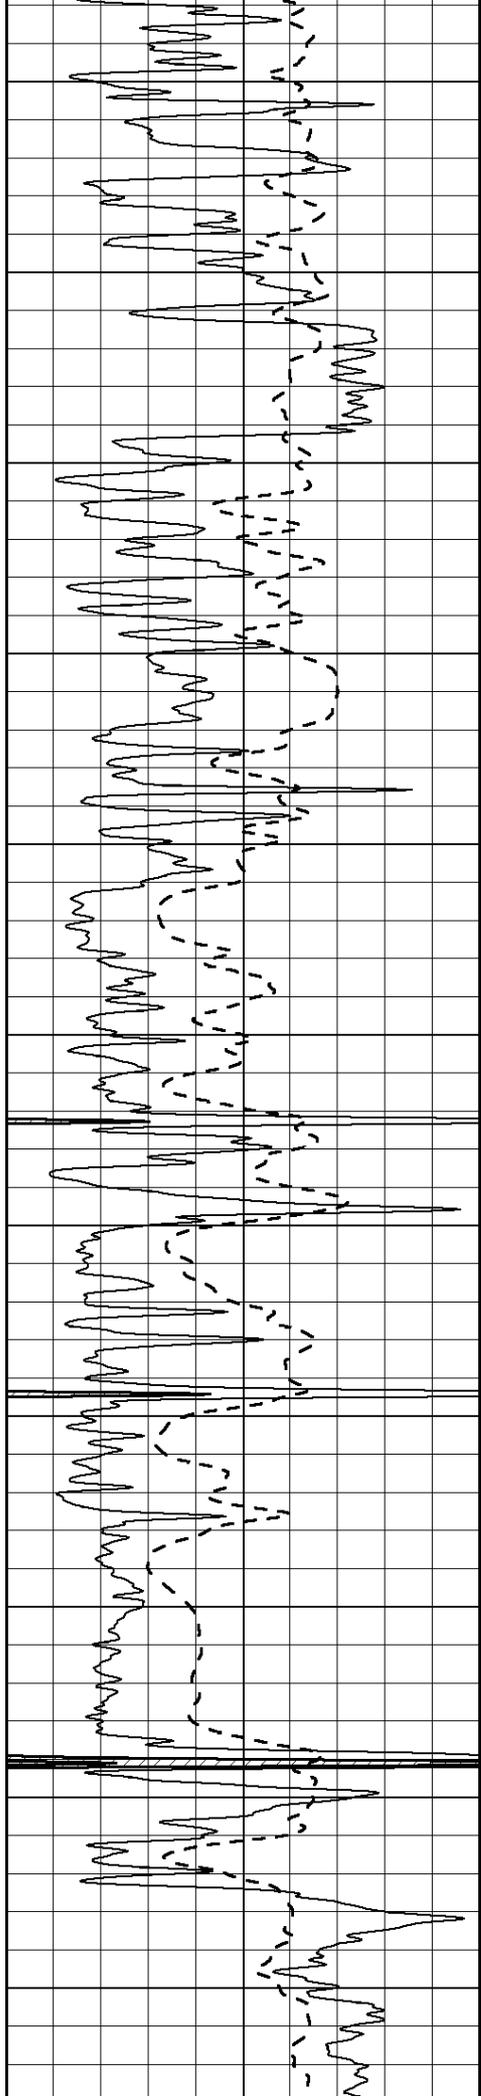

2700

2750

2800

2850

2900

2950


3000


3050

3100


3150


3200

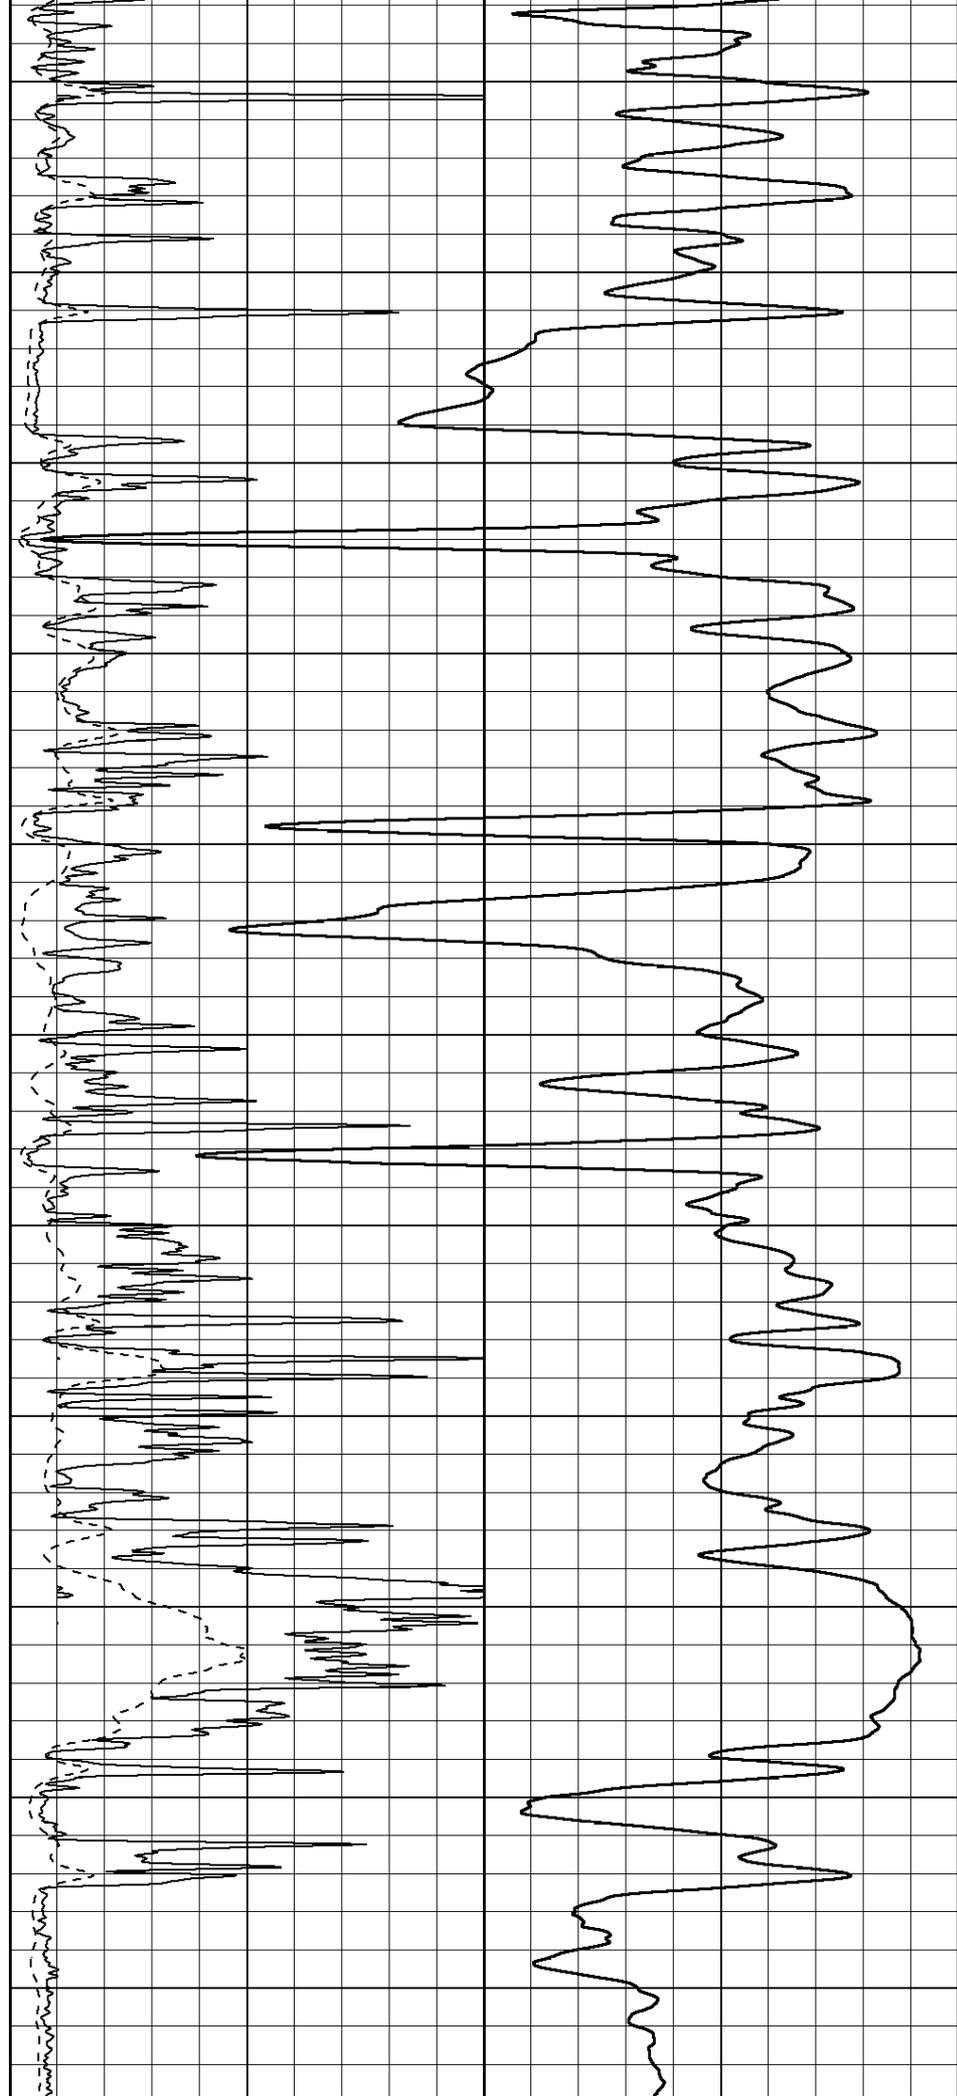

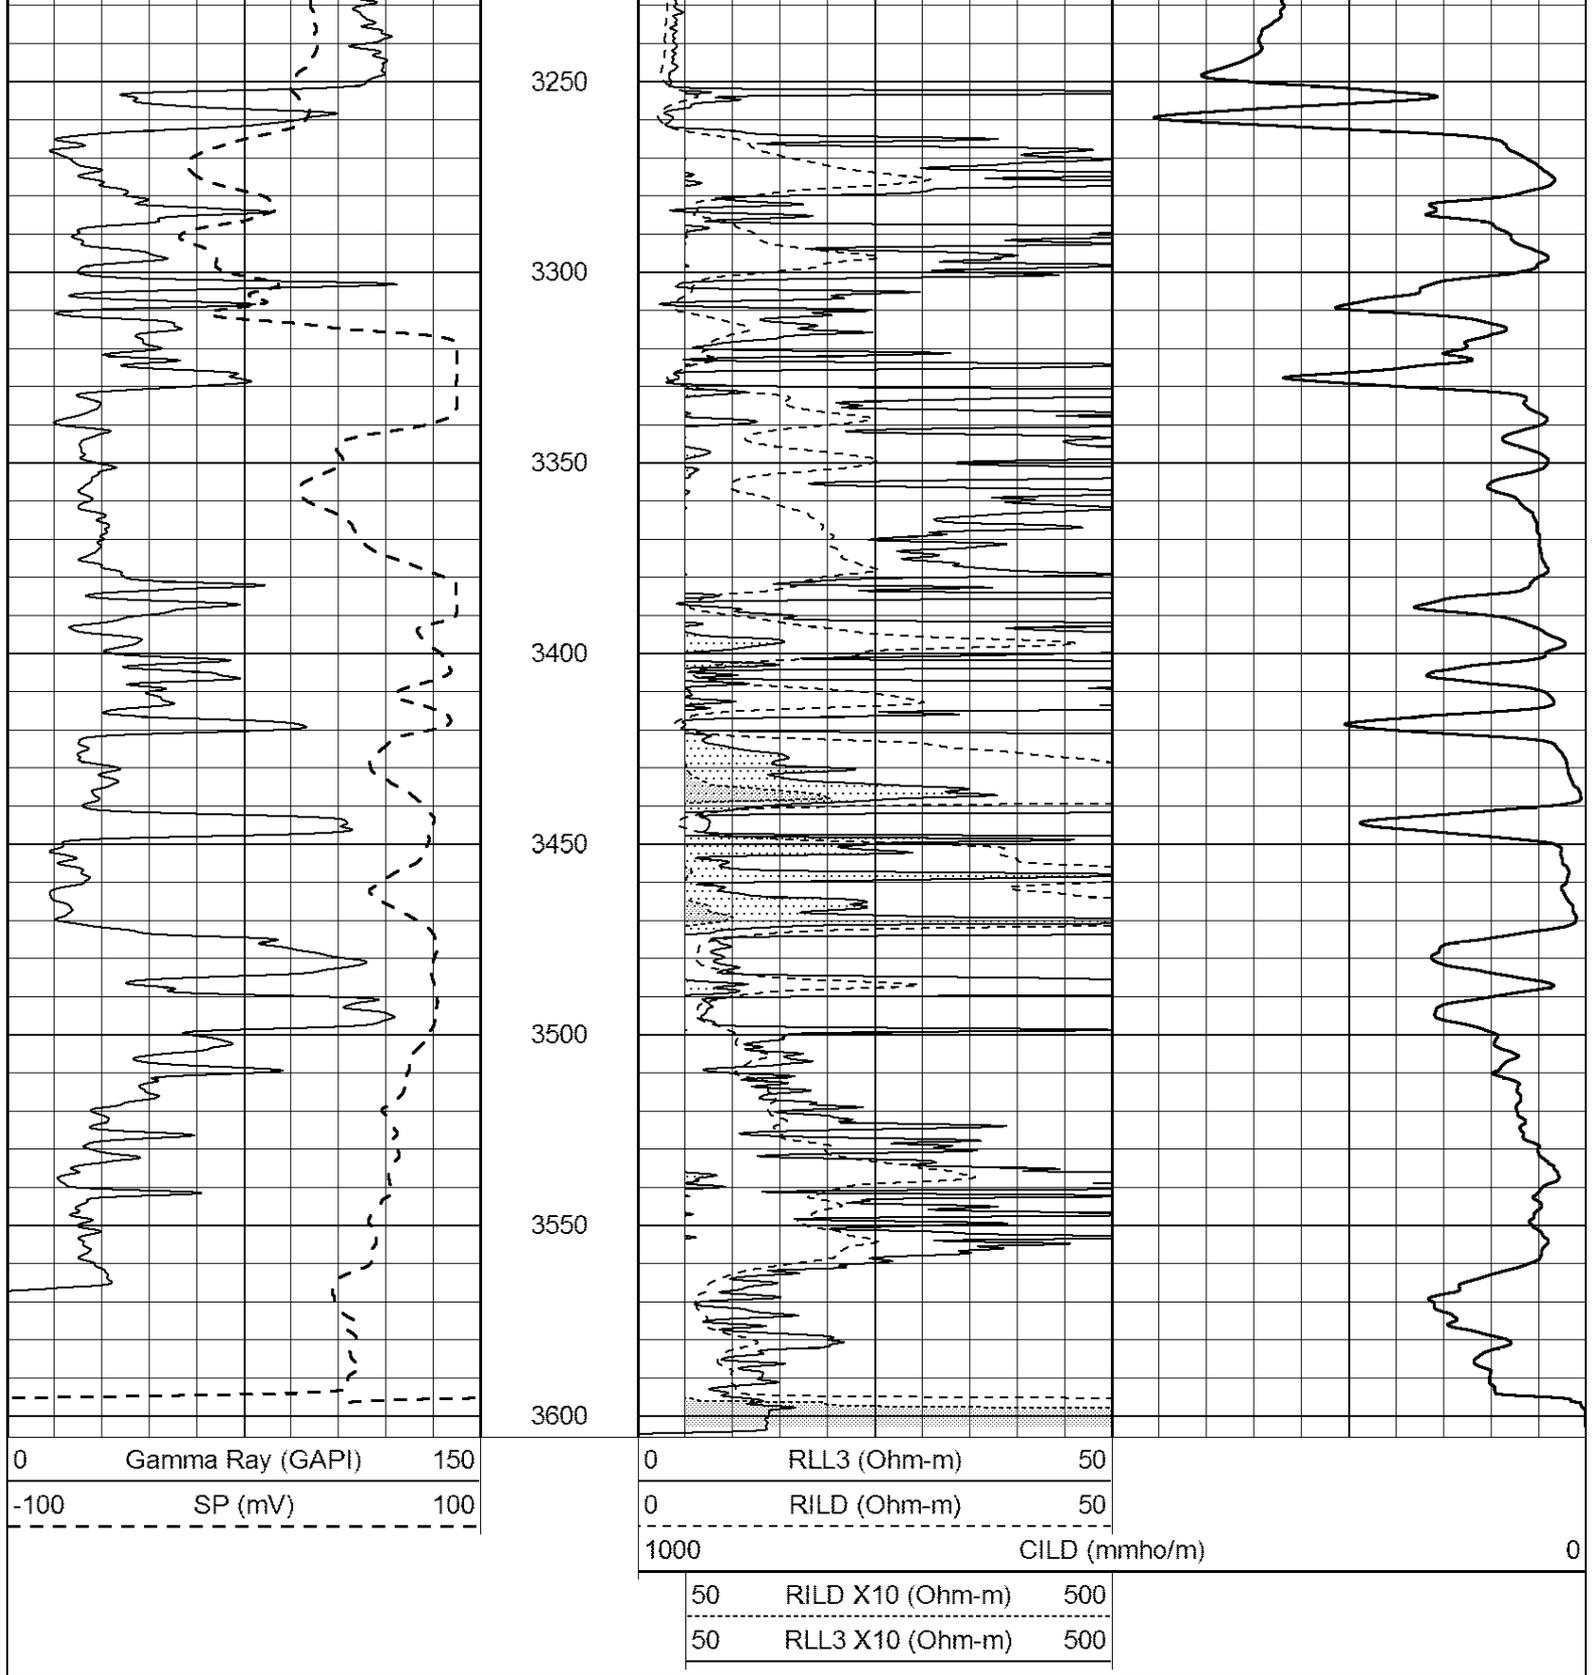

Database File: 008602pe.db
 Dataset Pathname: pass3.1
 Presentation Format: _dil
 Dataset Creation: Sat Feb 18 11:33:21 2012 by Calc Open-Cased 110302
 Charted by: Depth in Feet scaled 1:240

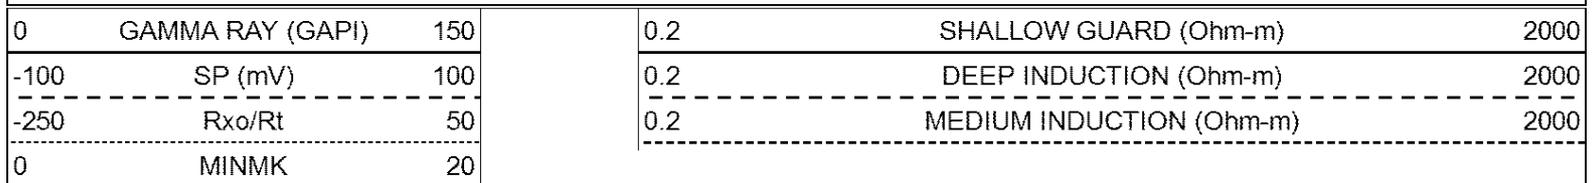

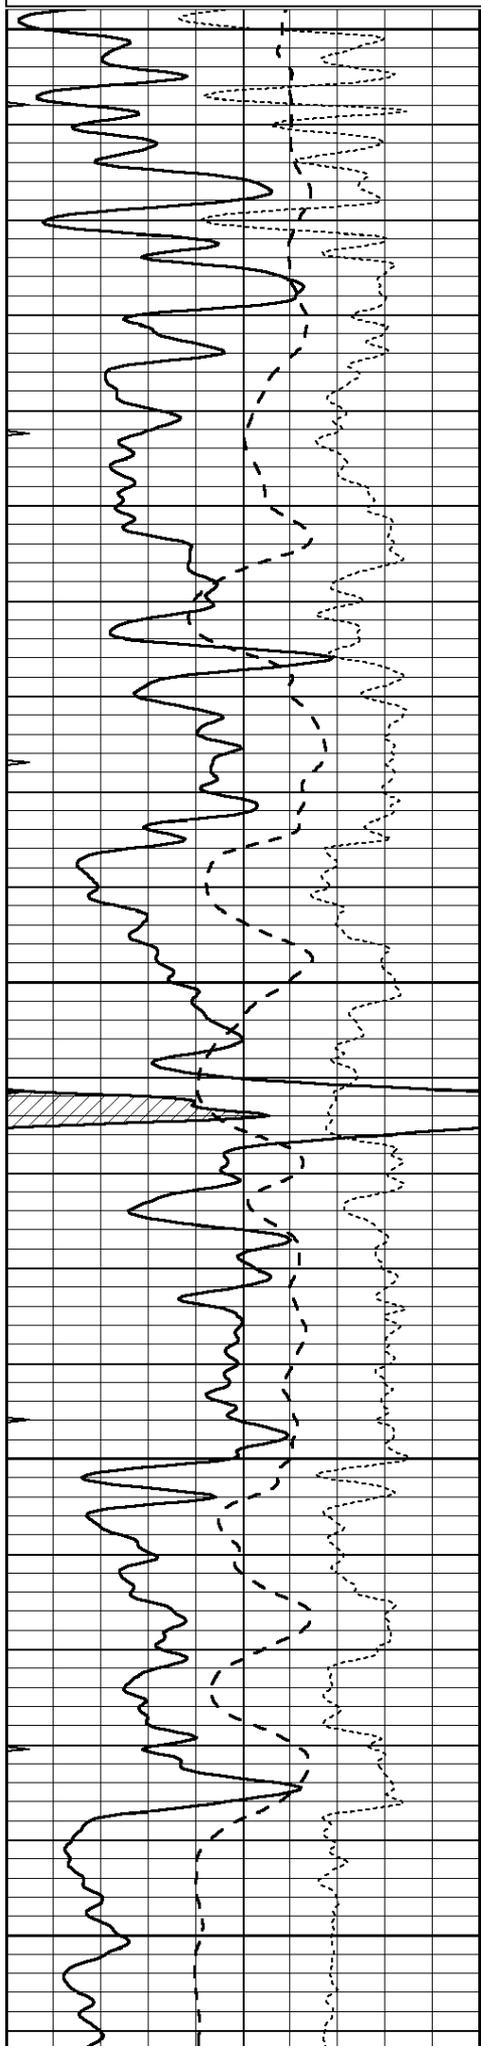


1700


1750

1800

1850

1900

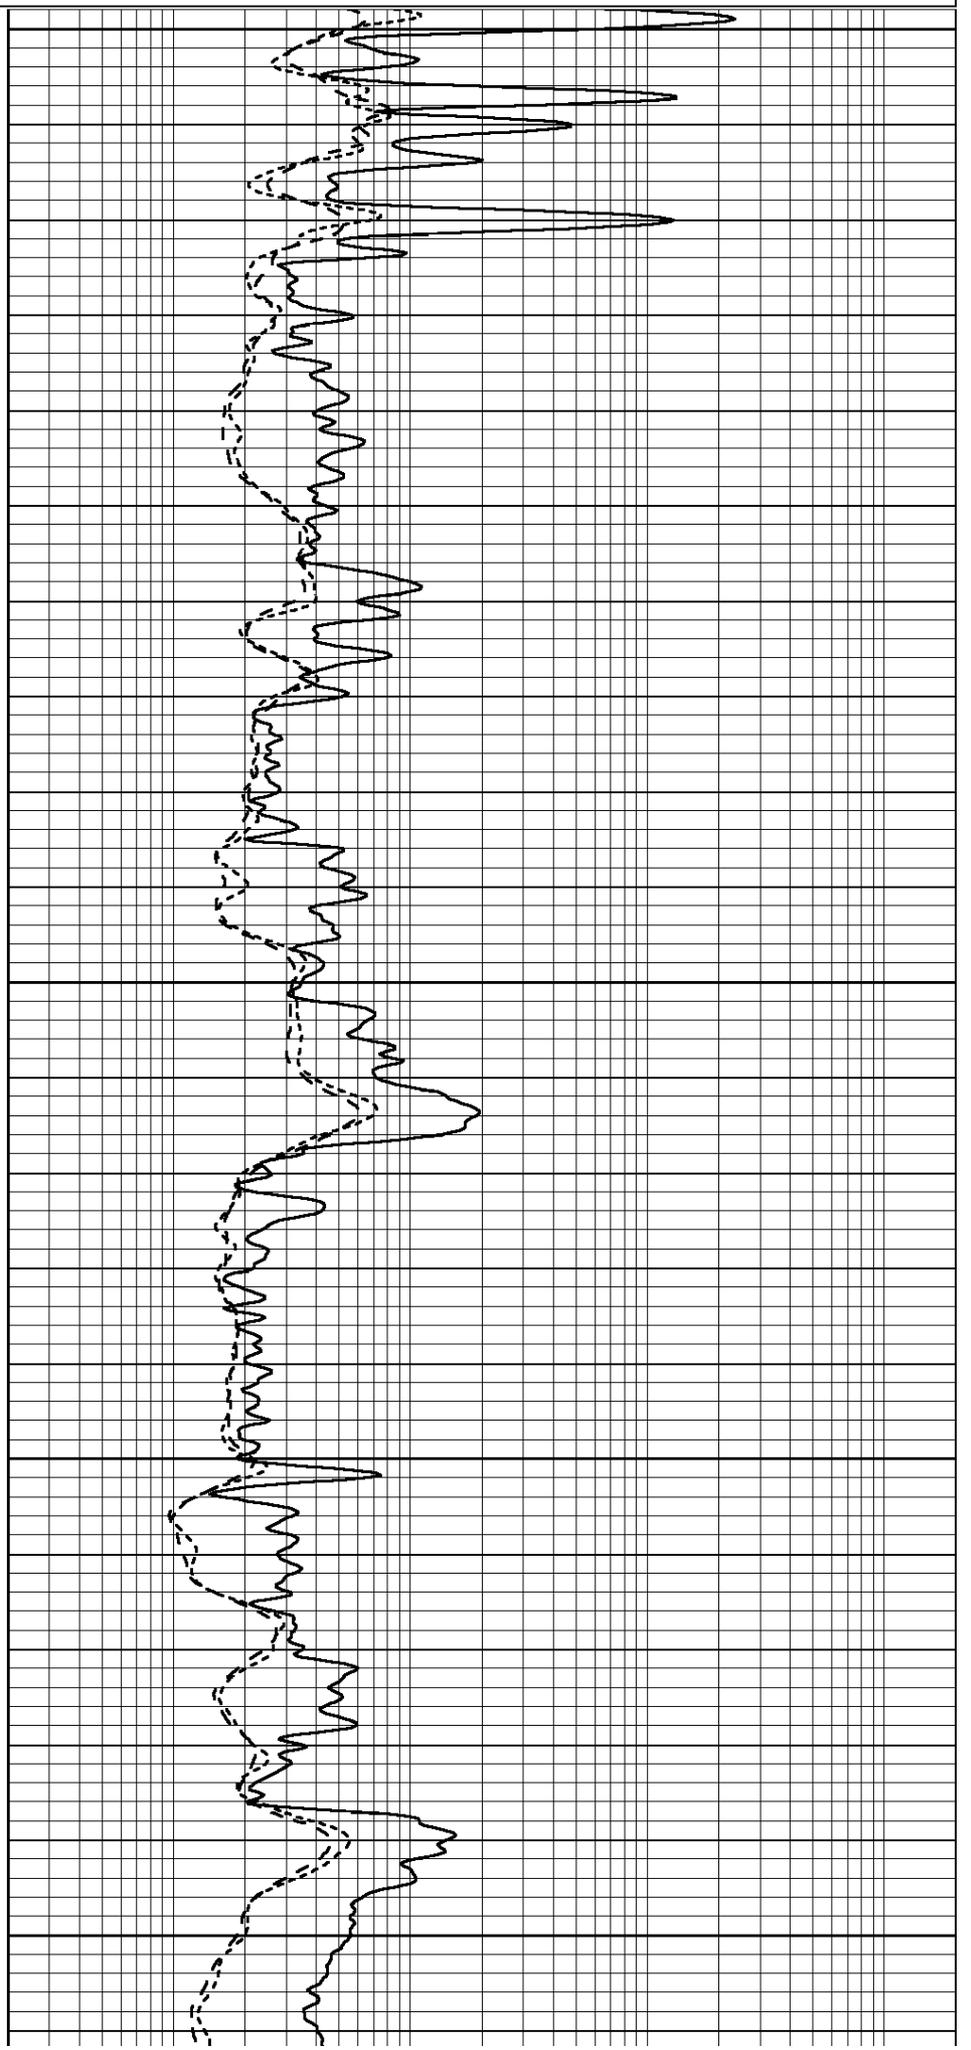

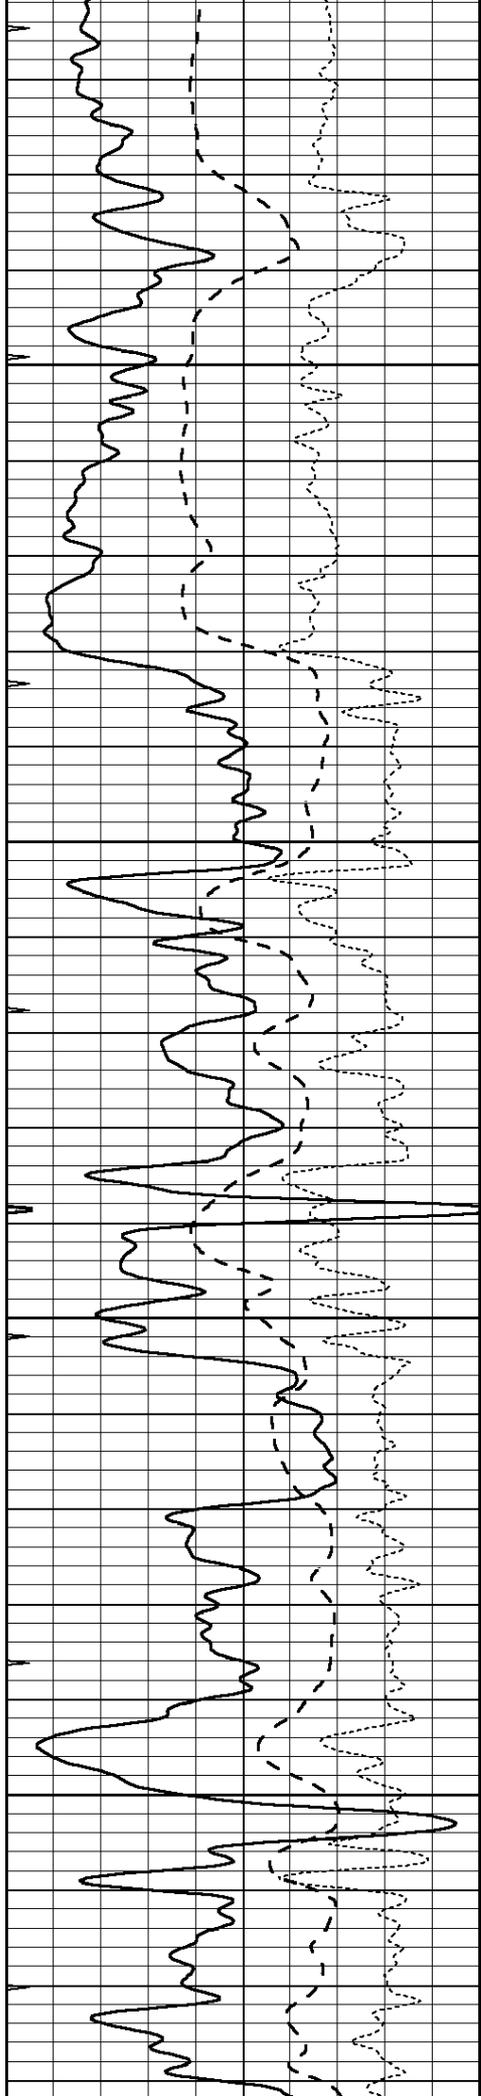



1950

2000

2050

2100

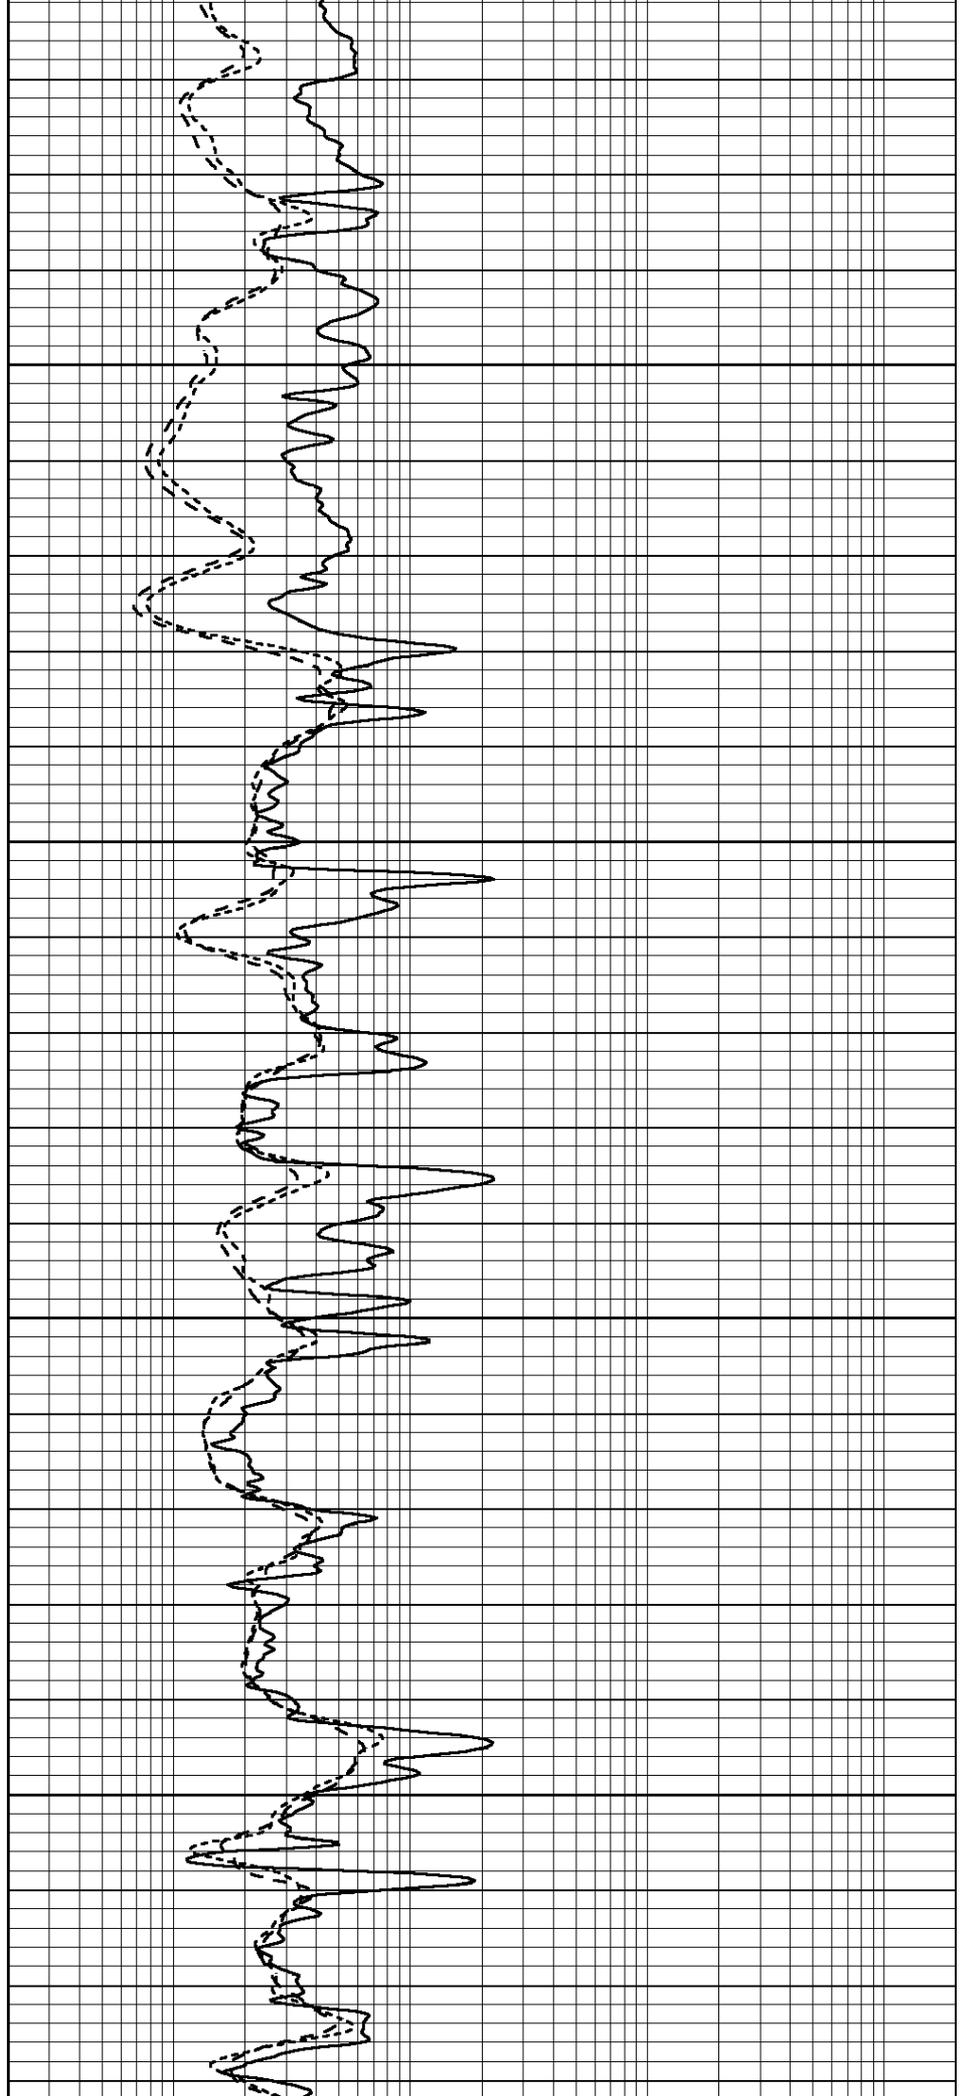

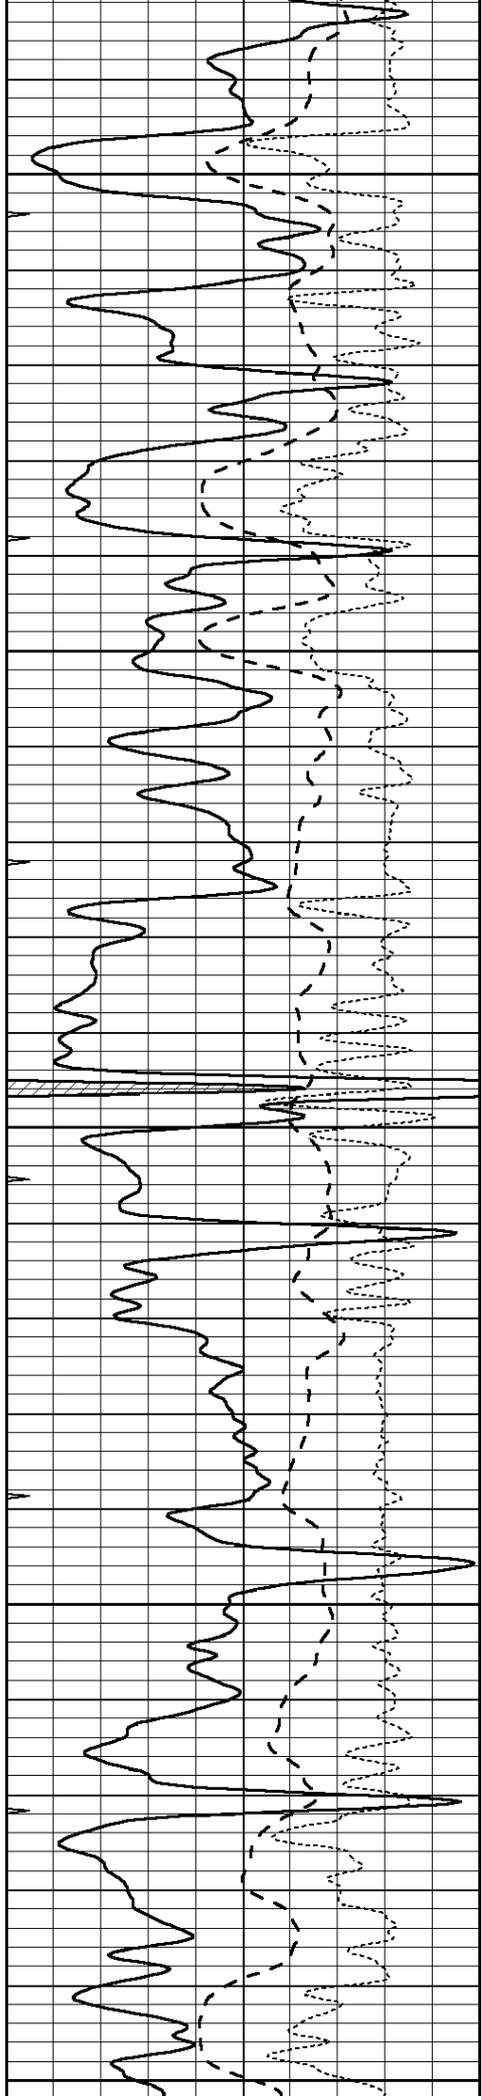


2150


2200

2250

2300

2350

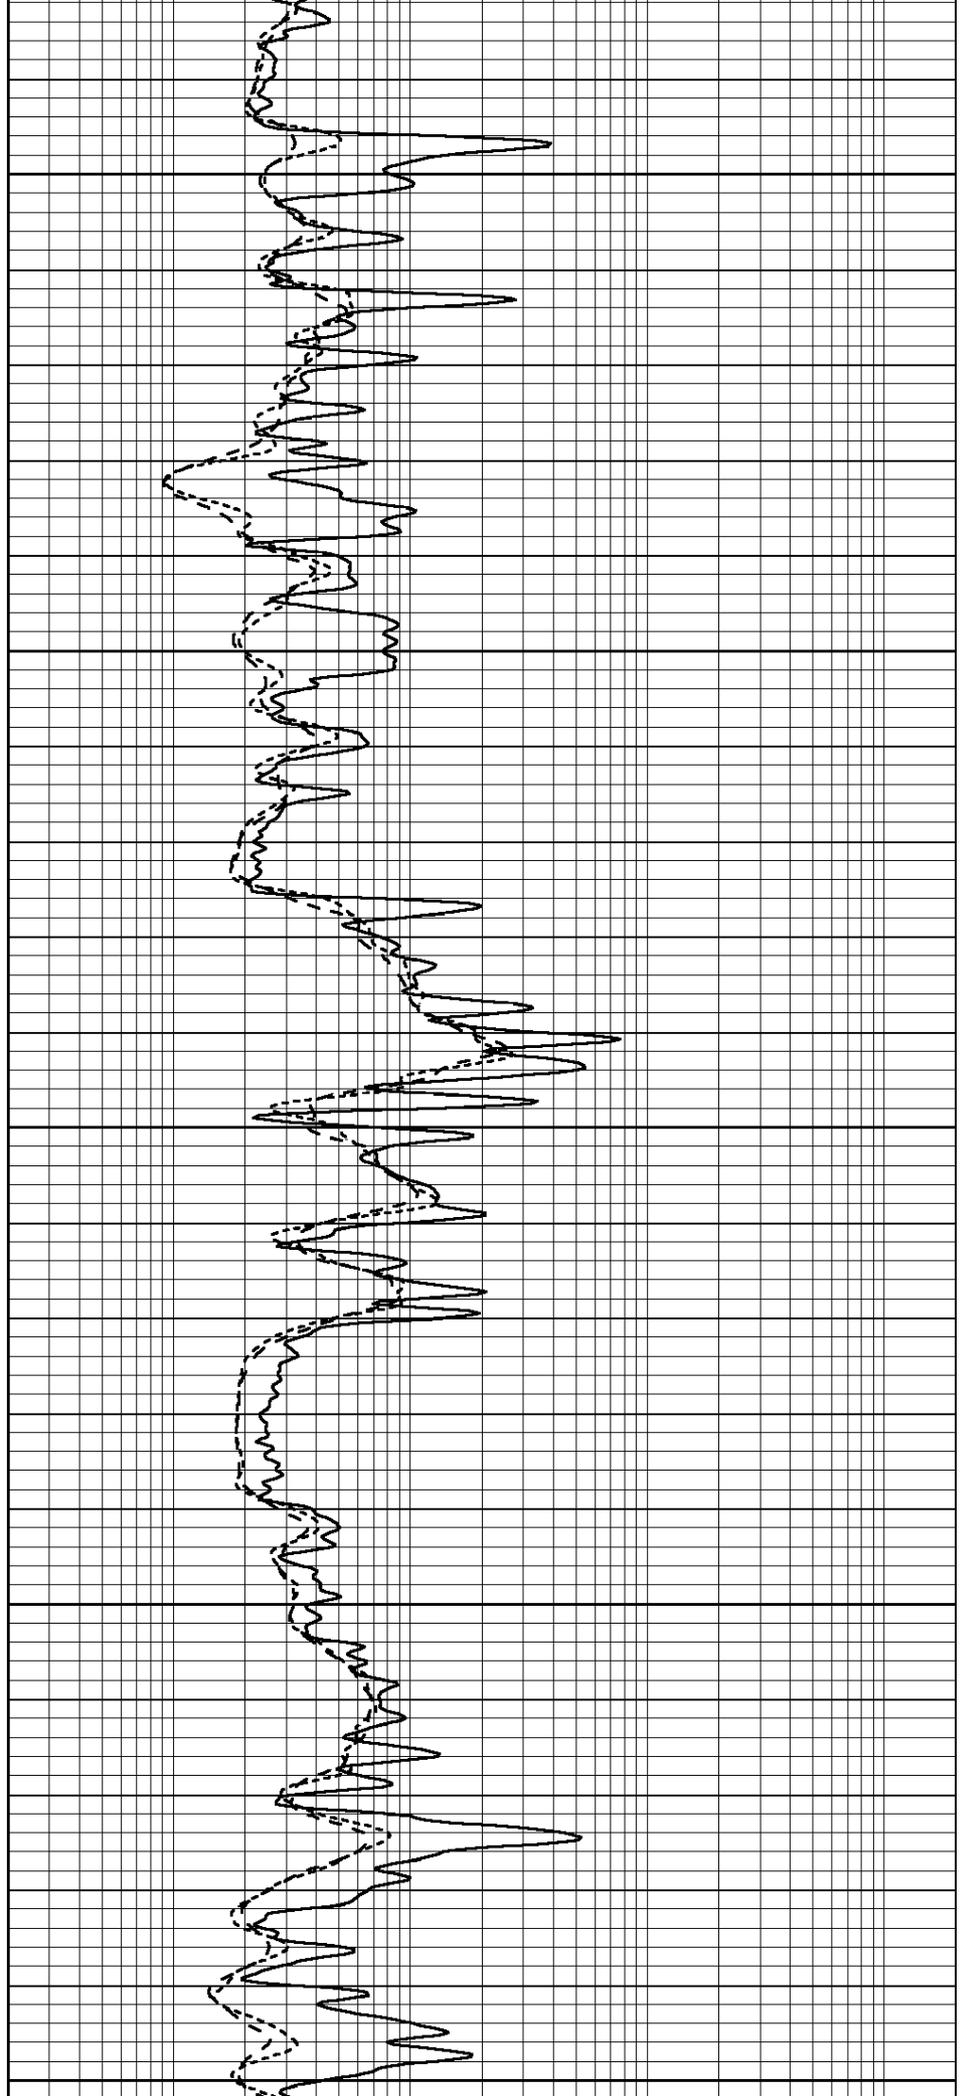

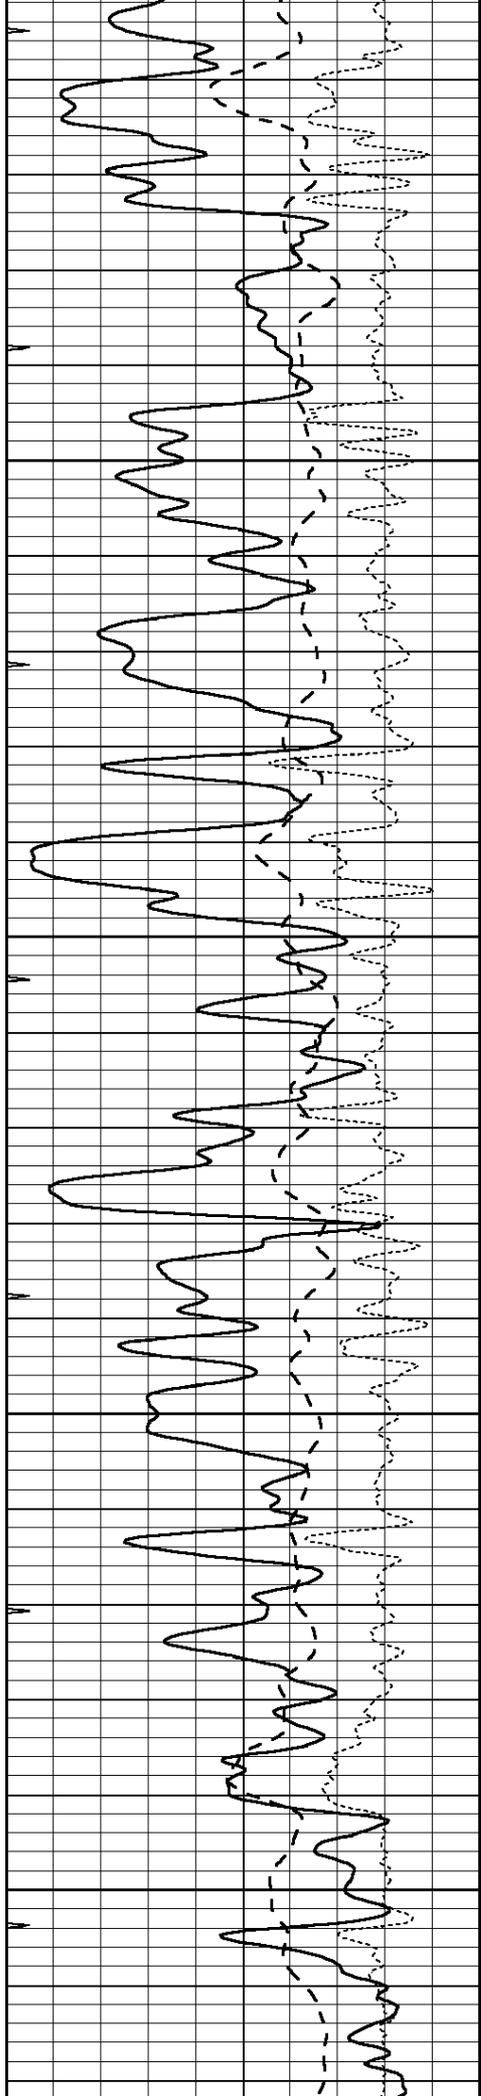



2400

2450

2500

2550

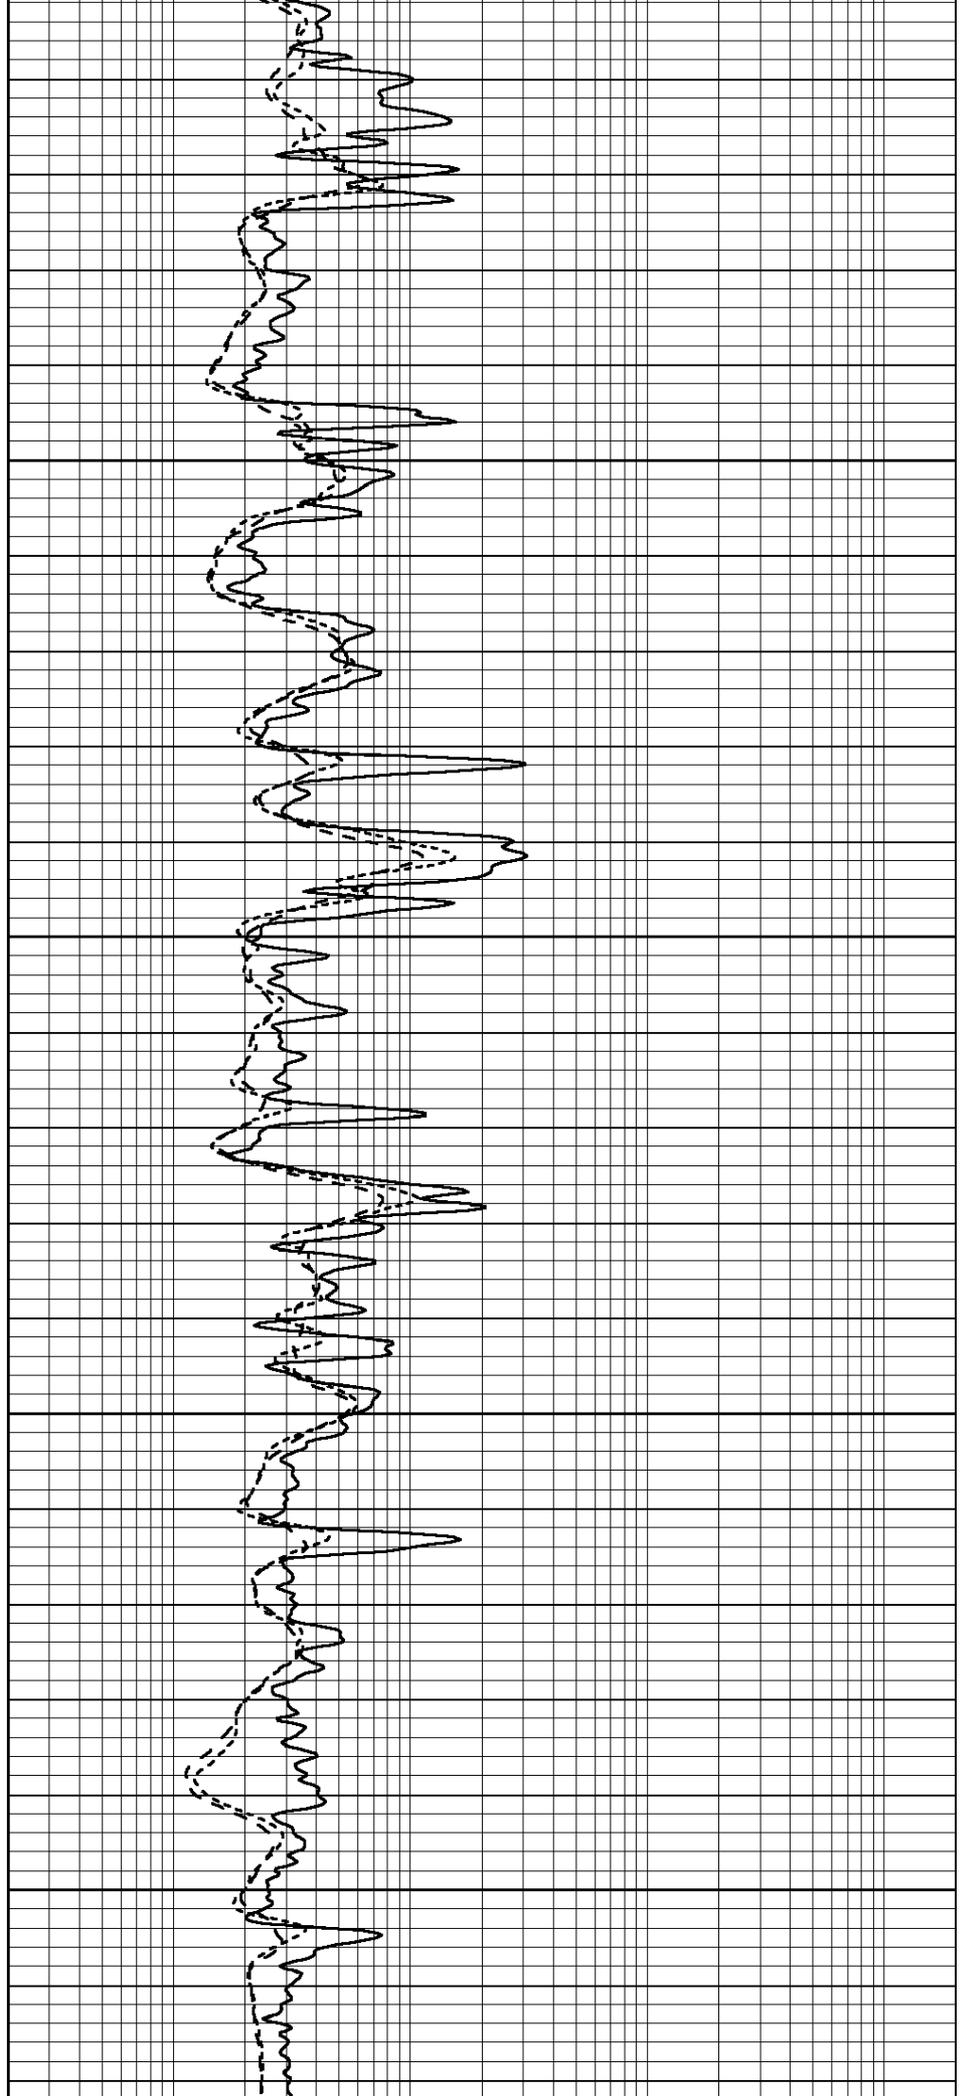

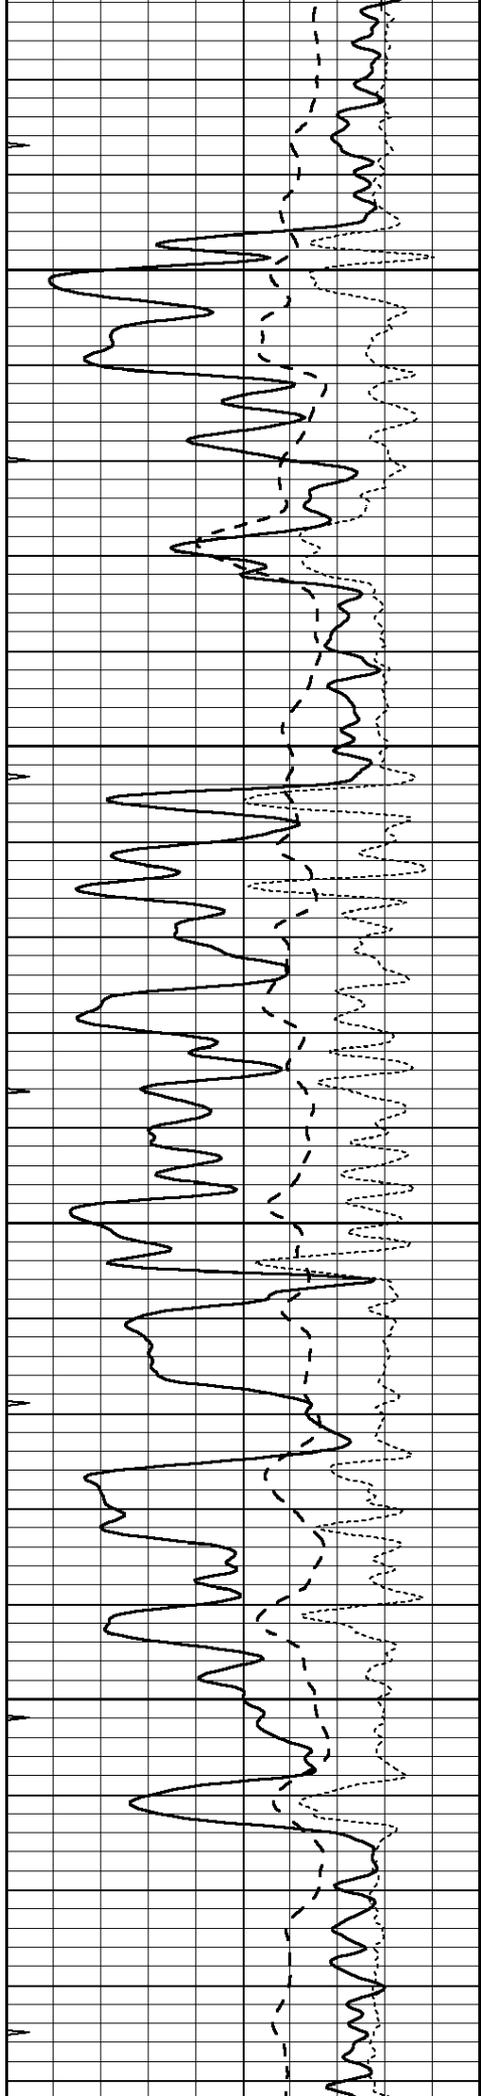



2600

2650

2700

2750

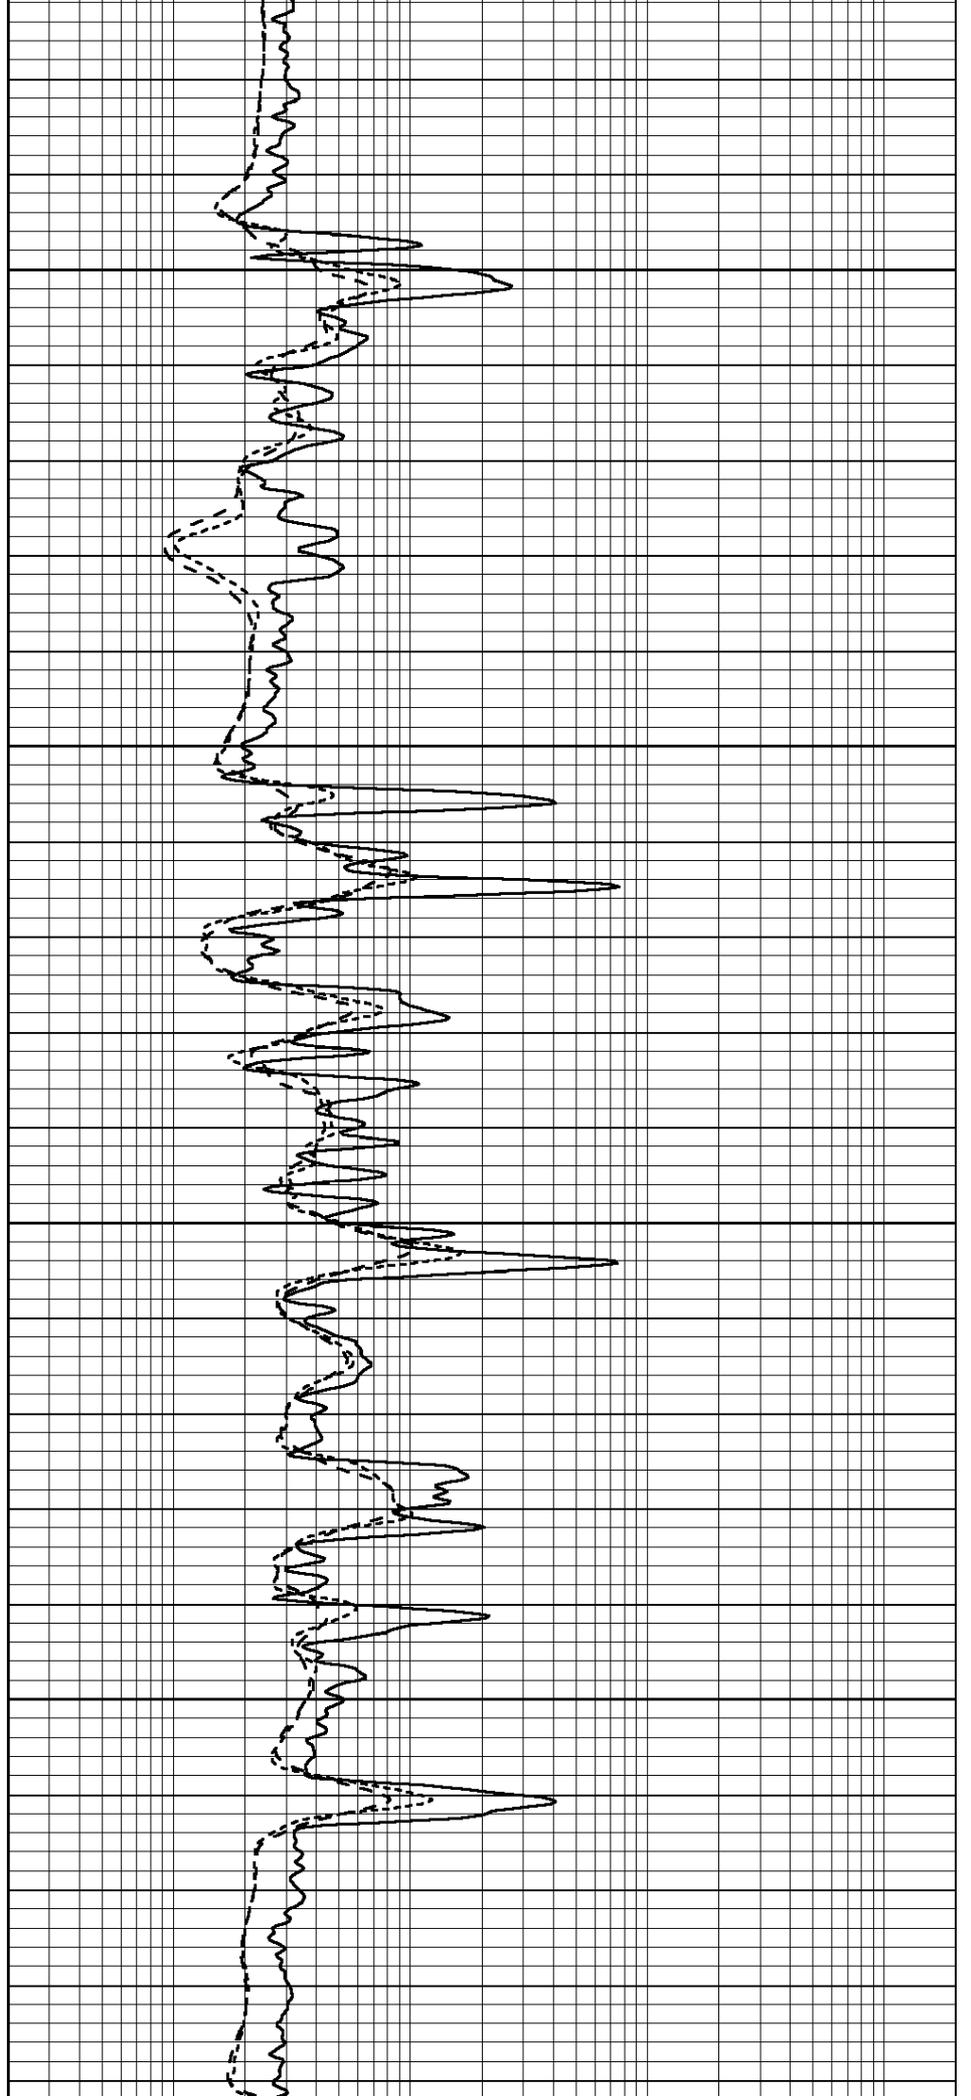

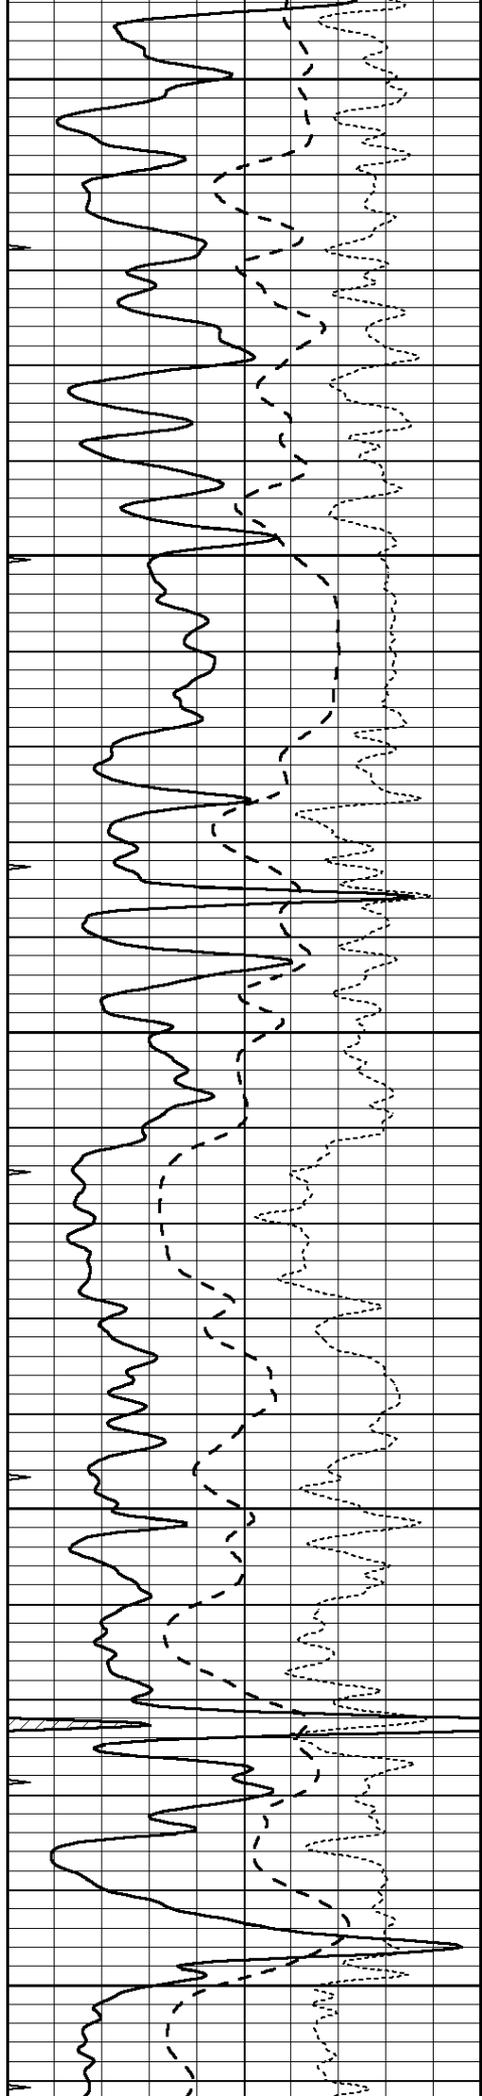


2800


2850

2900

2950

3000

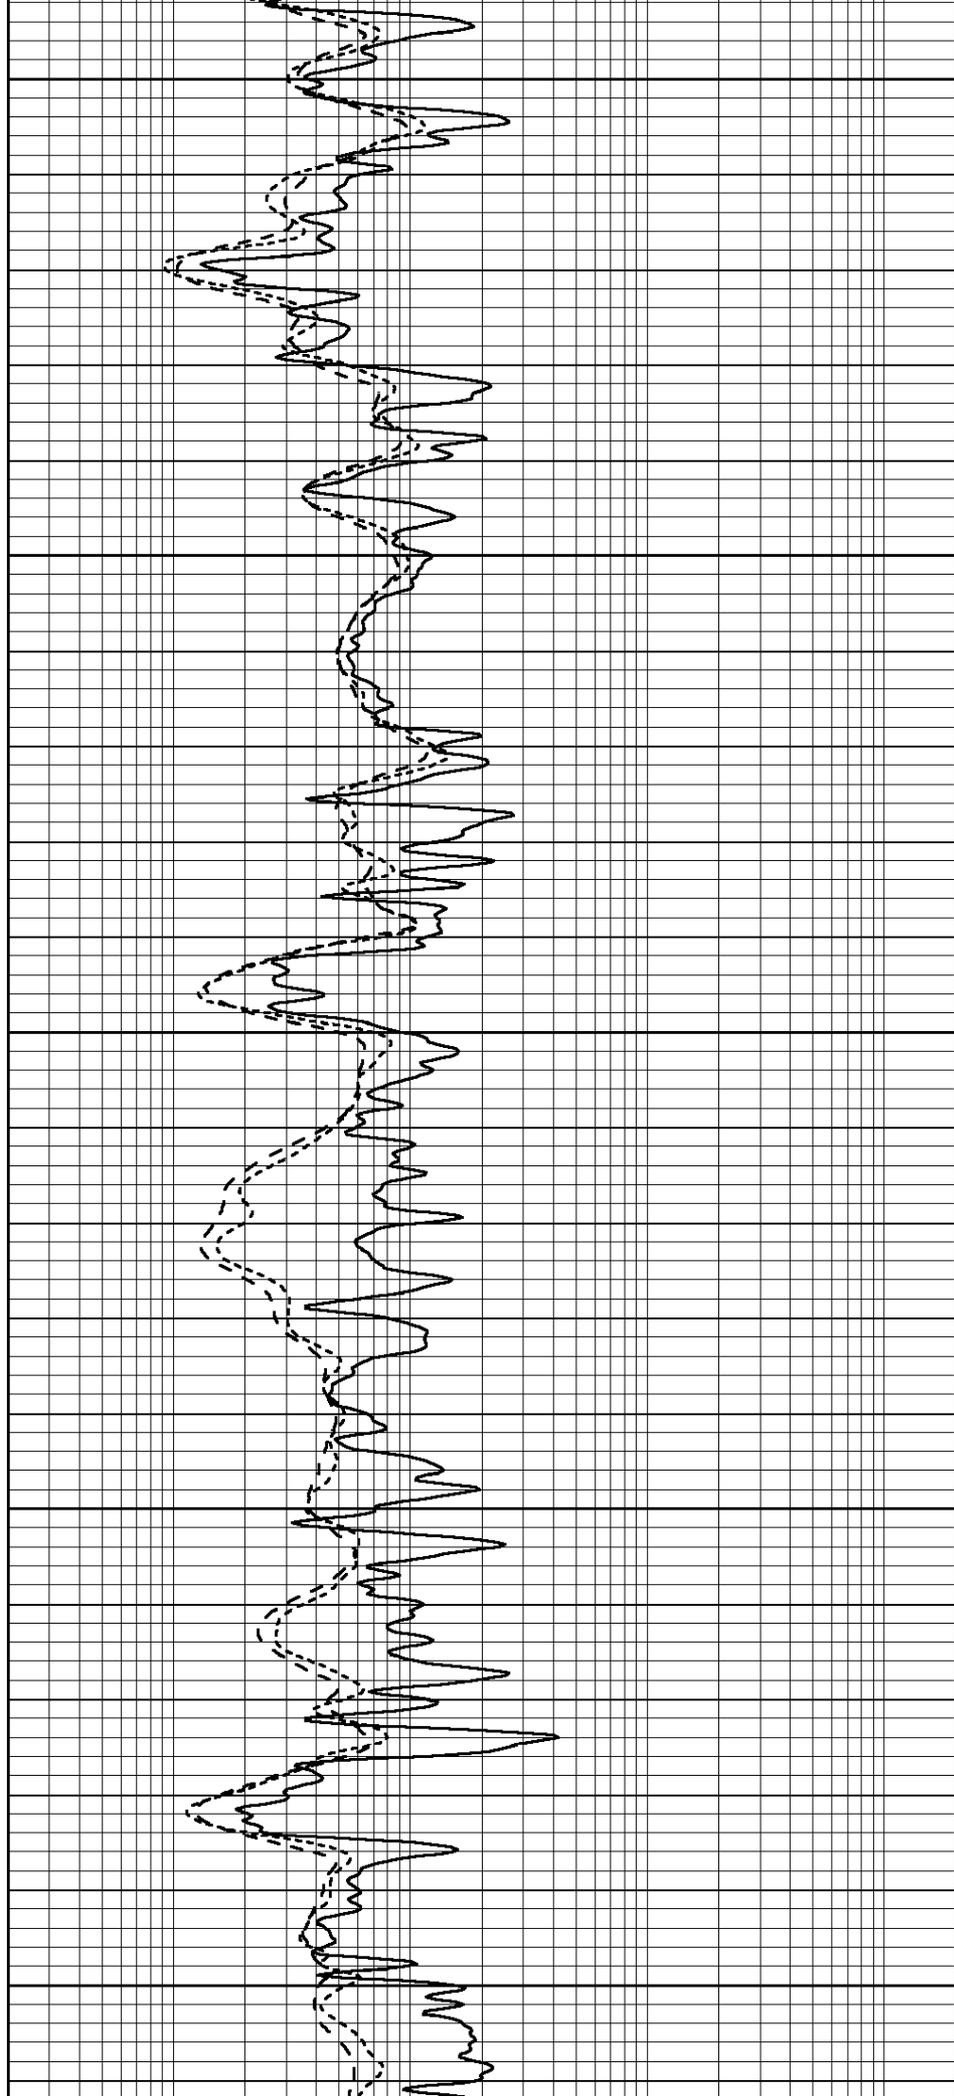

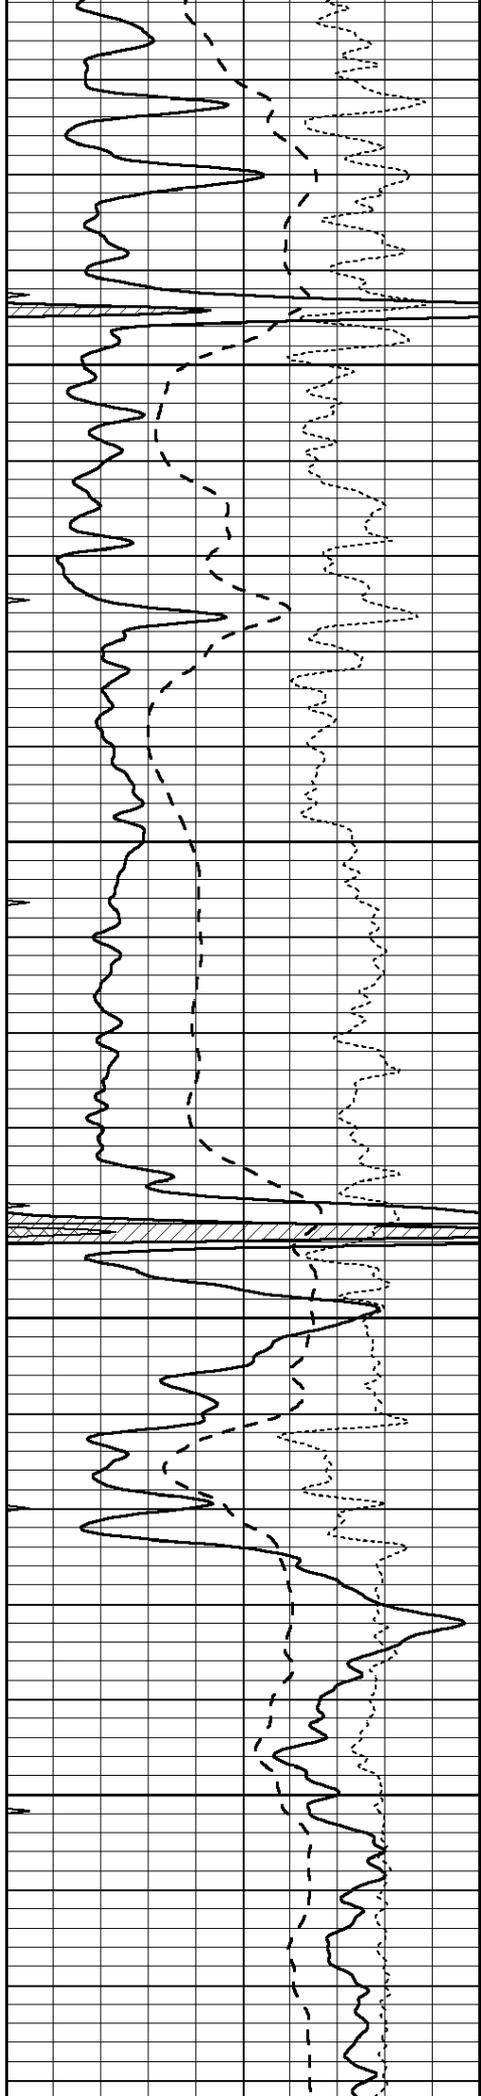


3050

3100

3150

3200

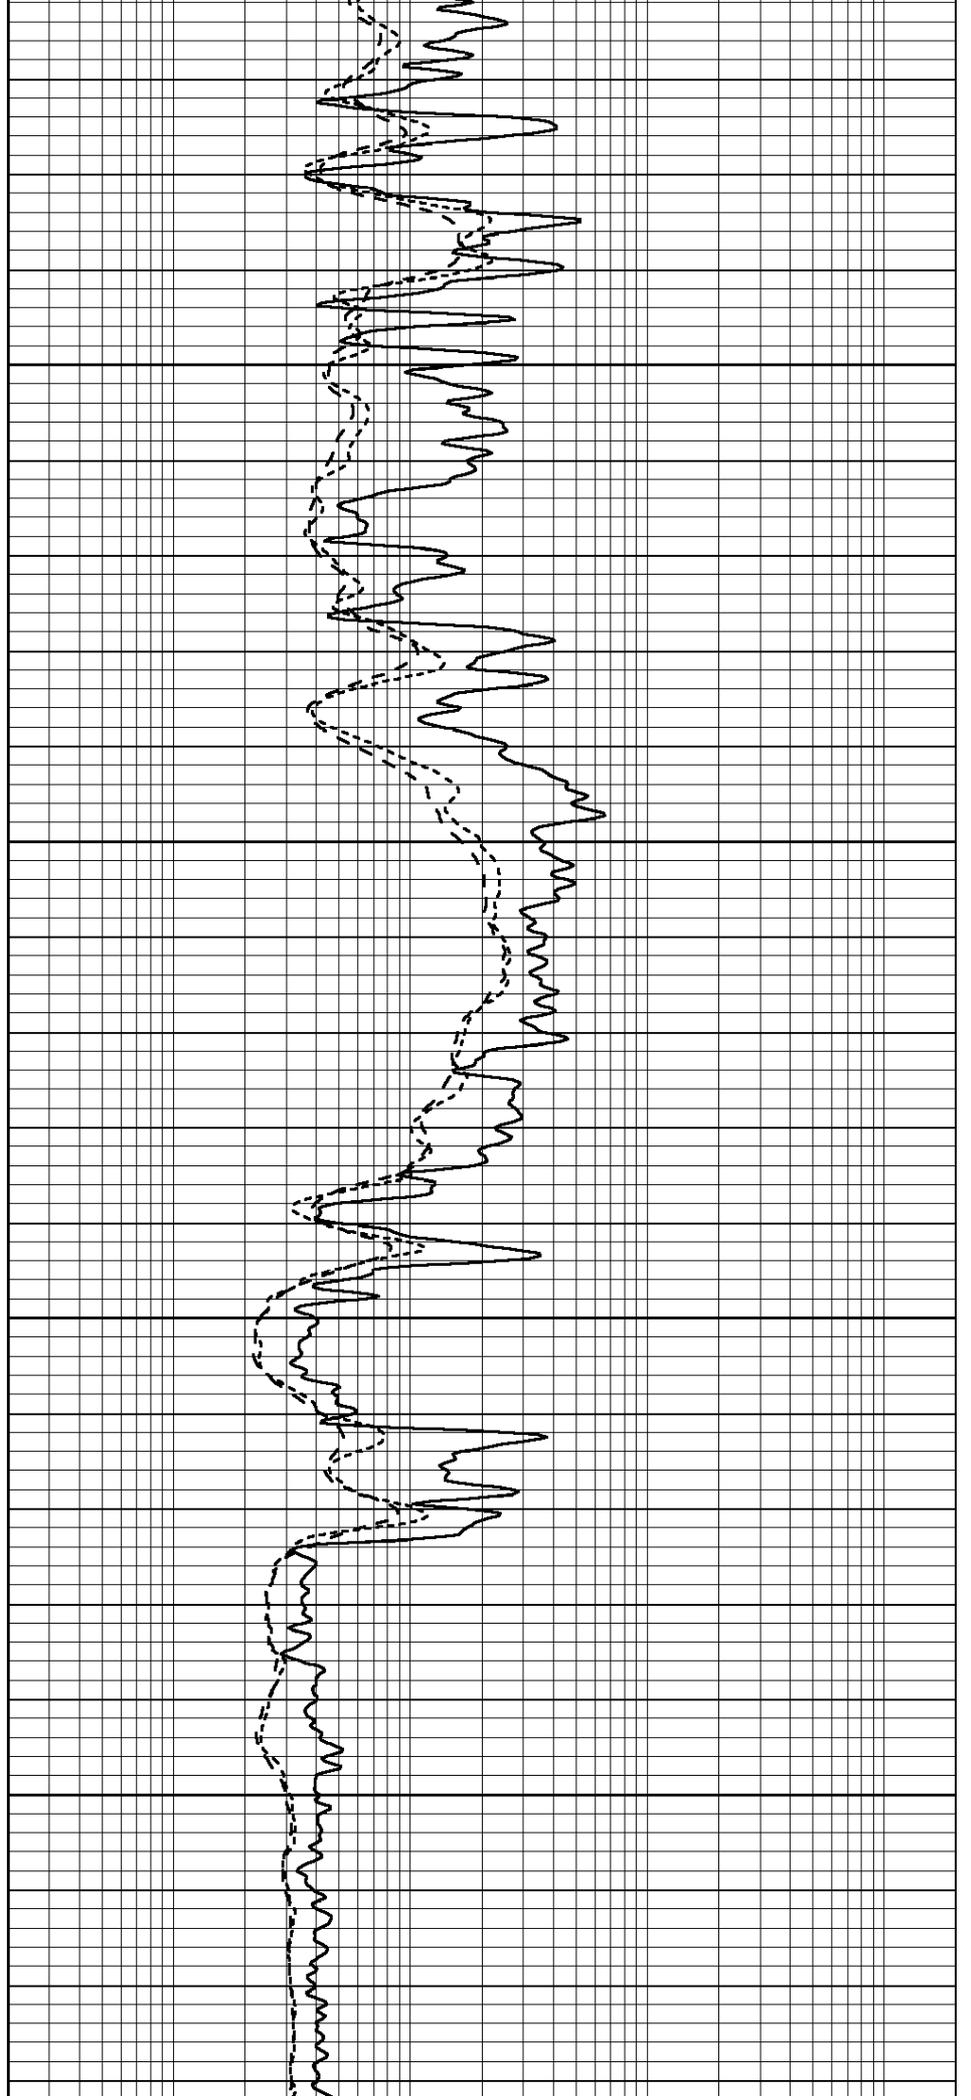


3050

3100

3150

3200

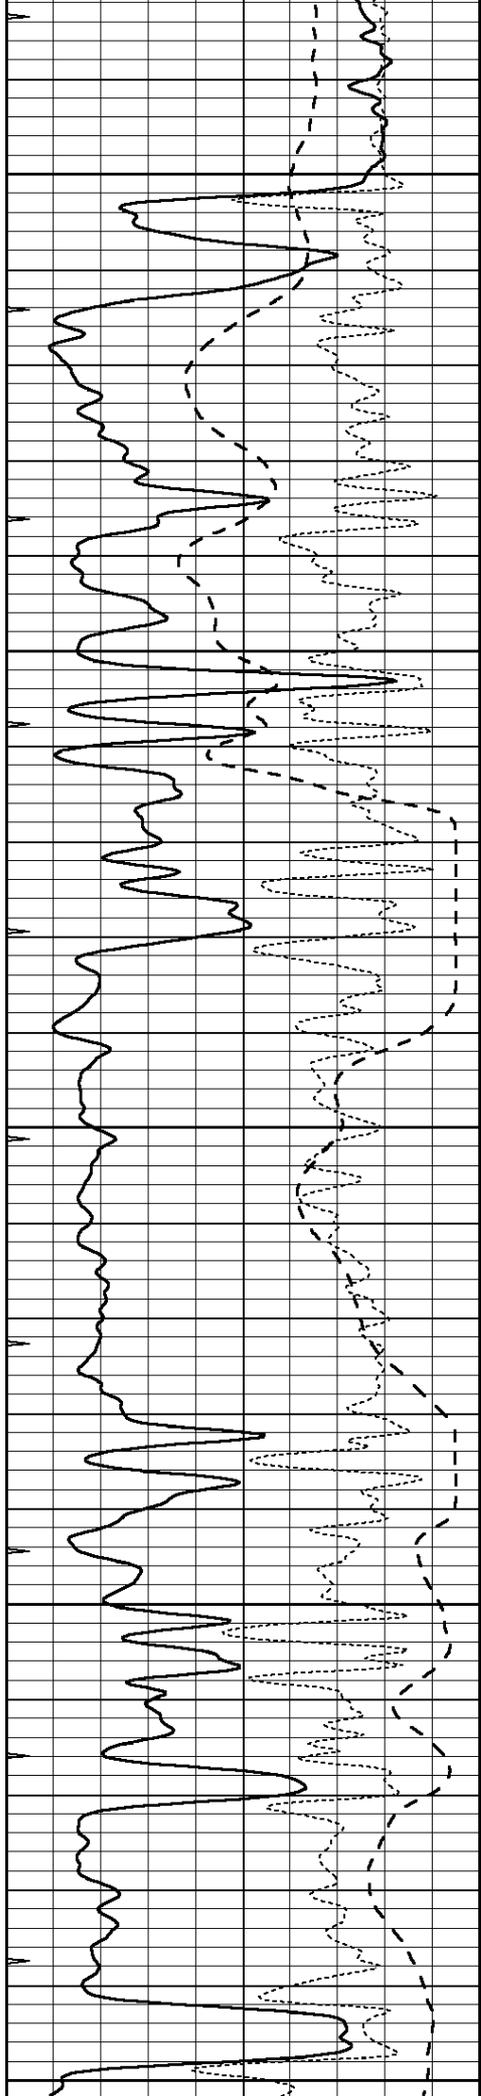


3250



3300

3350

3400

3450

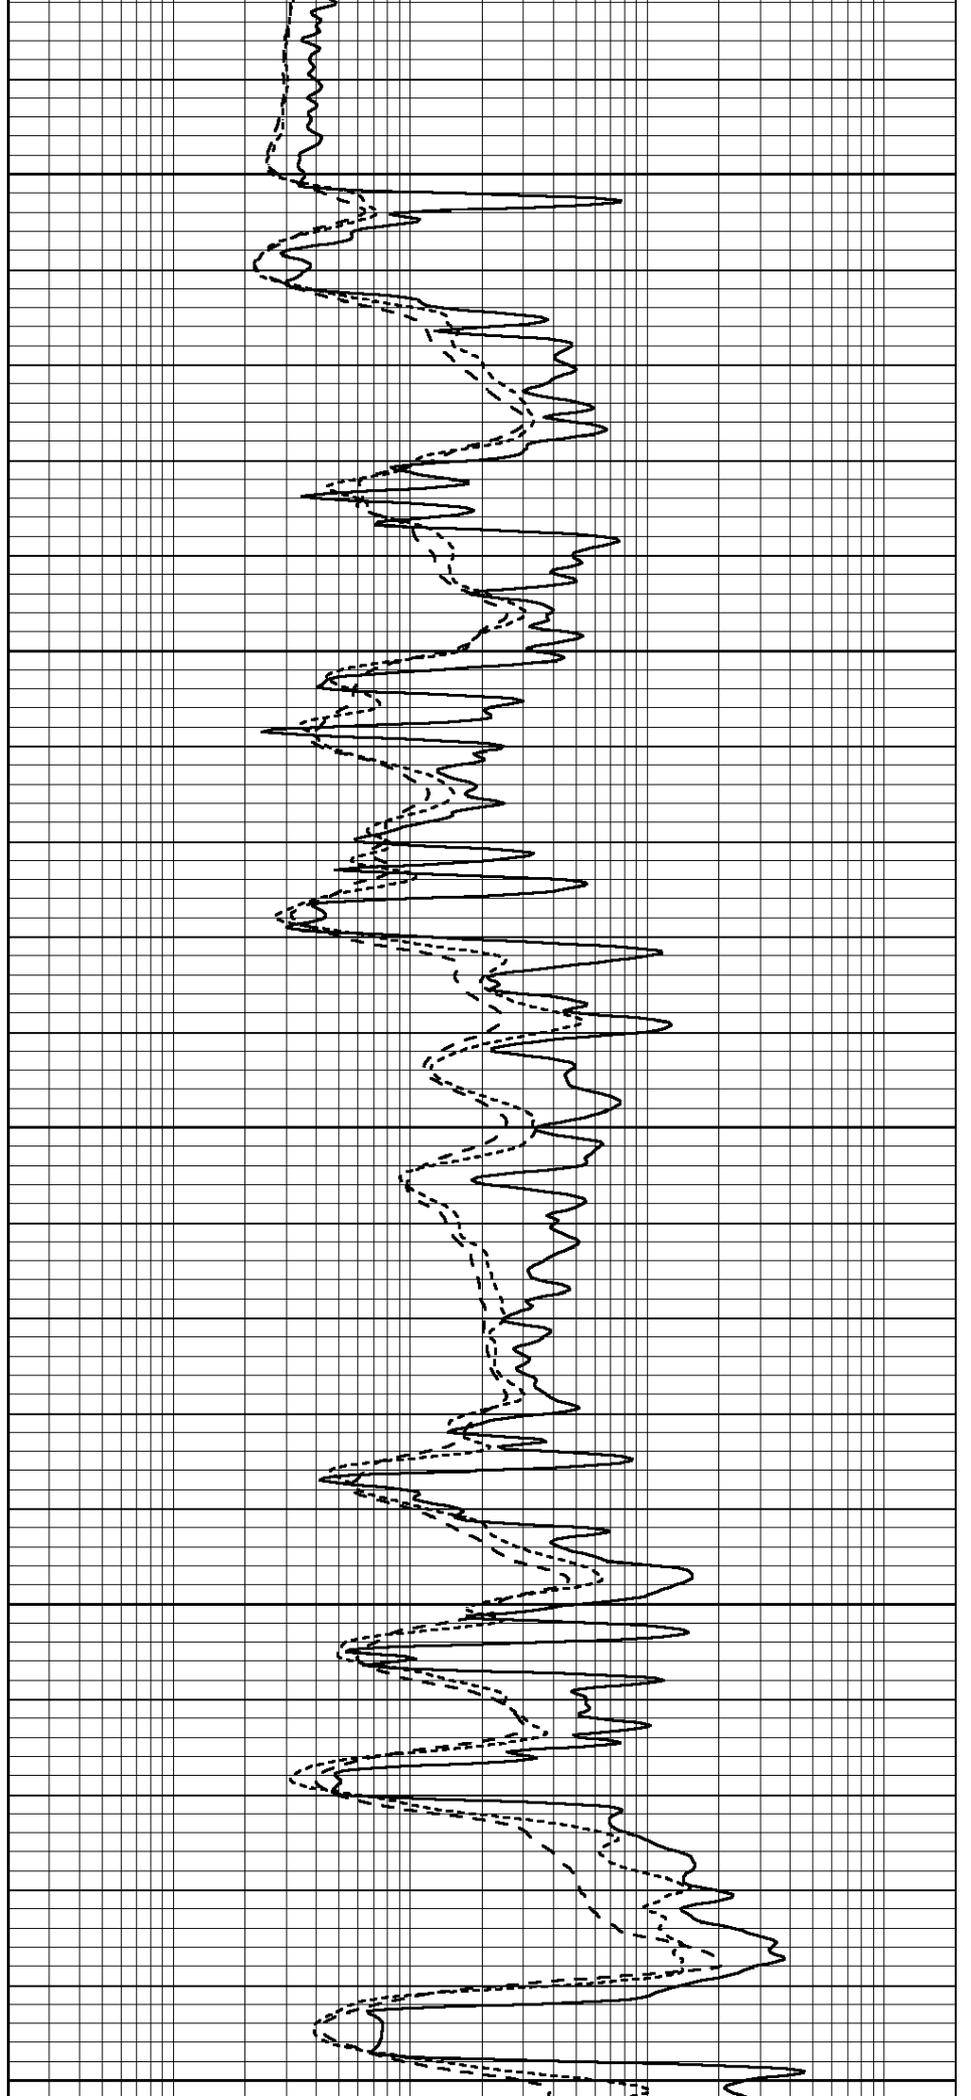

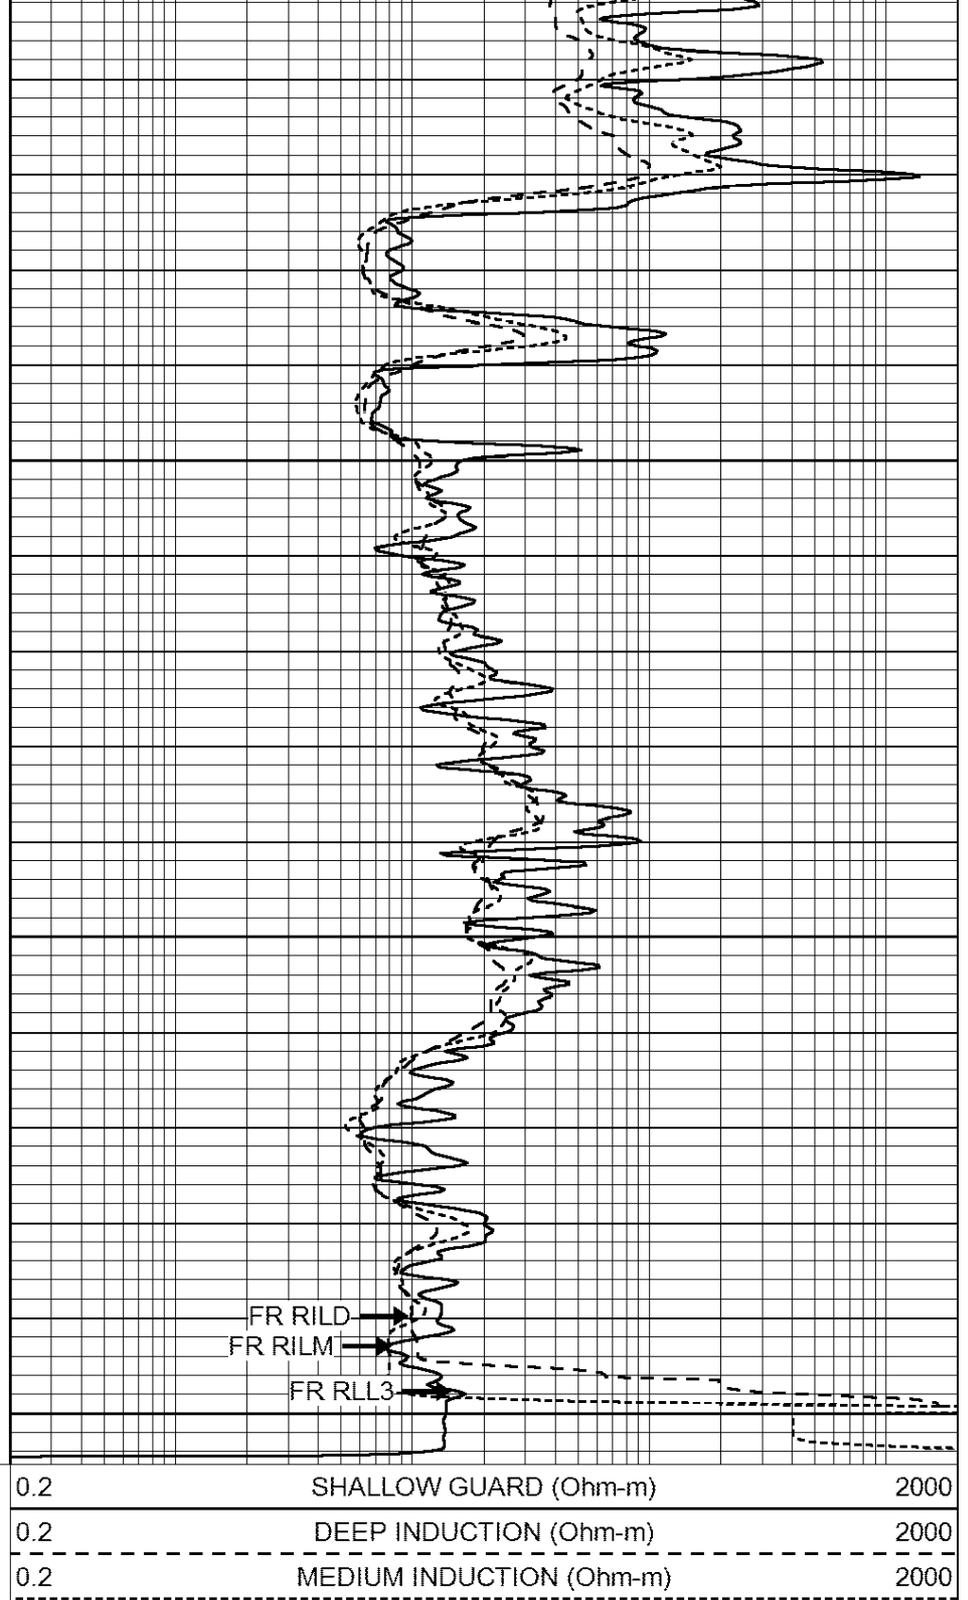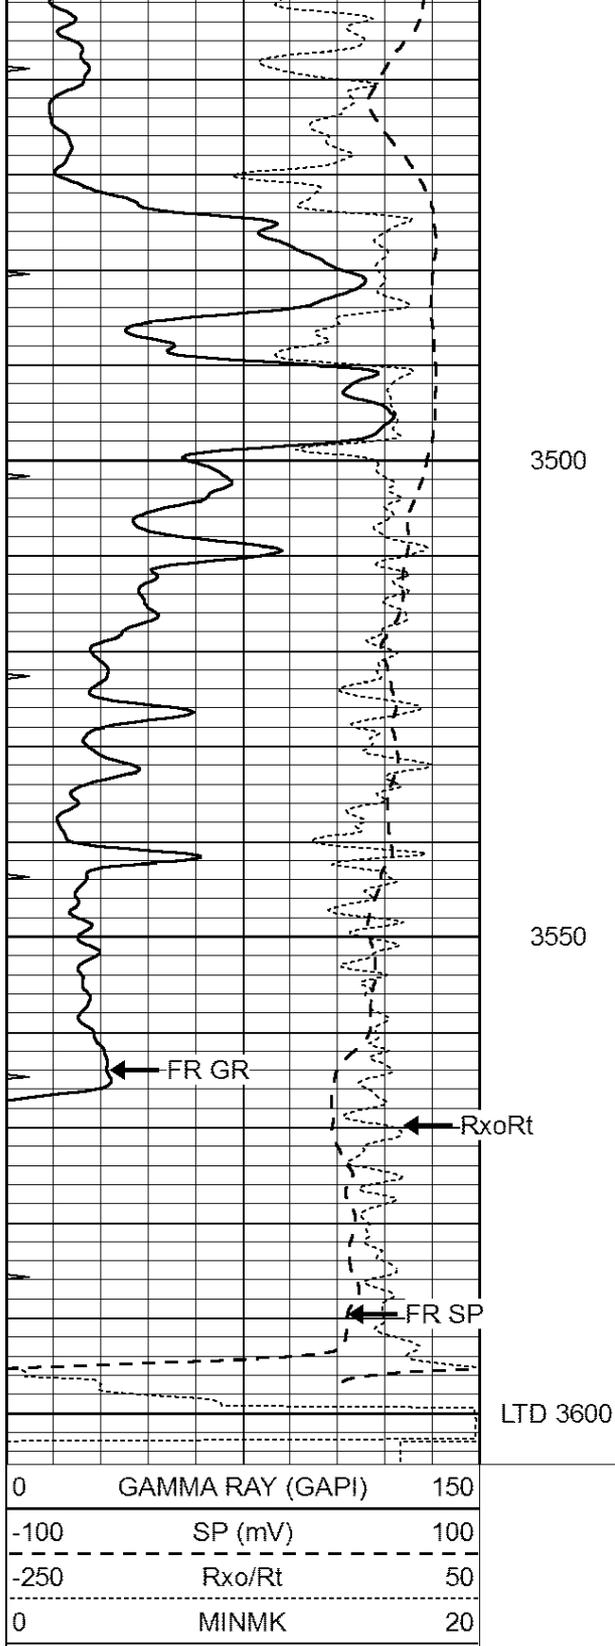


SUPERIOR
Hays,
Kansas

REPEAT SECTION

Database File: 008602pe.db
 Dataset Pathname: pass2.4
 Presentation Format: _dil
 Dataset Creation: Sat Feb 18 10:31:30 2012 by Calc Open-Cased 110302
 Created by: Death in East scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

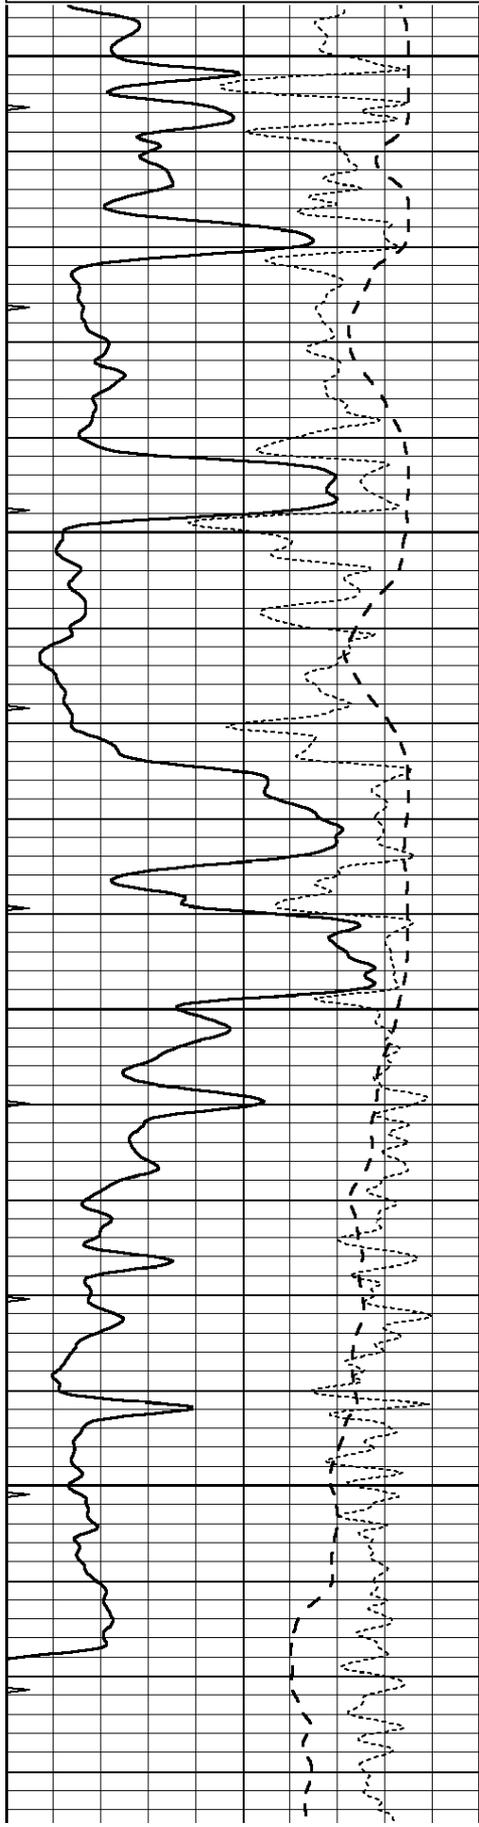



3400

3450

3500

3550

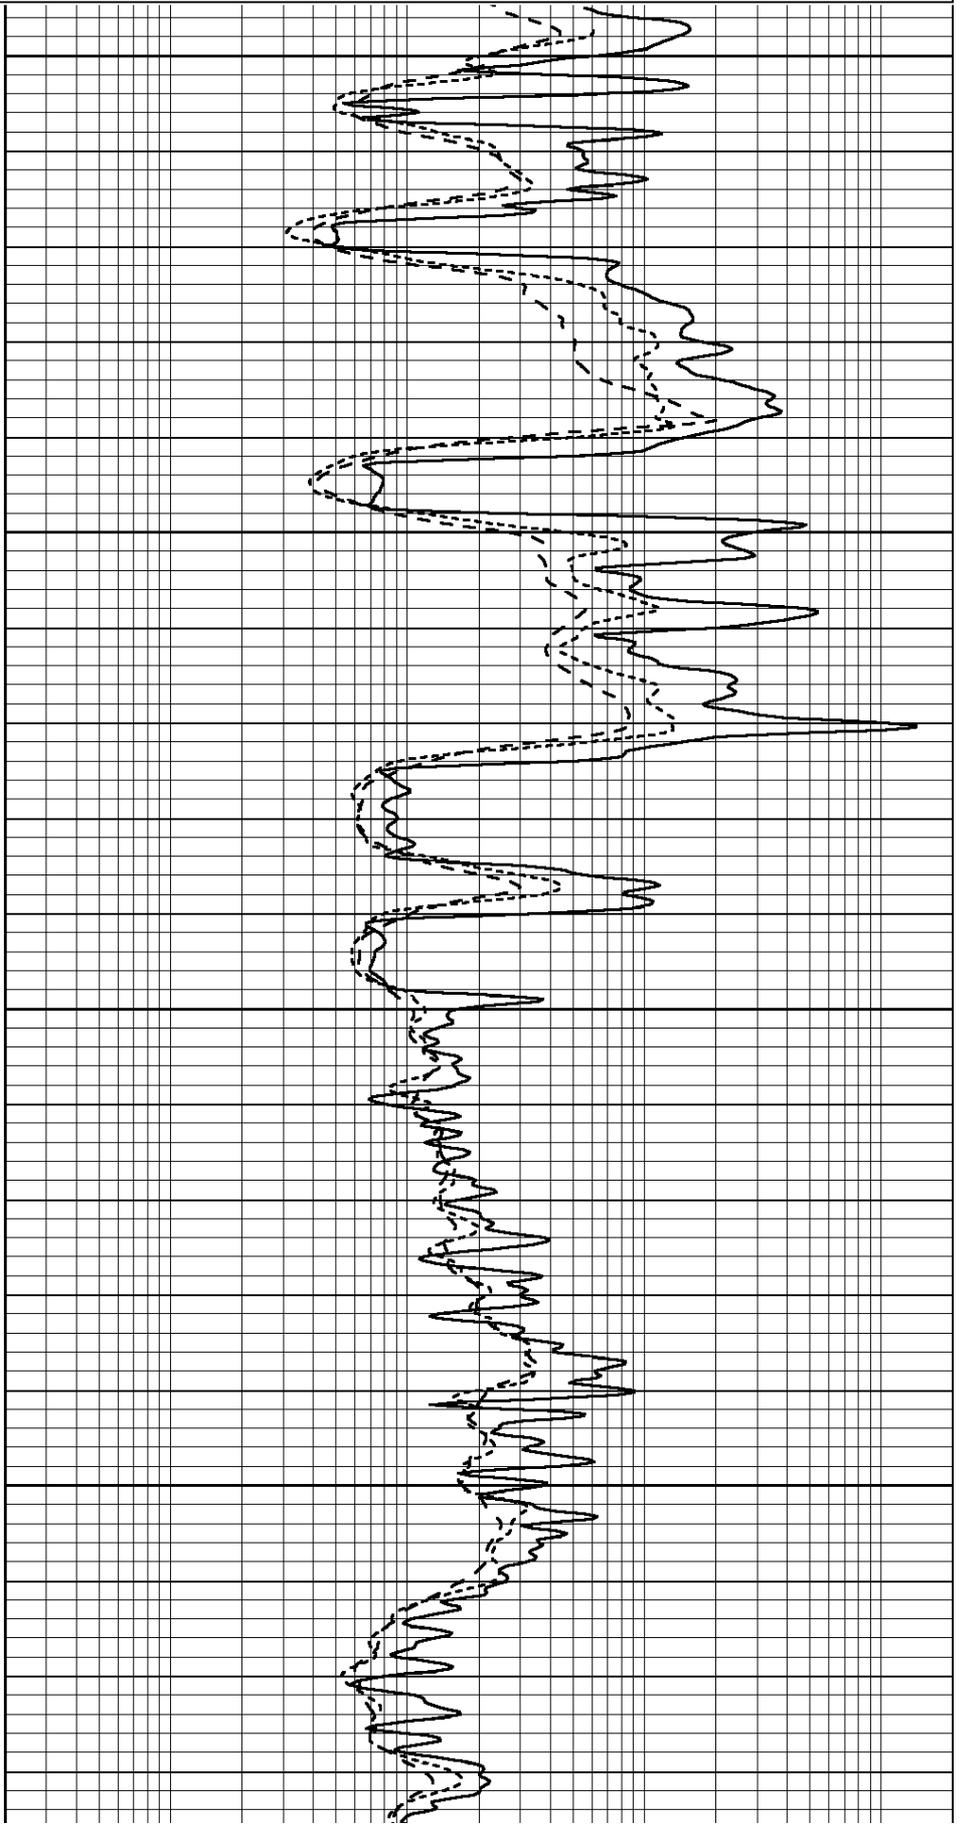

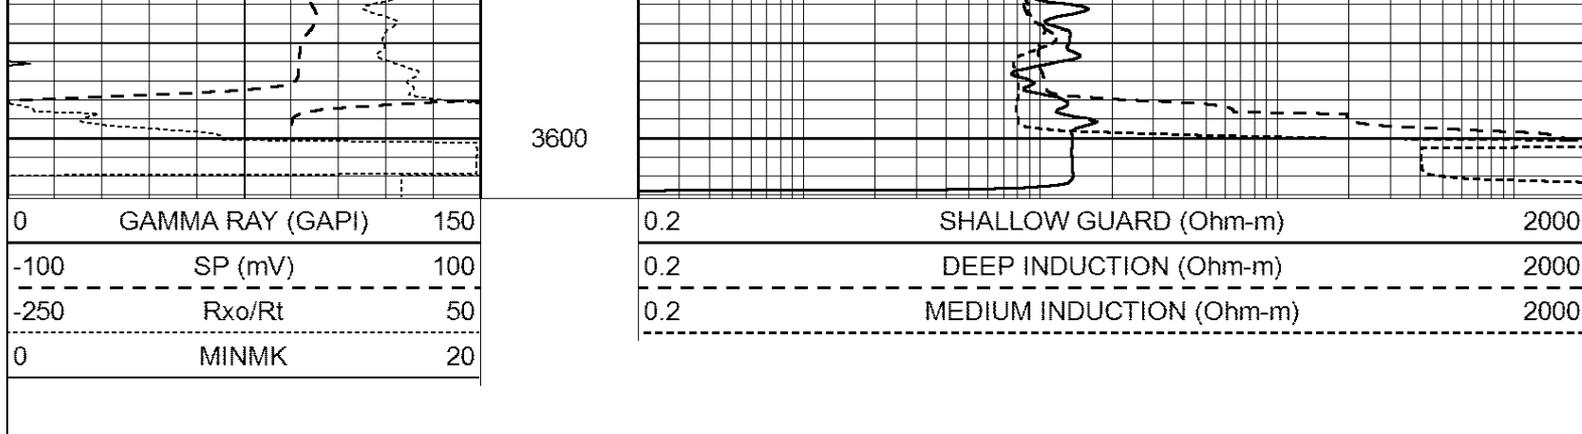

Calibration Report

Database File: 008602pe.db
 Dataset Pathname: pass3.2
 Dataset Creation: Sat Feb 18 13:02:45 2012 by Calc Open-Cased 110302

Dual Induction Calibration Report

Serial-Model: DIL3-GEAR
 Performed: Fri Feb 10 19:56:08 2012

Loop:	Readings				References		Results	
	Air	Loop			Air	Loop	m	b
Deep	0.011	0.656	V	0.000	400.000	mmho/m	640.000	10.000
Medium	0.013	0.740	V	0.000	462.500	mmho/m	700.000	-3.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.002	0.645	V	0.000	400.000	mmho/m	622.059	-1.071
Medium	0.007	0.740	V	0.000	462.500	mmho/m	631.393	-4.555

Litho Density Calibration Report

Serial: 006 Model: PRB
 Performed Sun Aug 15 09:48:41 2010

Litho Density Calibration

	Background	Magnesium	Aluminum	Sandstone	
Window 1	1686.6	11612.8	3932.0	12718.8	cps
Window 2	1531.4	9204.7	3267.8	9851.9	cps
Window 3	1198.3	4733.6	1952.5	4920.6	cps
Window 4	317.3	321.2	325.9	303.6	cps
Long Space	0.0	7673.3	1736.4	8320.4	cps
Short Space	1.7	2548.5	1657.2	2628.8	cps
Rho		1.7100	2.5900	1.3800	g/cc
Pe			2.5700	1.5500	
Rib Angle	: 43.8	Rib Slope	: 0.961	Density/Spine Ratio	: 0.569
Spine Angle	: 73.8	Spine Slope	: 3.453	Spine Intercept	: -18.1

Caliper

	Readings	Reference
Low Ref	4.0	8.3
High Ref	5.9	15.0
Gain:	3.5	Offset: -5.5

Compensated Neutron Calibration Report

Serial Number: 070808
 Tool Model: Probe

PRE-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number:	070559		
Tool Model:	OPEN_GR		
Performed:	Tue Feb 14 15:29:38 2012		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.3000	GAPI/cps	