



Dual Induction Log

Pioneer Energy Services

API No.	15-135-25452-00-00		
Company	American Warrior, Inc.		
Well	D. McVicker #2-25		
Field	McVicker		
County	Ness	State	Kansas
Location	SE SW NE NE 1055' FNL / 838' FEL		
Sec: 25	Twp: 20S	Rge: 26W	Other Services CNL/CDL MEL
Permanent Datum	Ground Level	Elevation 2429	Elevation
Log Measured From	Kelly Bushing	11 Ft. Above Perm. Datum	K.B. 2440 D.F. 2429
Drilling Measured From	Kelly Bushing		G.L. 2429
Date	8/21/2012		
Run Number	One		
Depth Driller	4520		
Depth Logger	4521		
Bottom Logged Interval	4520		
Top Log Interval	200		
Casing Driller	8.625 @ 224		
Casing Logger	222		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	4500		
Density / Viscosity	9.4 40		
pH / Fluid Loss	9.5 16.0		
Source of Sample	Flowline		
Rm @ Meas. Temp	0.50 @ 78		
Rmf @ Meas. Temp	0.38 @ 78		
Rmc @ Meas. Temp	0.68 @ 78		
Source of Rmf / Rmc	Charts		
Rm @ BHT	0.32 @ 121		
Operating Rig Time	4 Hours		
Max Rec. Temp. F	121		
Equipment Number	15		
Location	Hays		
Recorded By	R. Barnhart		
Witnessed By	Kevin Timson		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858




Ness City, KS:
W to Laird Elevator: 1/4W to J Rd., 10S to 20 Rd.,
4W to F Rd., 1/4S, W into



Database File: amwar_hd.db
Dataset Pathname: dil/amwmain
Presentation Format: dil2in
Dataset Creation: Tue Aug 21 03:50:44 2012
Charted by: Depth in Feet scaled 1:600



0	Gamma Ray	150
-200	SP	0



0	Shallow Resistivity	50
0	Deep Resistivity	50
1000	Conductivity	0
15000	Line Tension	0
50	Shallow Resistivity	500
50	Deep Resistivity	500




LSPD

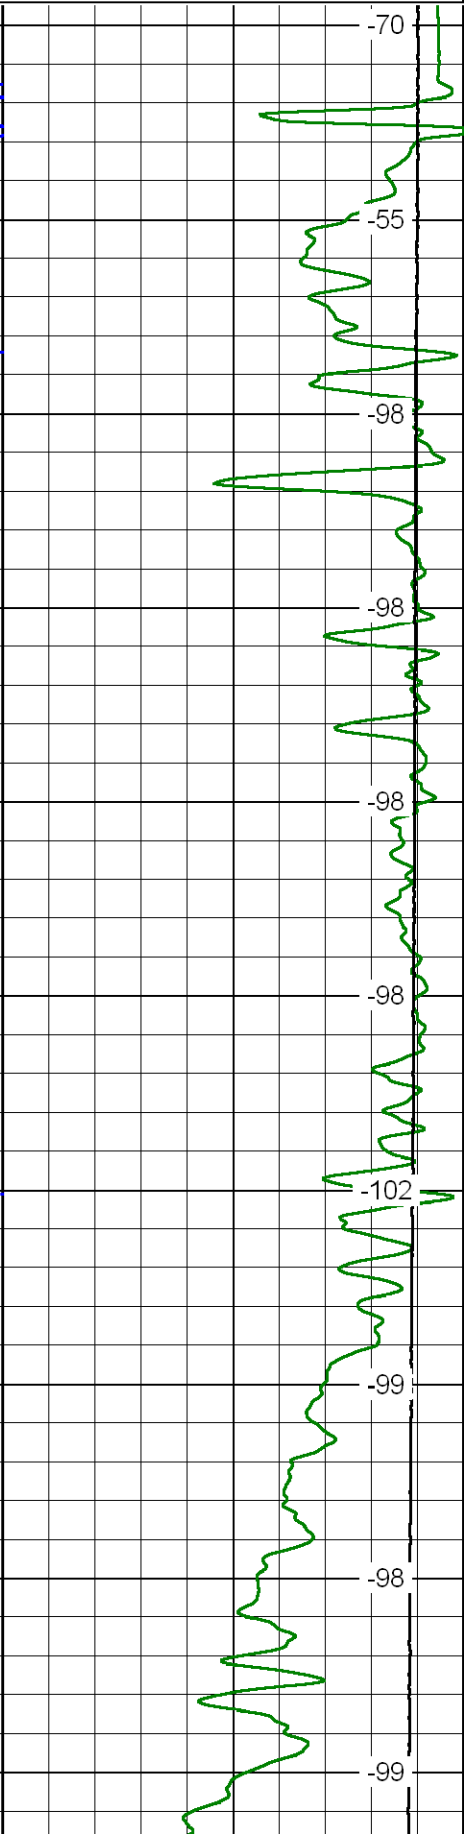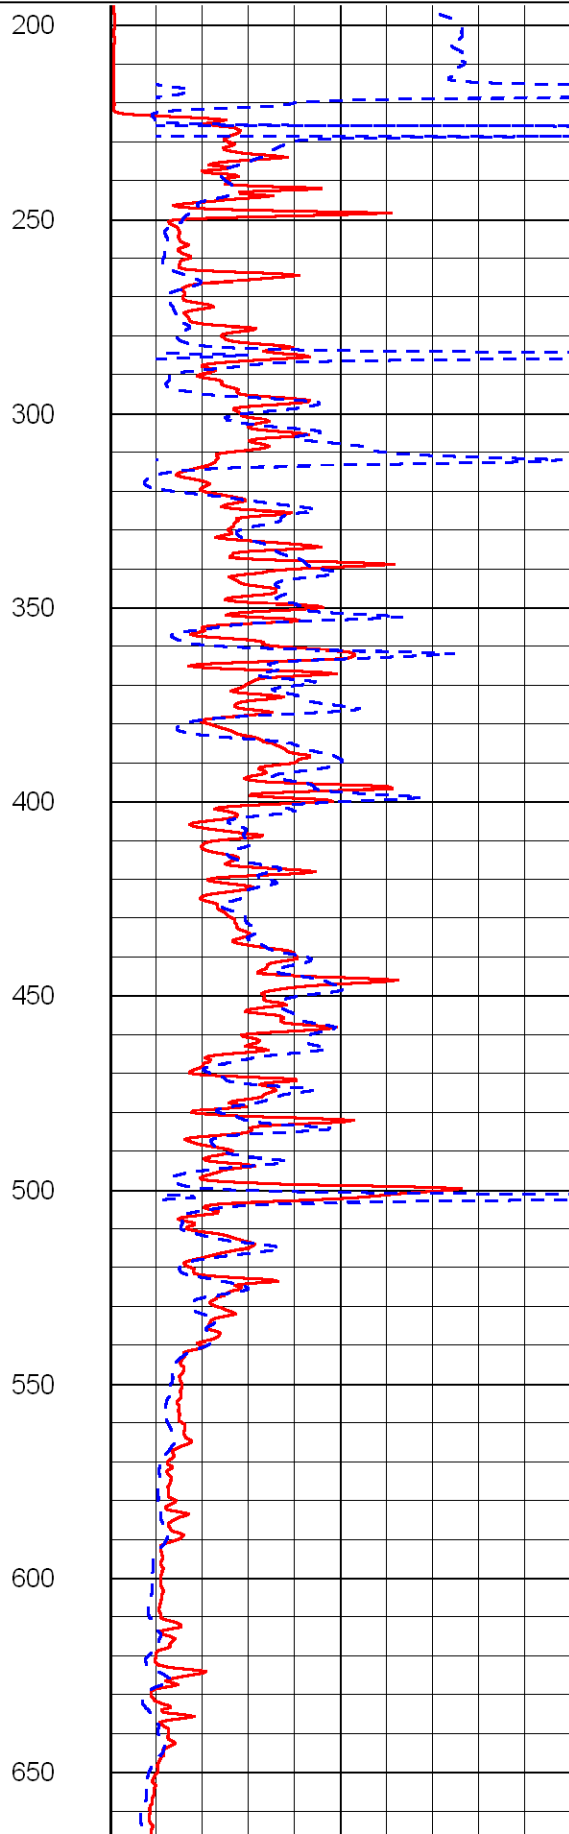
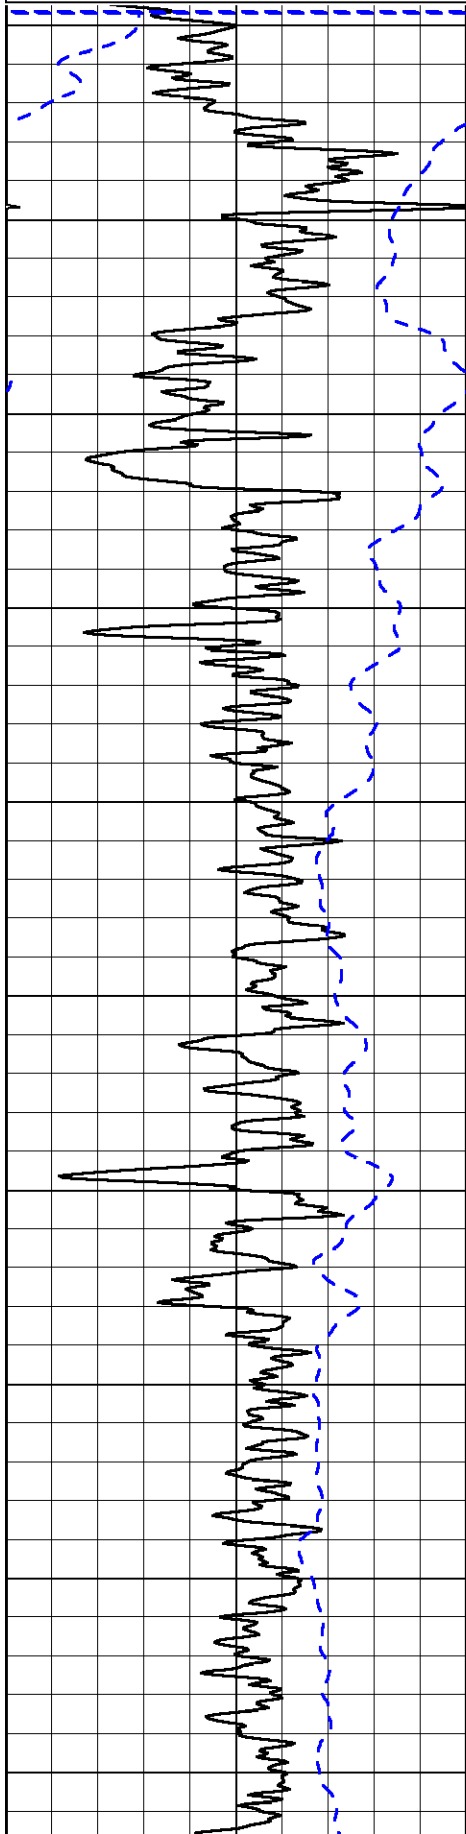



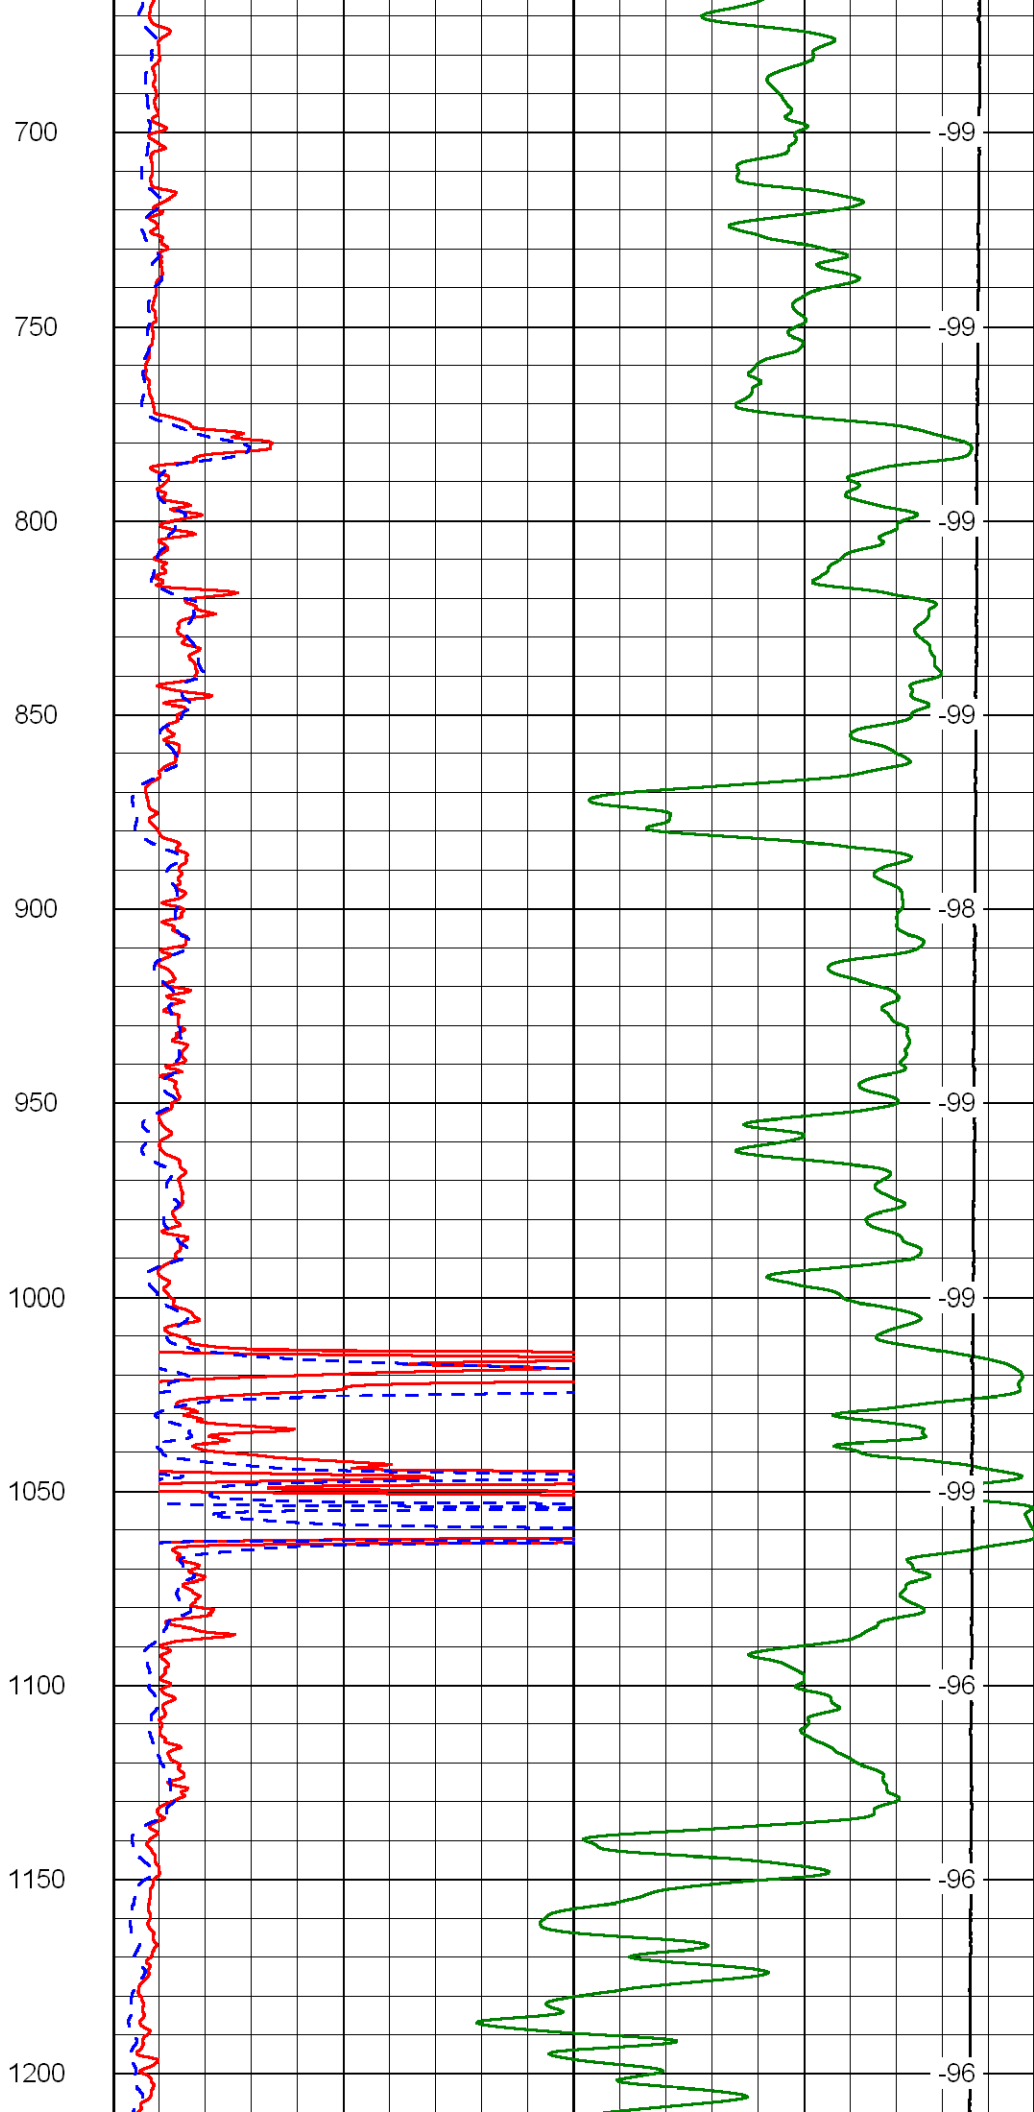
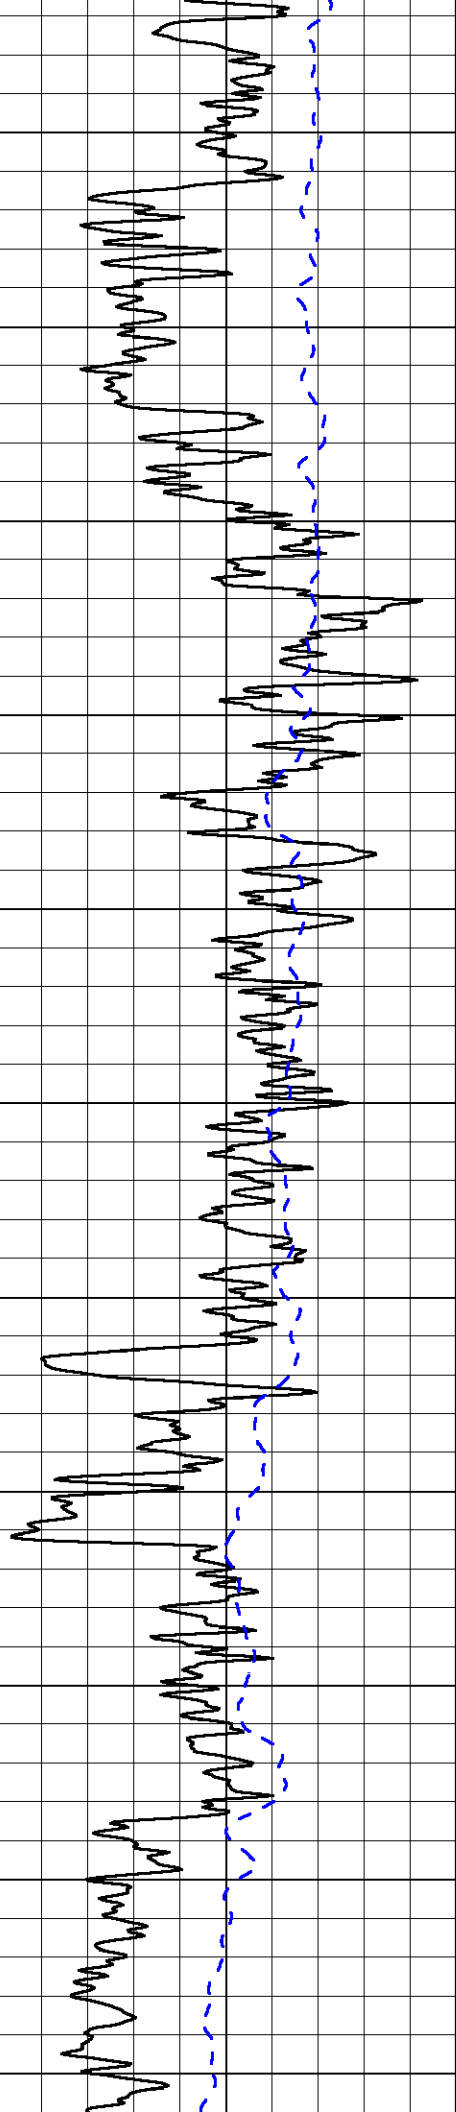


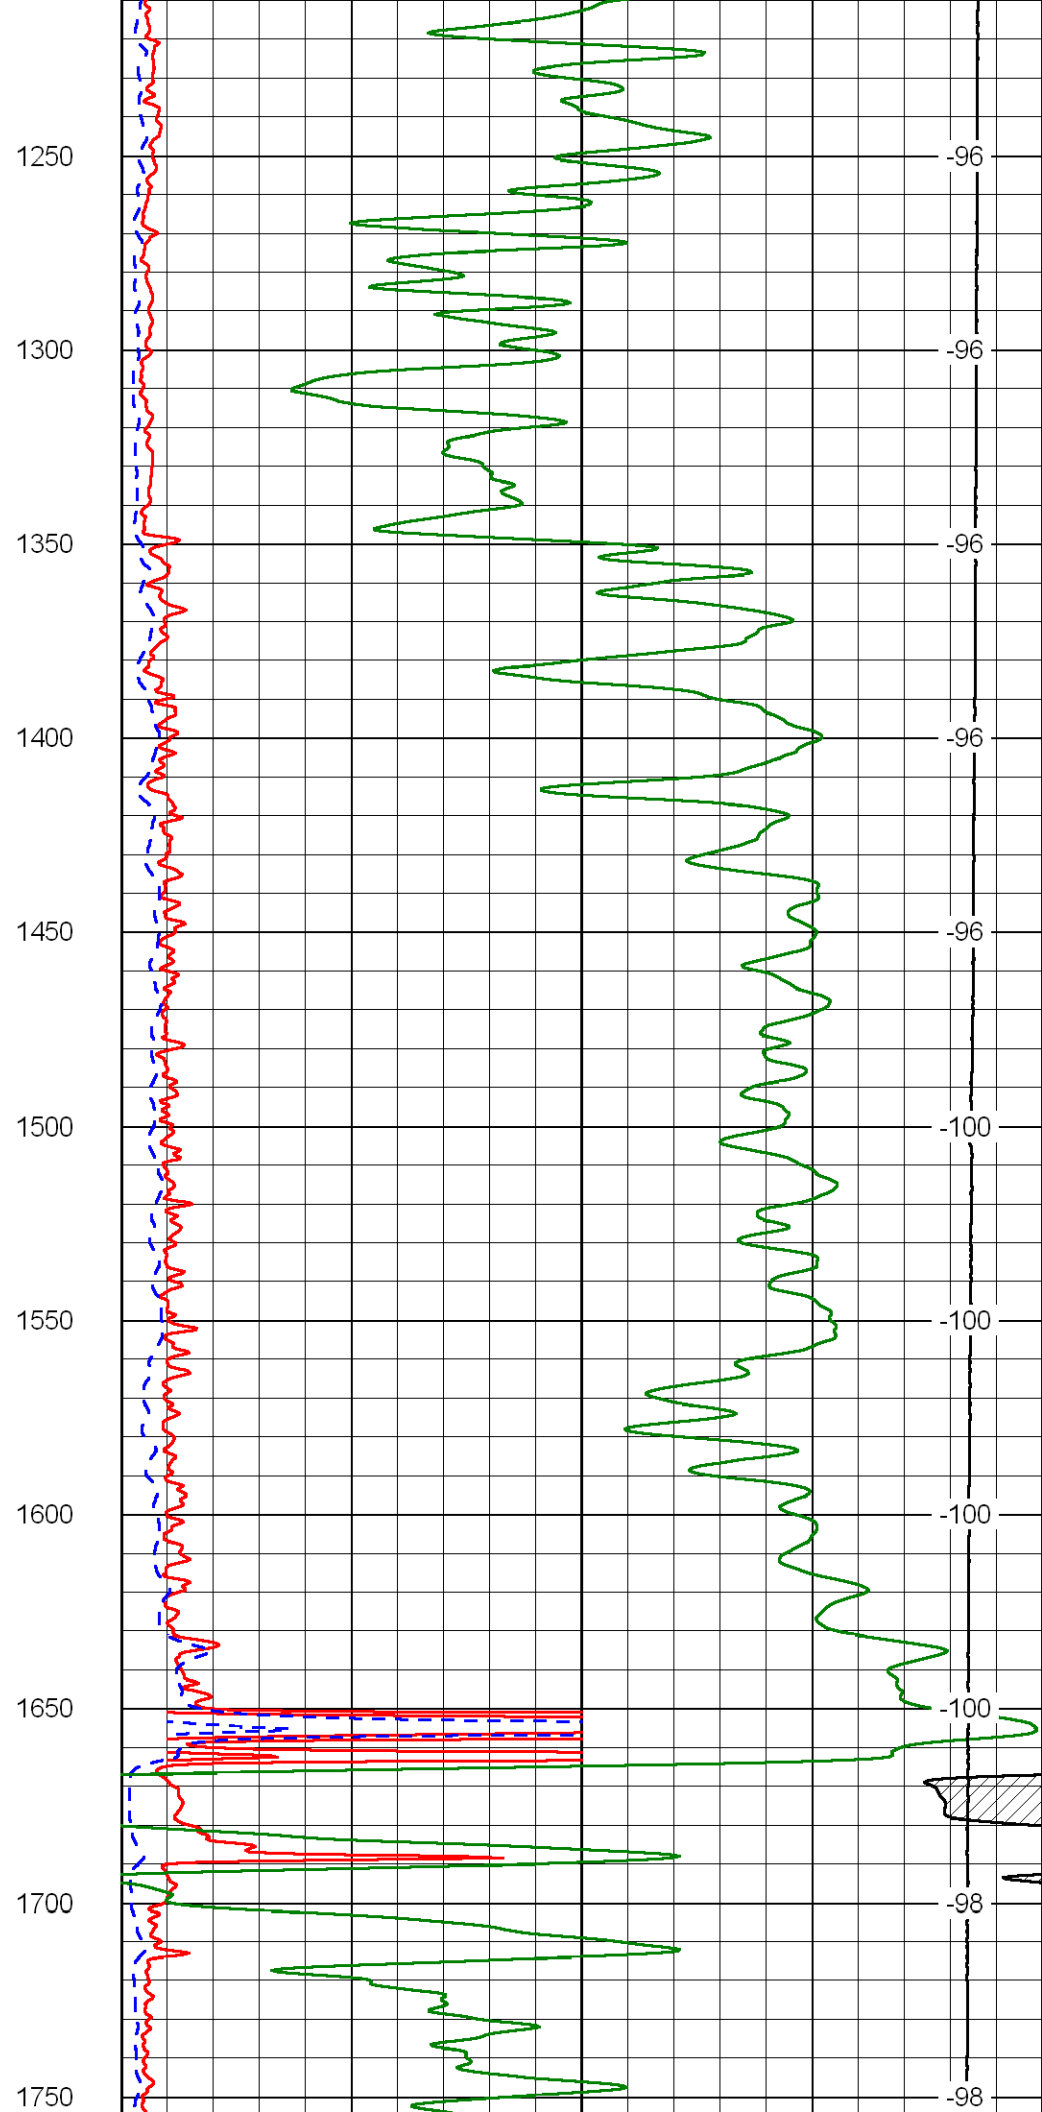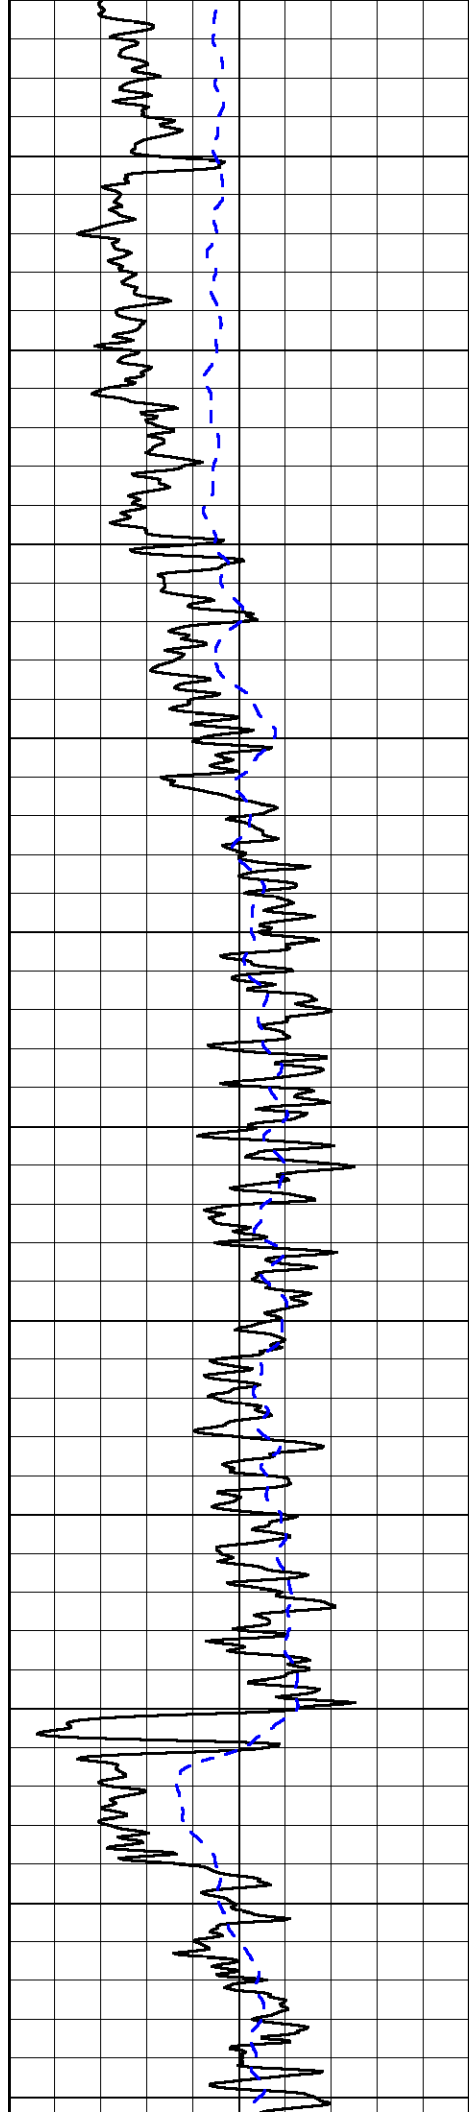


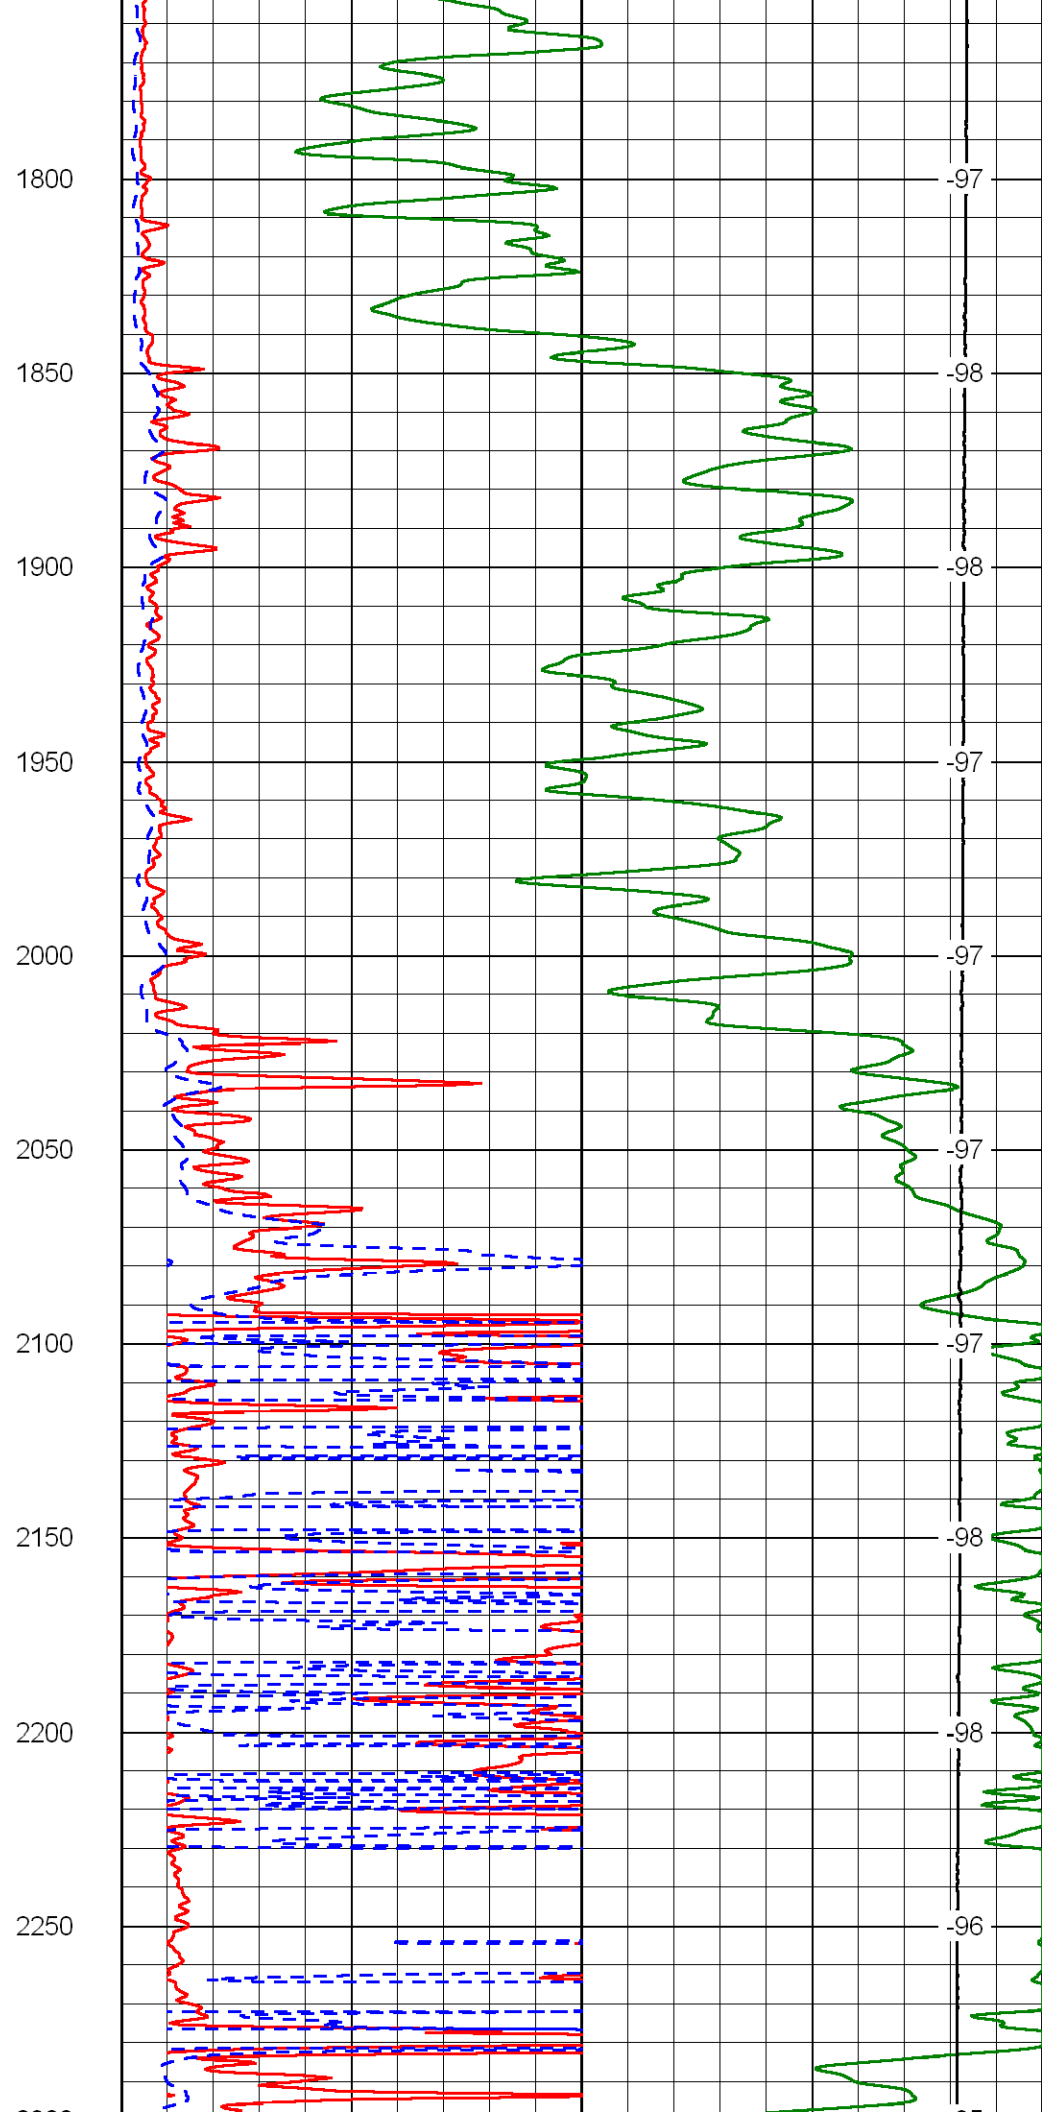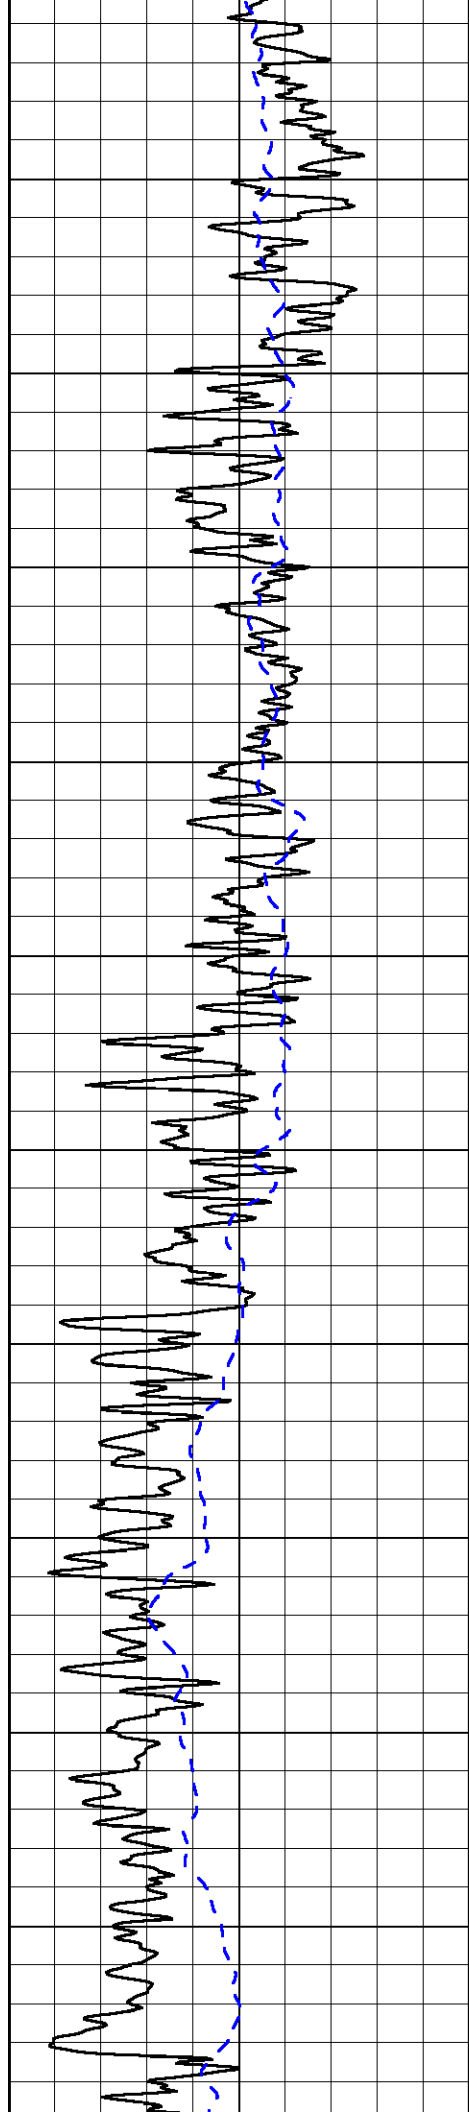

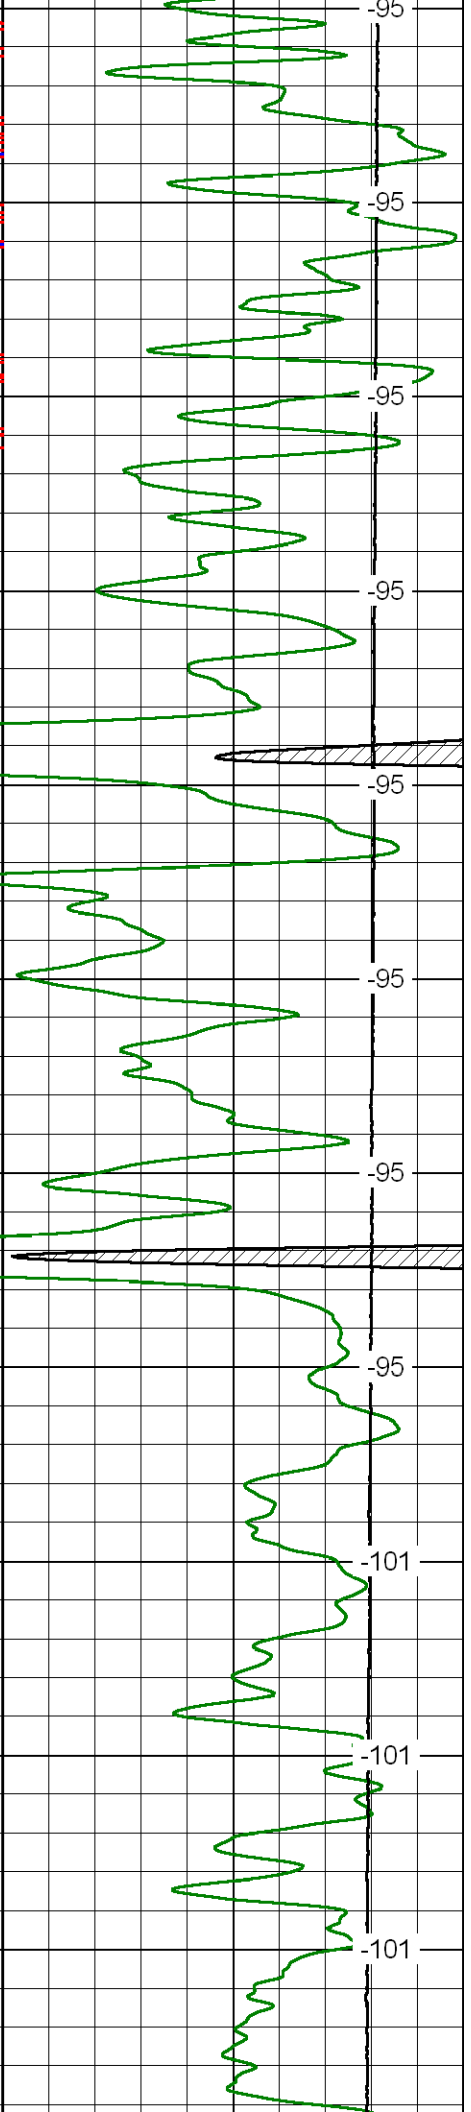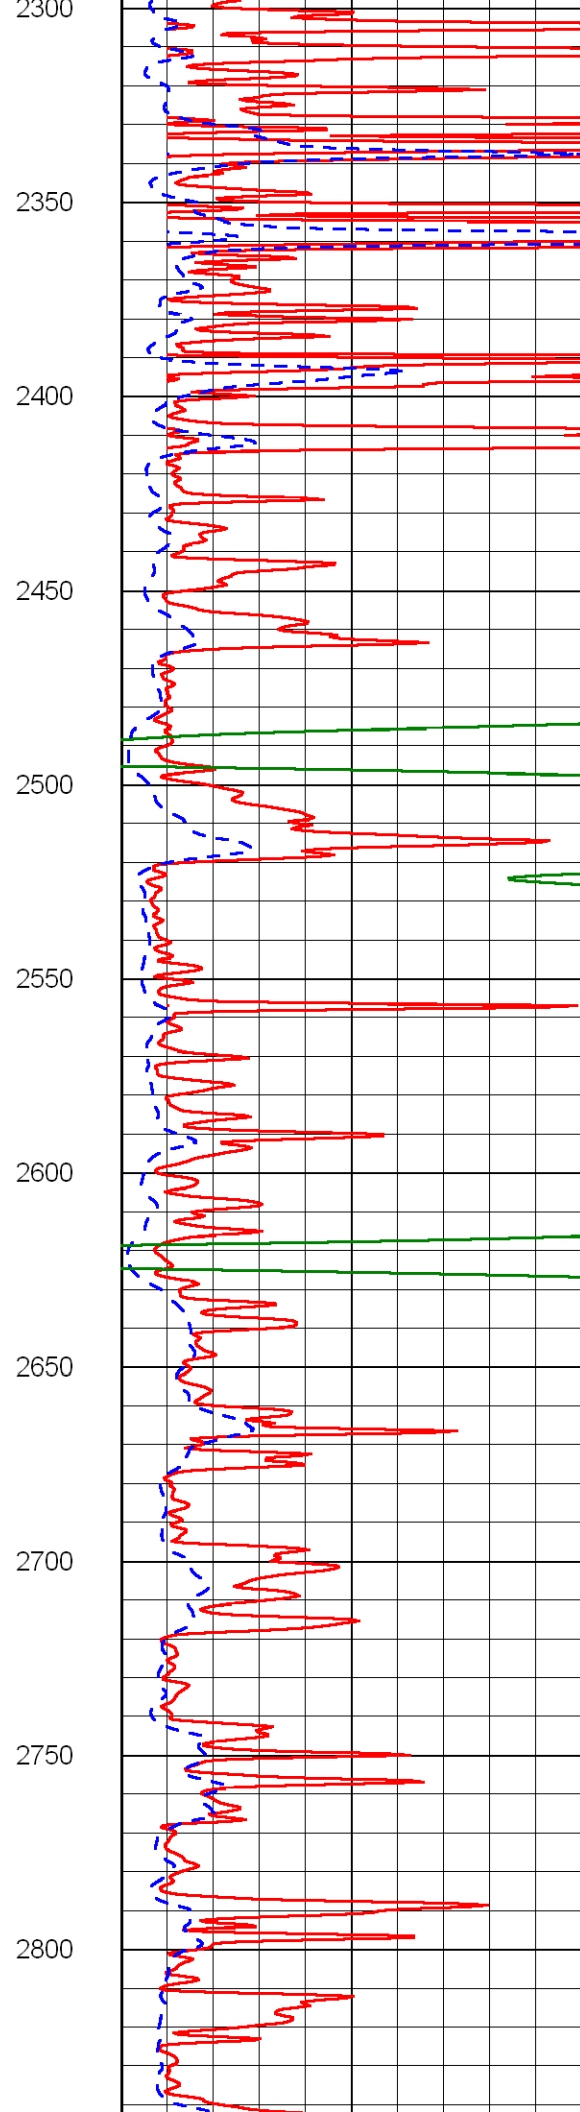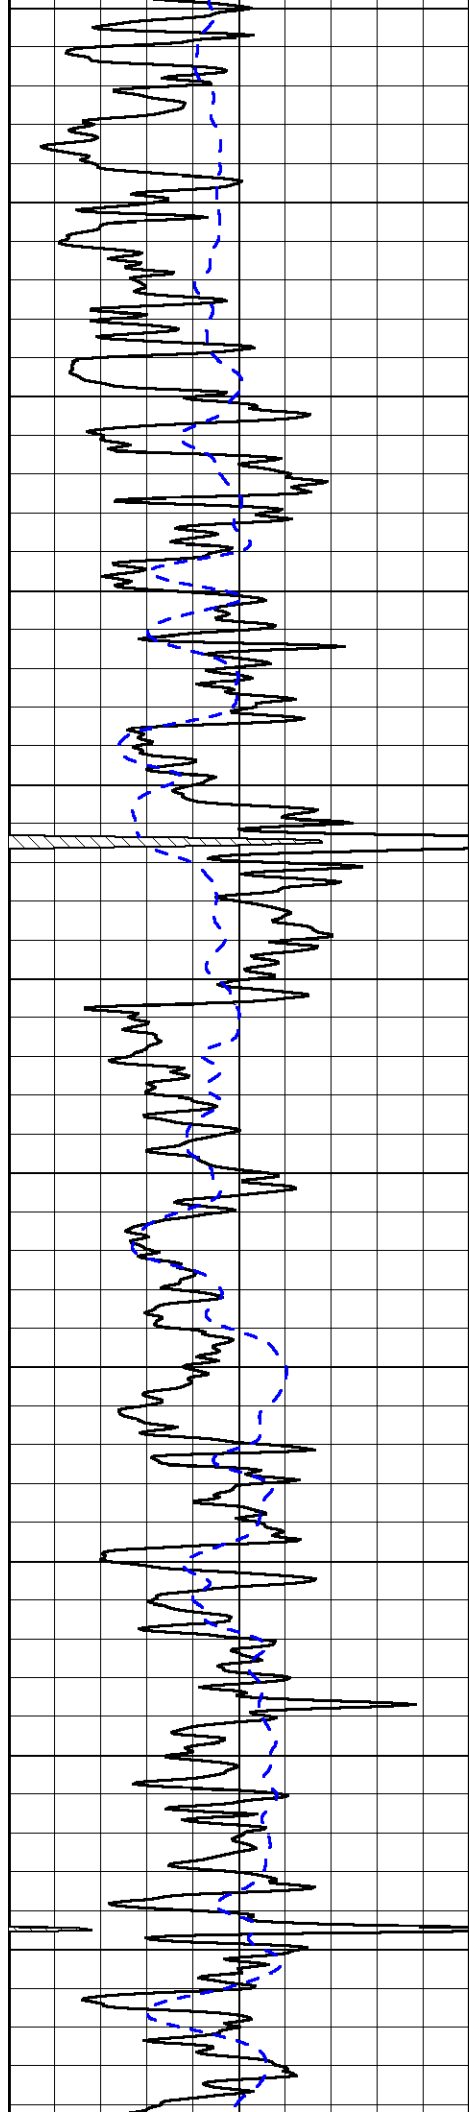

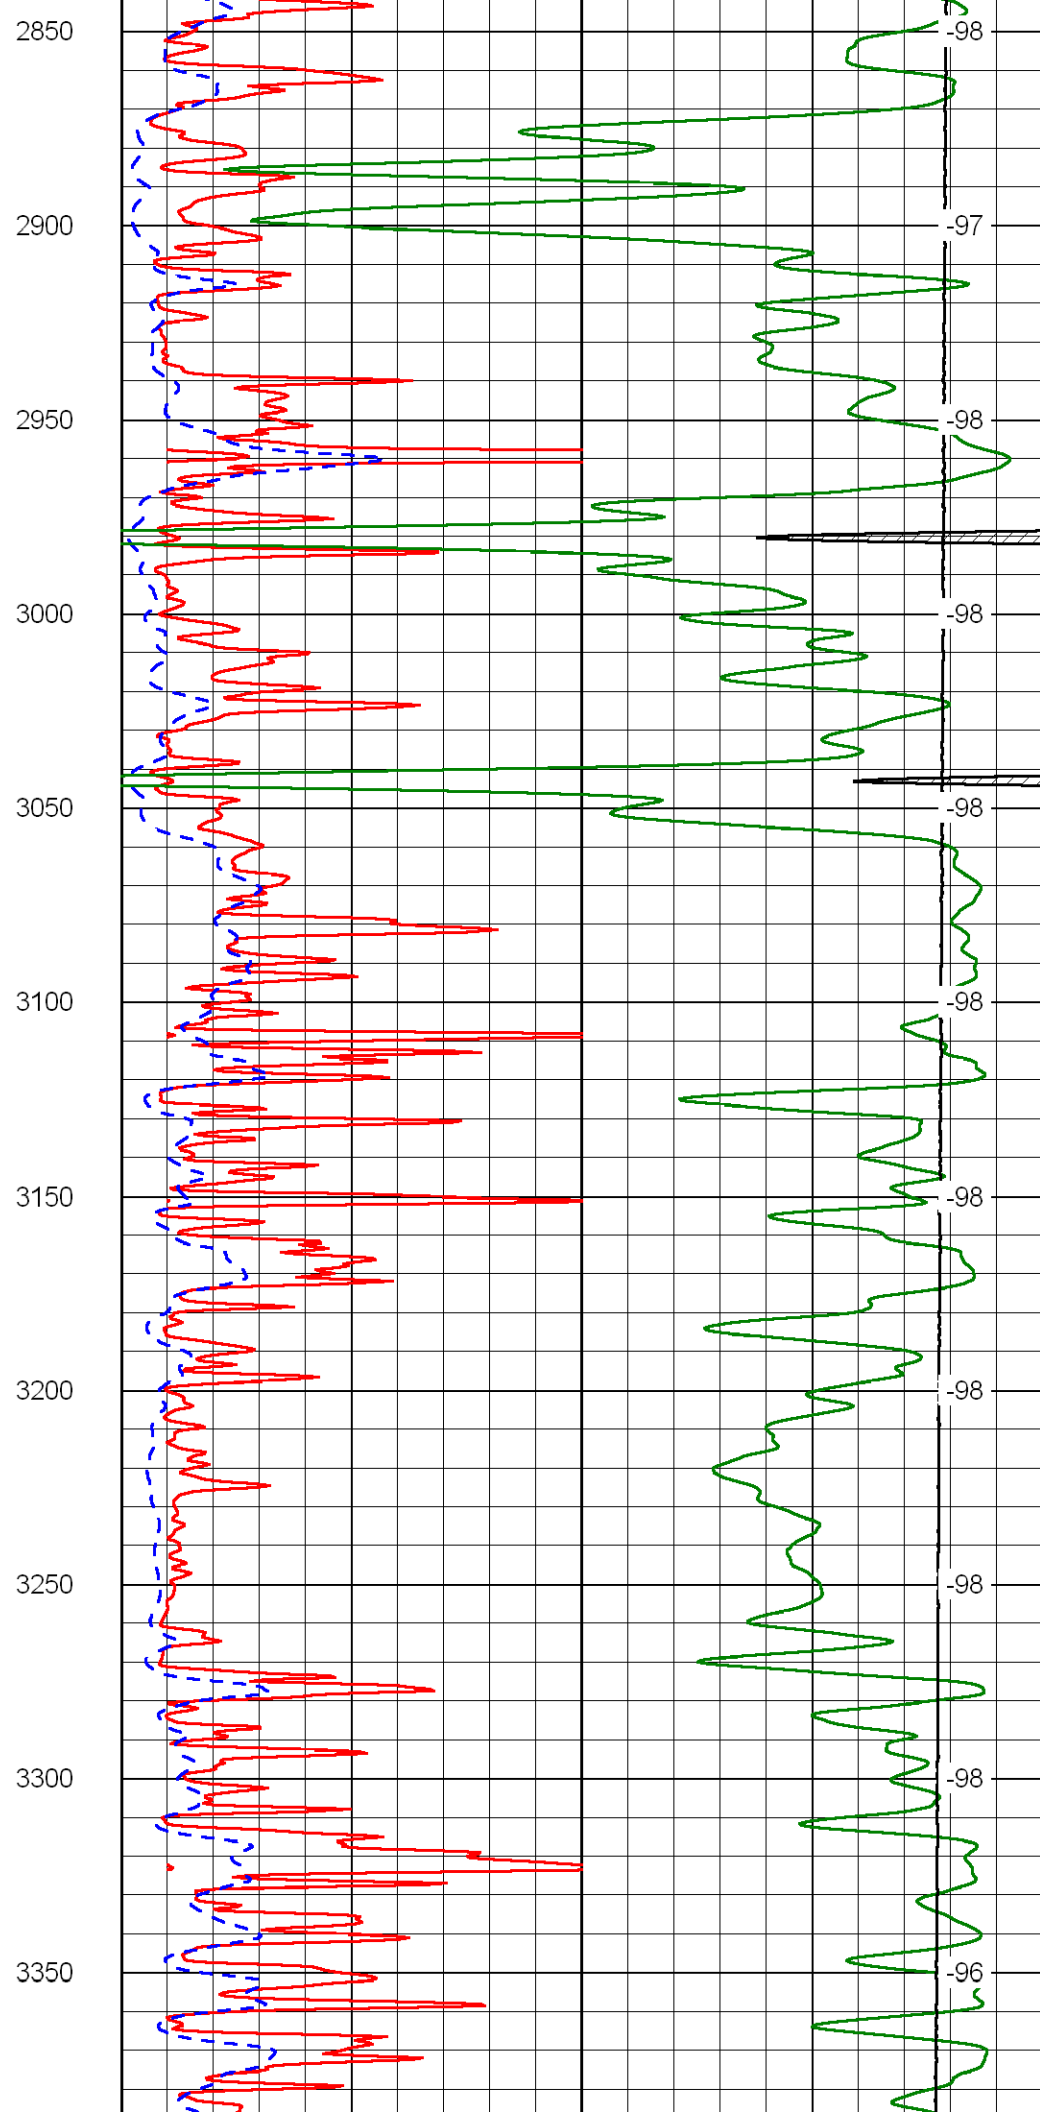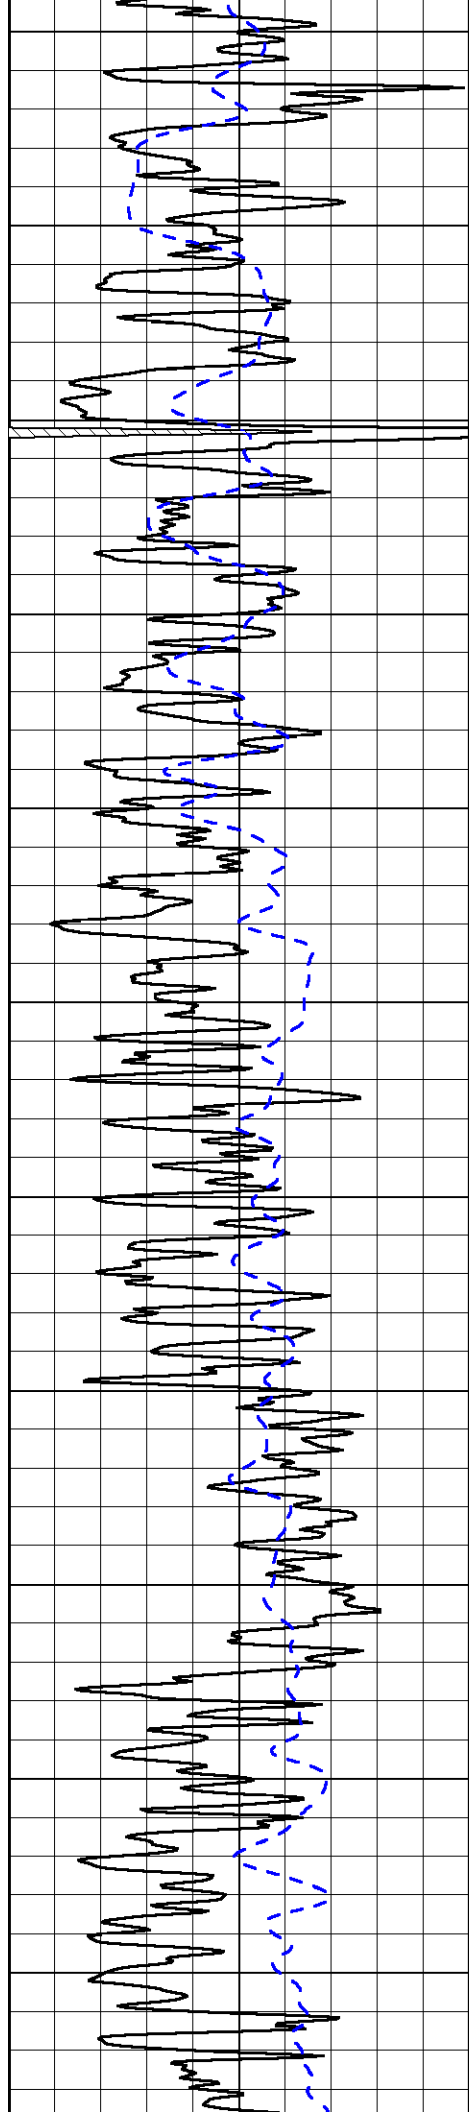

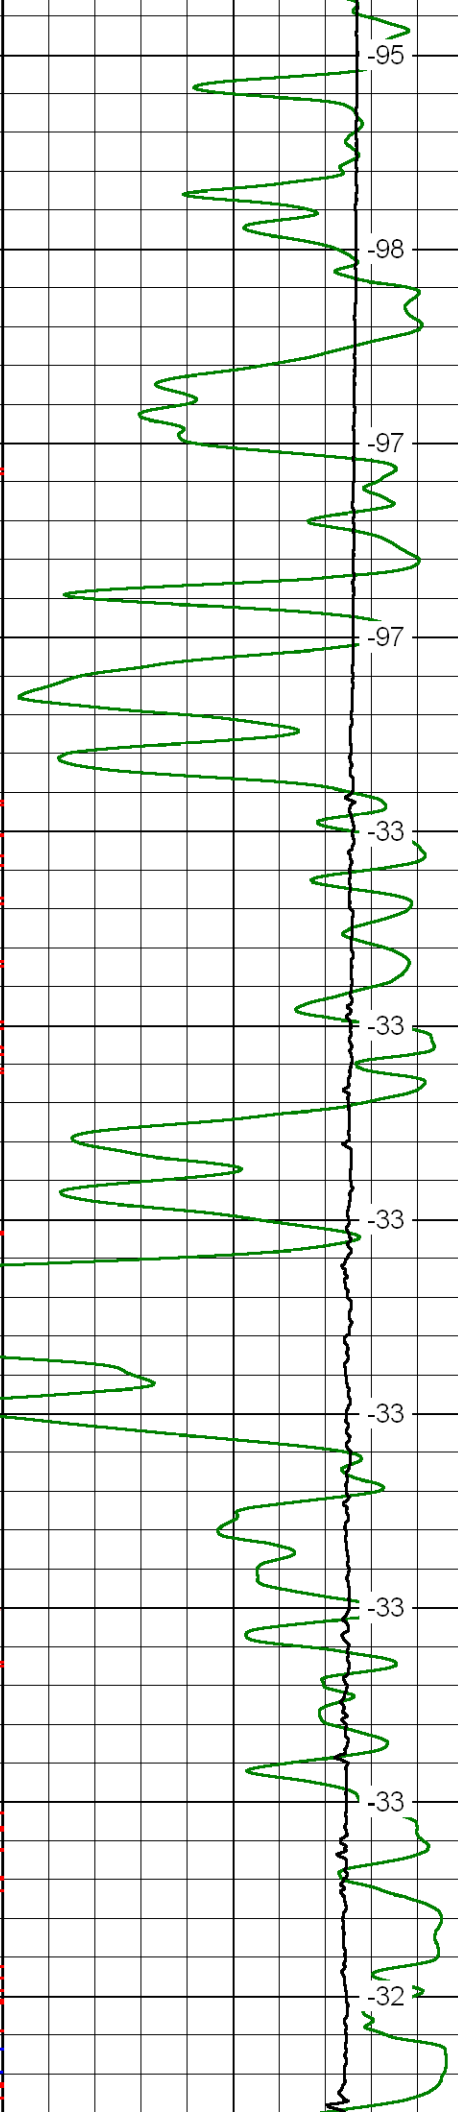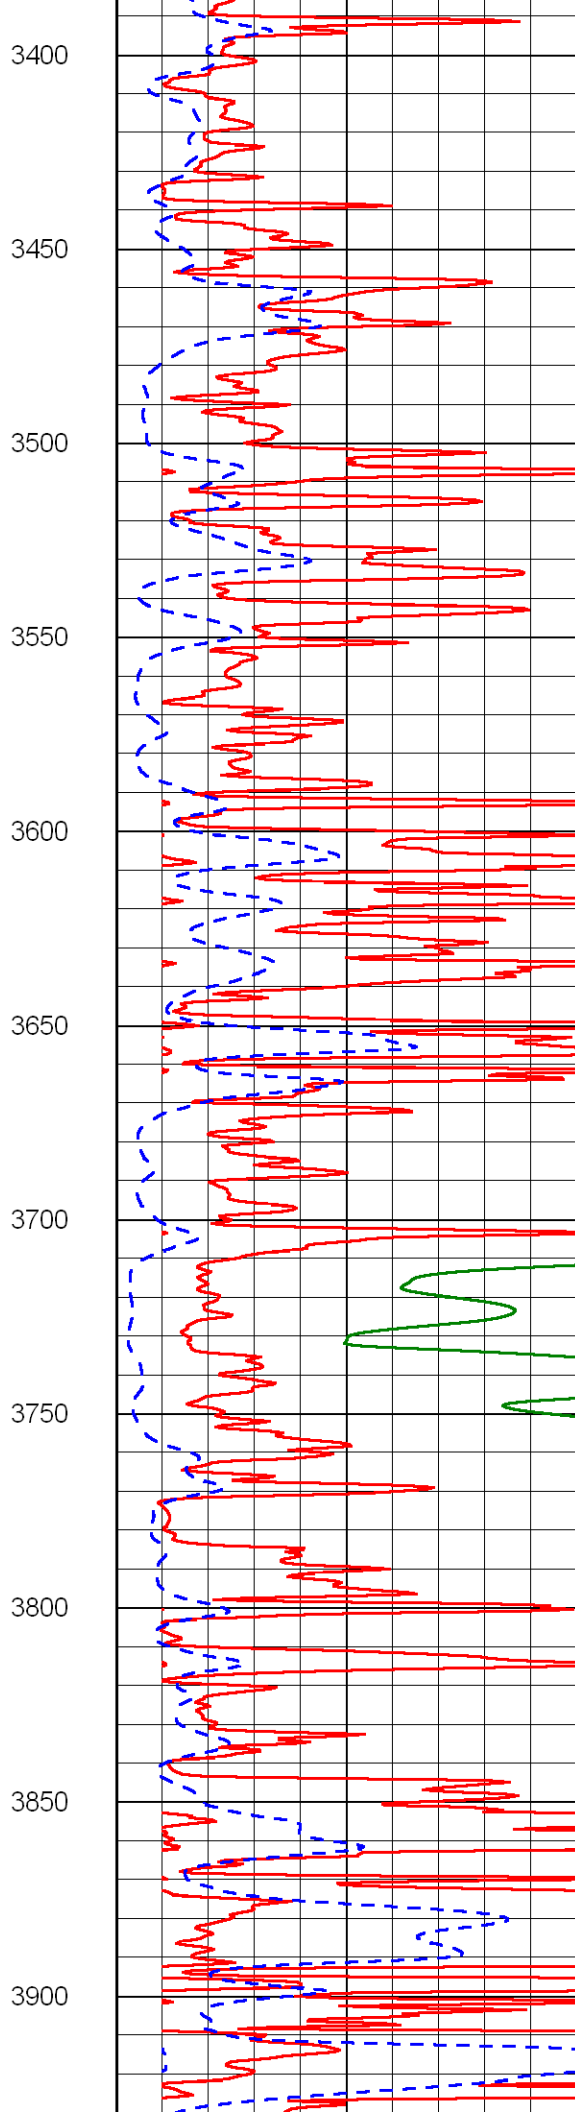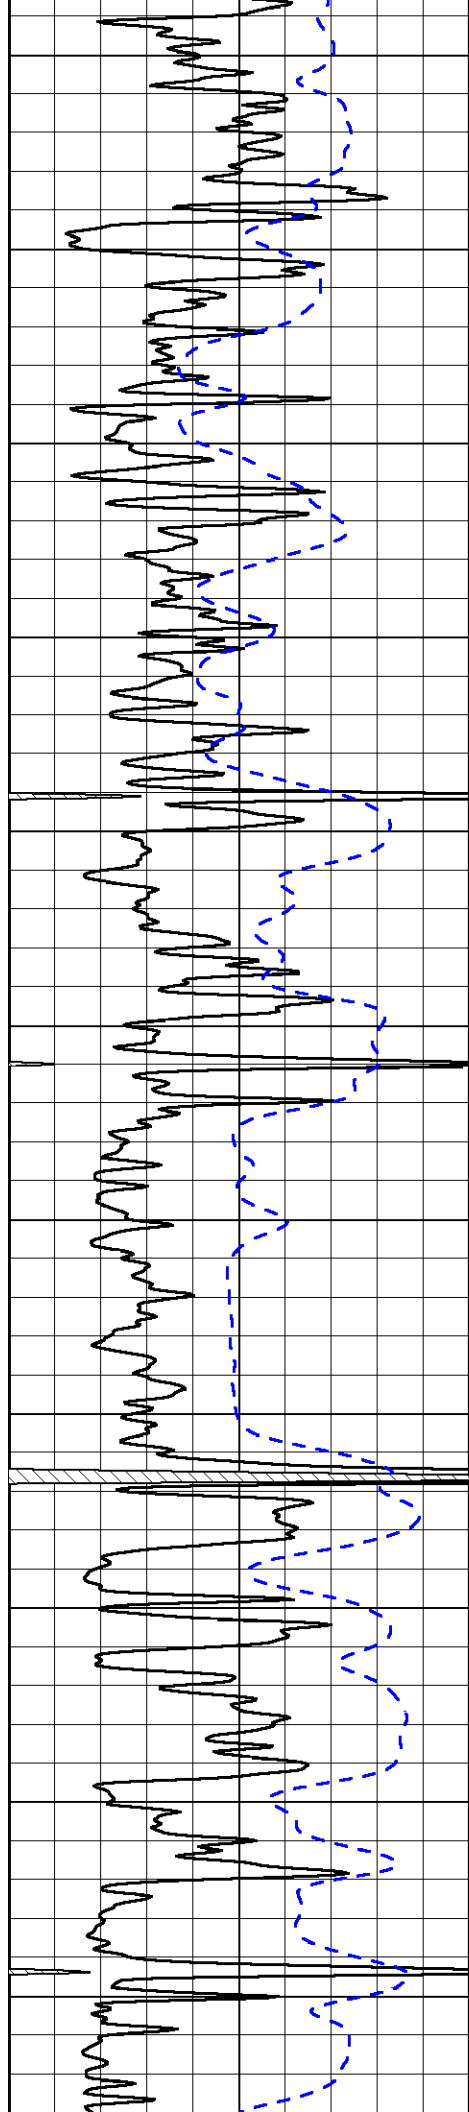

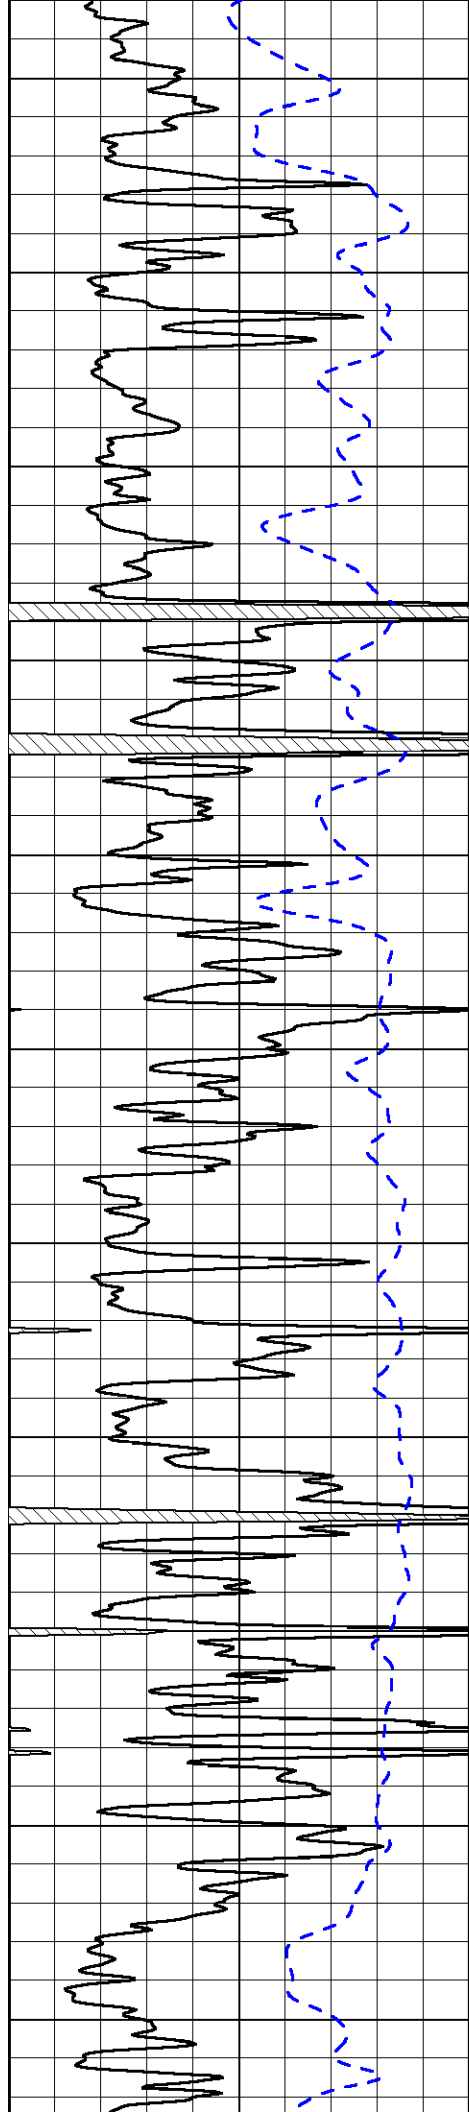

3950

4000

4050

4100

4150

4200


4250

4300

4350

4400

4450

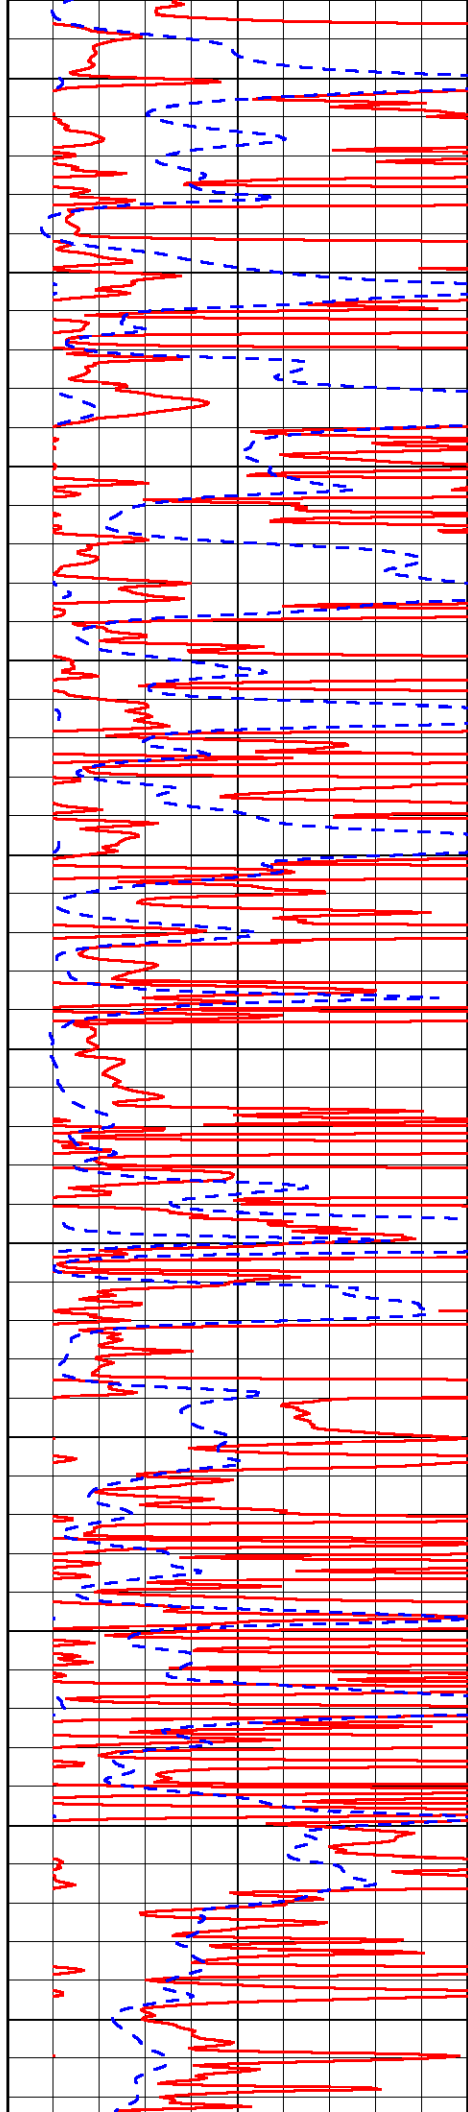

-32

-32

-32

-32

-32

-32


-32


-31

-32



-31

-31

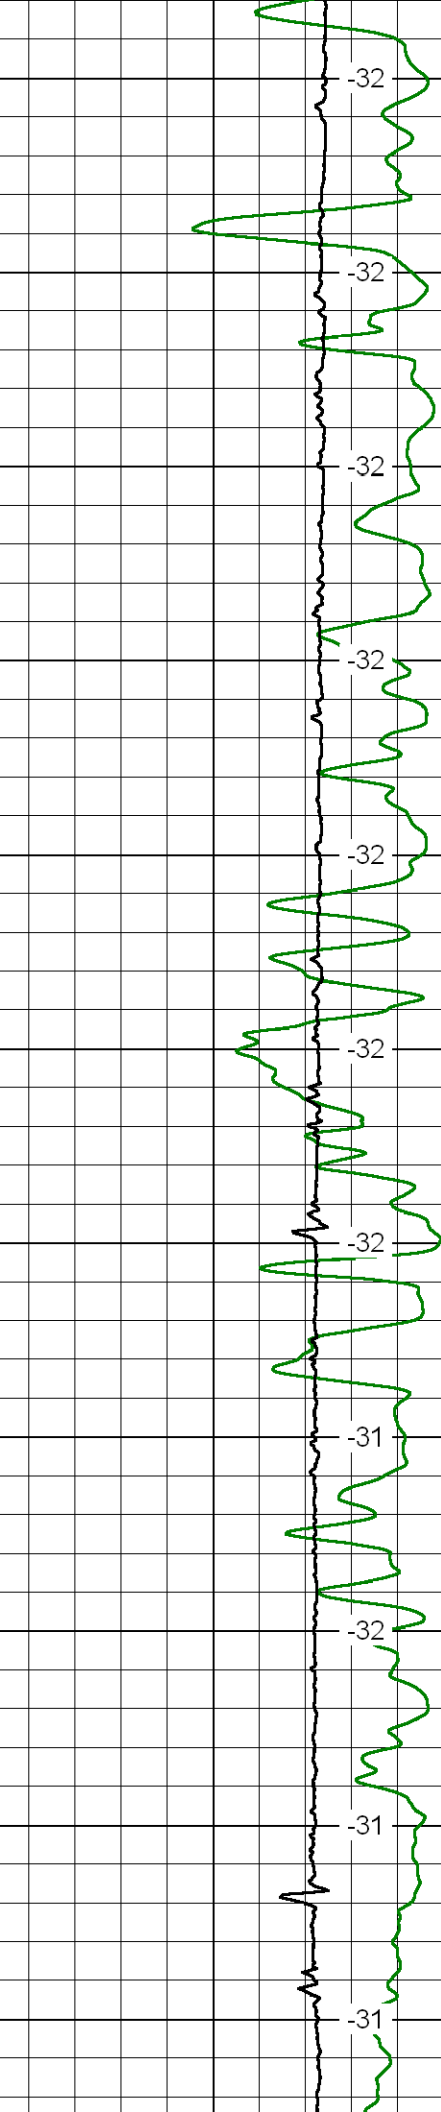

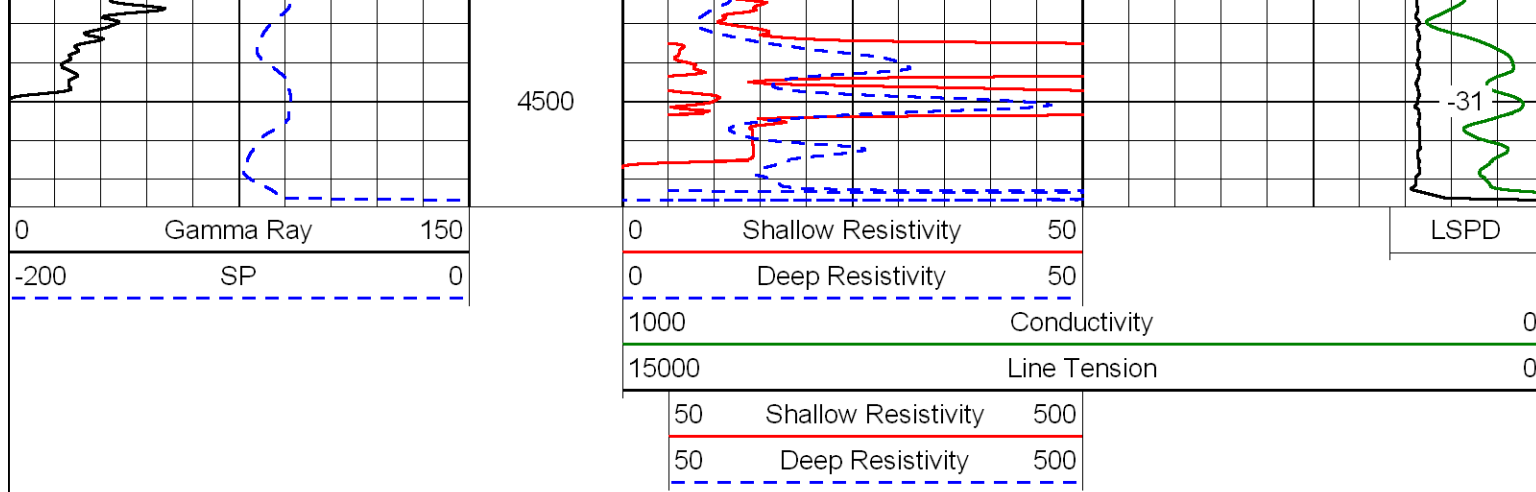

Database File: amwar_hd.db
 Dataset Pathname: dil/amwmain
 Presentation Format: dil
 Dataset Creation: Tue Aug 21 03:50:44 2012
 Charted by: Depth in Feet scaled 1:240

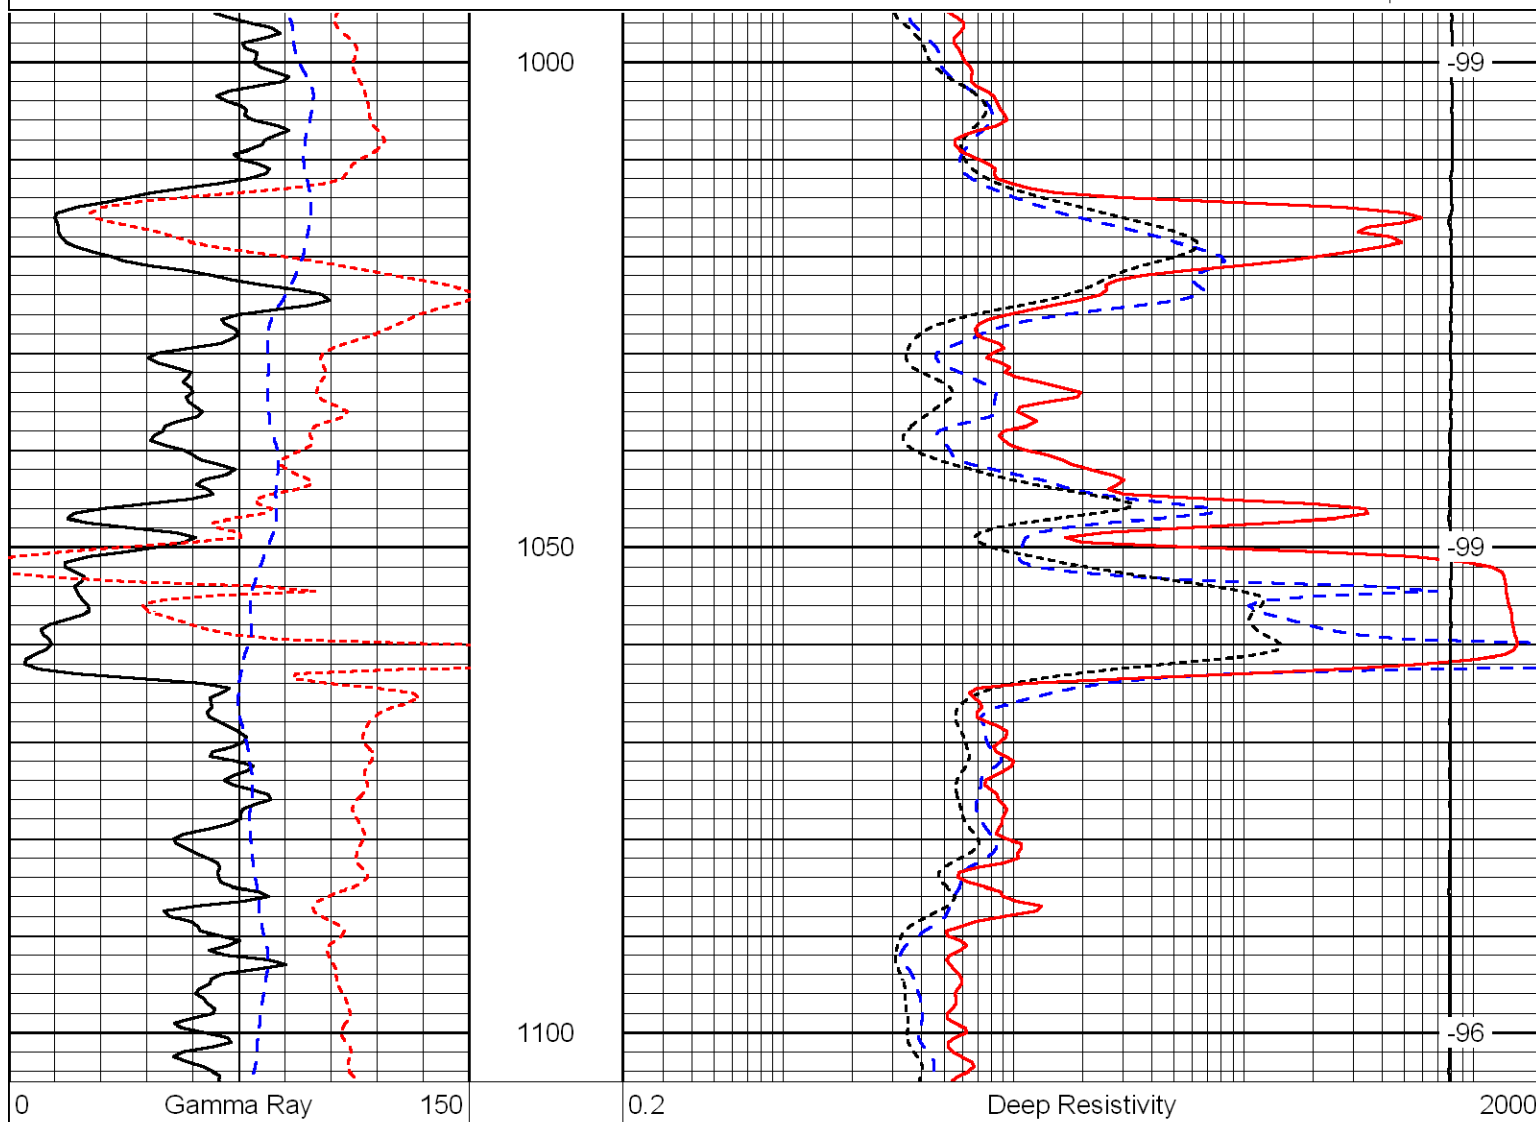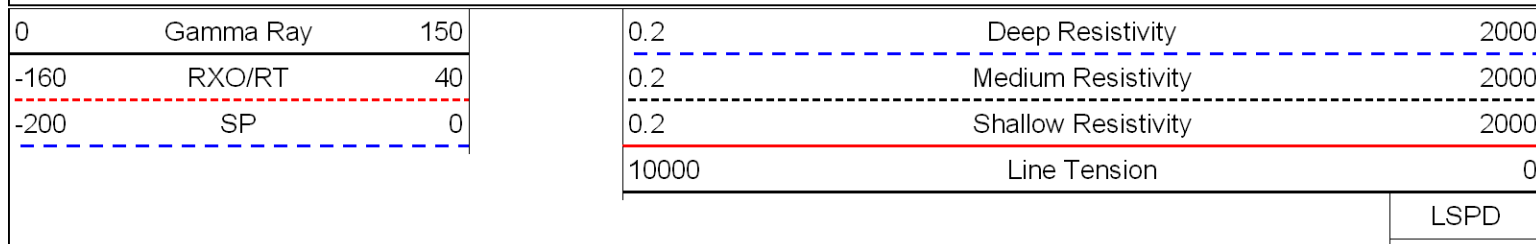


-160	RXO/RT	40
-200	SP	0

0.2	Medium Resistivity	2000
0.2	Shallow Resistivity	2000
10000	Line Tension	0
		LSPD

Database File: amwar_hd.db
 Dataset Pathname: dil/amwmain
 Presentation Format: dil
 Dataset Creation: Tue Aug 21 03:50:44 2012
 Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
-160	RXO/RT	40
-200	SP	0


0.2	Deep Resistivity	2000
0.2	Medium Resistivity	2000
0.2	Shallow Resistivity	2000
10000	Line Tension	0
		LSPD

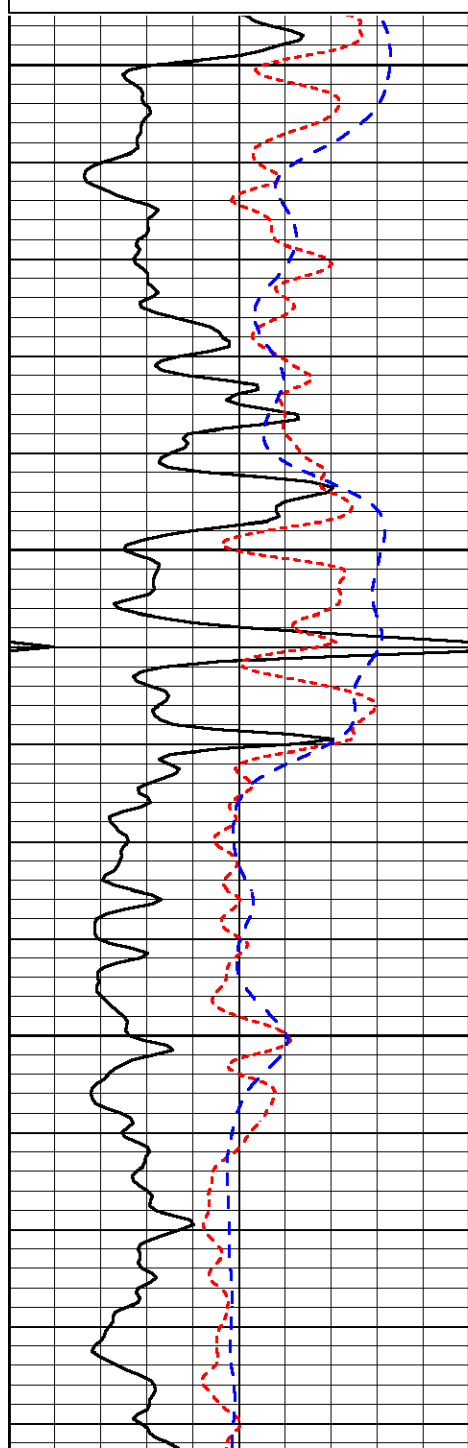

3600

3650


3700

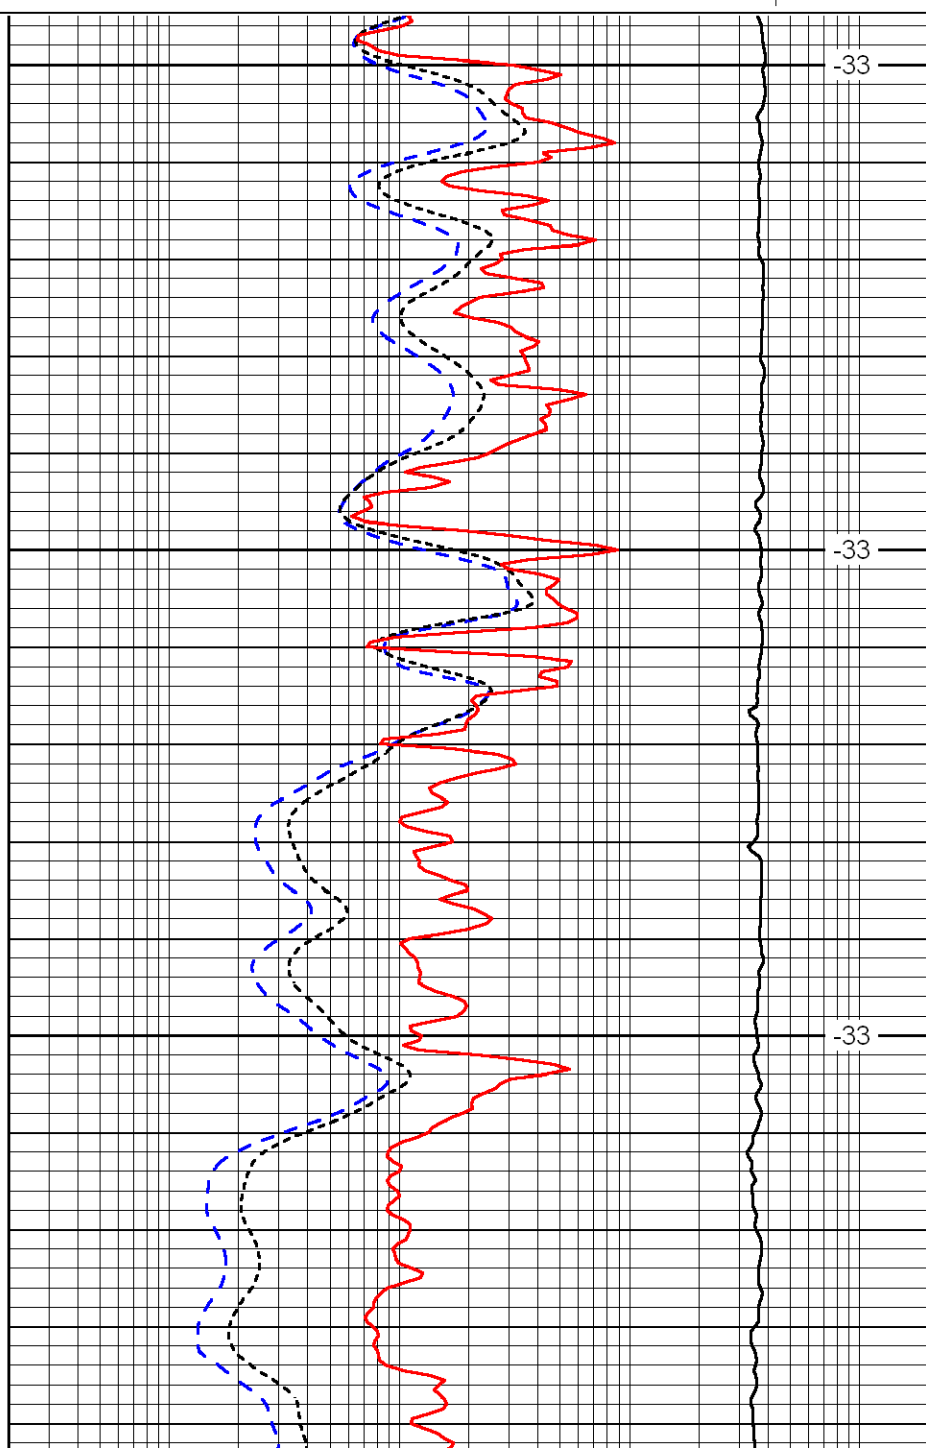

-33

-33

-33

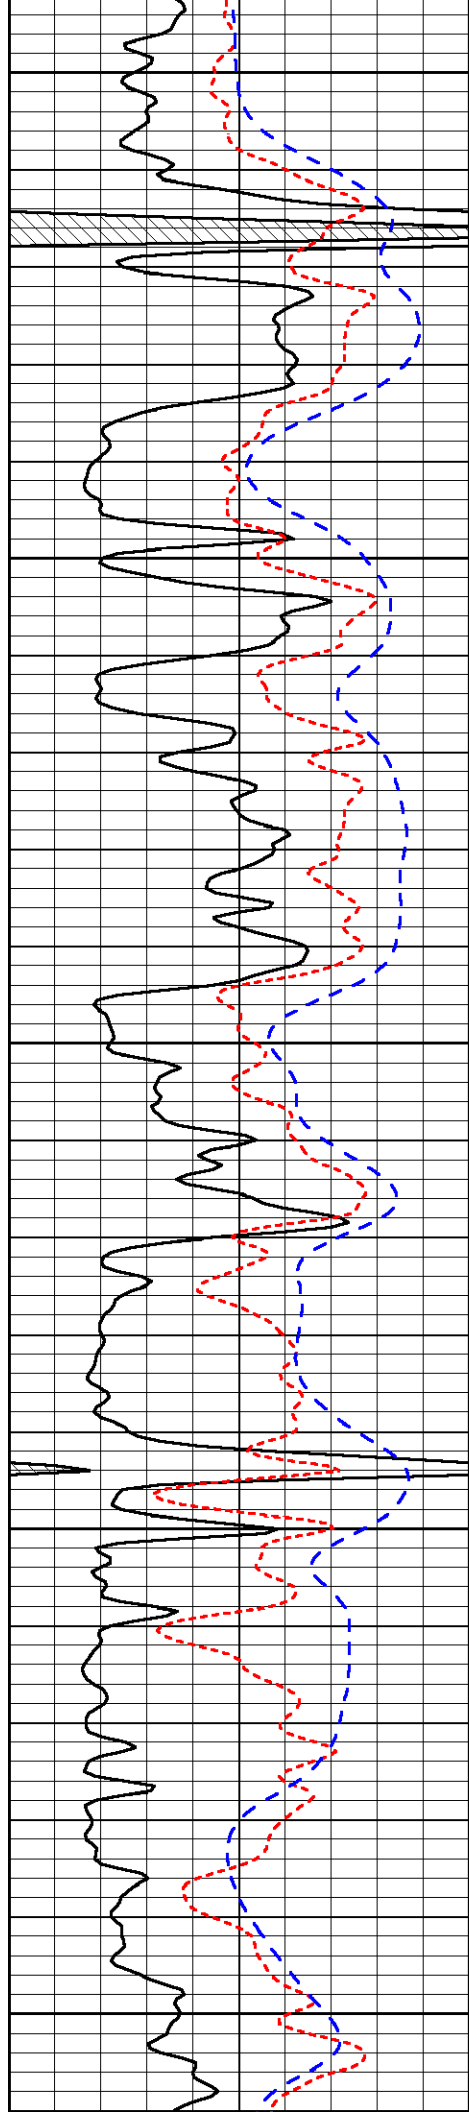


3750

3800

3850

3900

3950

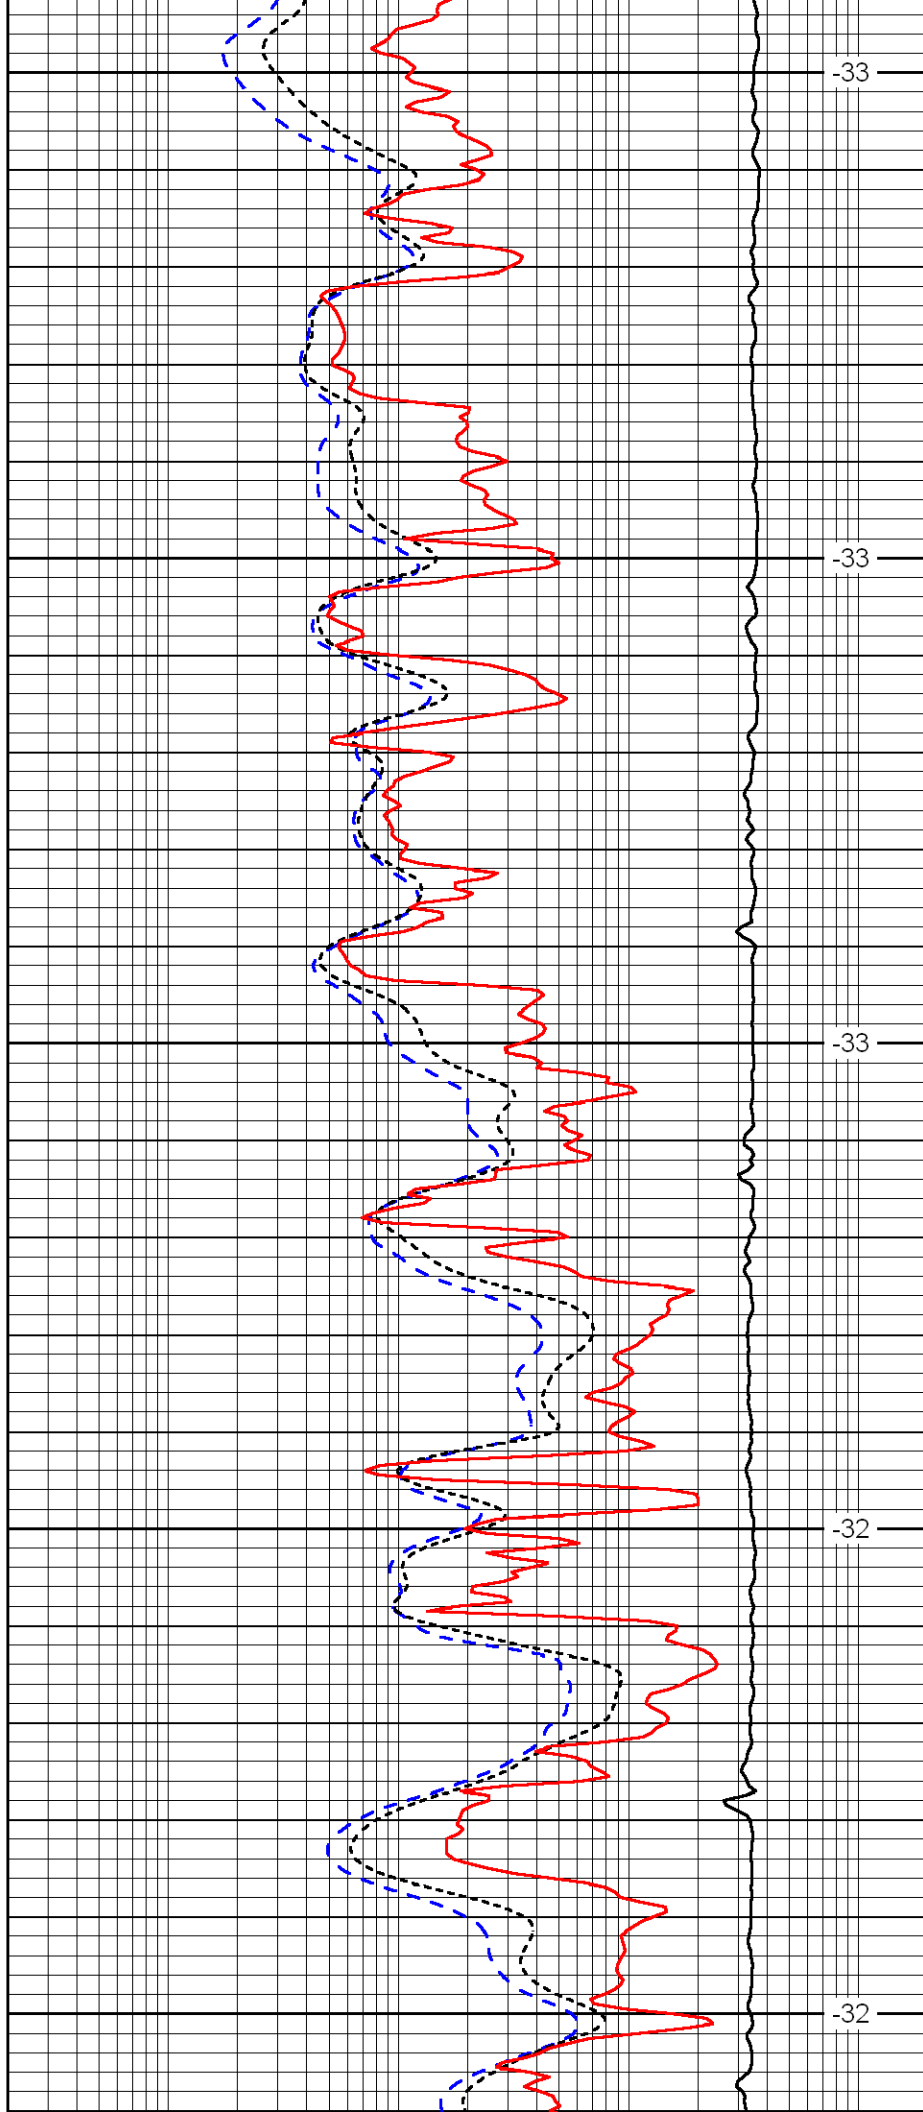


-33

-33

-33

-32

-32

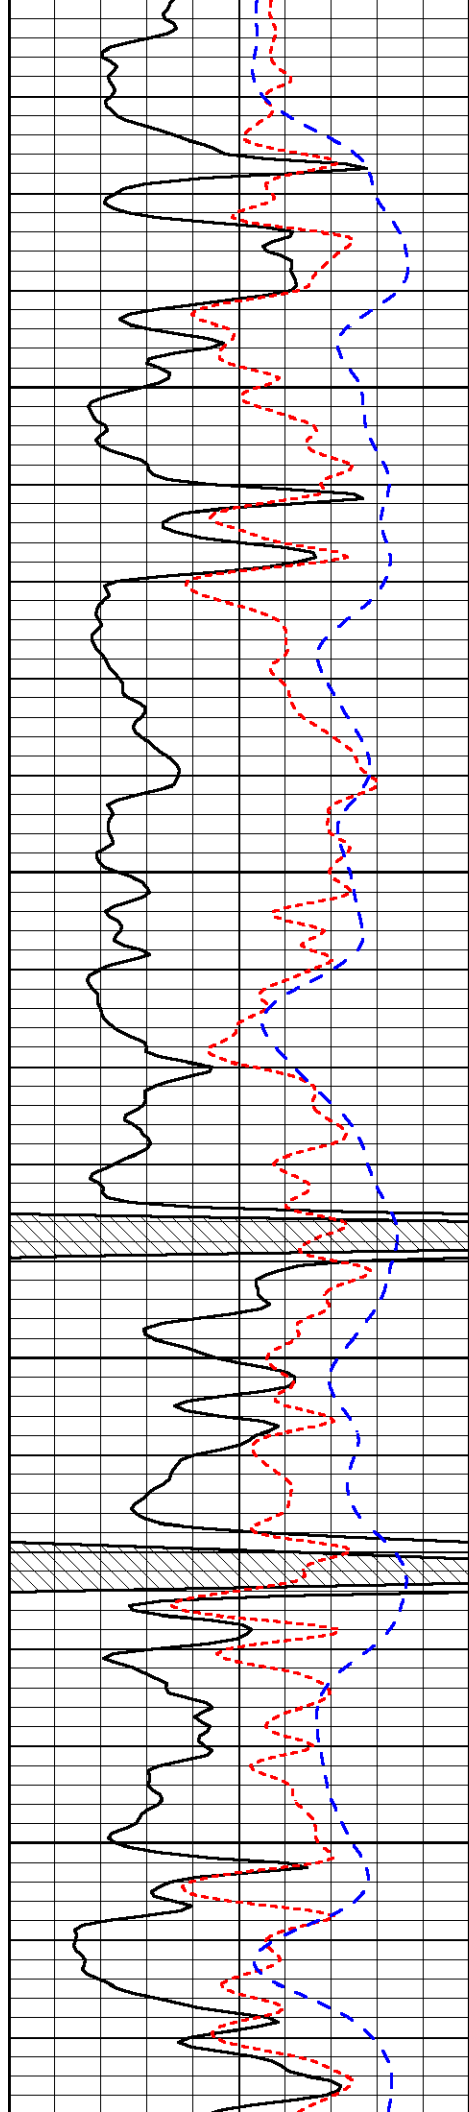



4000

4050

4100

4150

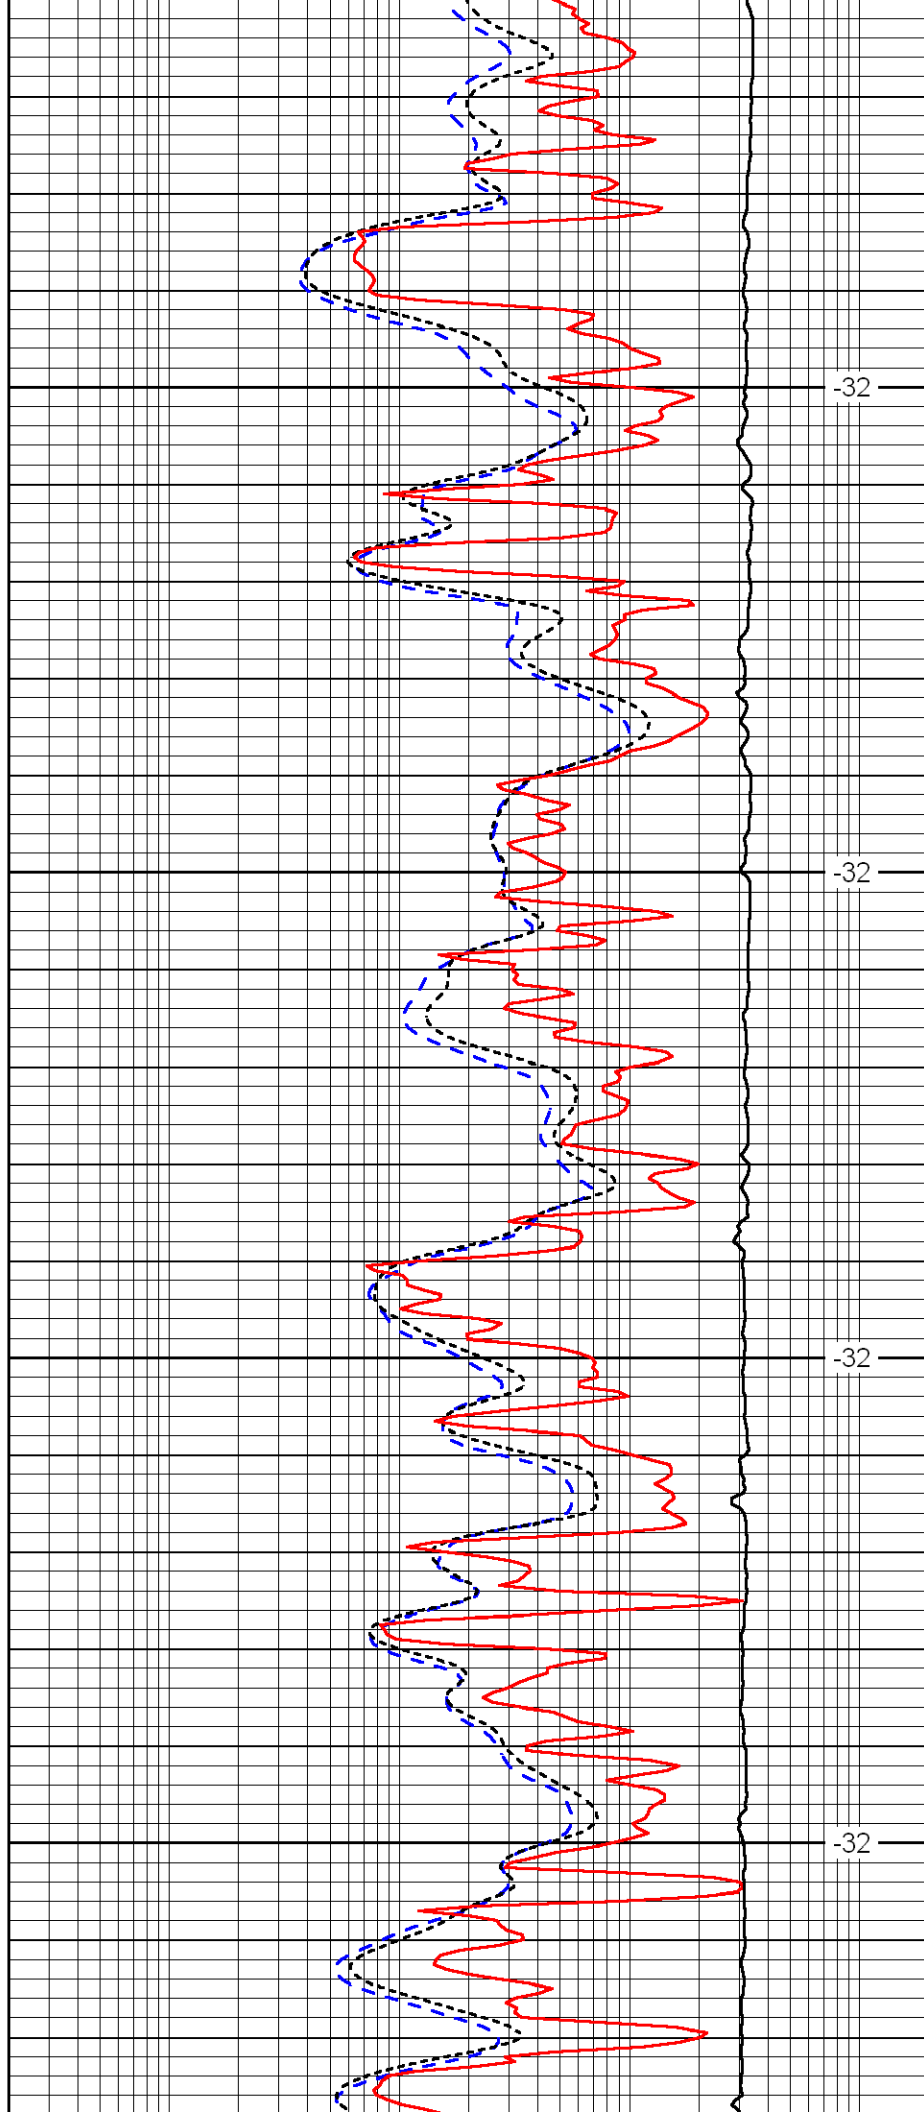

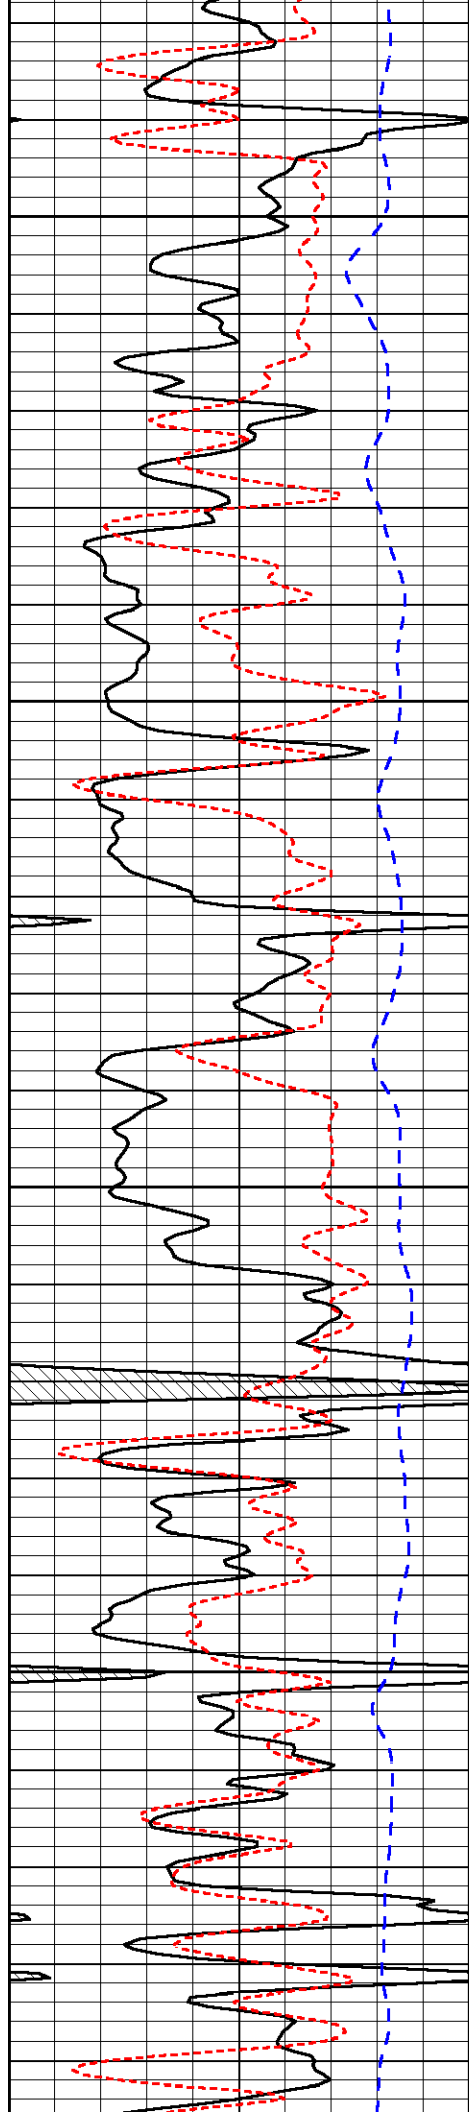


4200

4250

4300

4350

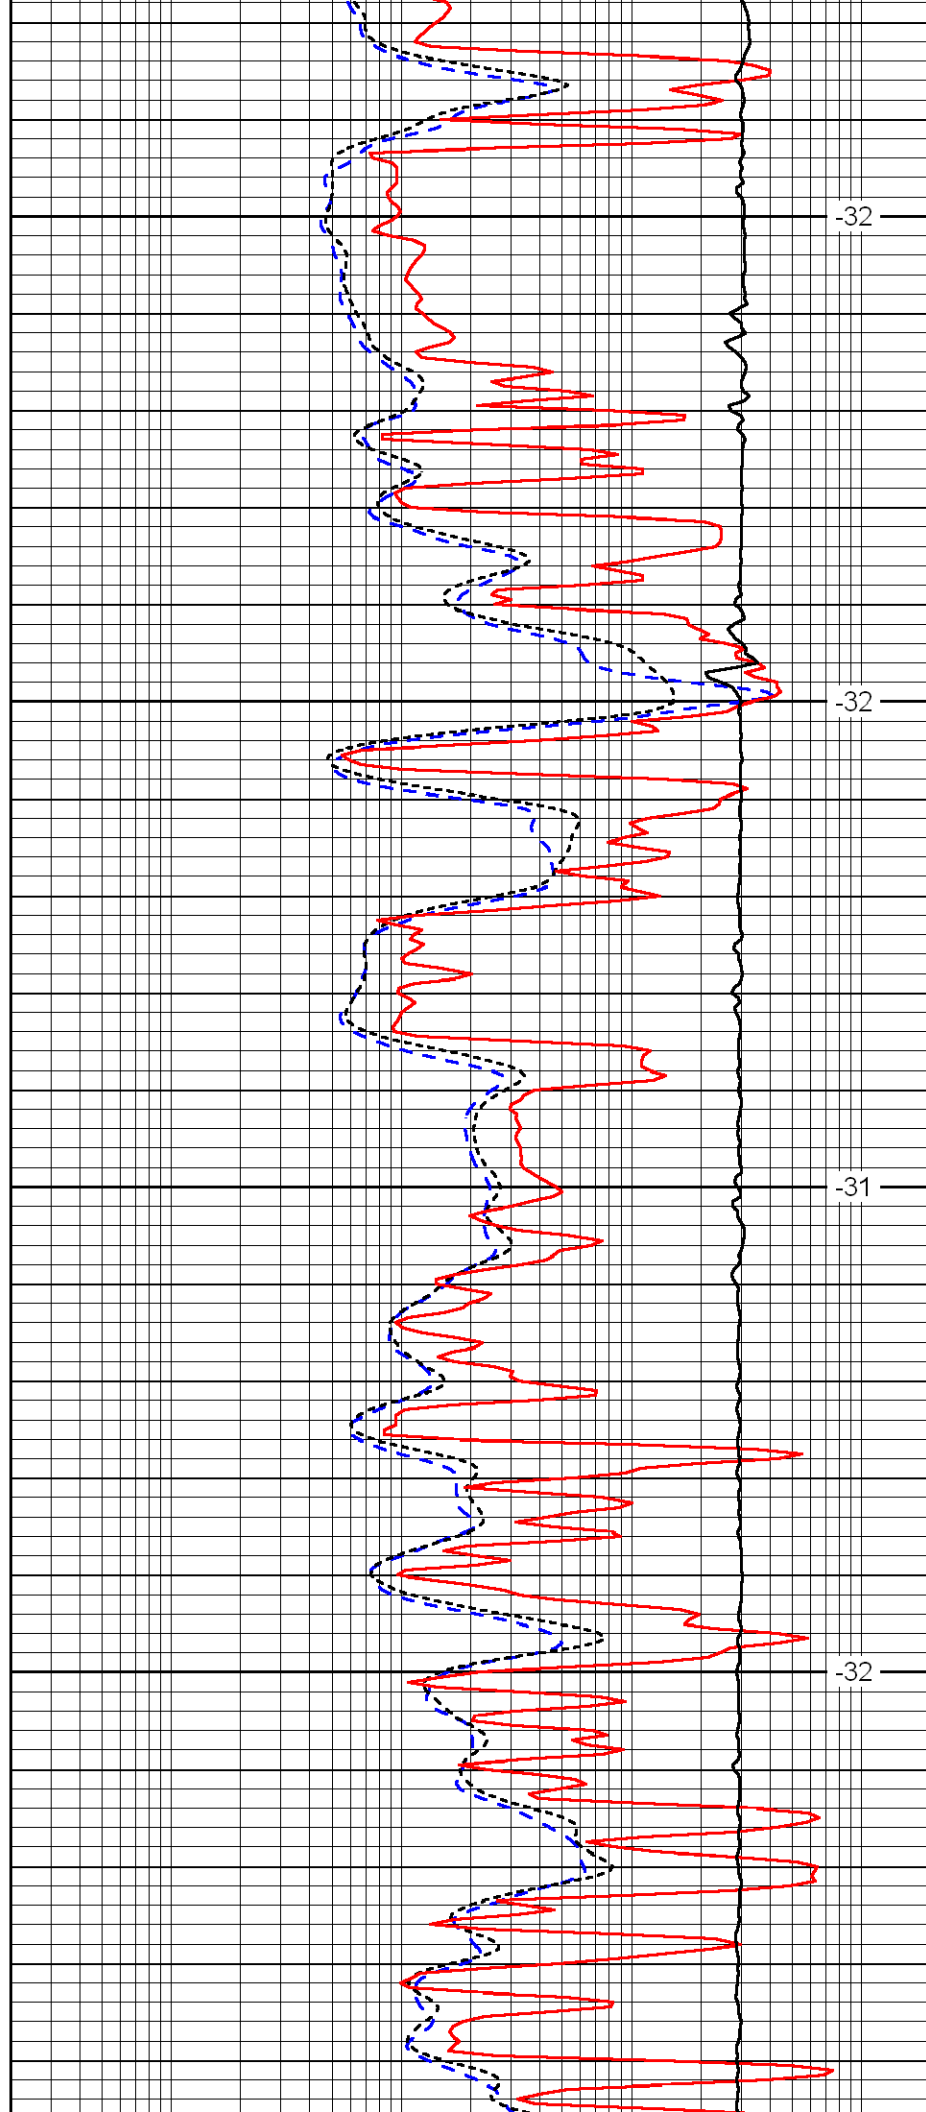


-32

-32

-31


-32

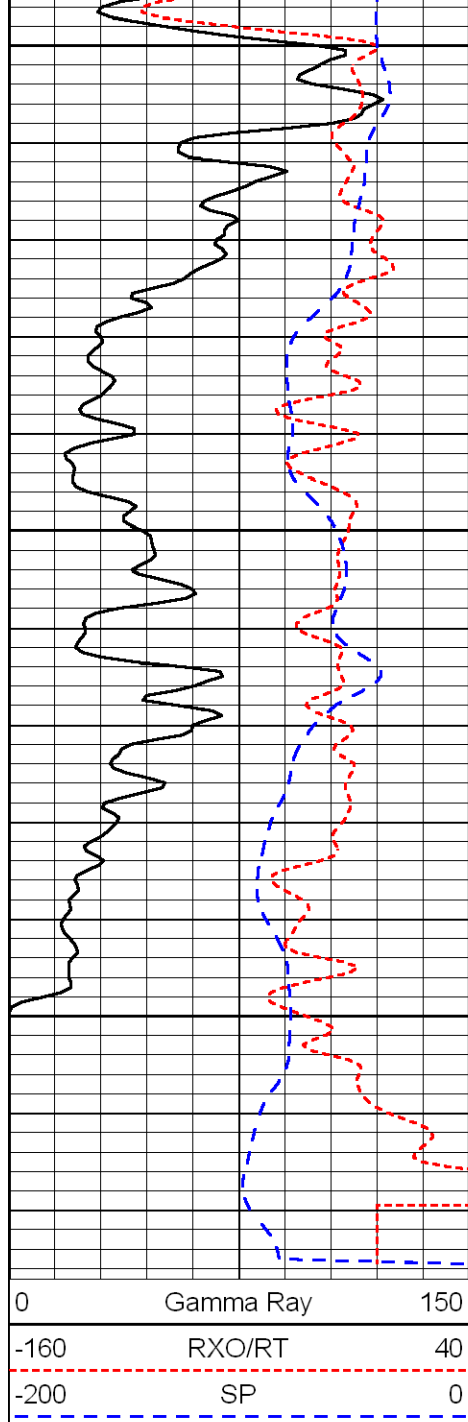

4400

4450

4500

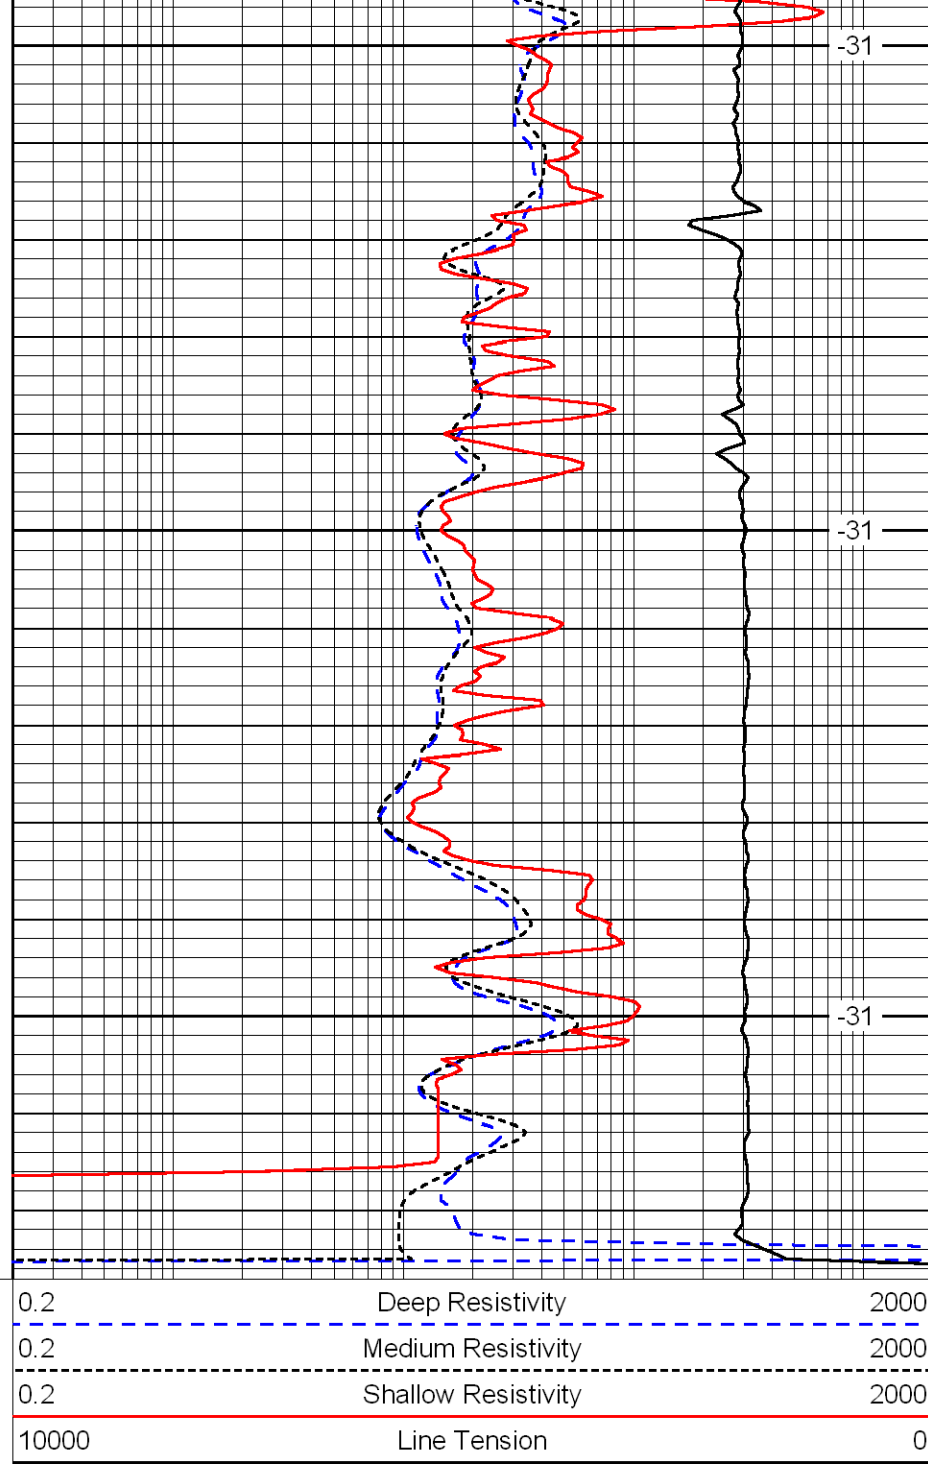

-31

-31

-31

LSPD