LOG-TECH

DIGITAL LOG (785) 625-3858

Dual Induction Log

API No. 15-077-21850-00-00

Company R & B Oil & Gas

Well Albright #3

Field Spivey-Grabs

County Harper State Kansas

Location NW SW SE
990' FSL / 2310' FEL

Sec: 17 Twp: 31S Rge: 8W

Permanent Datum Ground Level Elevation 1610

Log Measured From Kelly Bushing 10 Ft. Above Perm. Datum

Drilling Measured From Kelly Bushing

Other Services
CNL / CDL

Elevation
K.B. 1620
D.F.
G.L. 1610

Date	6/20/2012					
Run Number	One					
Depth Driller	4915					
Depth Logger	4916					
Bottom Logged Interval	4915					
Top Log Interval	200					
Casing Driller	8.625 @ 255					
Casing Logger	251					
Bit Size	7.875					
Type Fluid in Hole	Chemical					
Salinity,ppm CL	3000					
Density / Viscosity	9.4 53					
pH / Fluid Loss	11.5 9.6					
Source of Sample	Flowline					
Rm @ Meas. Temp	0.90 @ 90					
Rmf @ Meas. Temp	0.68 @ 90					
Rmc @ Meas. Temp	1.22 @ 90					
Source of Rmf / Rmc	Charts					
Rm @ BHT	0.65 @ 125					
Operating Rig Time	4 Hours					
Max Rec. Temp. F	125					
Equipment Number	15					
Location	Hays					
Recorded By	R. Barnhart					
Witnessed By	Tim Pierce					

<<< Fold Here >>>

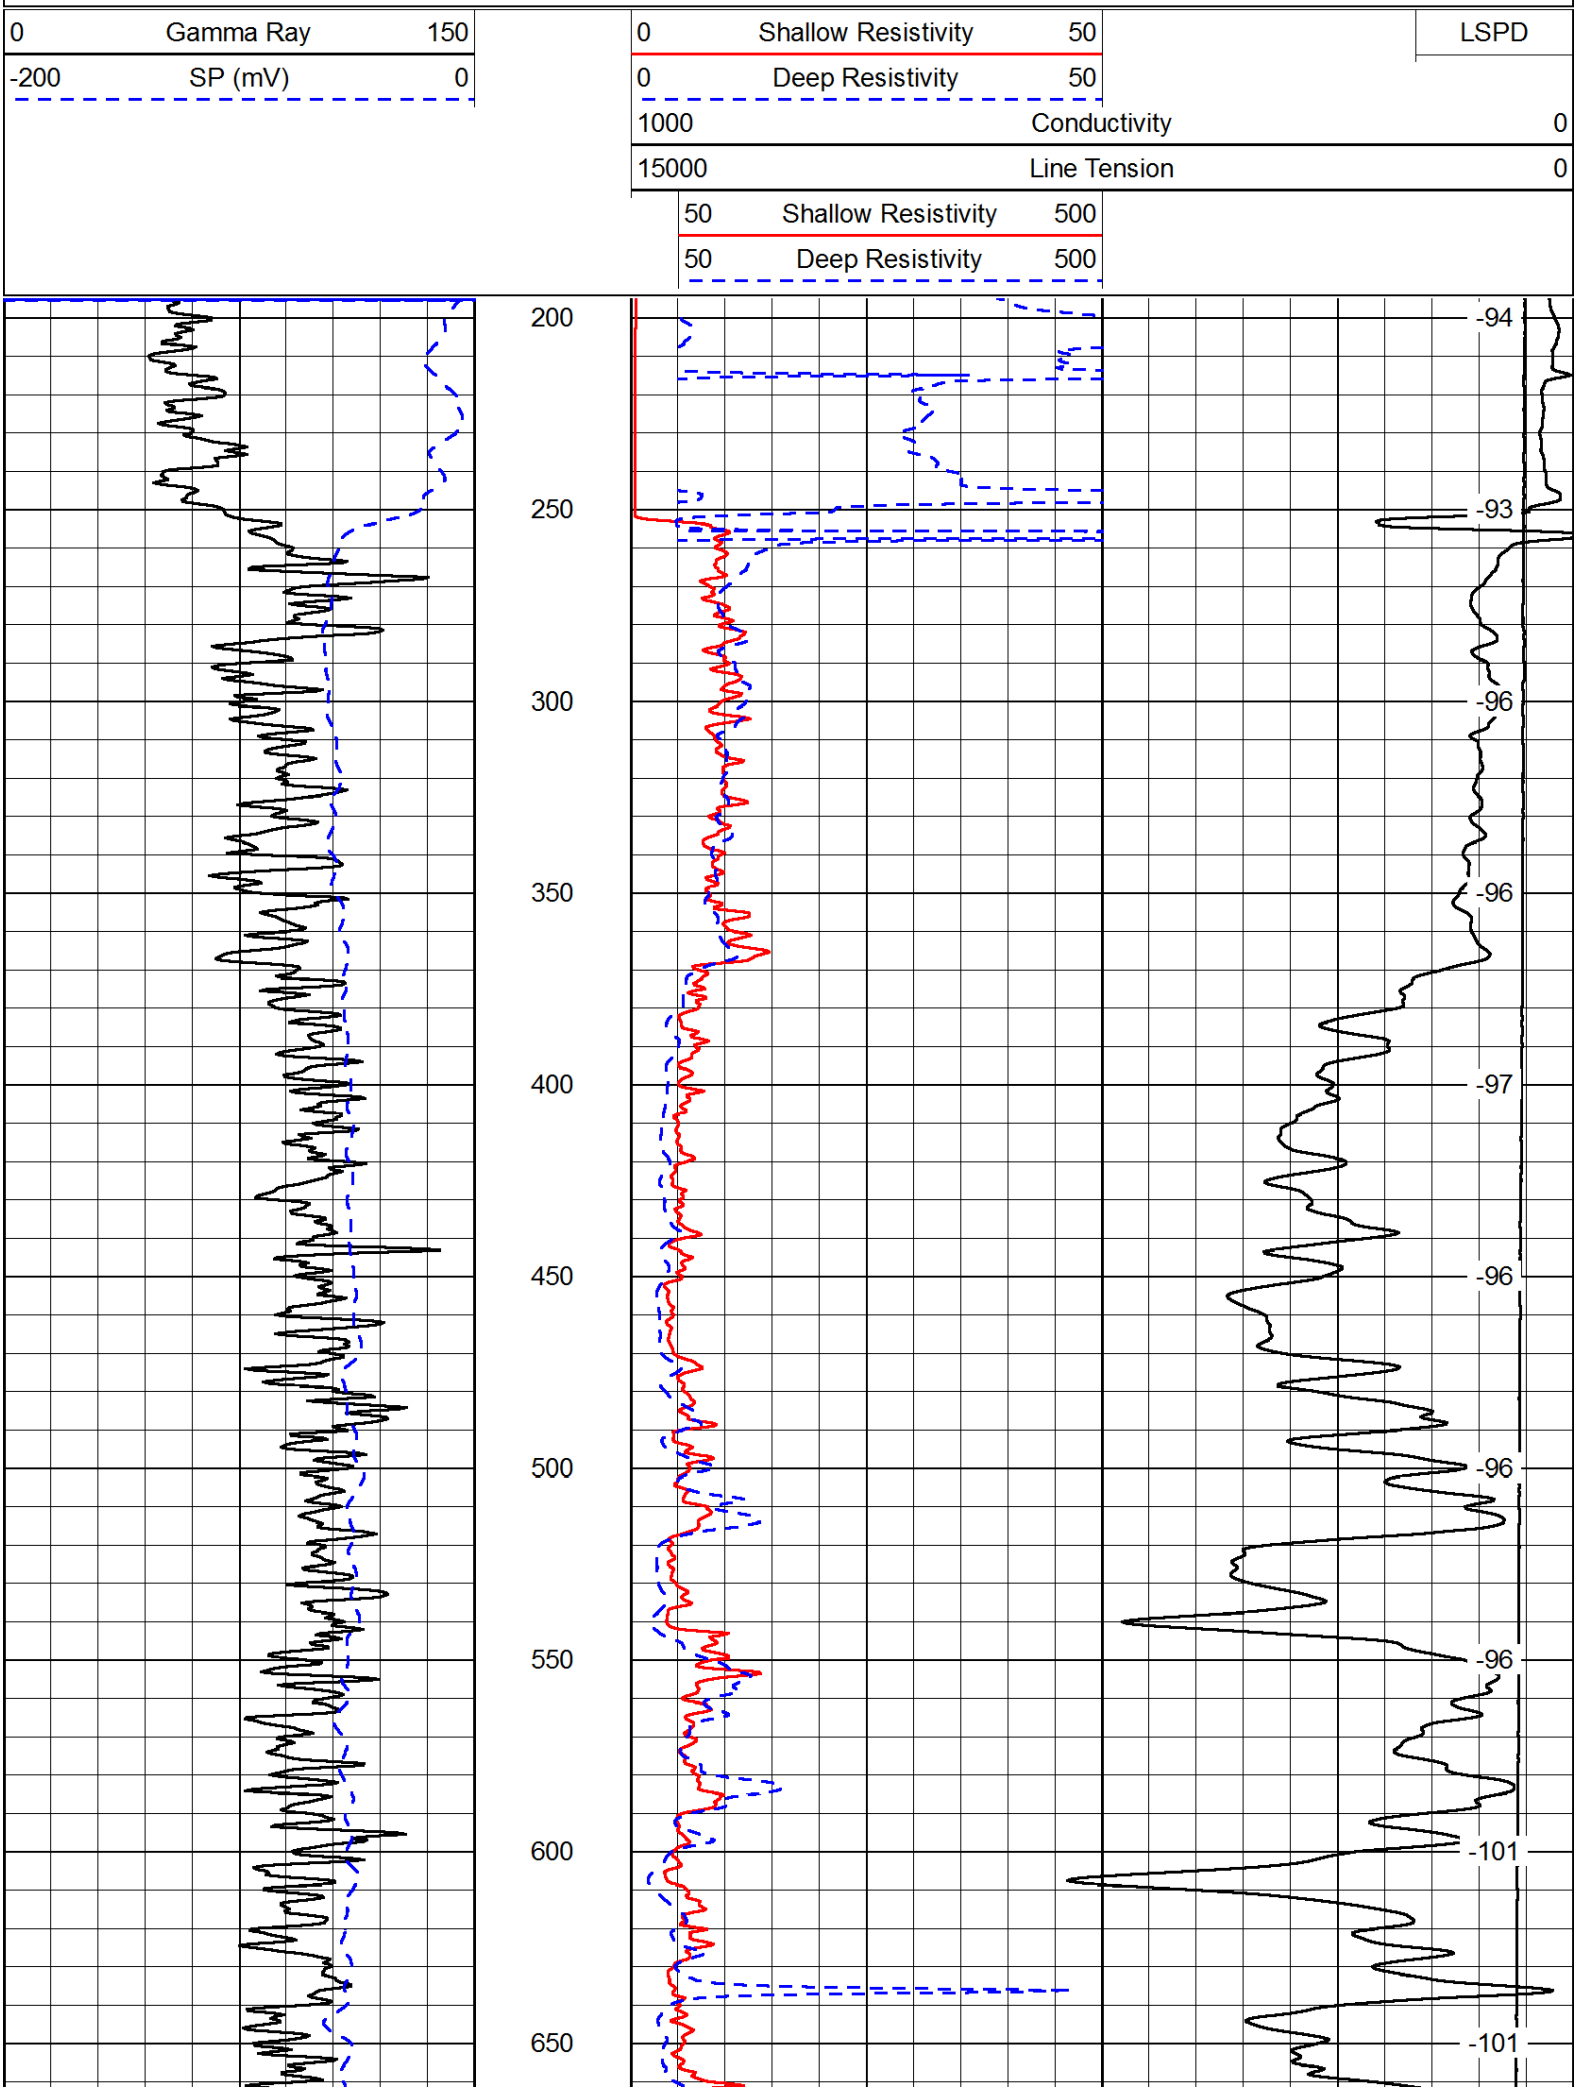
All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

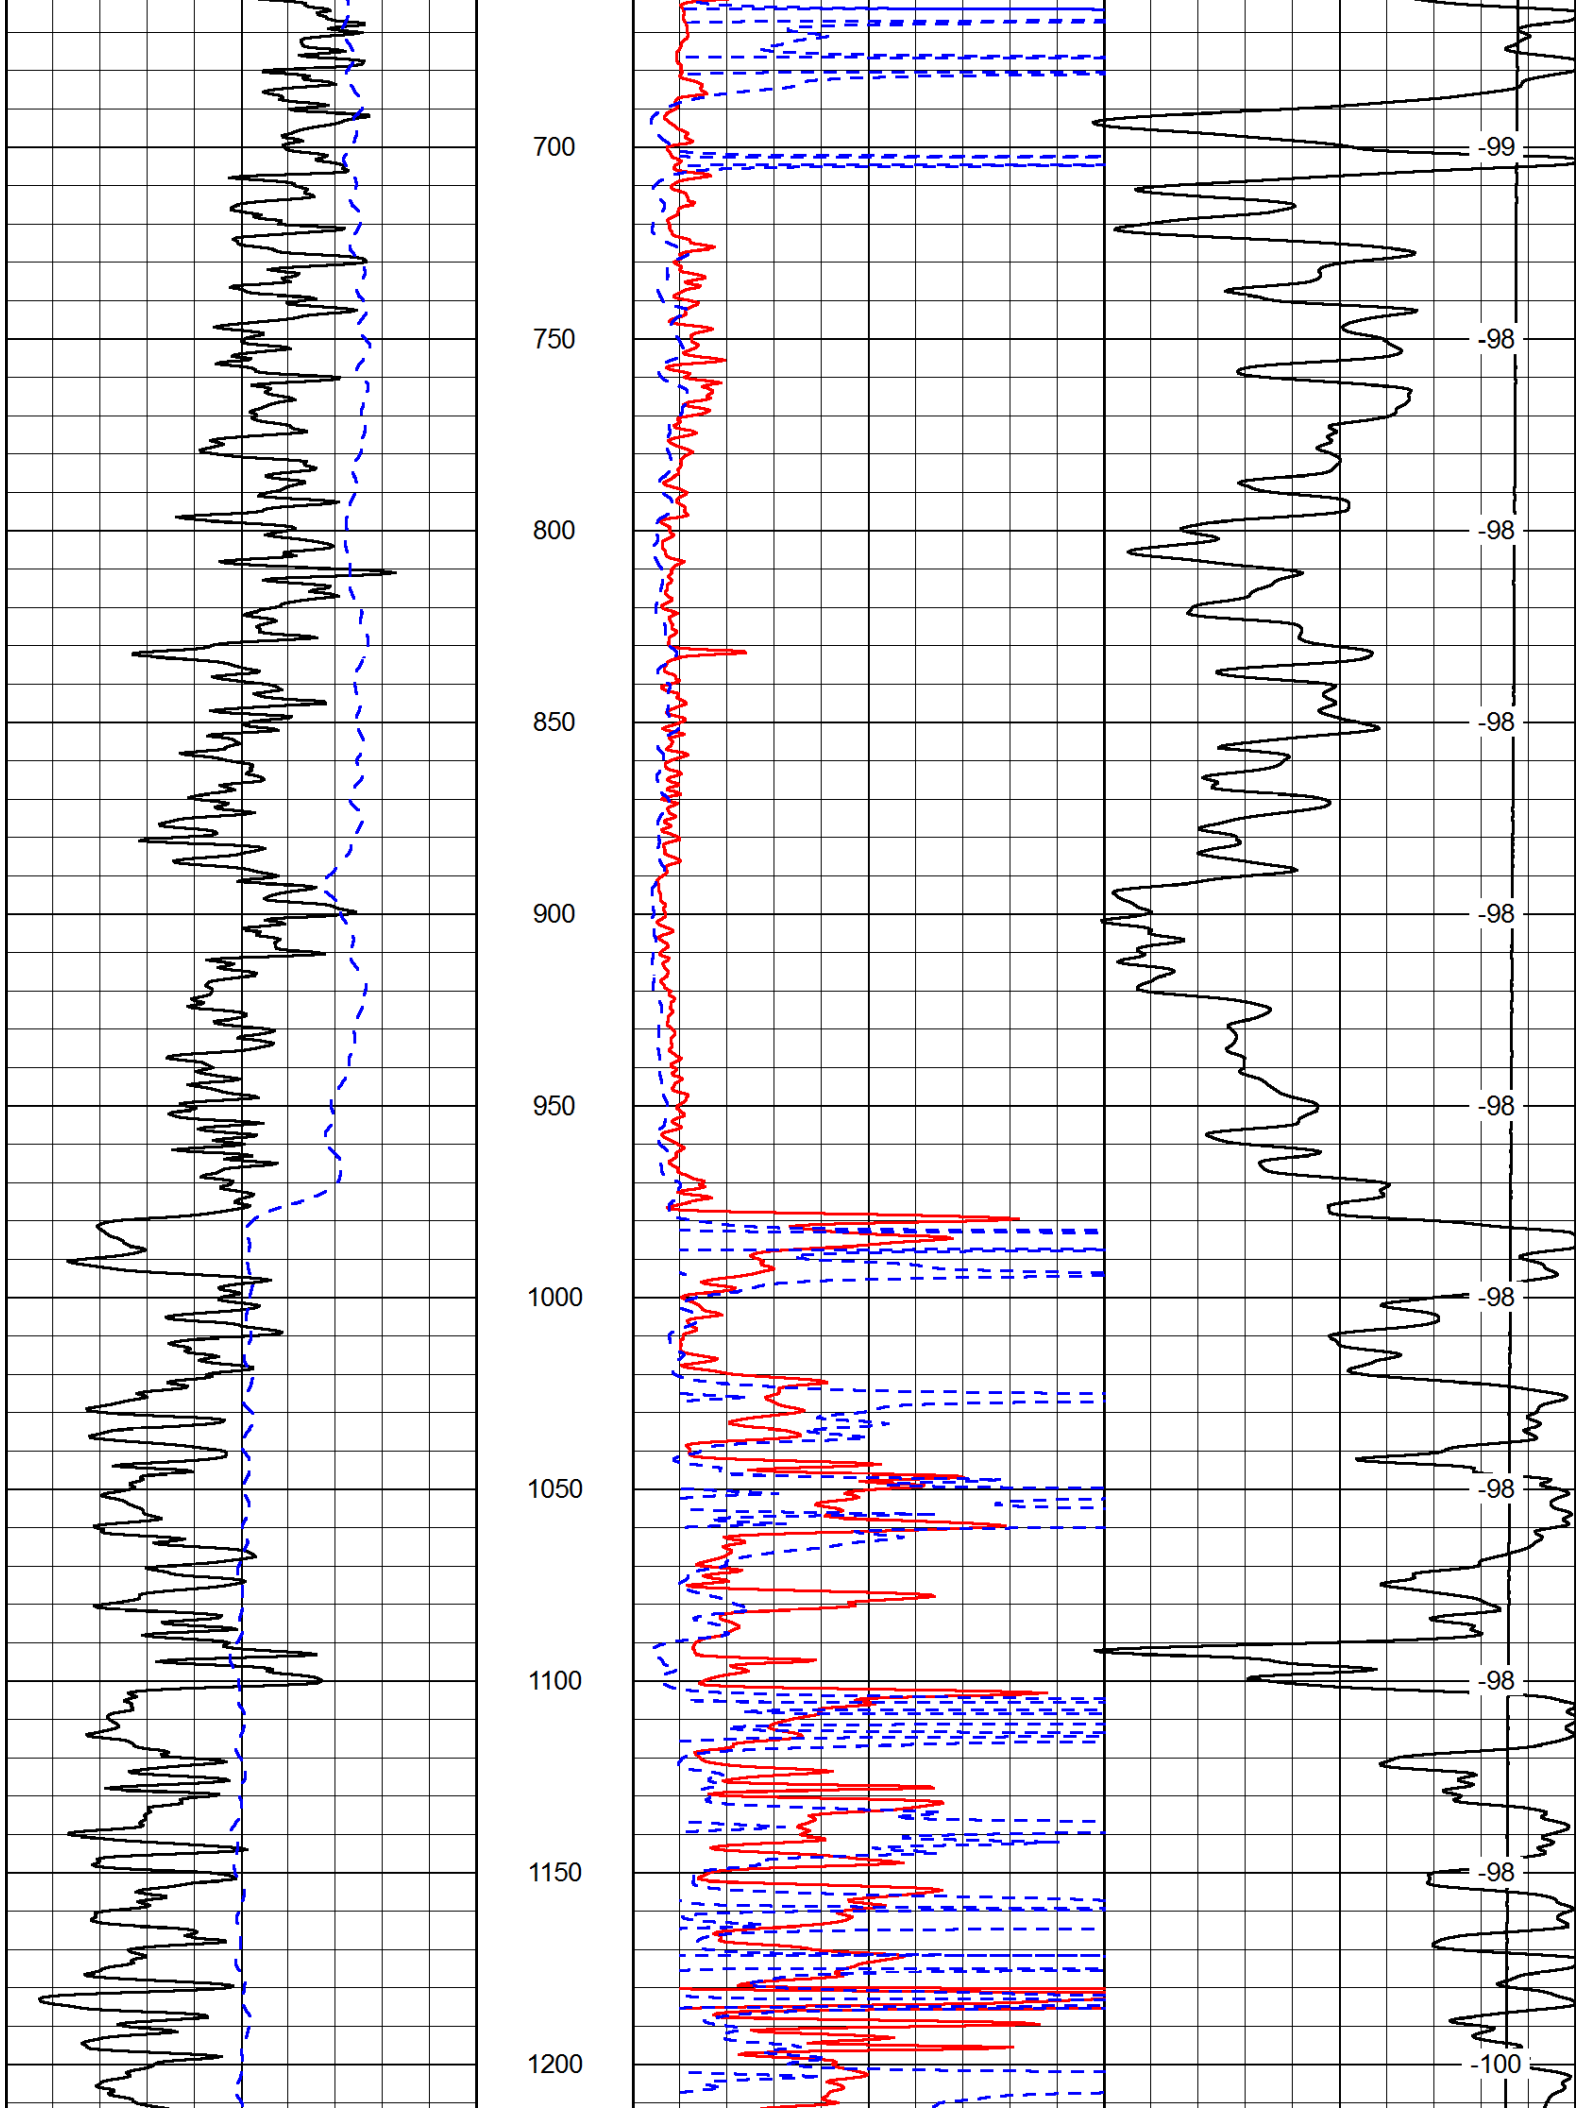
Comments

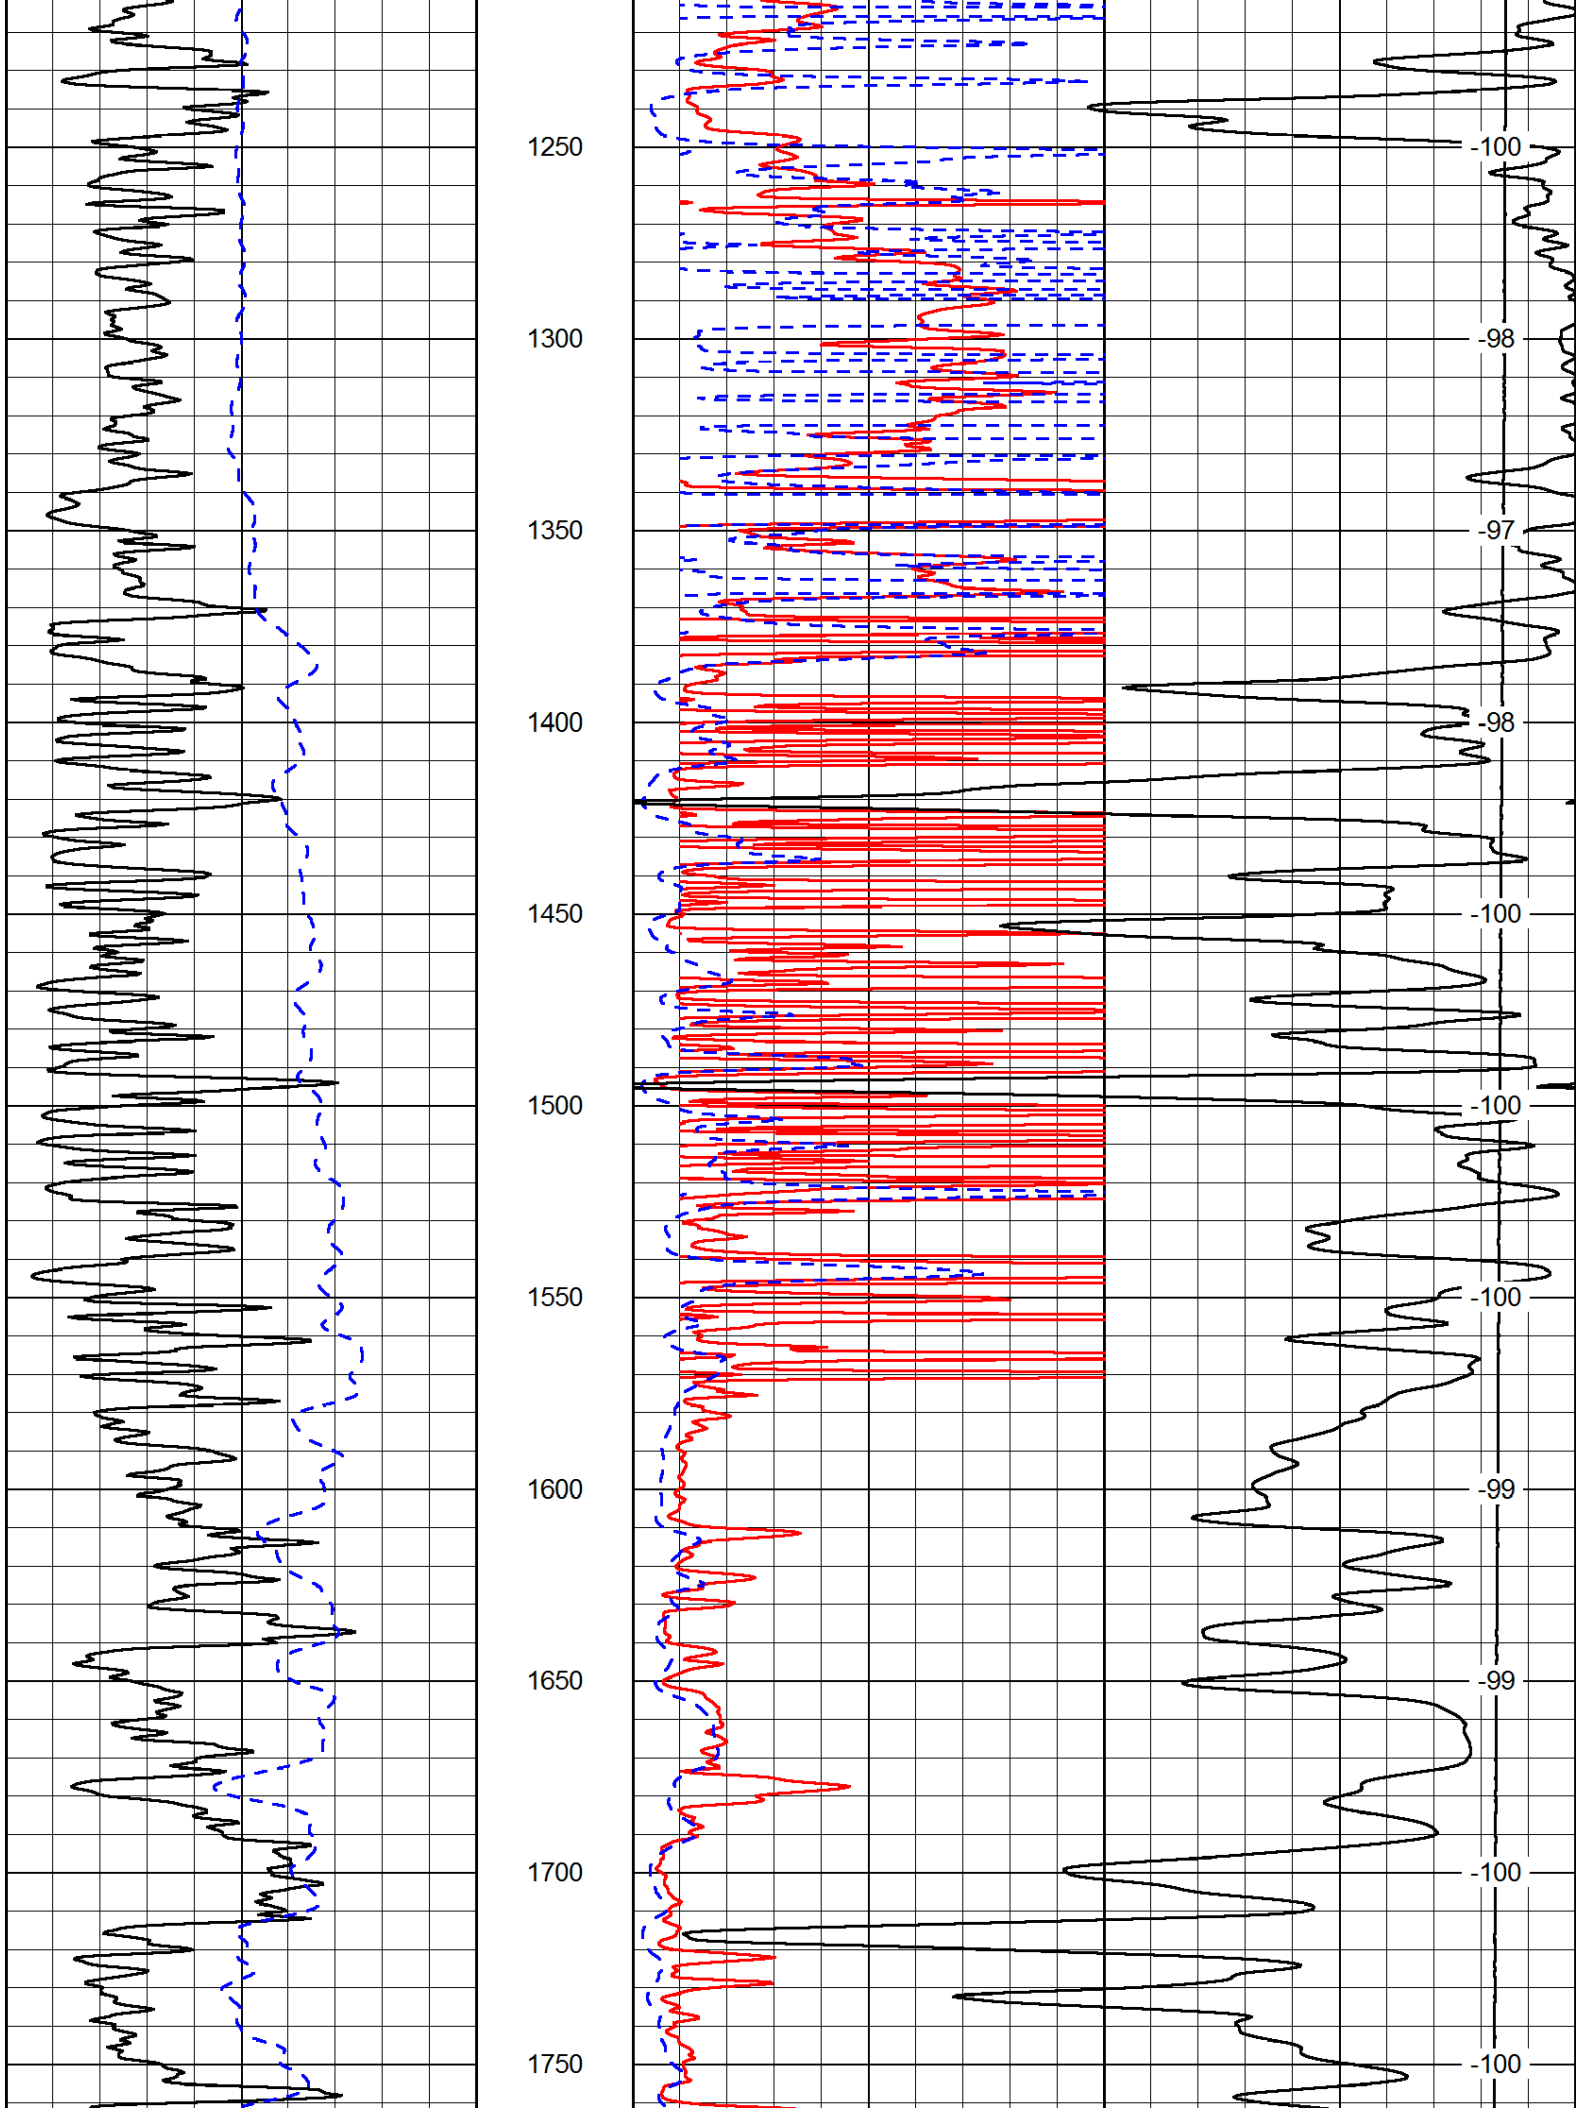
Thank you for using Log-Tech, Inc.
(785) 625-3858

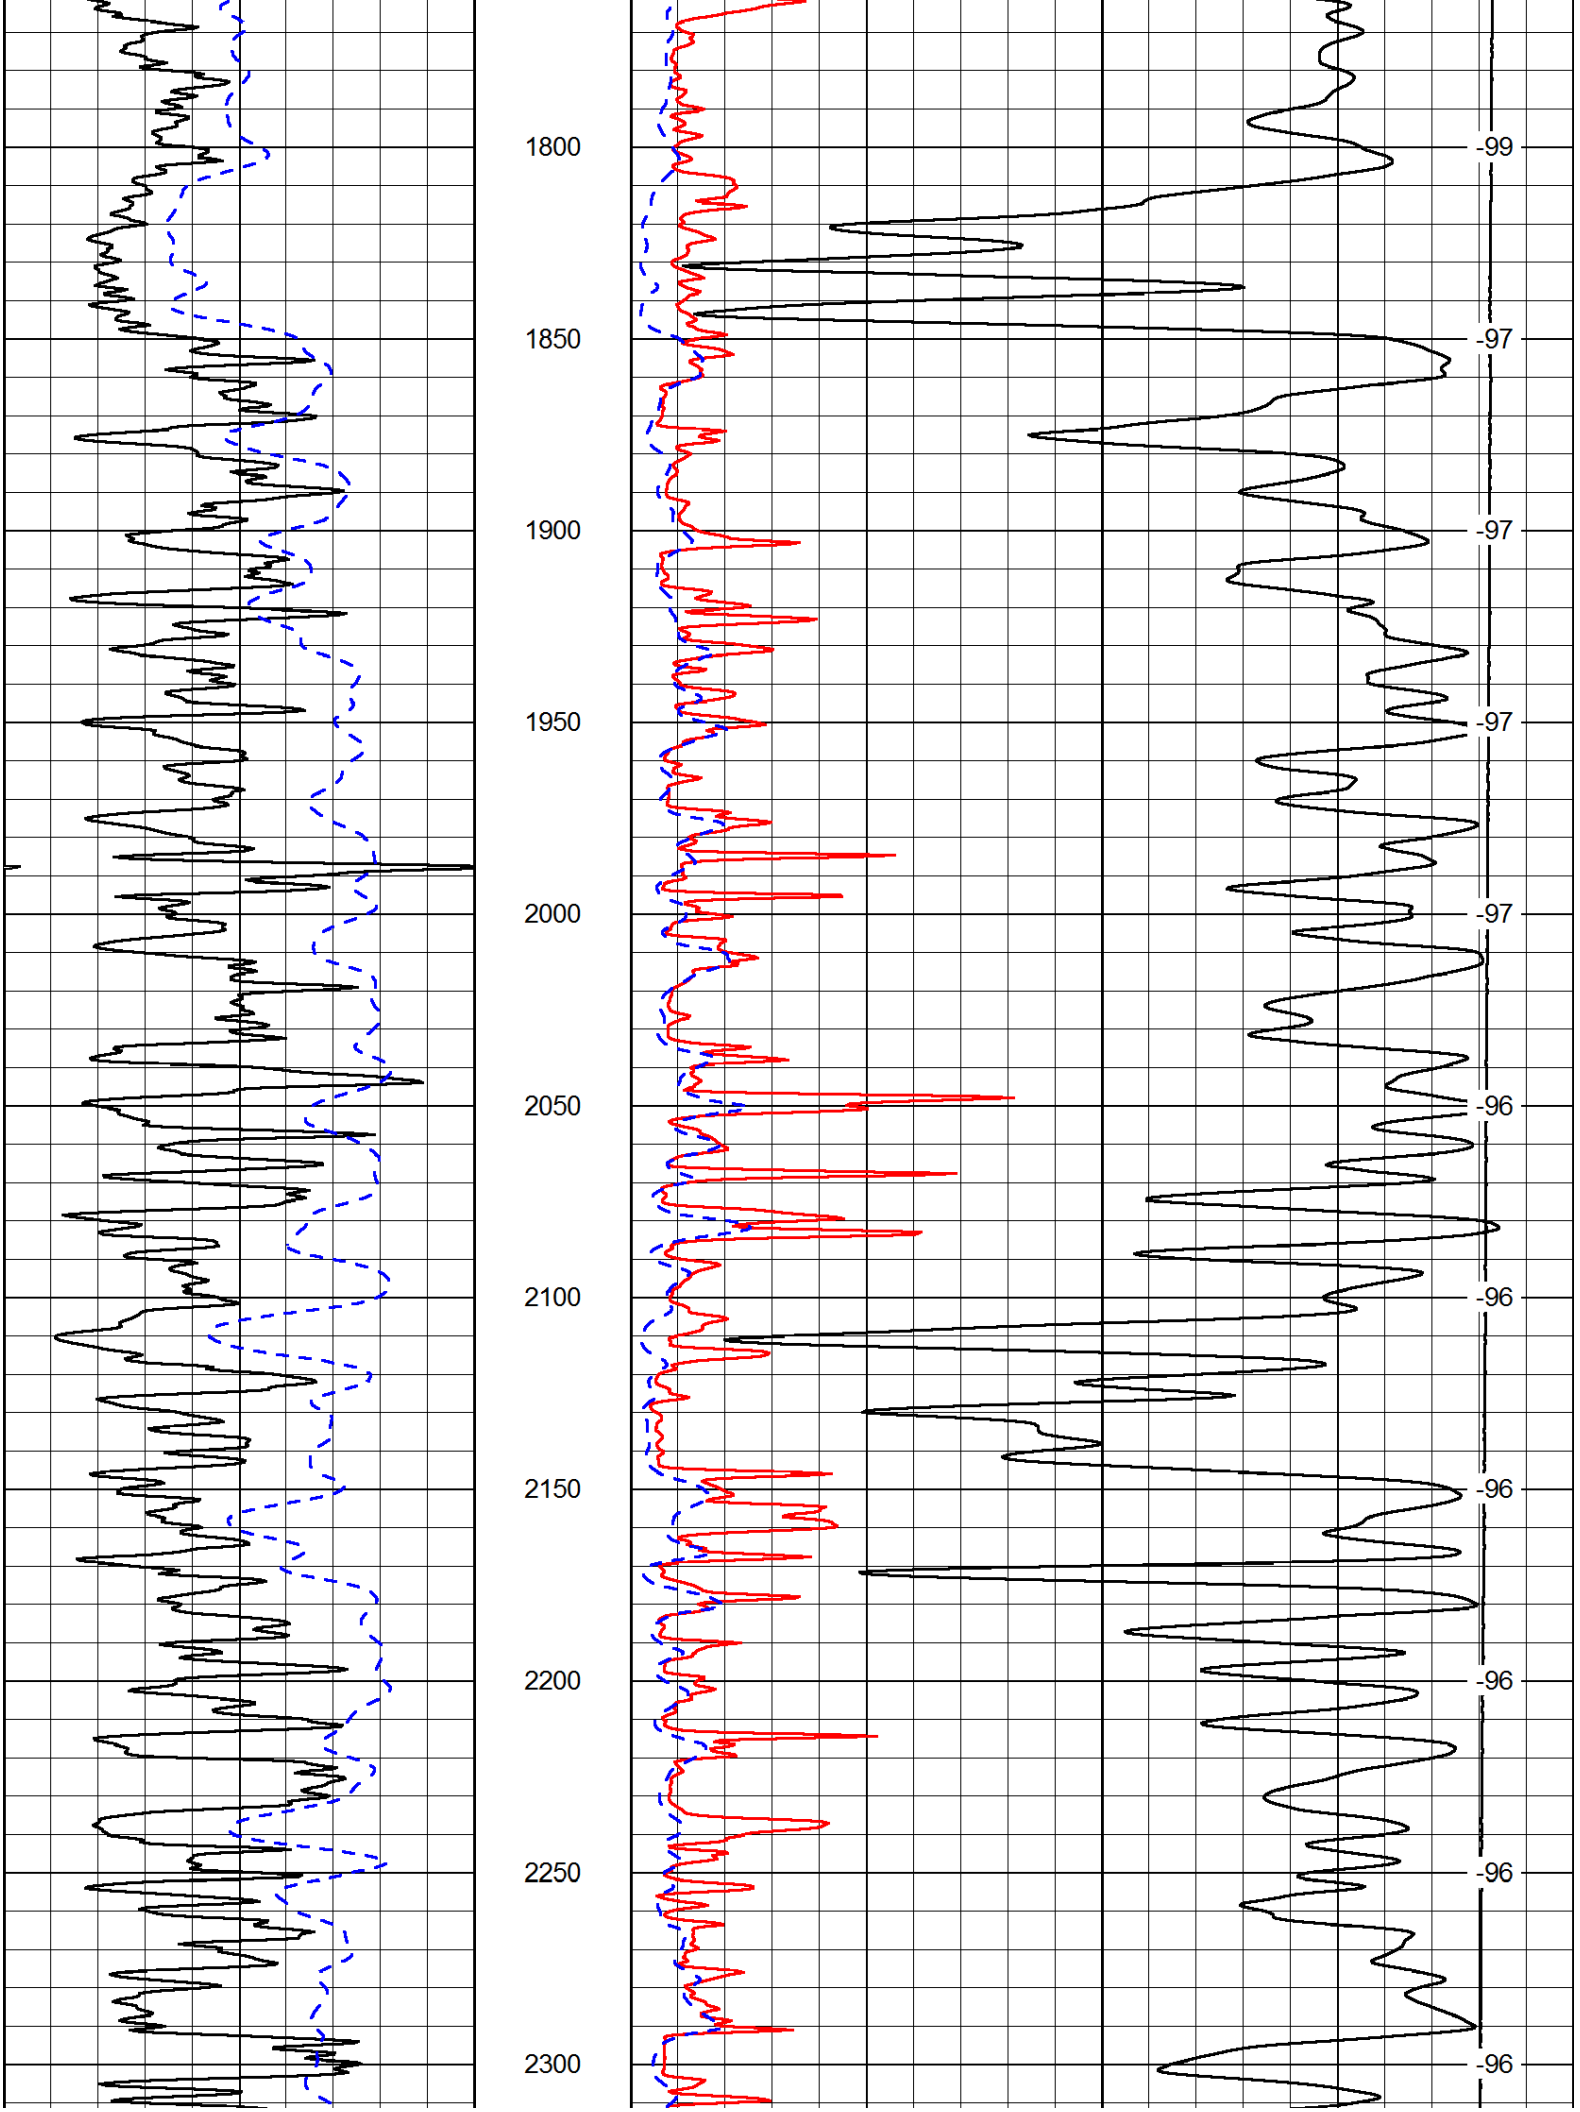
Zenda, KS:
4E to Blktop, 4S,
1W, 2S, 1/2E, N into

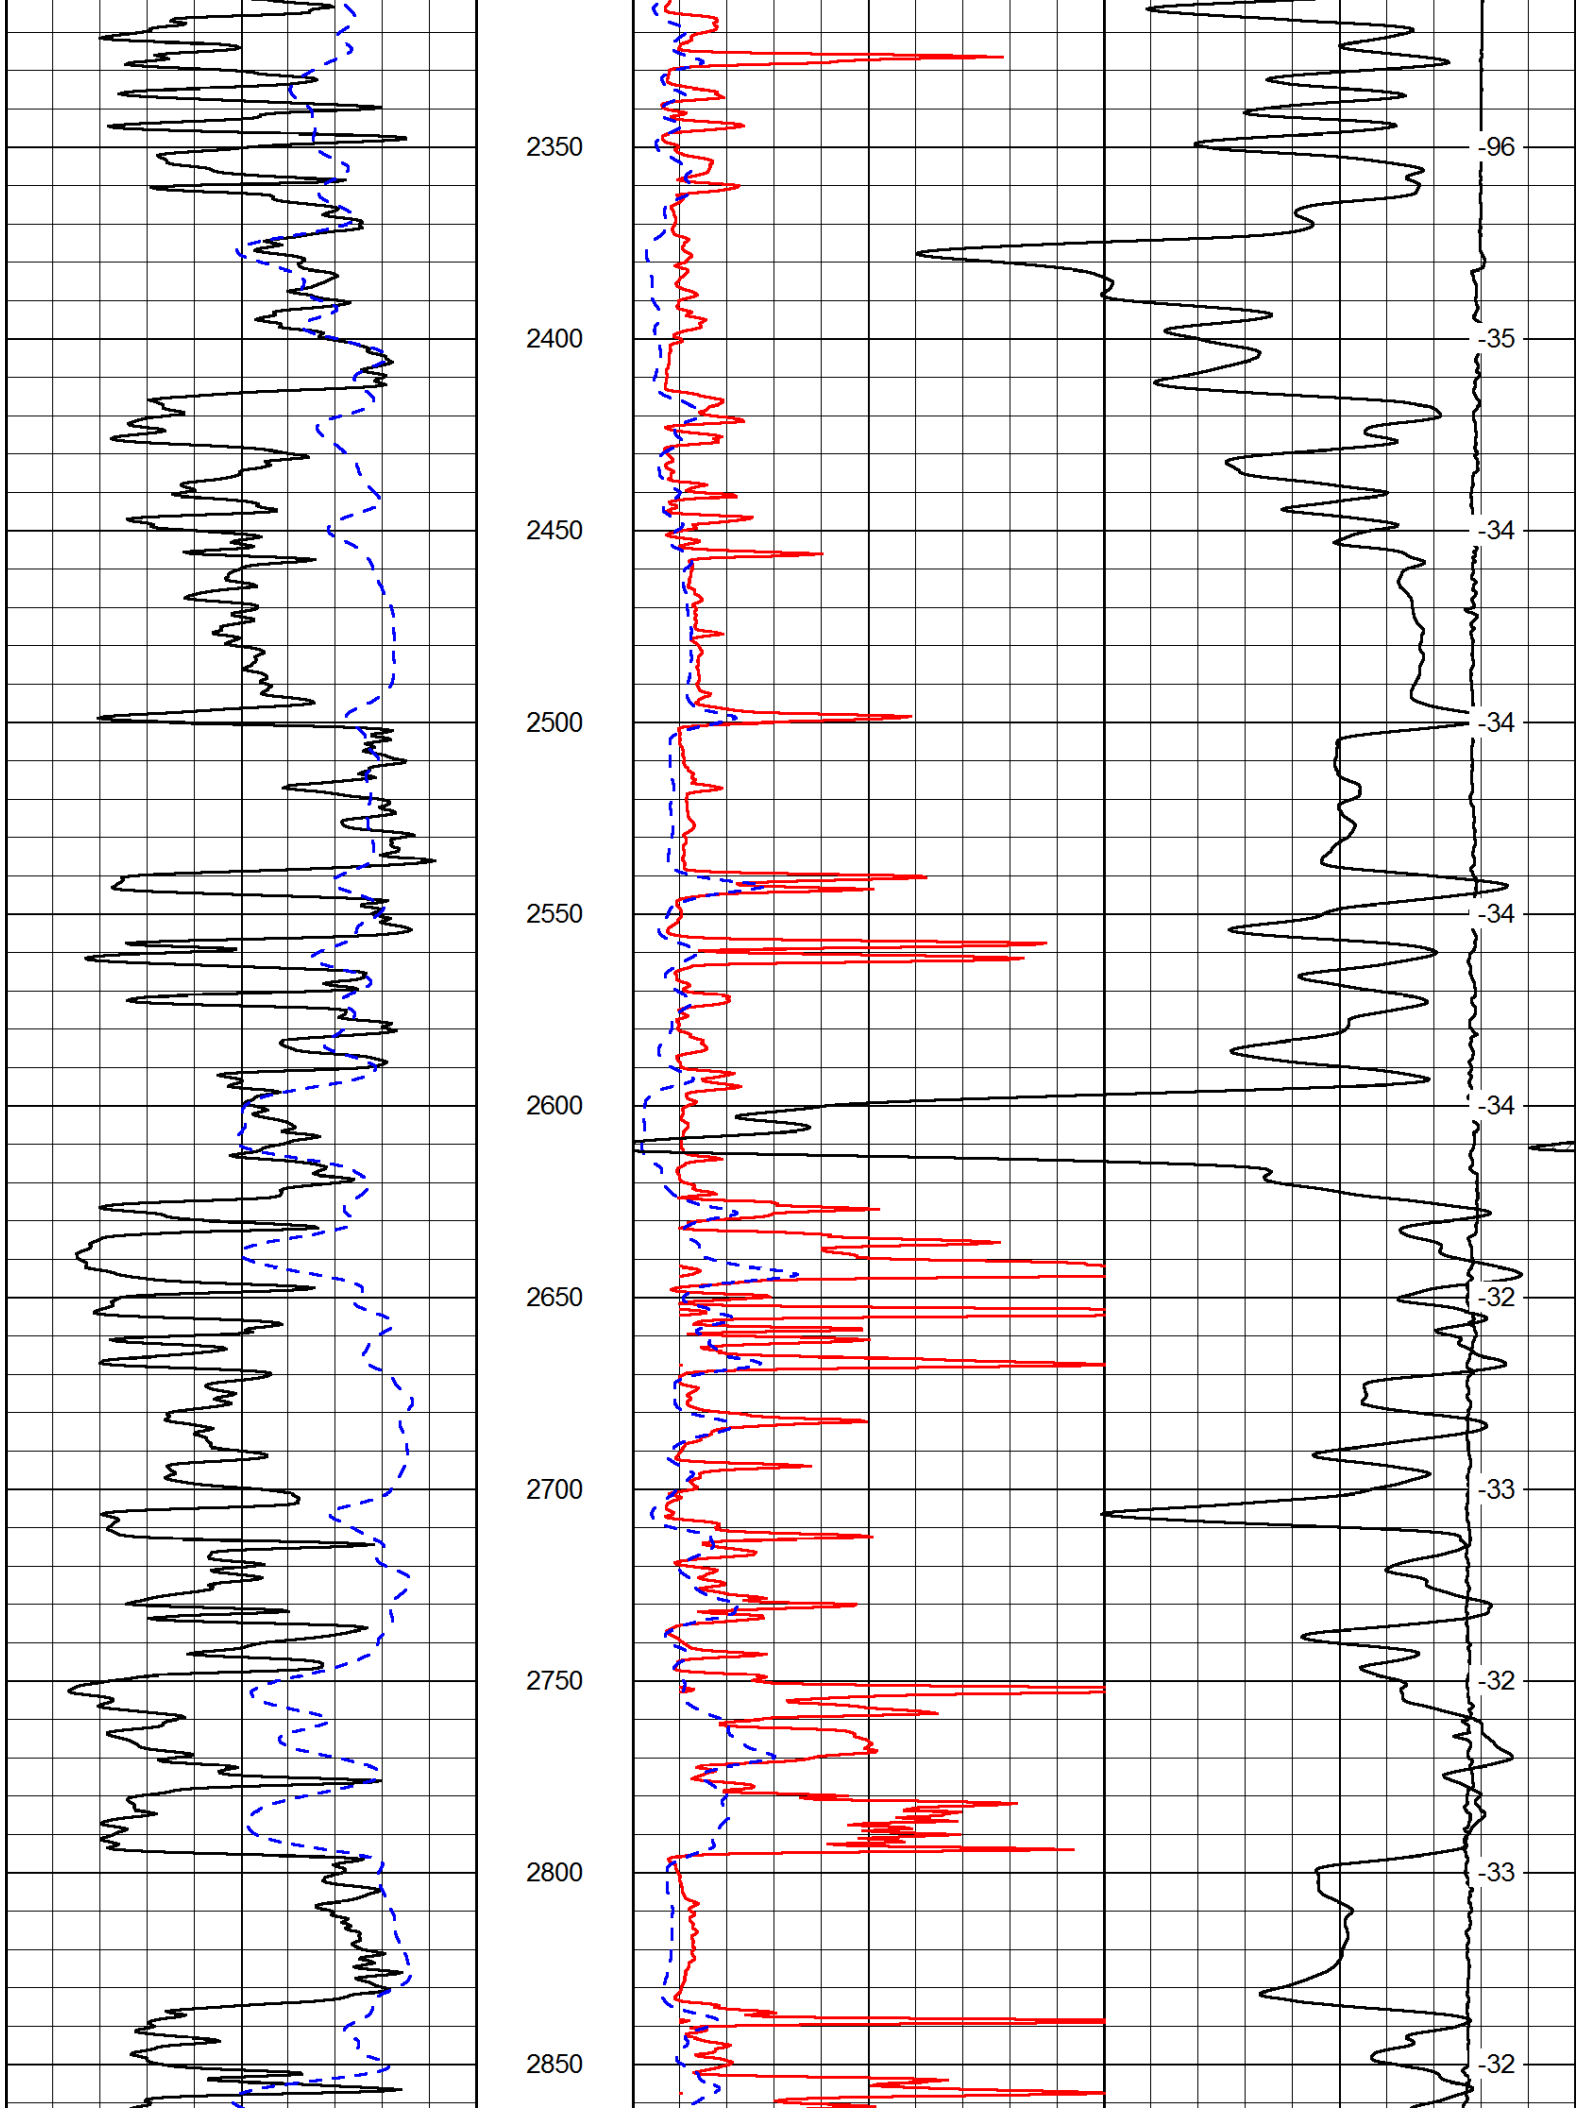
Database File:	c:\warrior\data\r&b_albright #3\r&bhd.db
Dataset Pathname:	dil/rbmain
Presentation Format:	dil2in
Dataset Creation:	Wed Jun 20 20:24:59 2012
Charted by:	Depth in Feet scaled 1:600

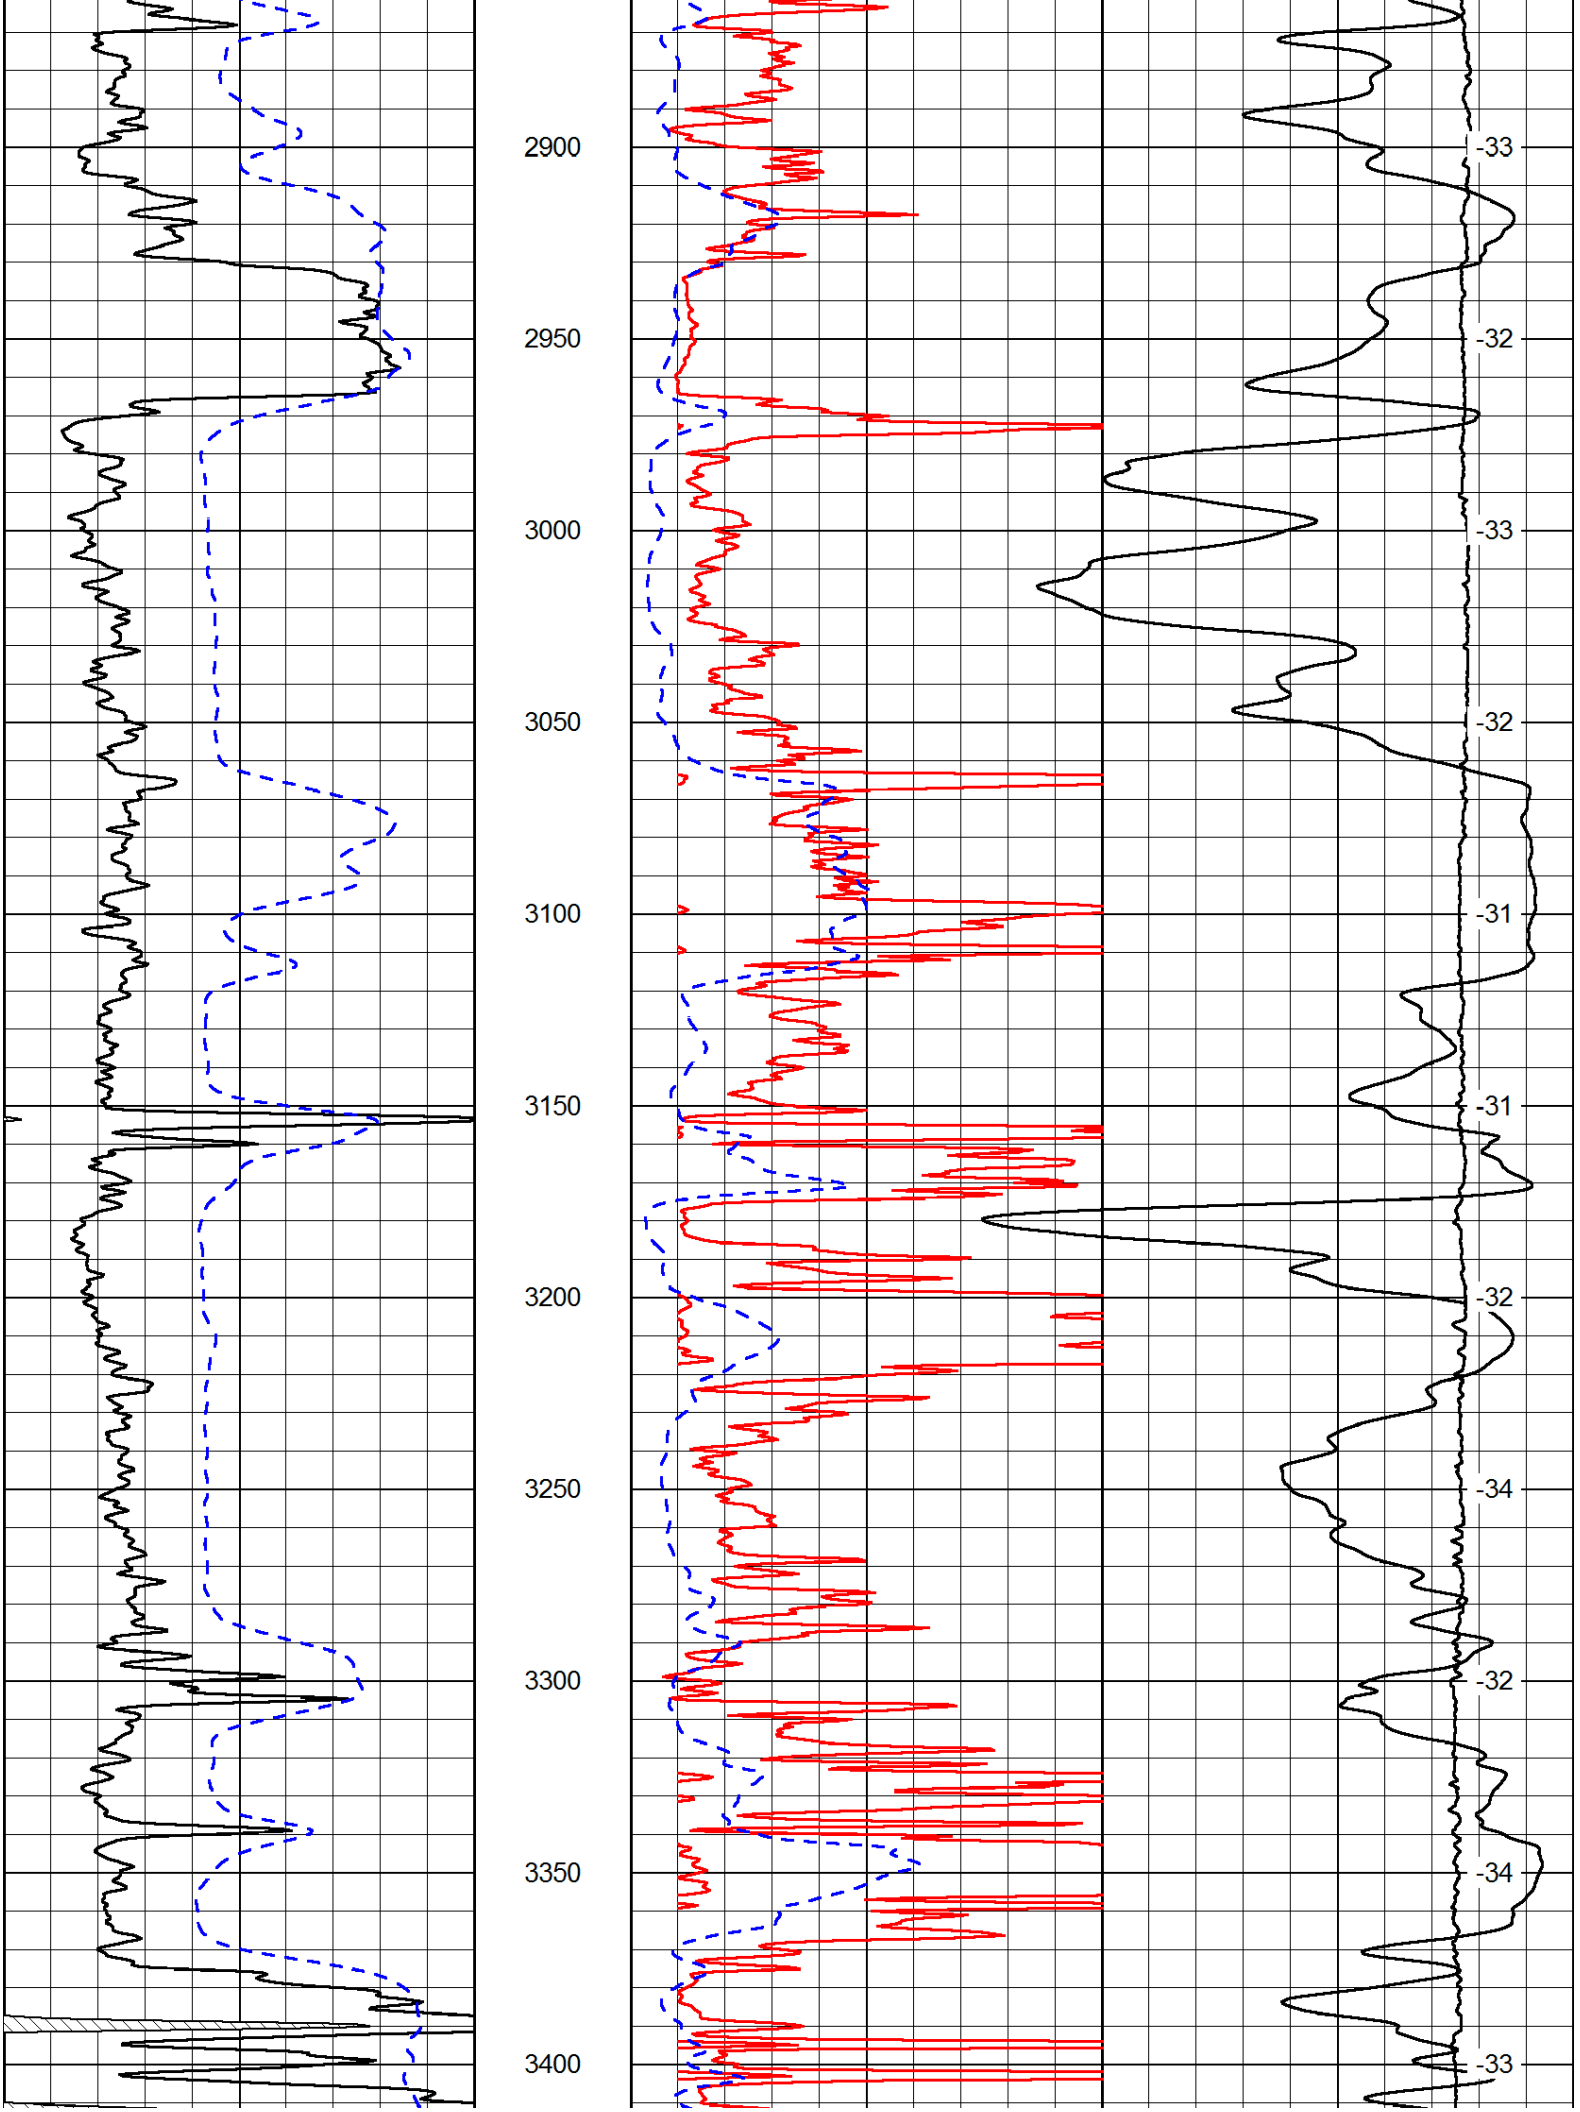

0 Gamma Ray 150
-200 SP (mV) 0
0 Shallow Resistivity 50
0 Deep Resistivity 50
1000 Conductivity 0
15000 Line Tension 0
50 Shallow Resistivity 500
50 Deep Resistivity 500
LSPD
200
250
300
350
400
450
500
550
600
650
-94
-93
-96
-96
-97
-96
-96
-96
-101
-101

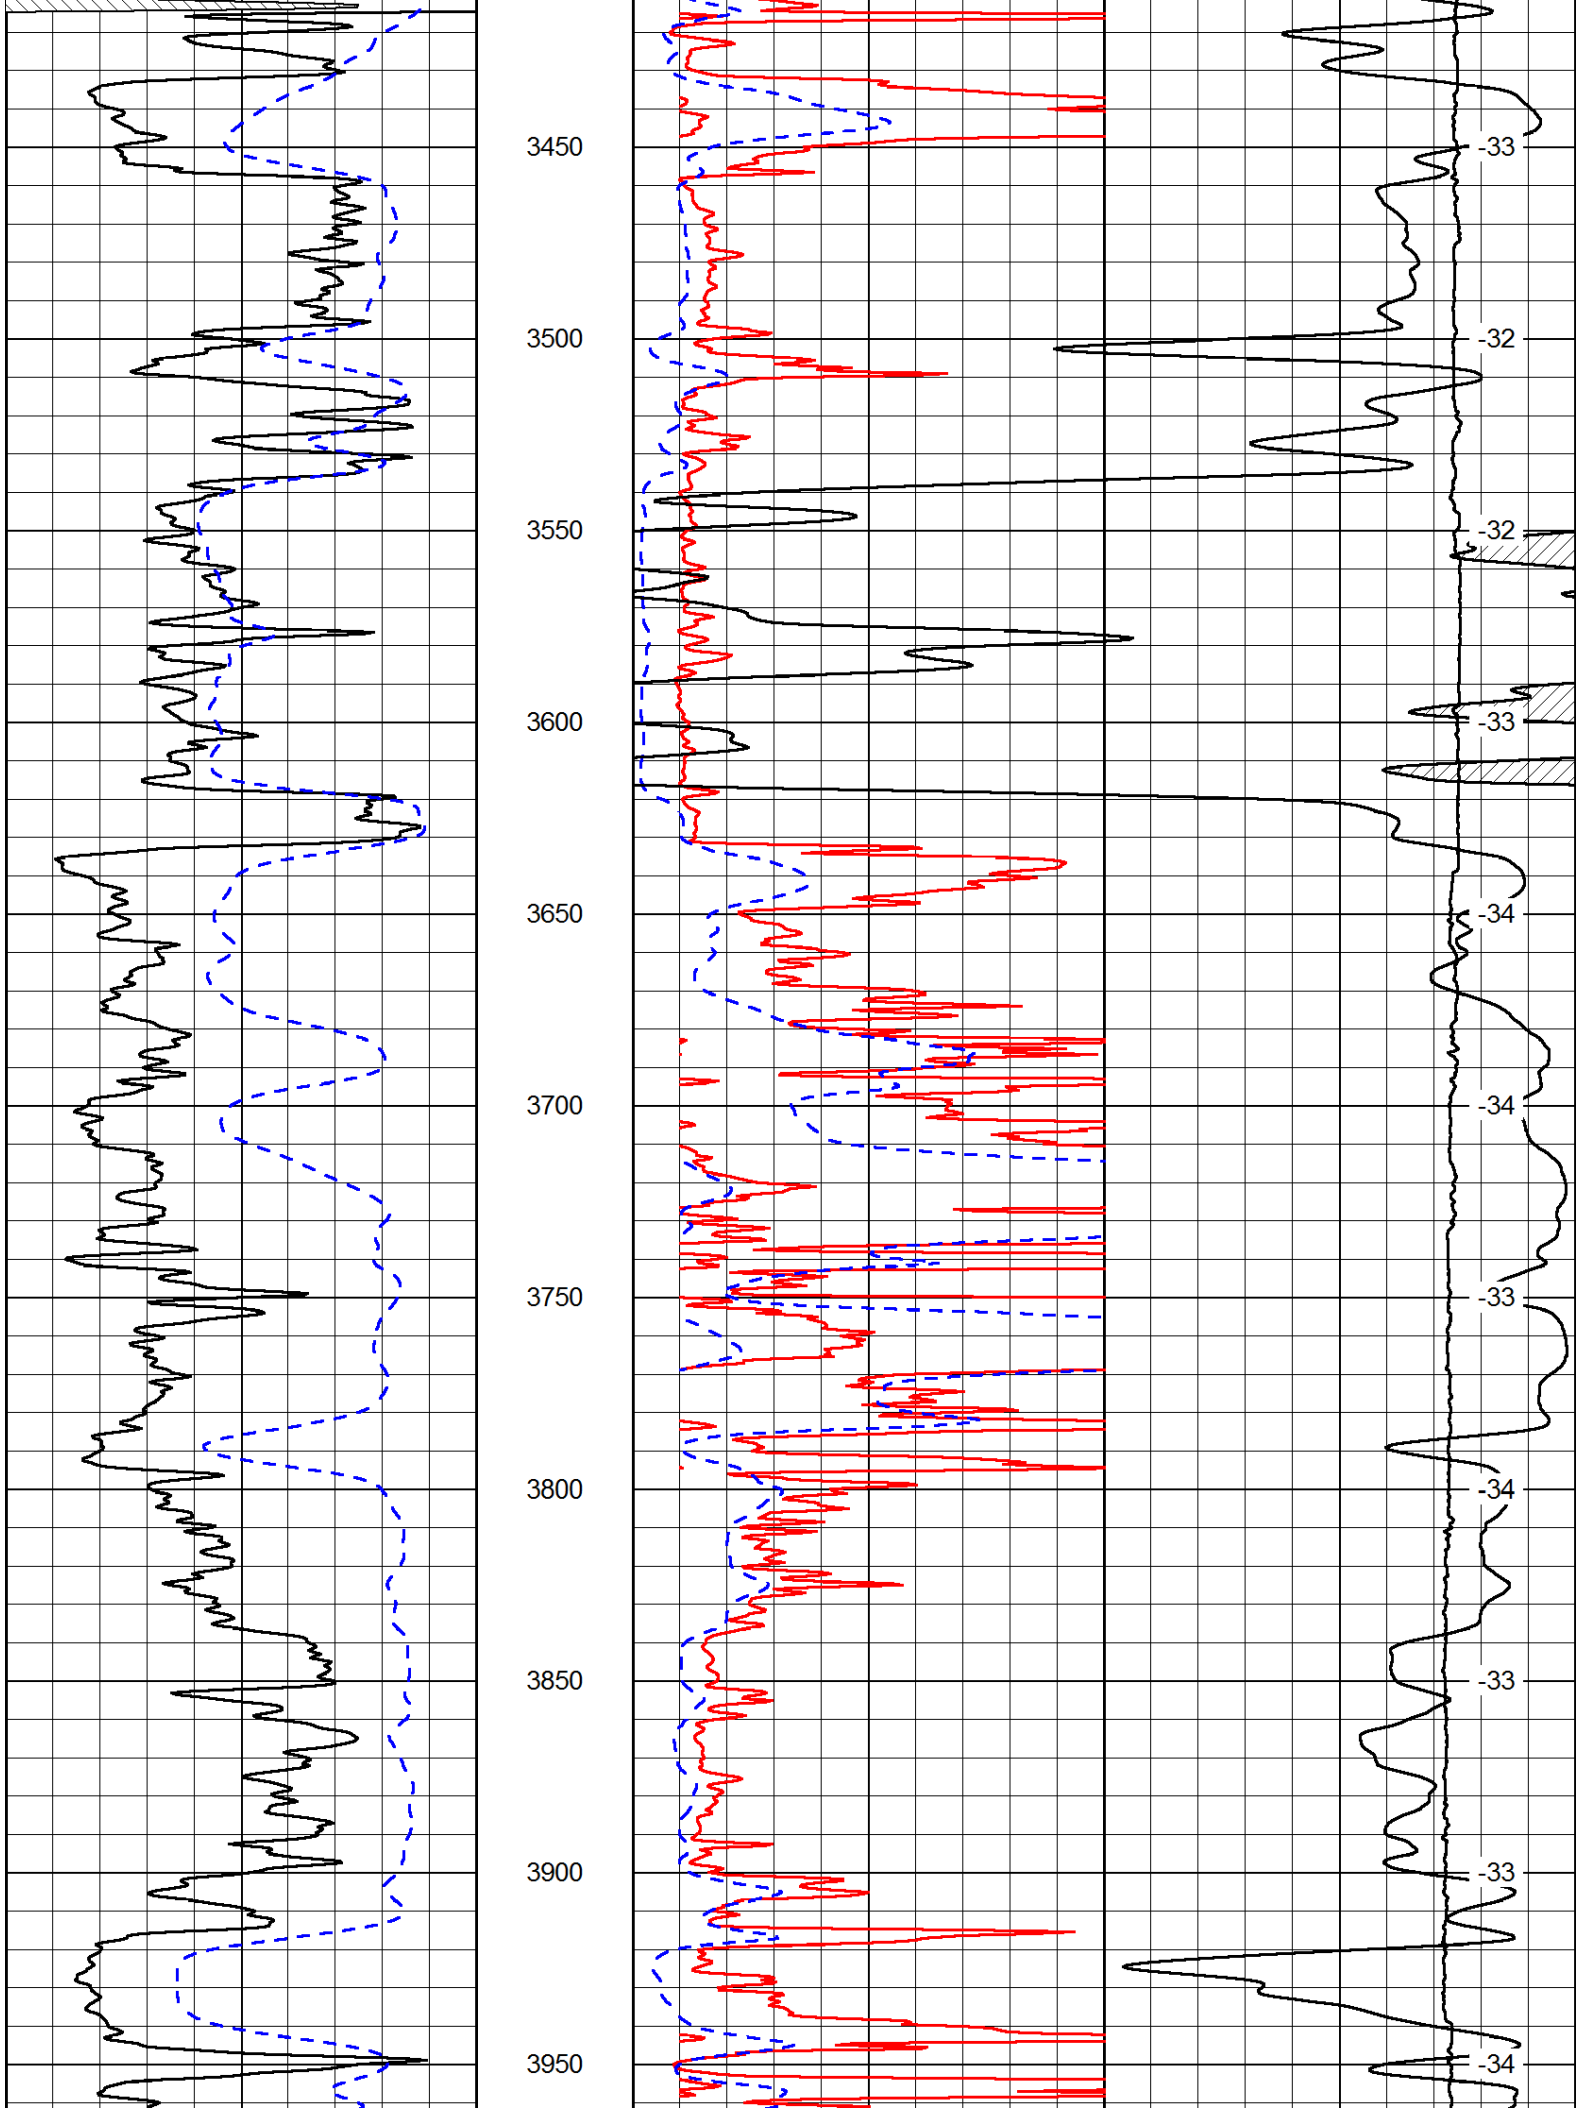

700
750
800
850
900
950
1000
1050
1100
1150
1200
-99
-98
-98
-98
-98
-98
-98
-98
-98
-100

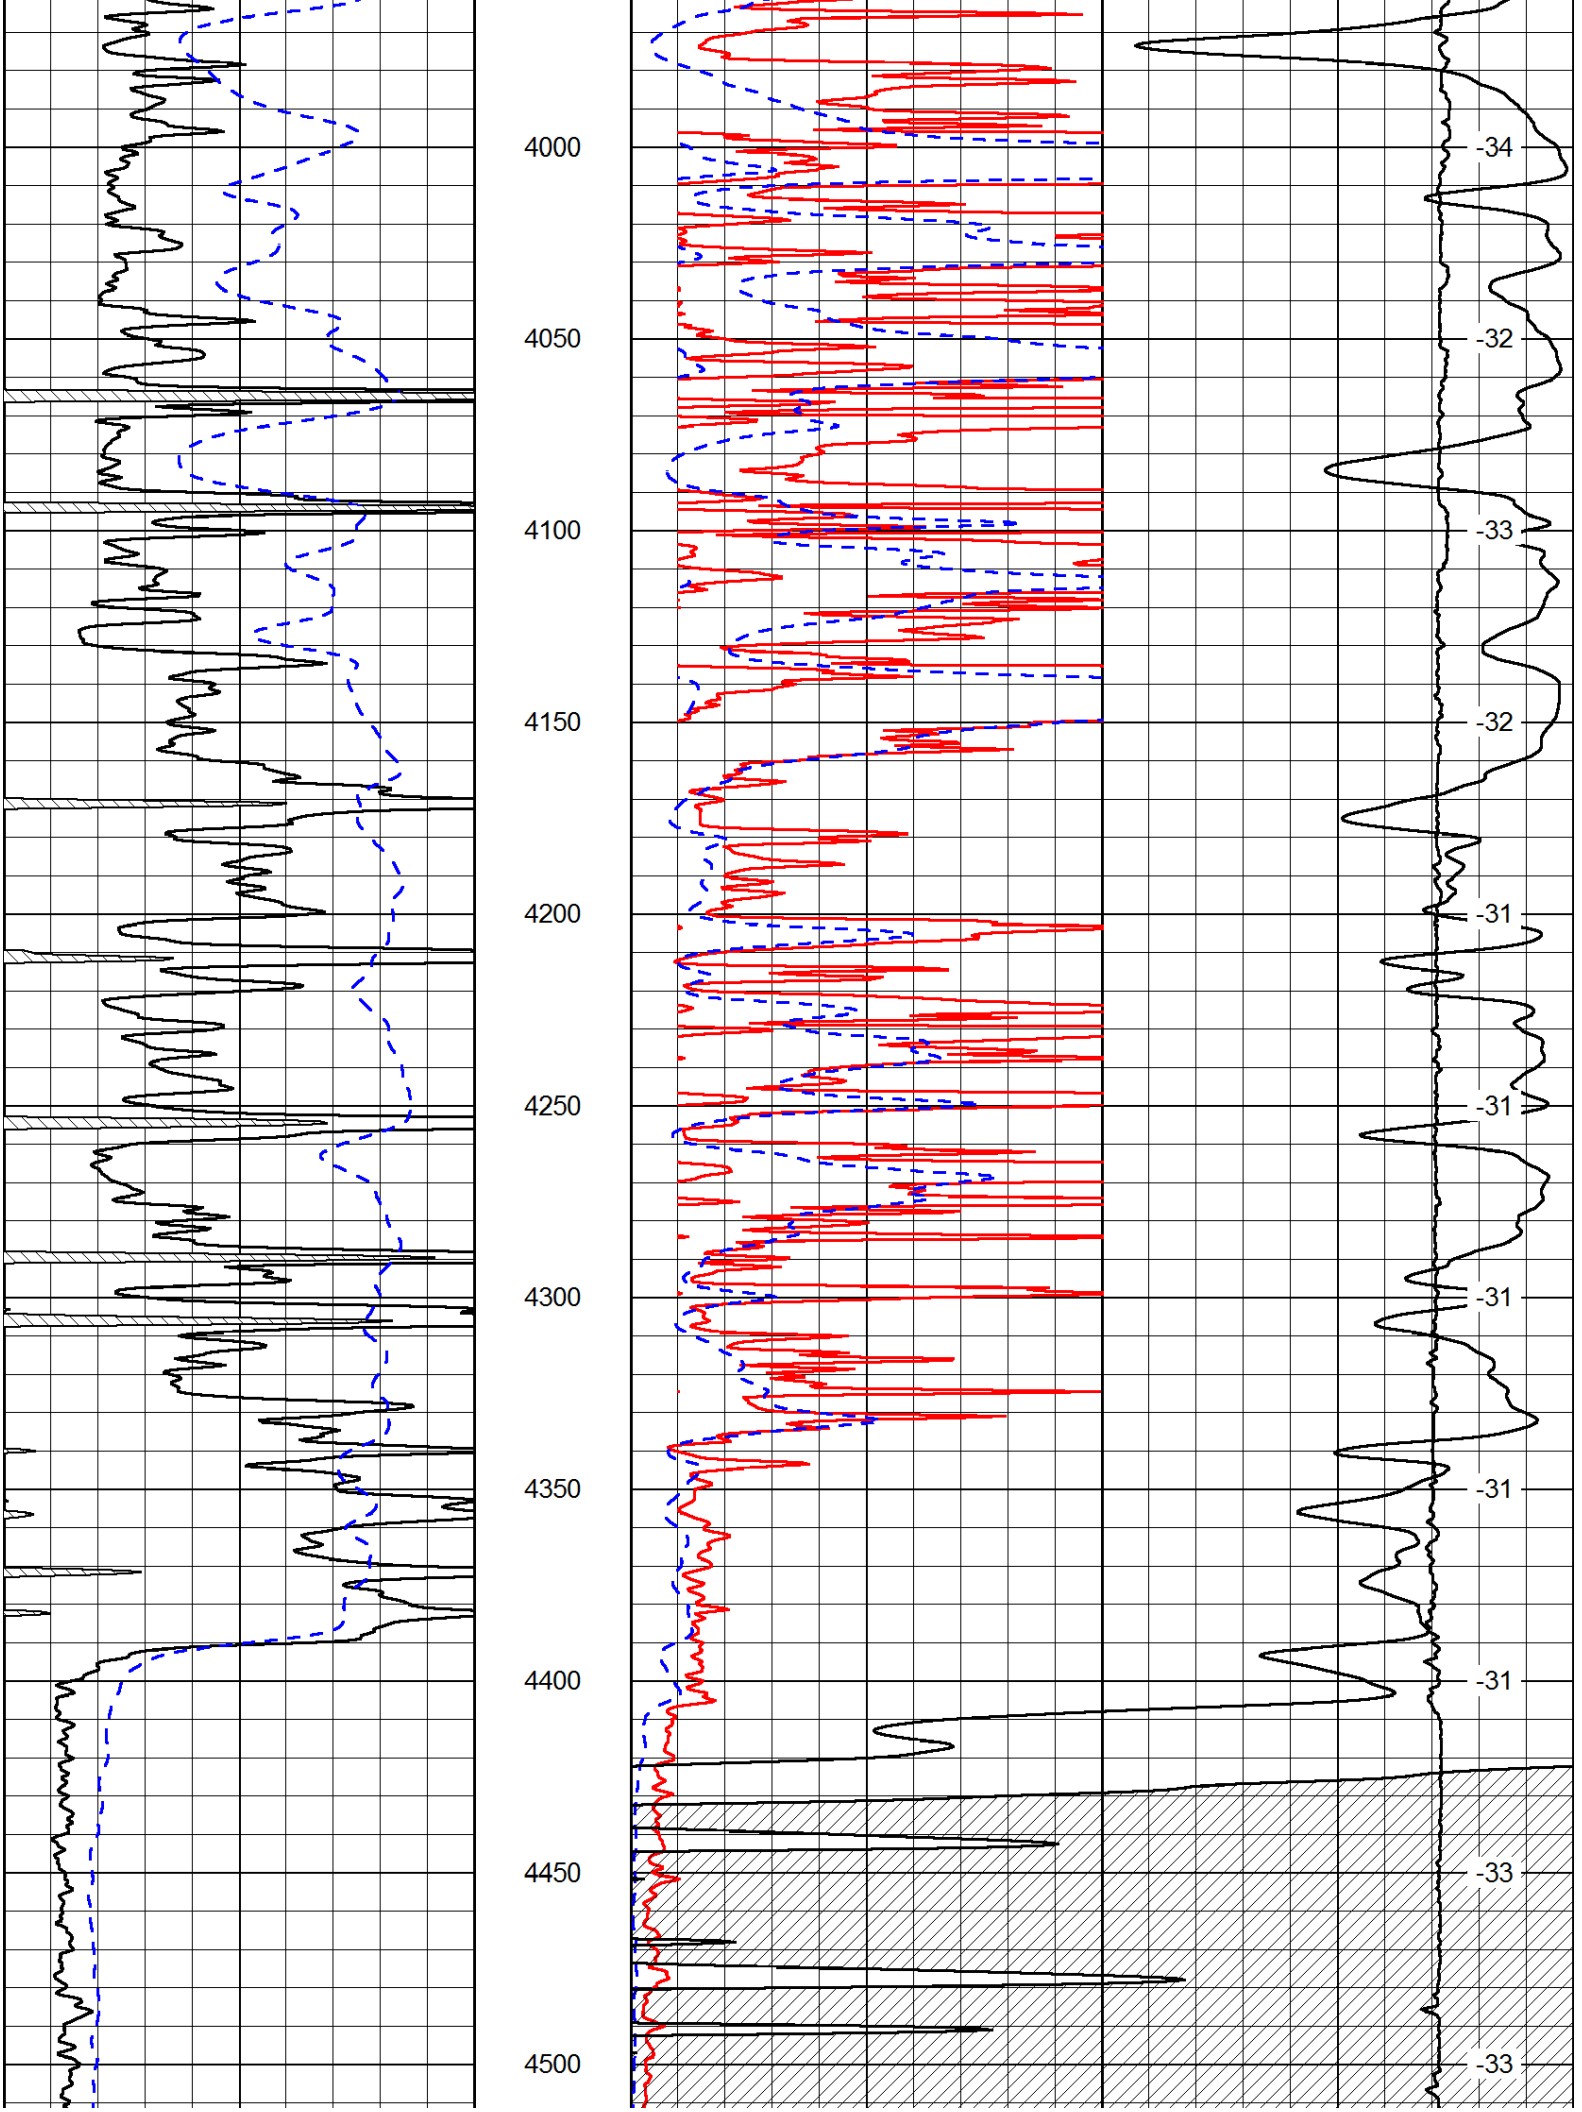

1250
1300
1350
1400
1450
1500
1550
1600
1650
1700
1750
-100
-98
-97
-98
-100
-100
-100
-99
-99
-100
-100

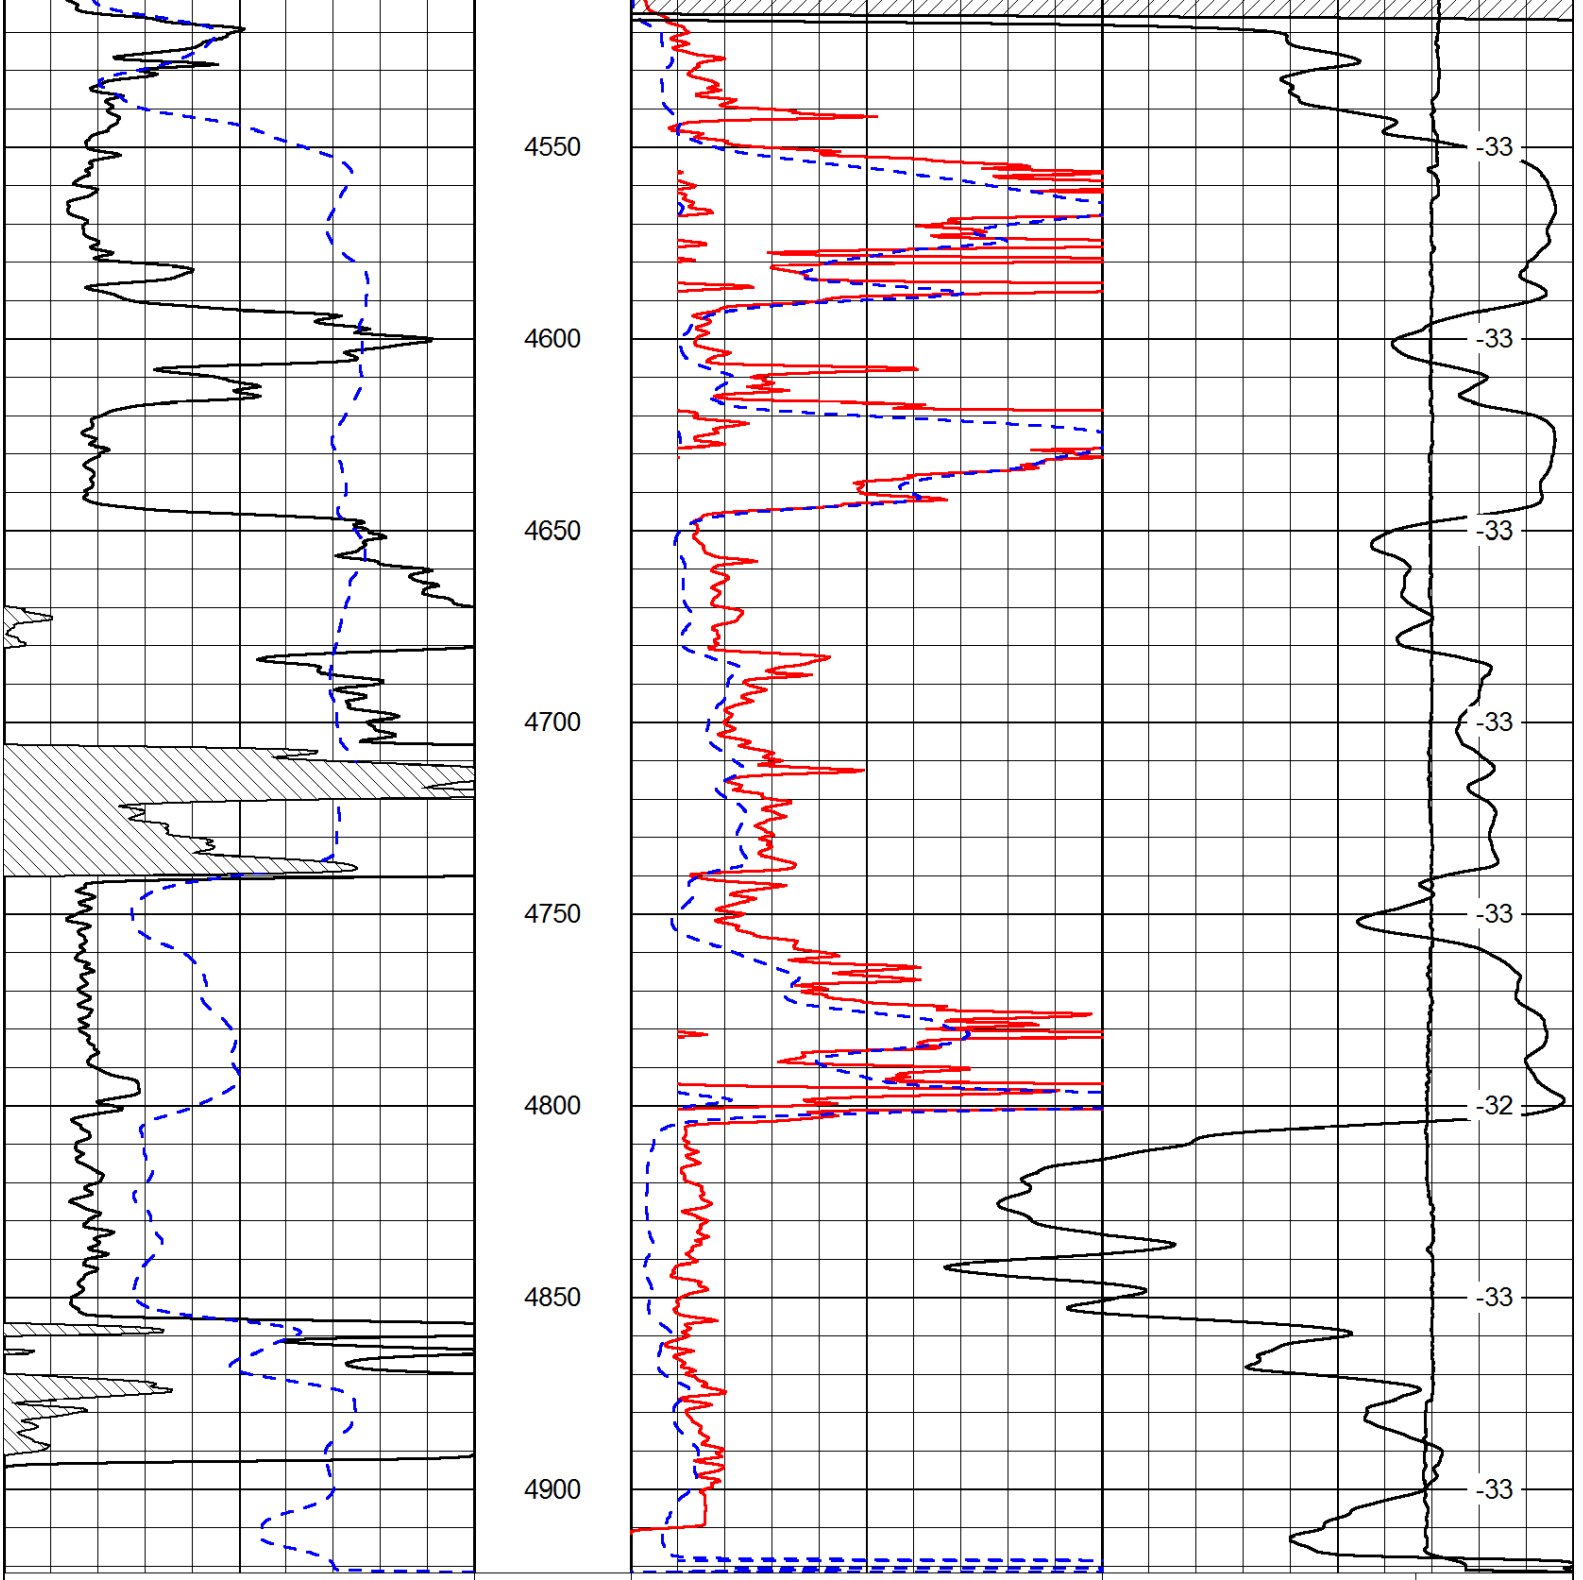

1800
1850
1900
1950
2000
2050
2100
2150
2200
2250
2300
-99
-97
-97
-97
-96
-96
-96
-96
-96


2350
2400
2450
2500
2550
2600
2650
2700
2750
2800
2850
-96
-35
-34
-34
-34
-34
-32
-33
-32
-33
-32


2900
2950
3000
3050
3100
3150
3200
3250
3300
3350
3400
-33
-32
-33
-32
-31
-31
-32
-34
-32
-34
-33


3450
3500
3550
3600
3650
3700
3750
3800
3850
3900
3950
-33
-32
-32
-33
-34
-34
-33
-34
-33
-33
-34


4000
4050
4100
4150
4200
4250
4300
4350
4400
4450
4500
-34
-32
-33
-32
-31
-31
-31
-31
-33
-33

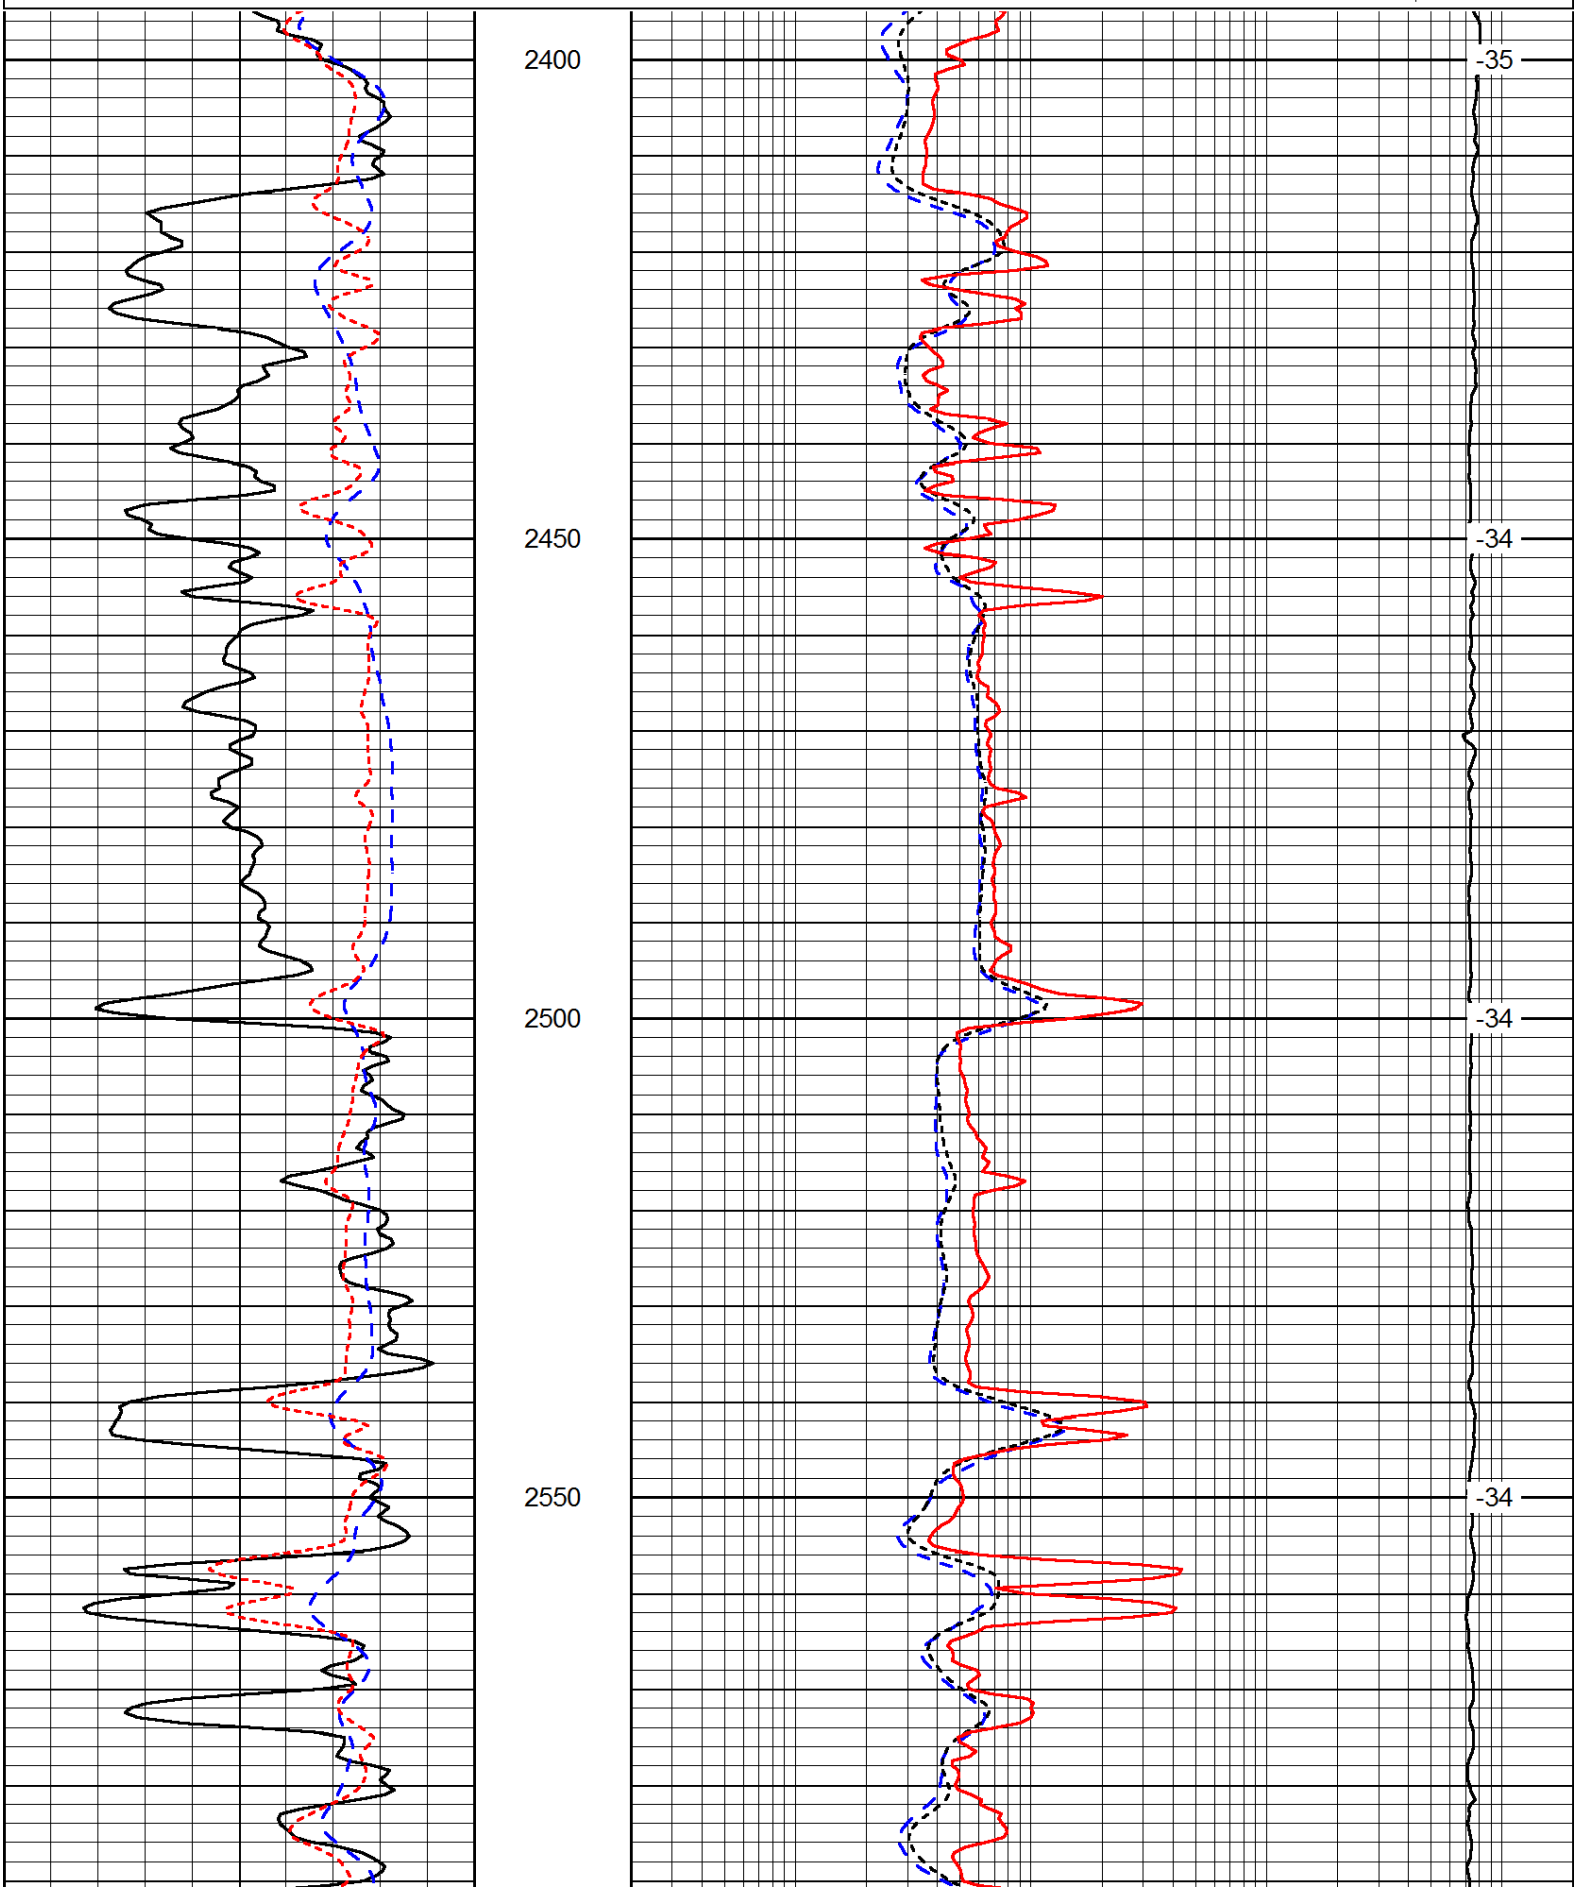


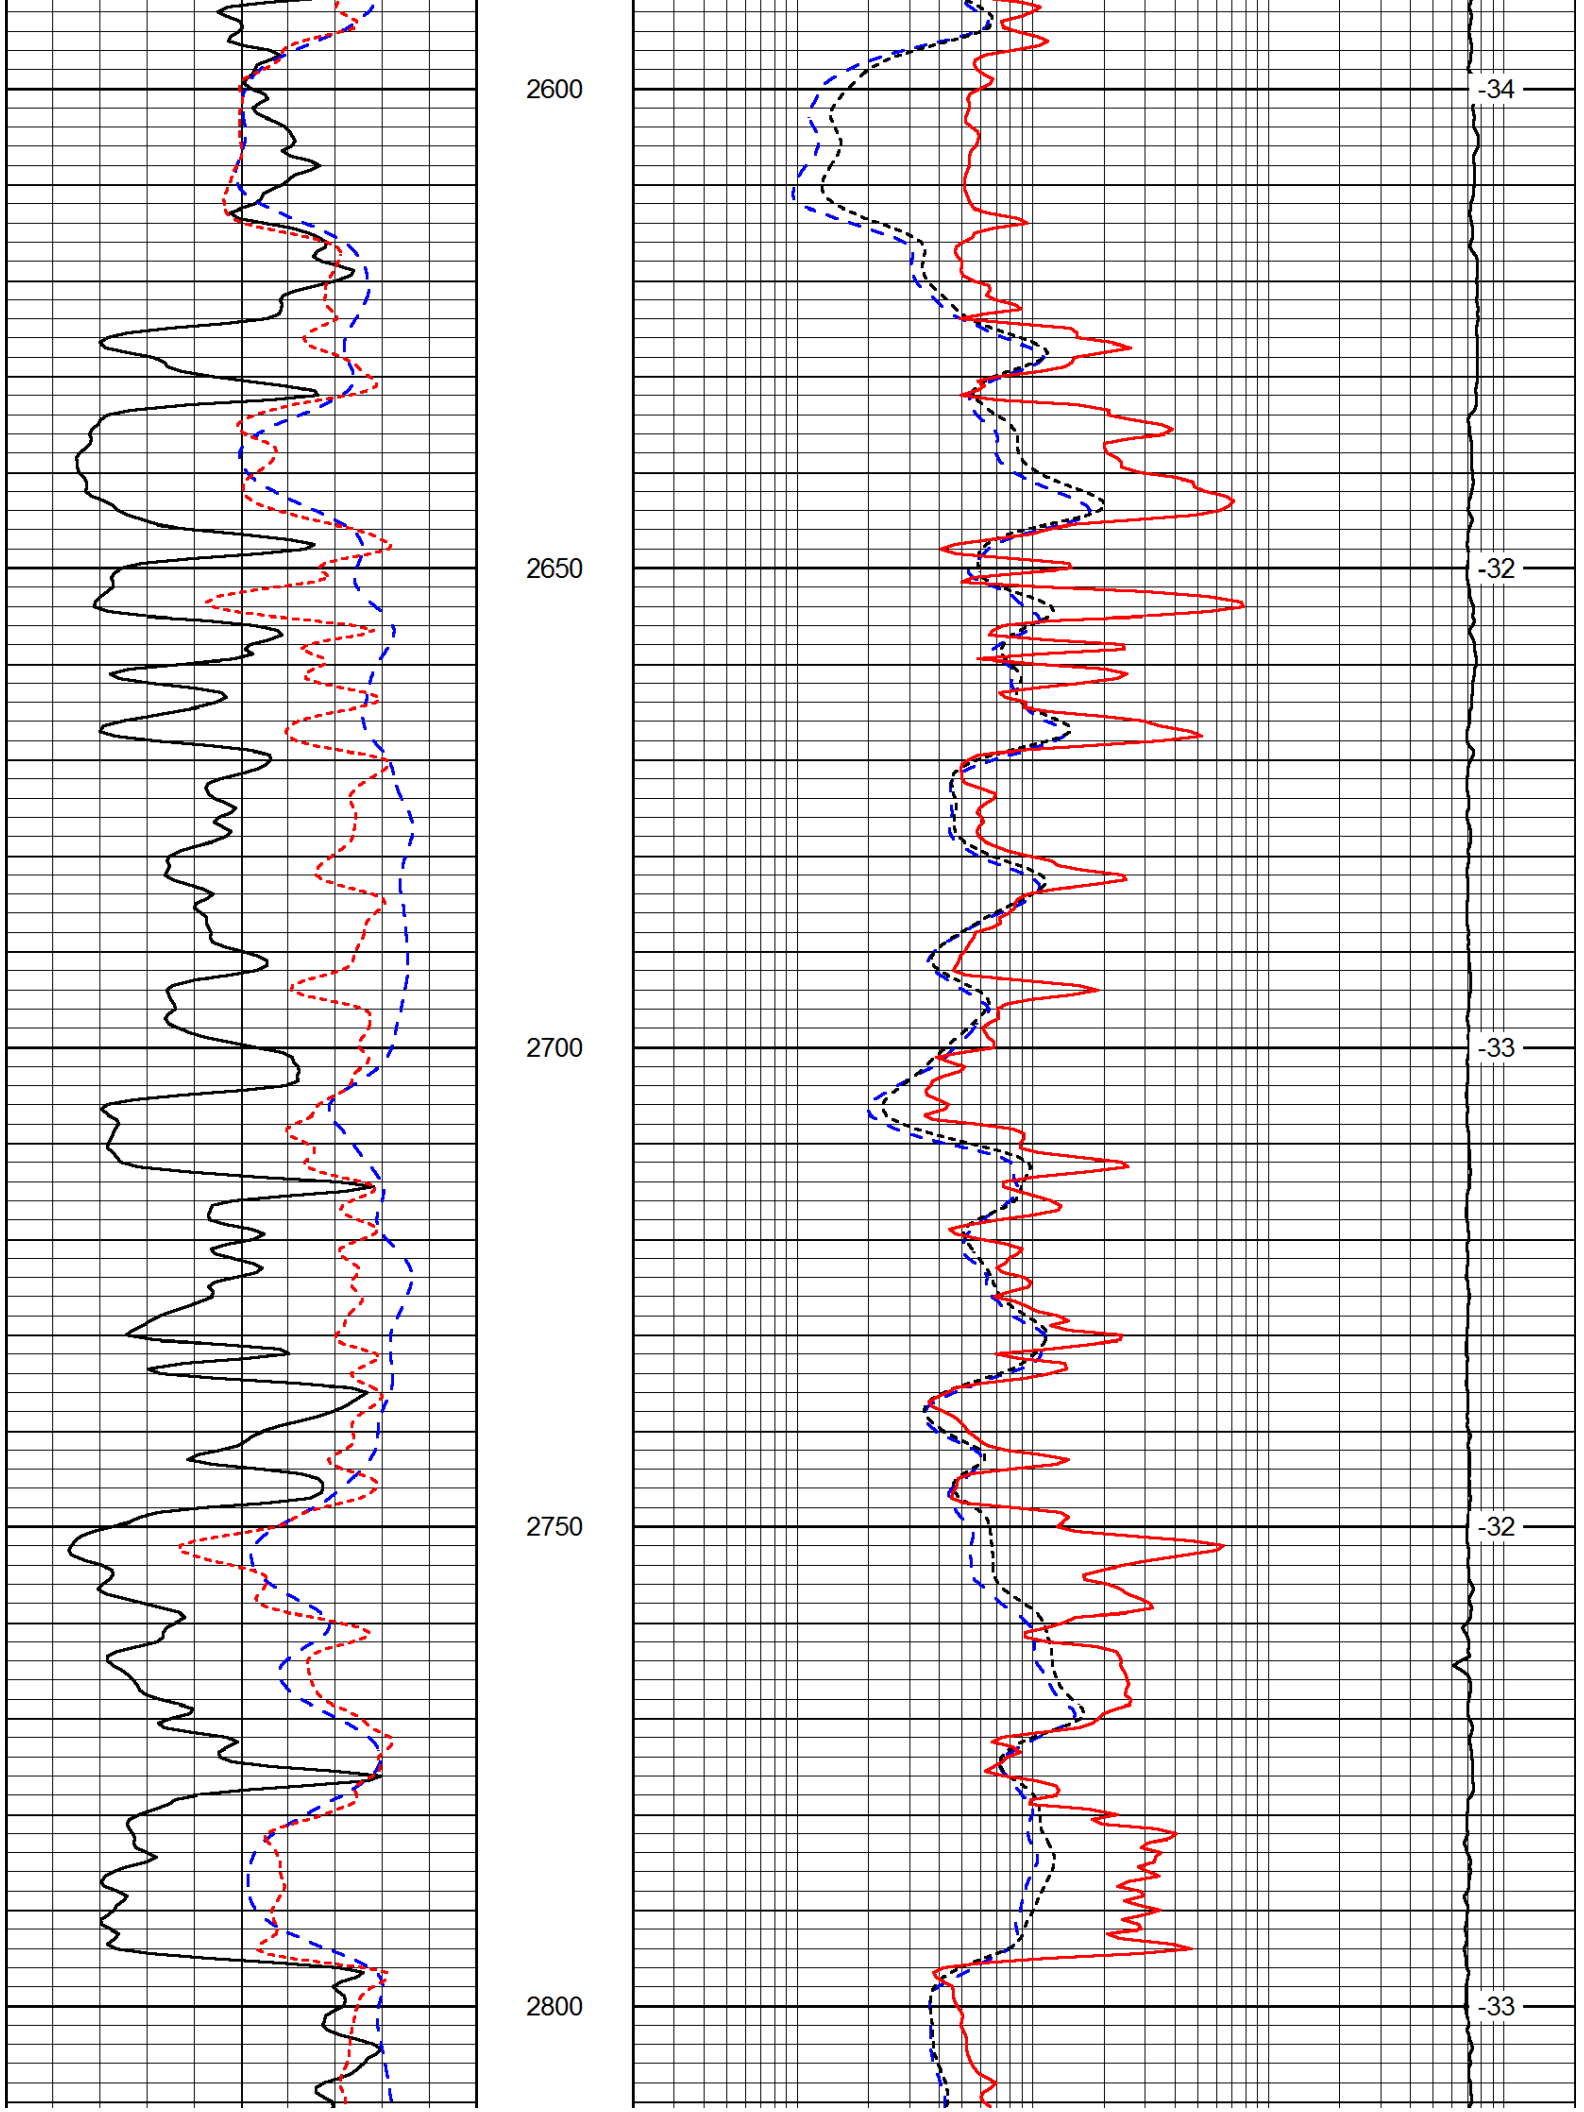
Database File:	c:\warrior\data\r&b_albright #3\r&bhd.db
Dataset Pathname:	dil/rbmain
Presentation Format:	dil
Dataset Creation:	Wed Jun 20 20:24:59 2012
Charted by:	Depth in Feet scaled 1:240

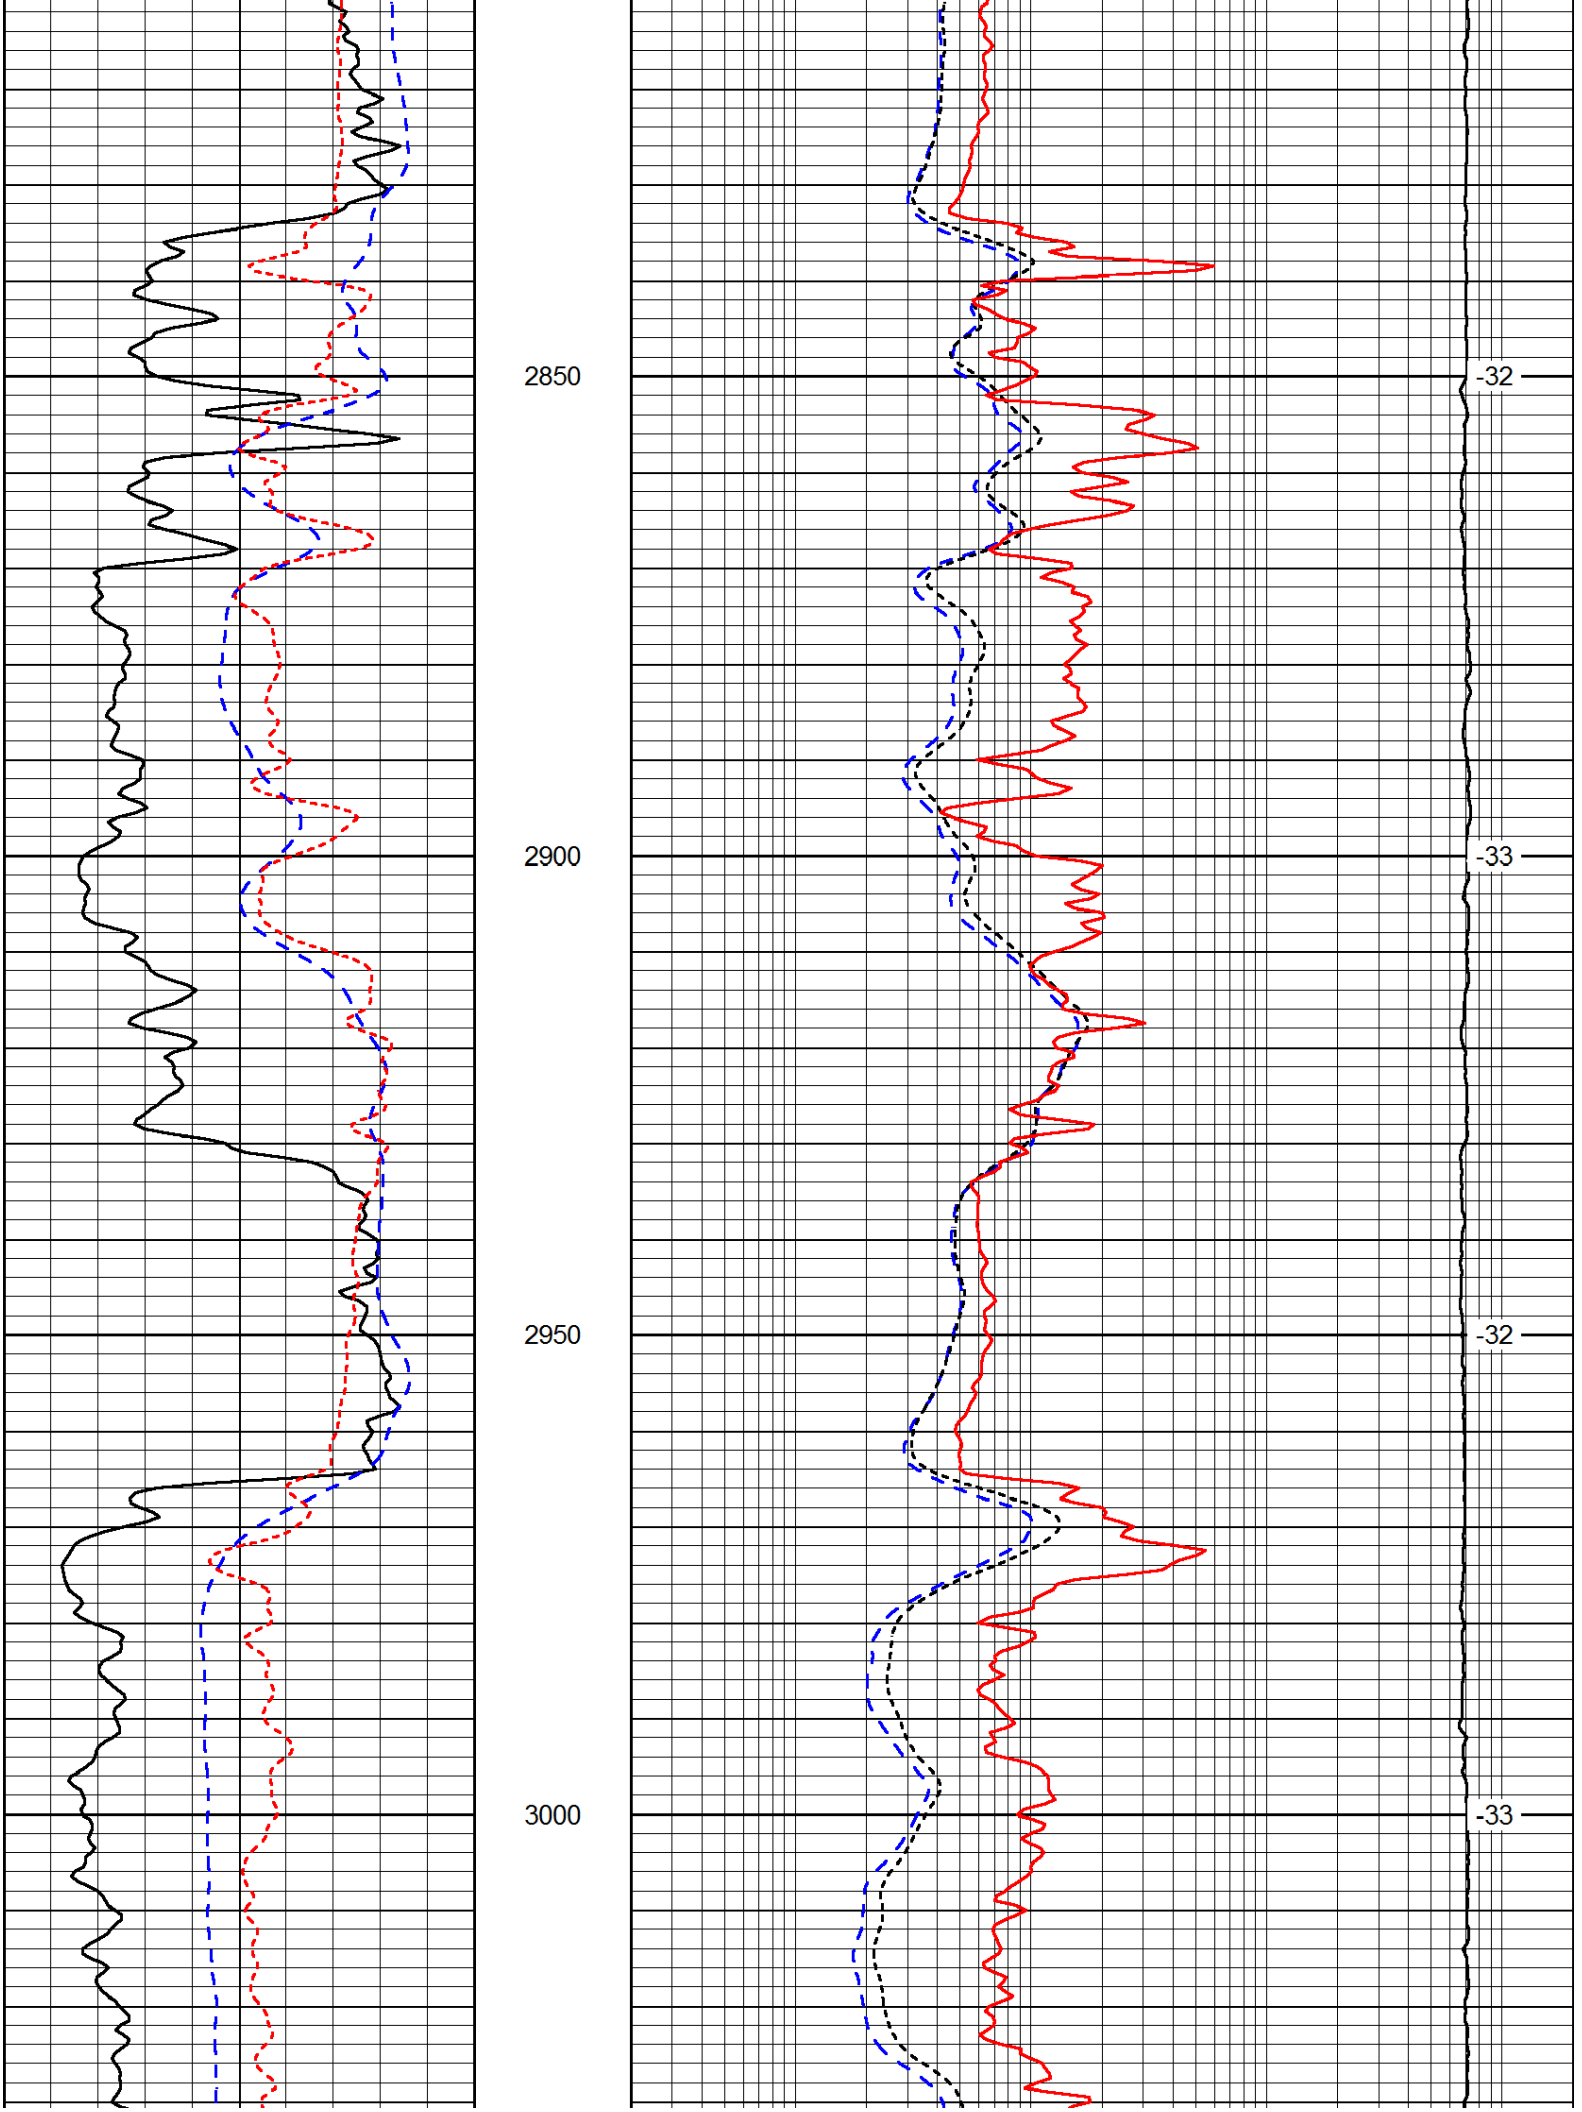
0	Gamma Ray	150
-200	SP (mV)	0
-160	Rxo / Rt	40

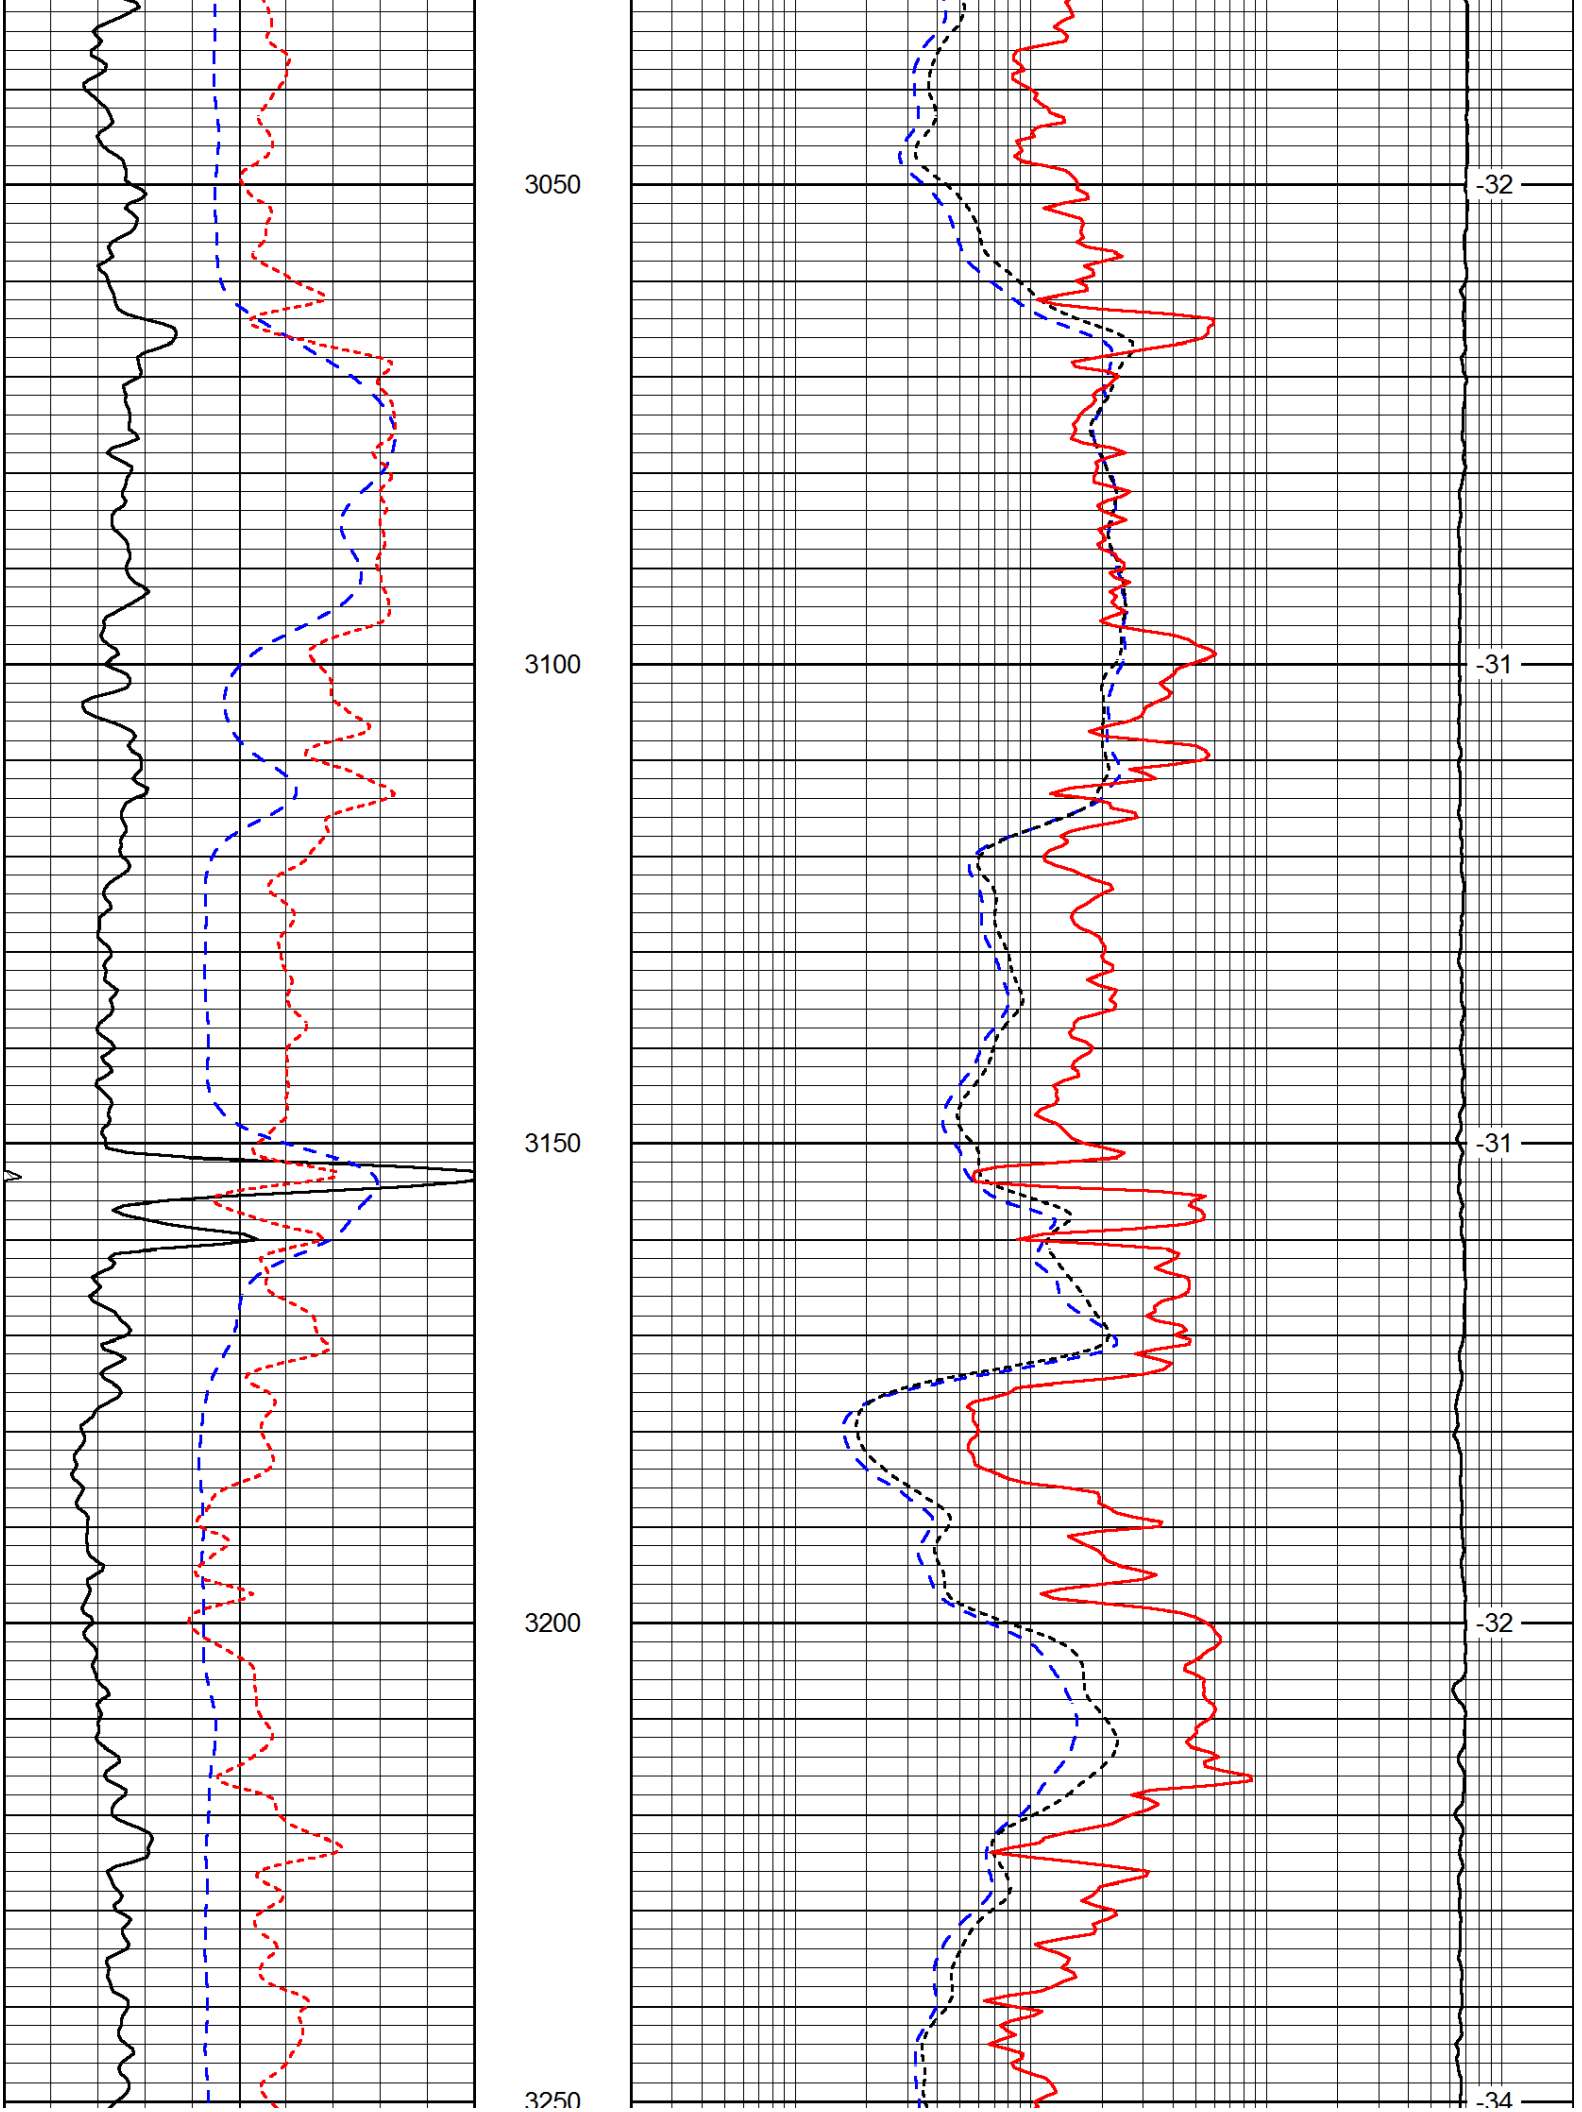
0.2	Deep Resistivity	2000
0.2	Medium Resistivity	2000
0.2	Shallow Resistivity	2000
15000	Line Tension	0

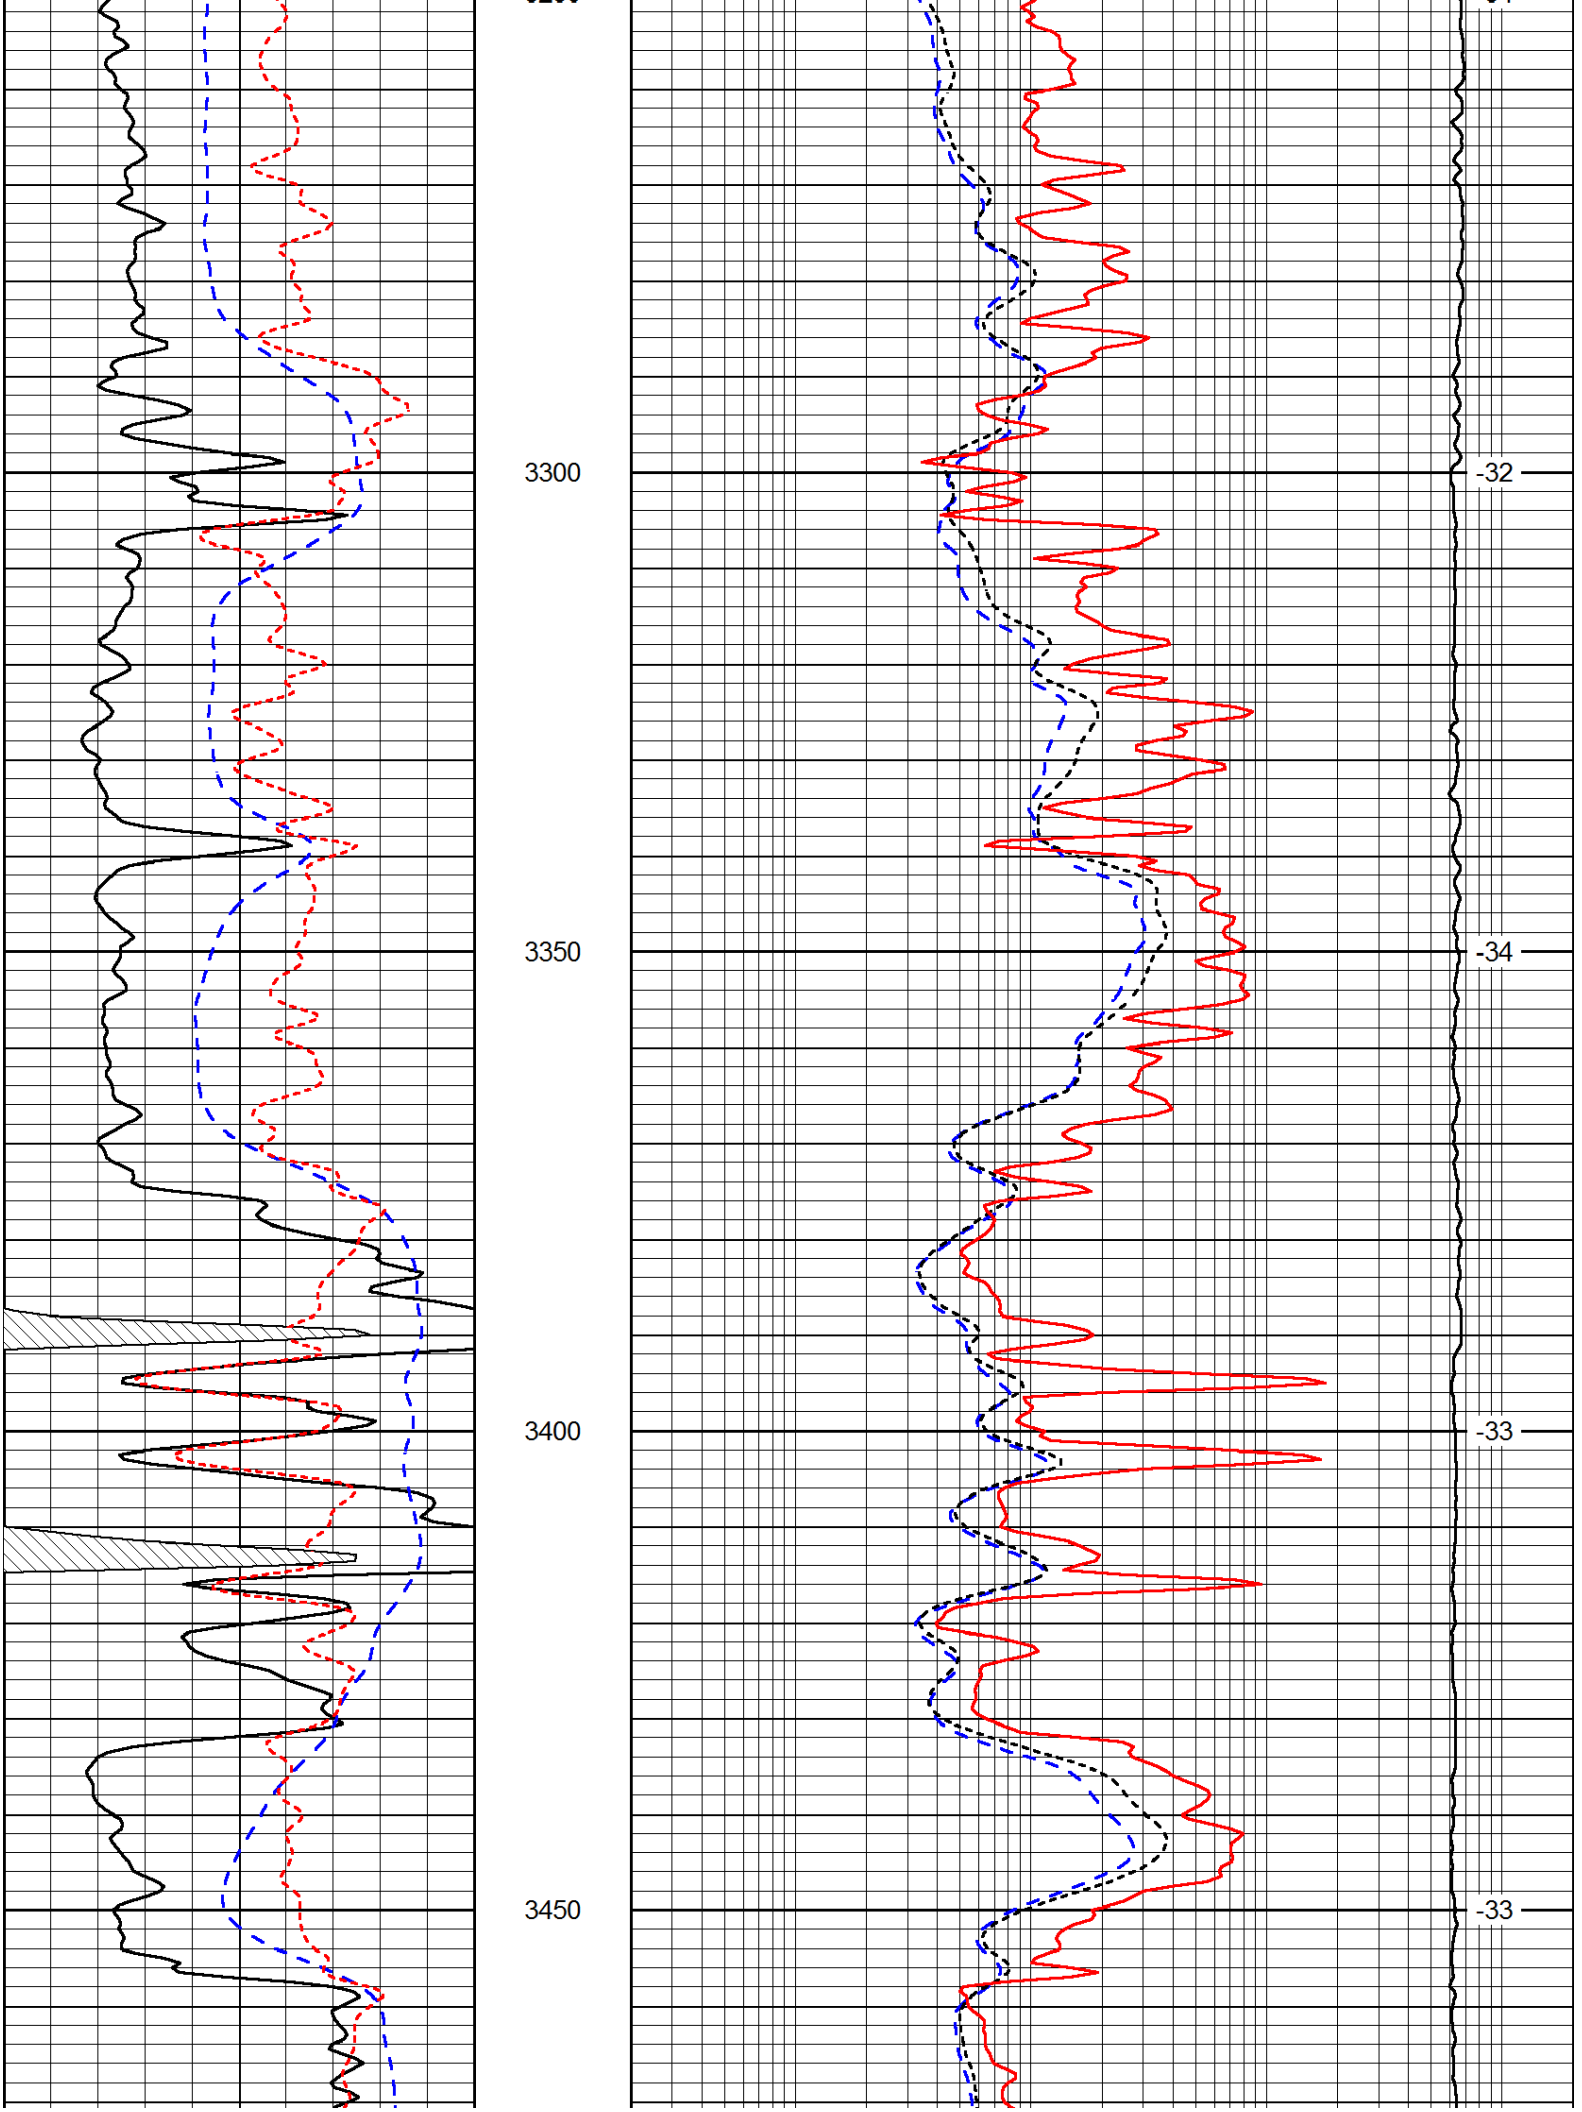
LSPD

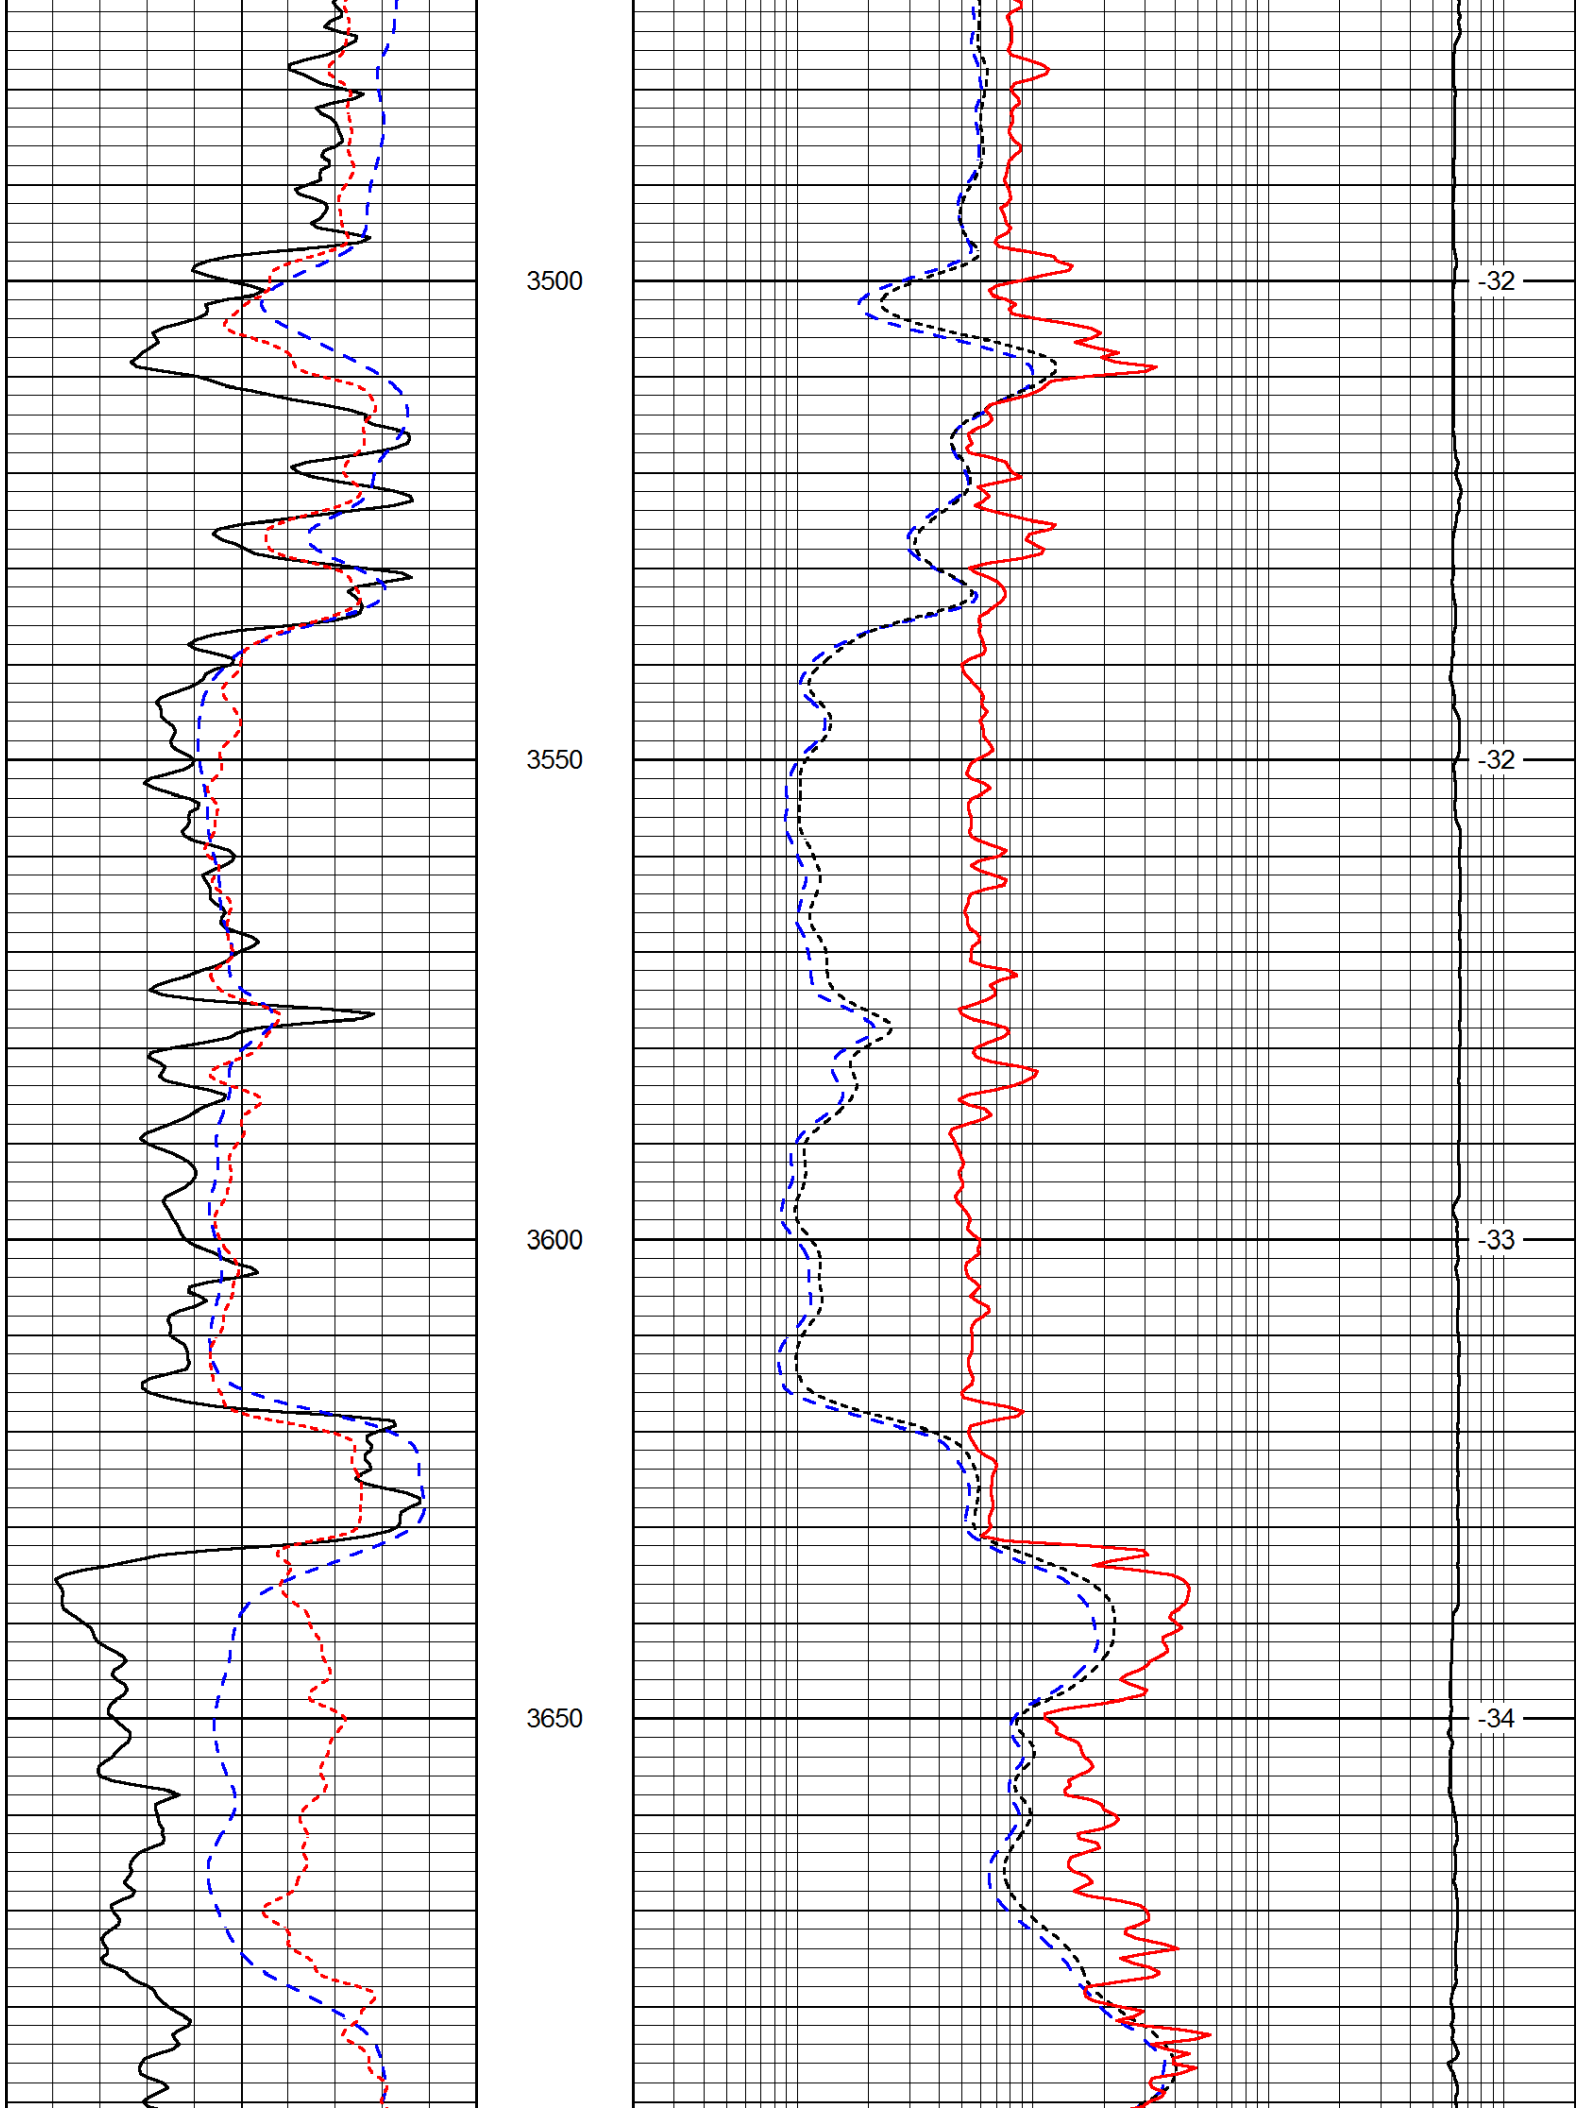


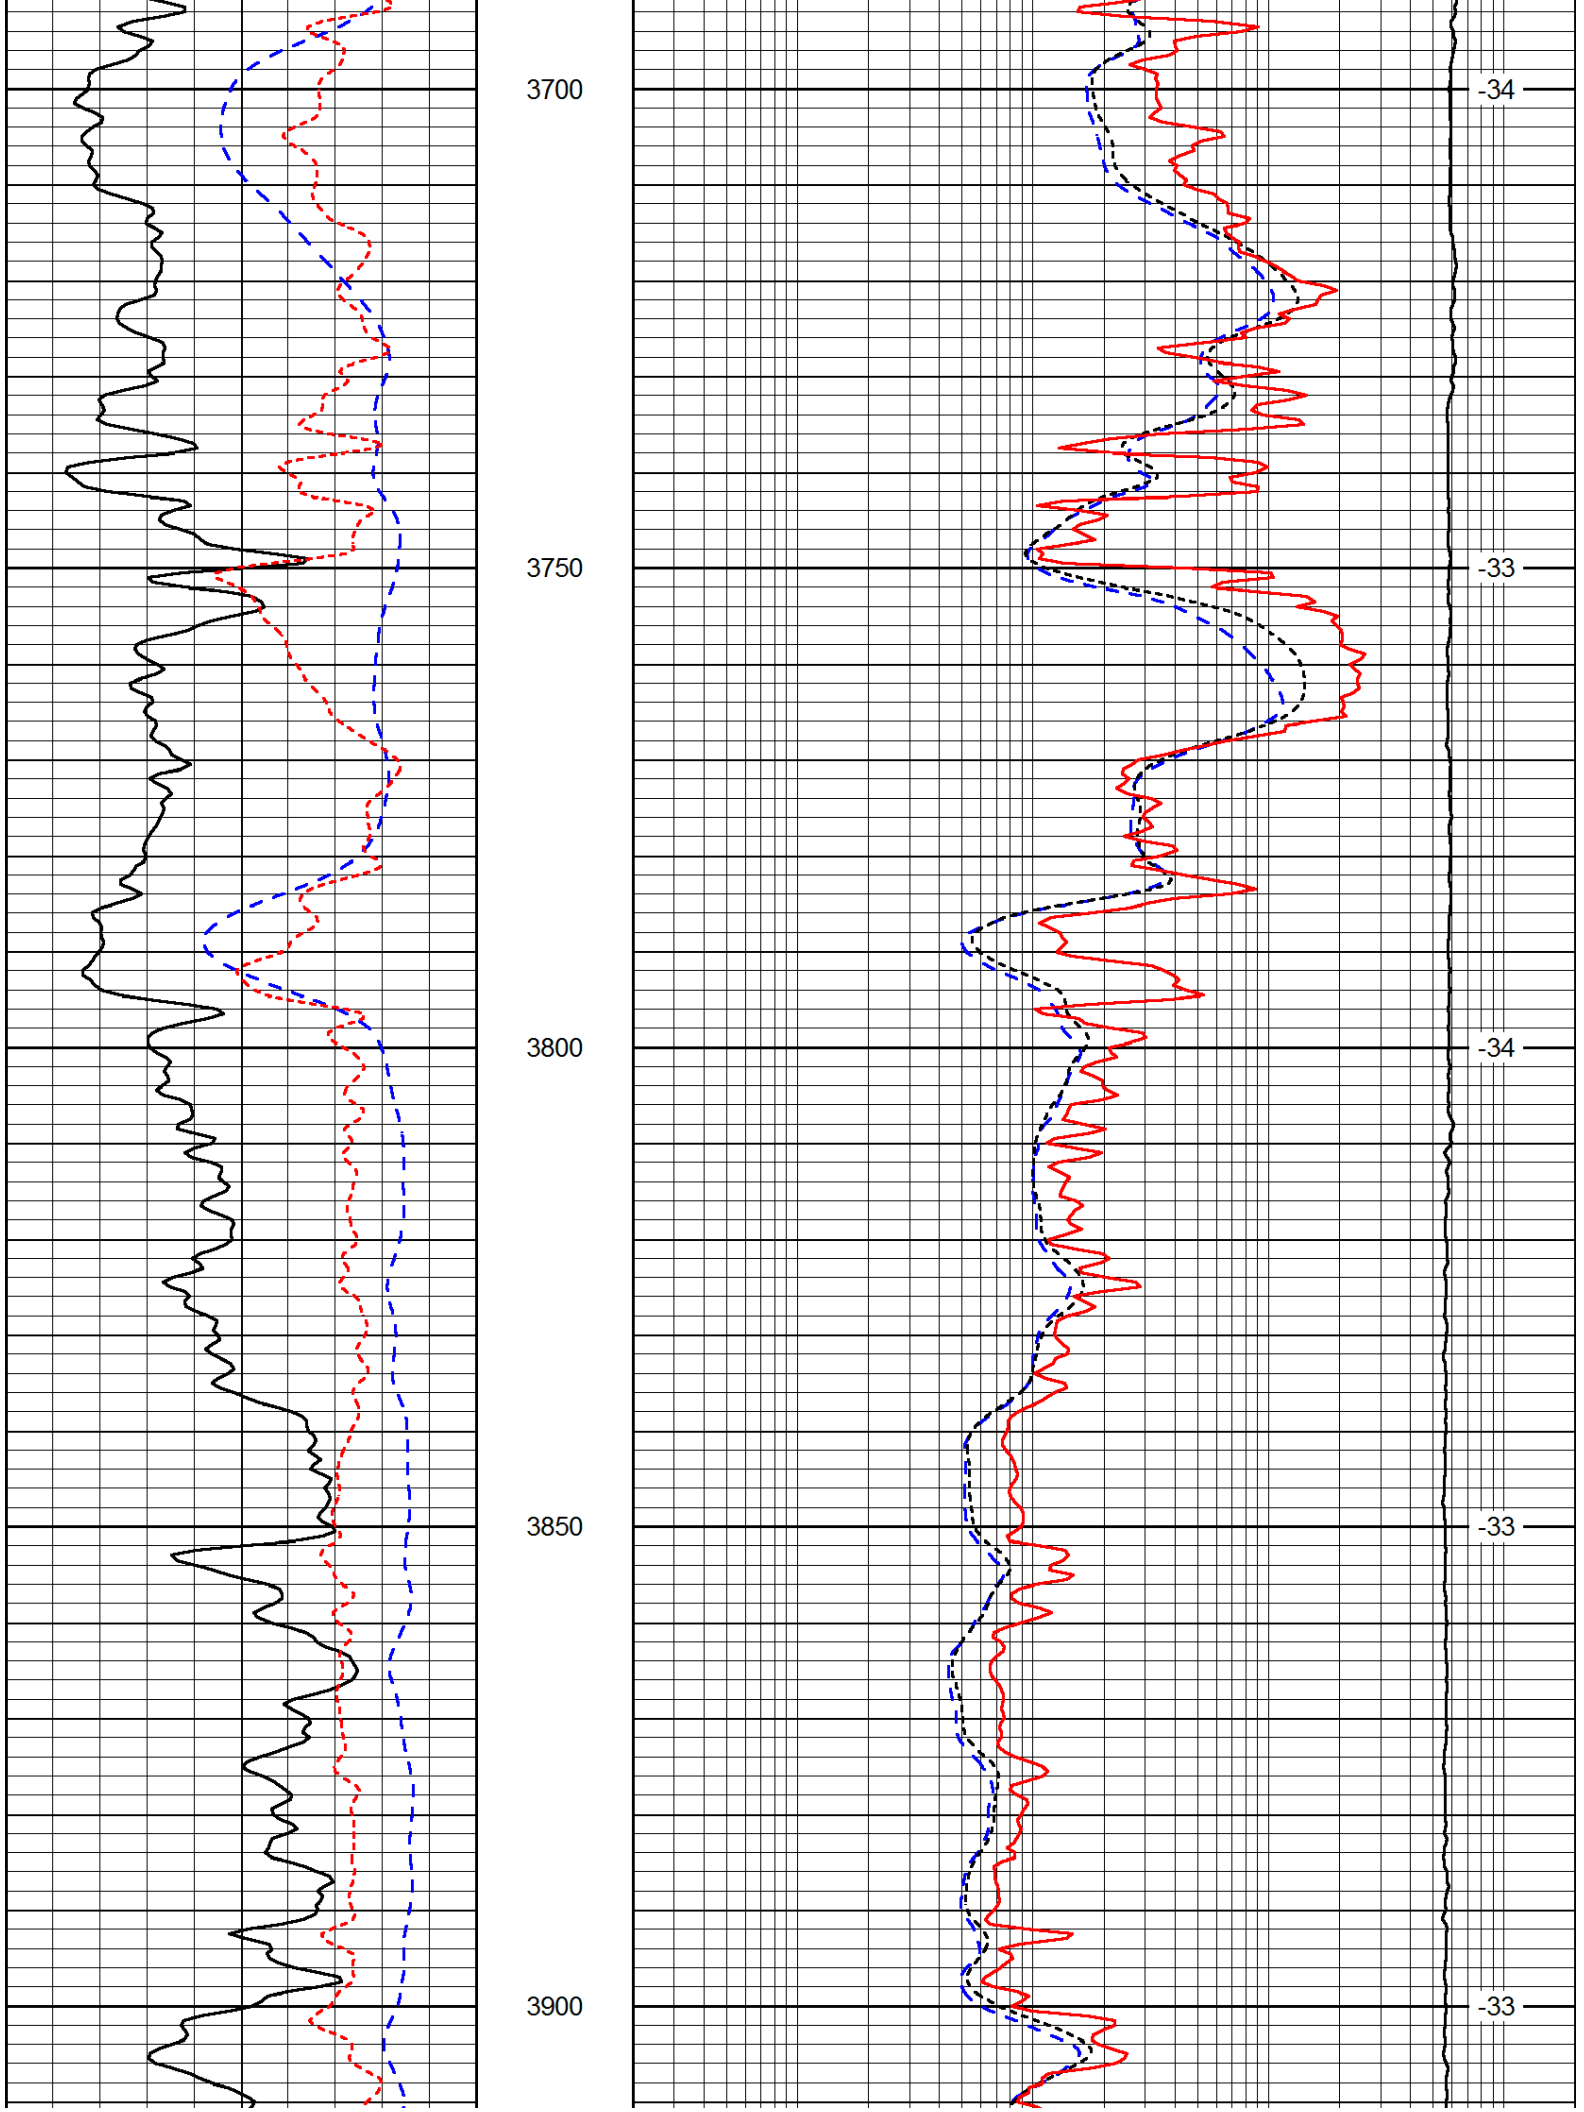

2600
2650
2700
2750
2800
-34
-32
-33
-32
-33

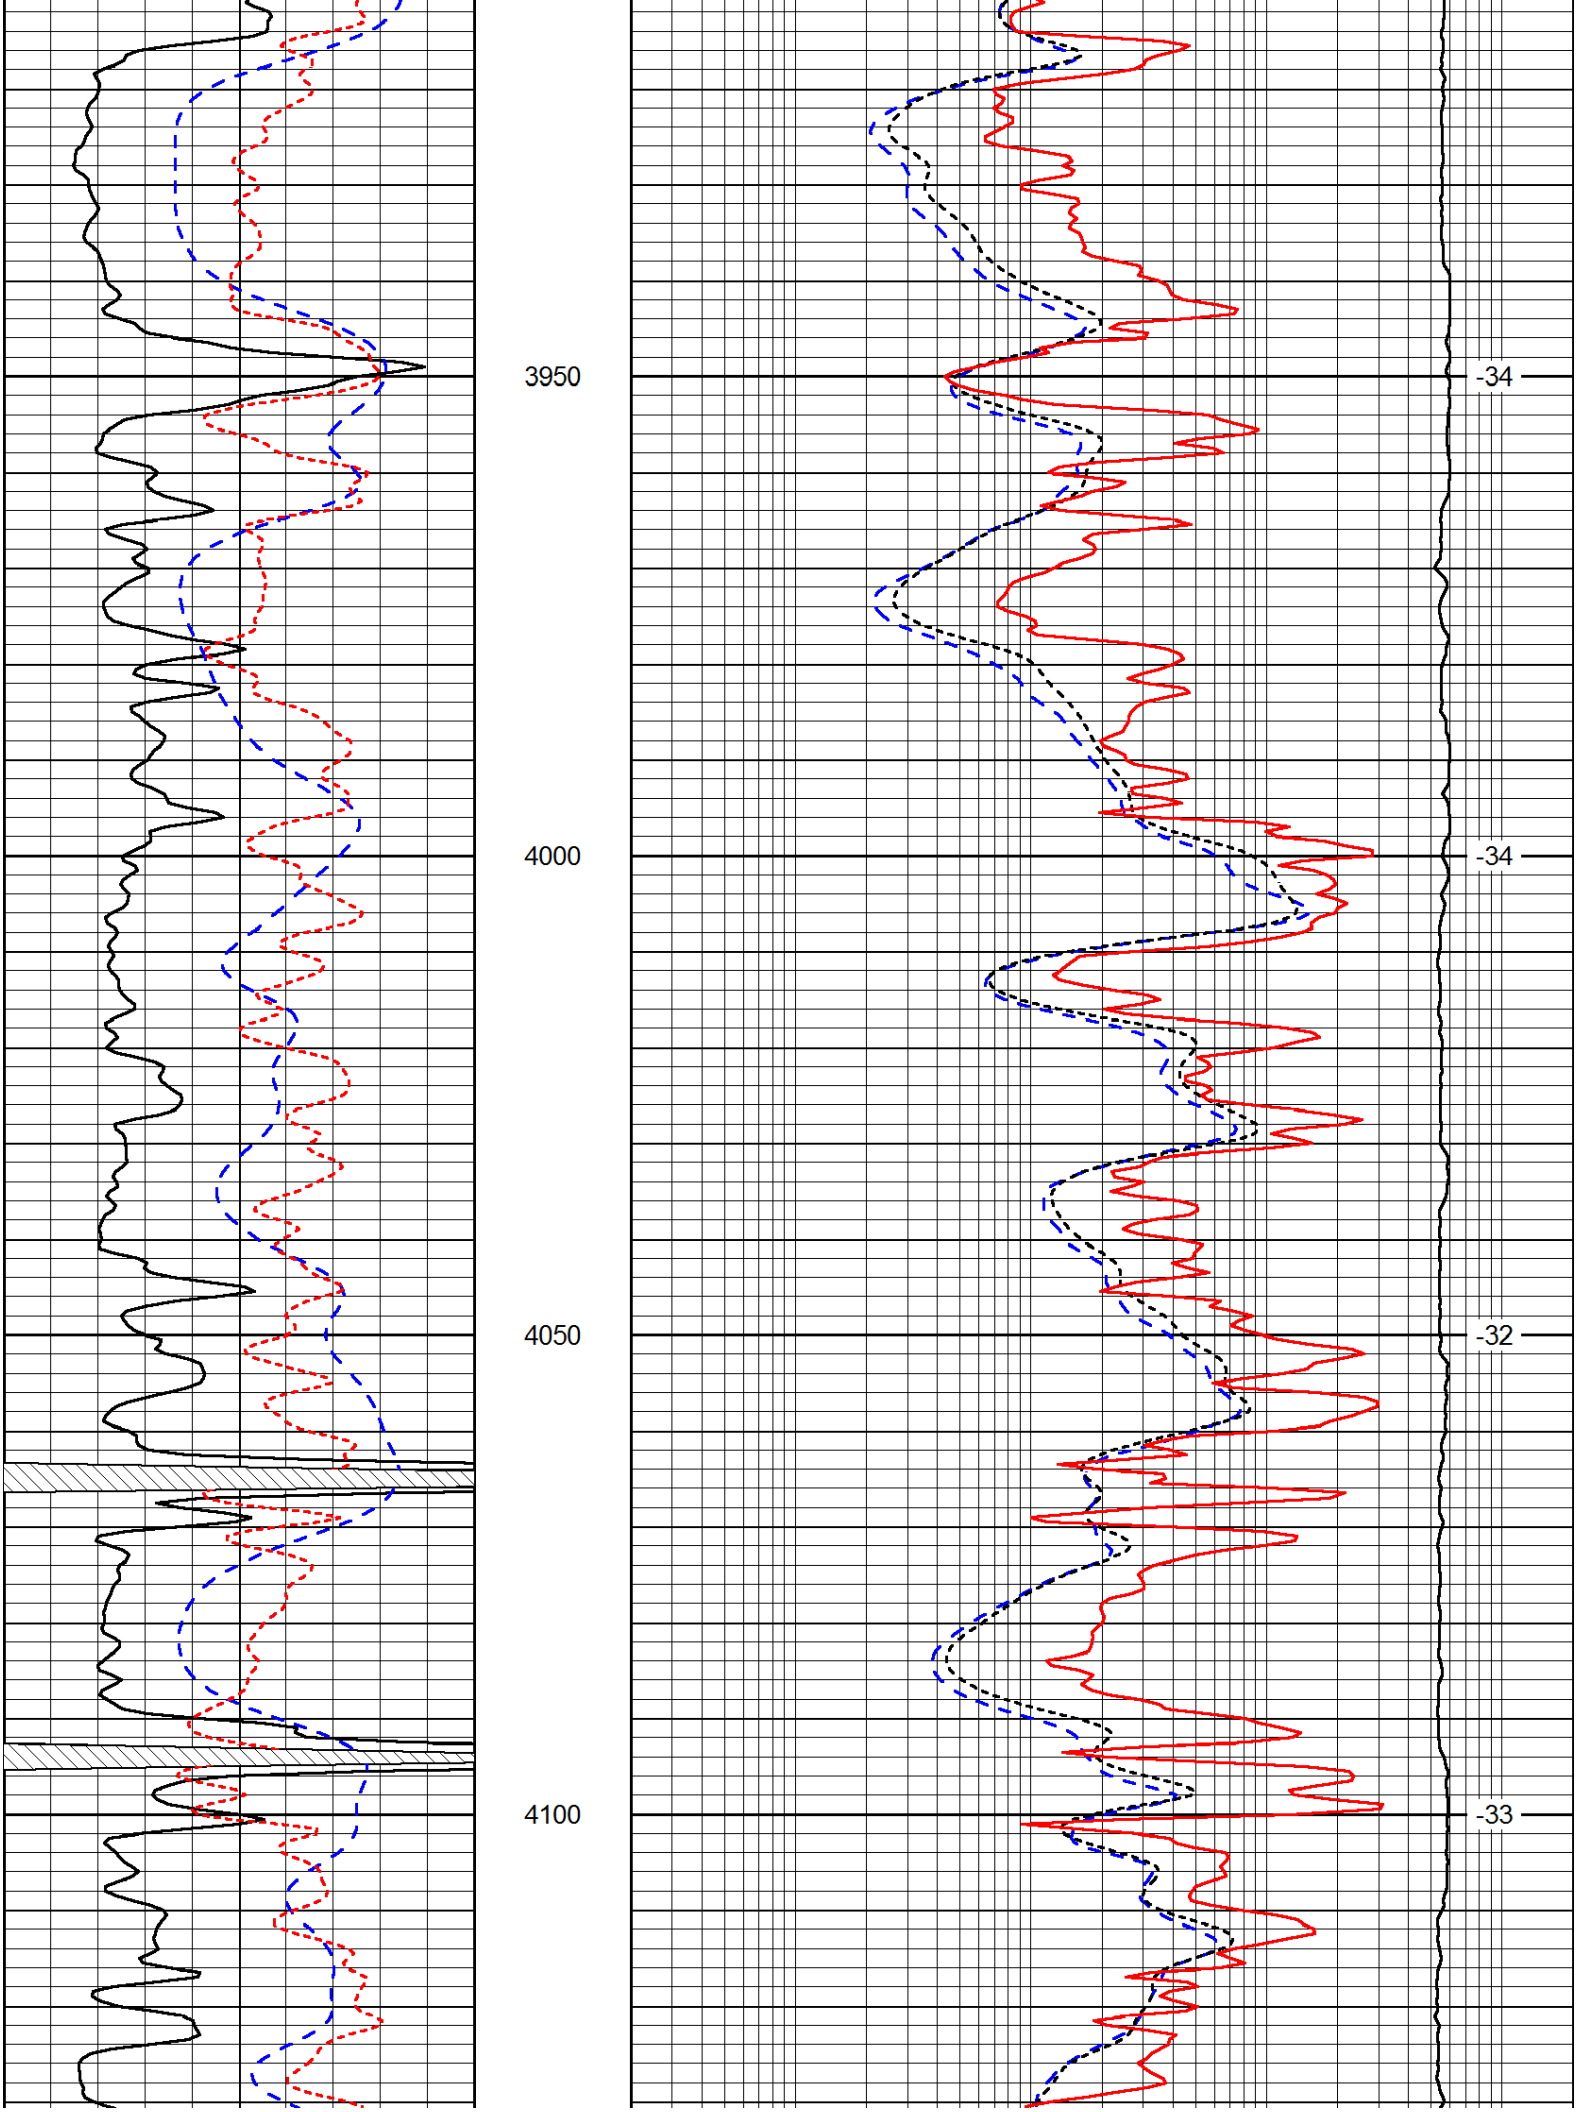

2850
2900
2950
3000
-32
-33
-32
-33

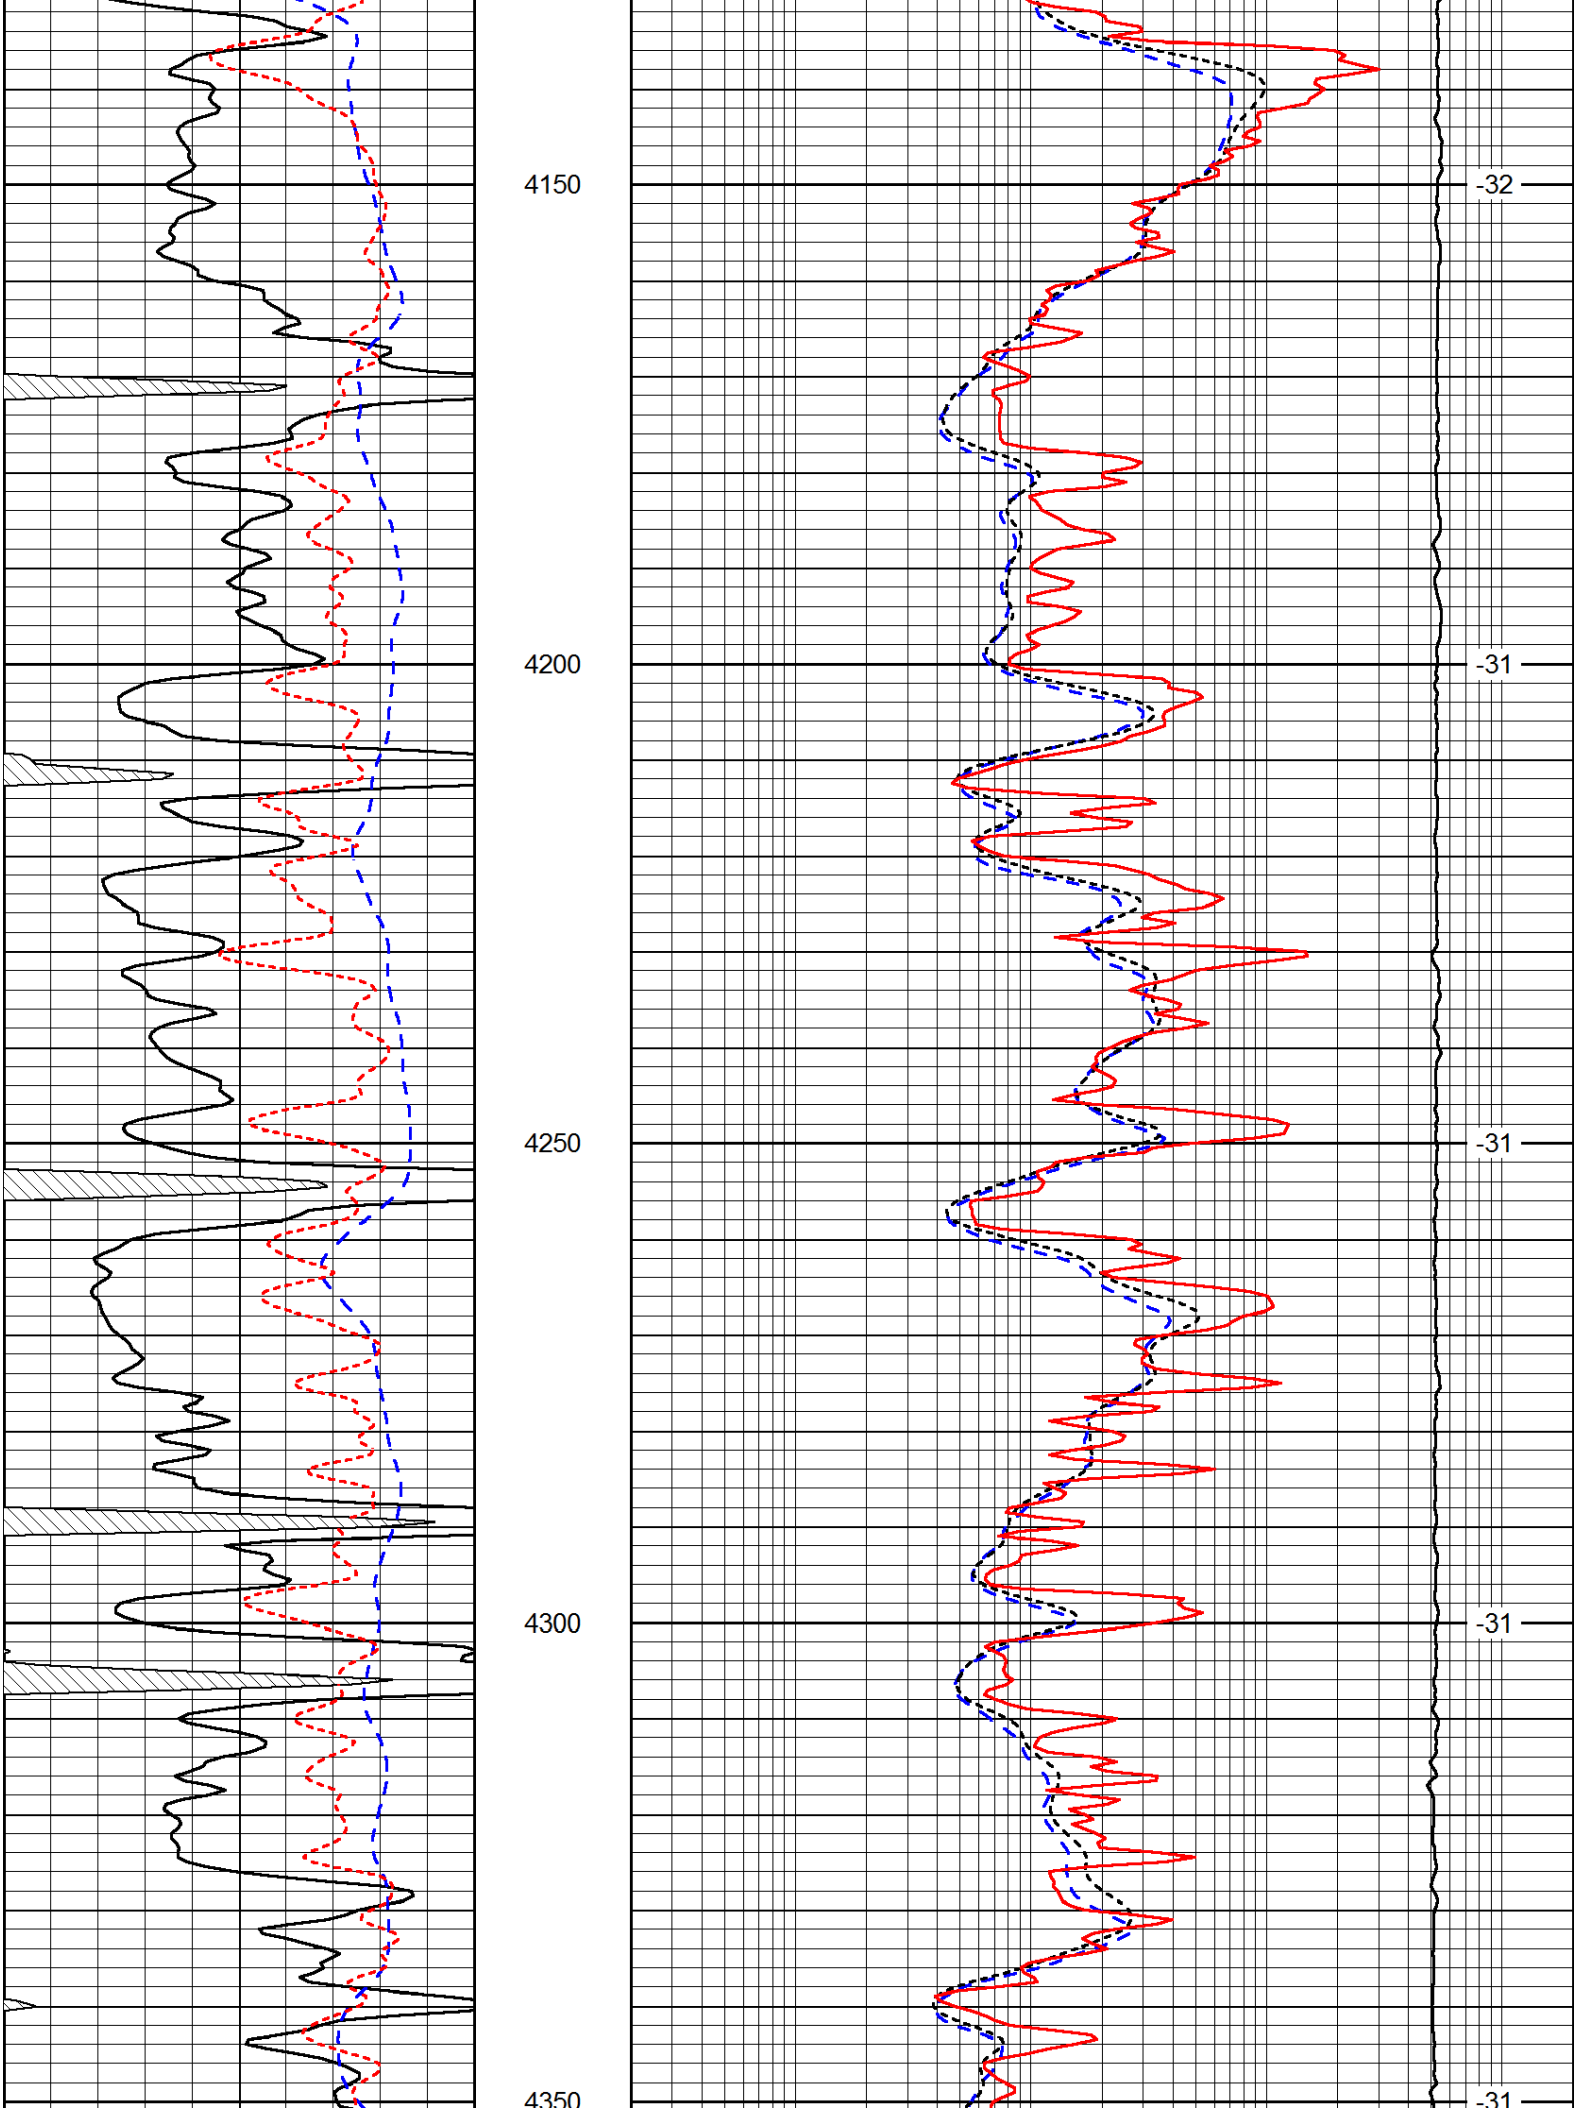

3050
3100
3150
3200
3250
-32
-31
-31
-32
-34

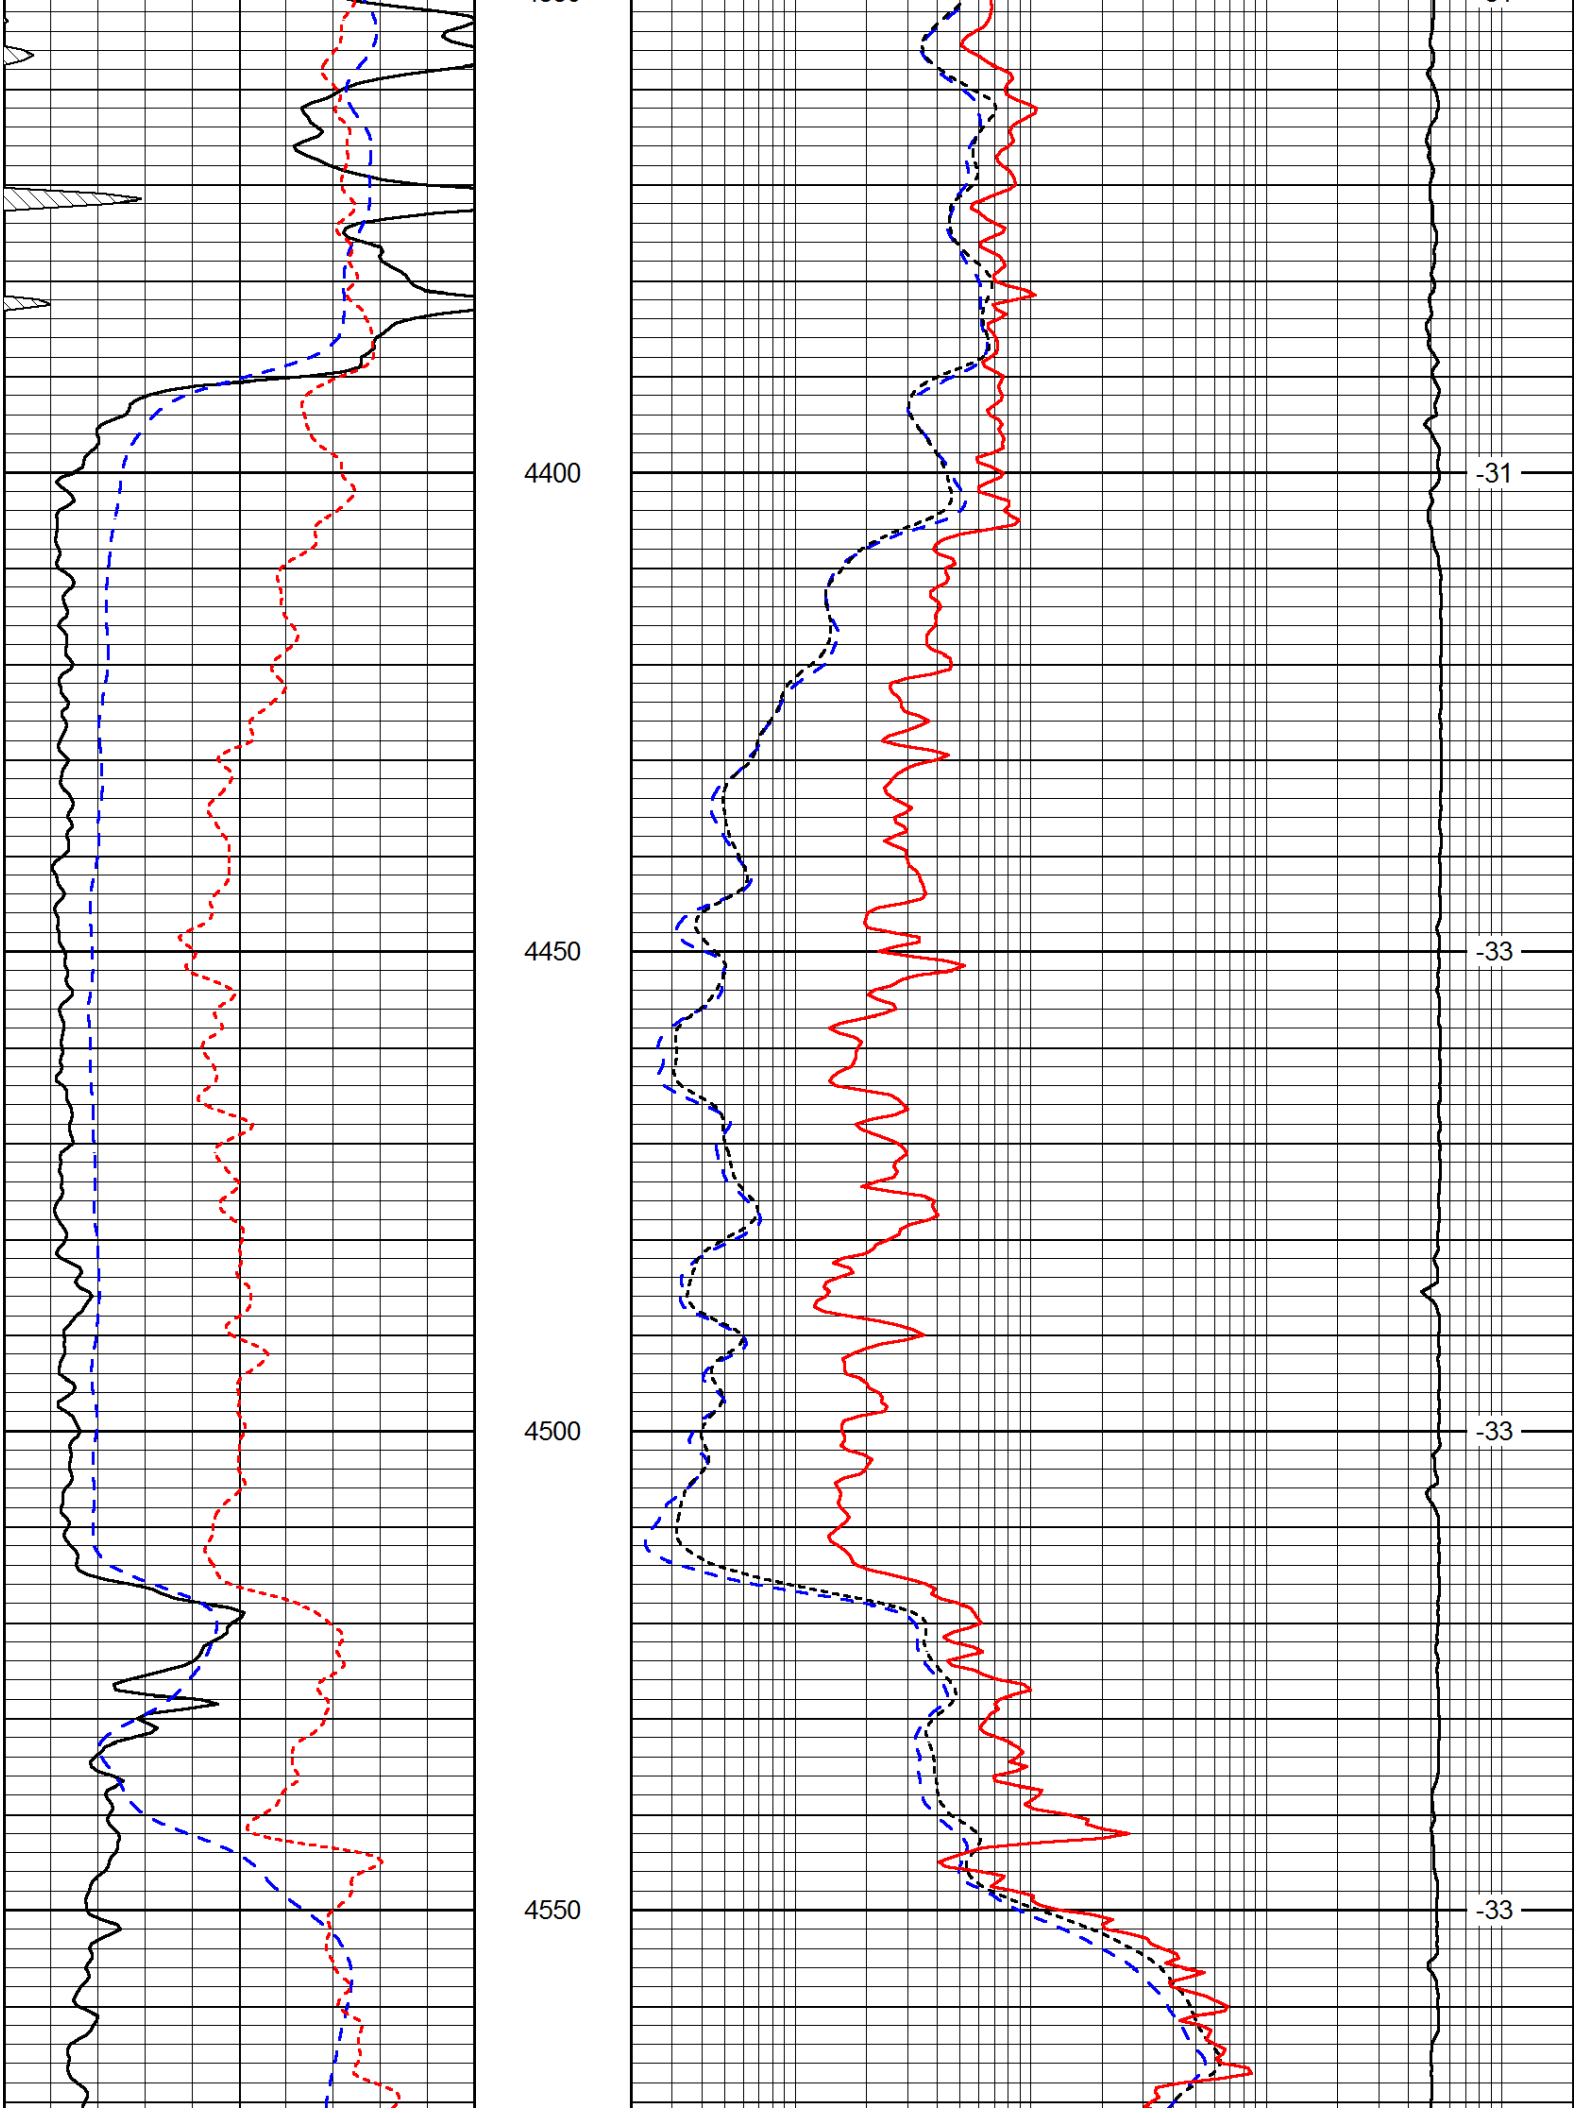

3300
3350
3400
3450
-32
-34
-33
-33

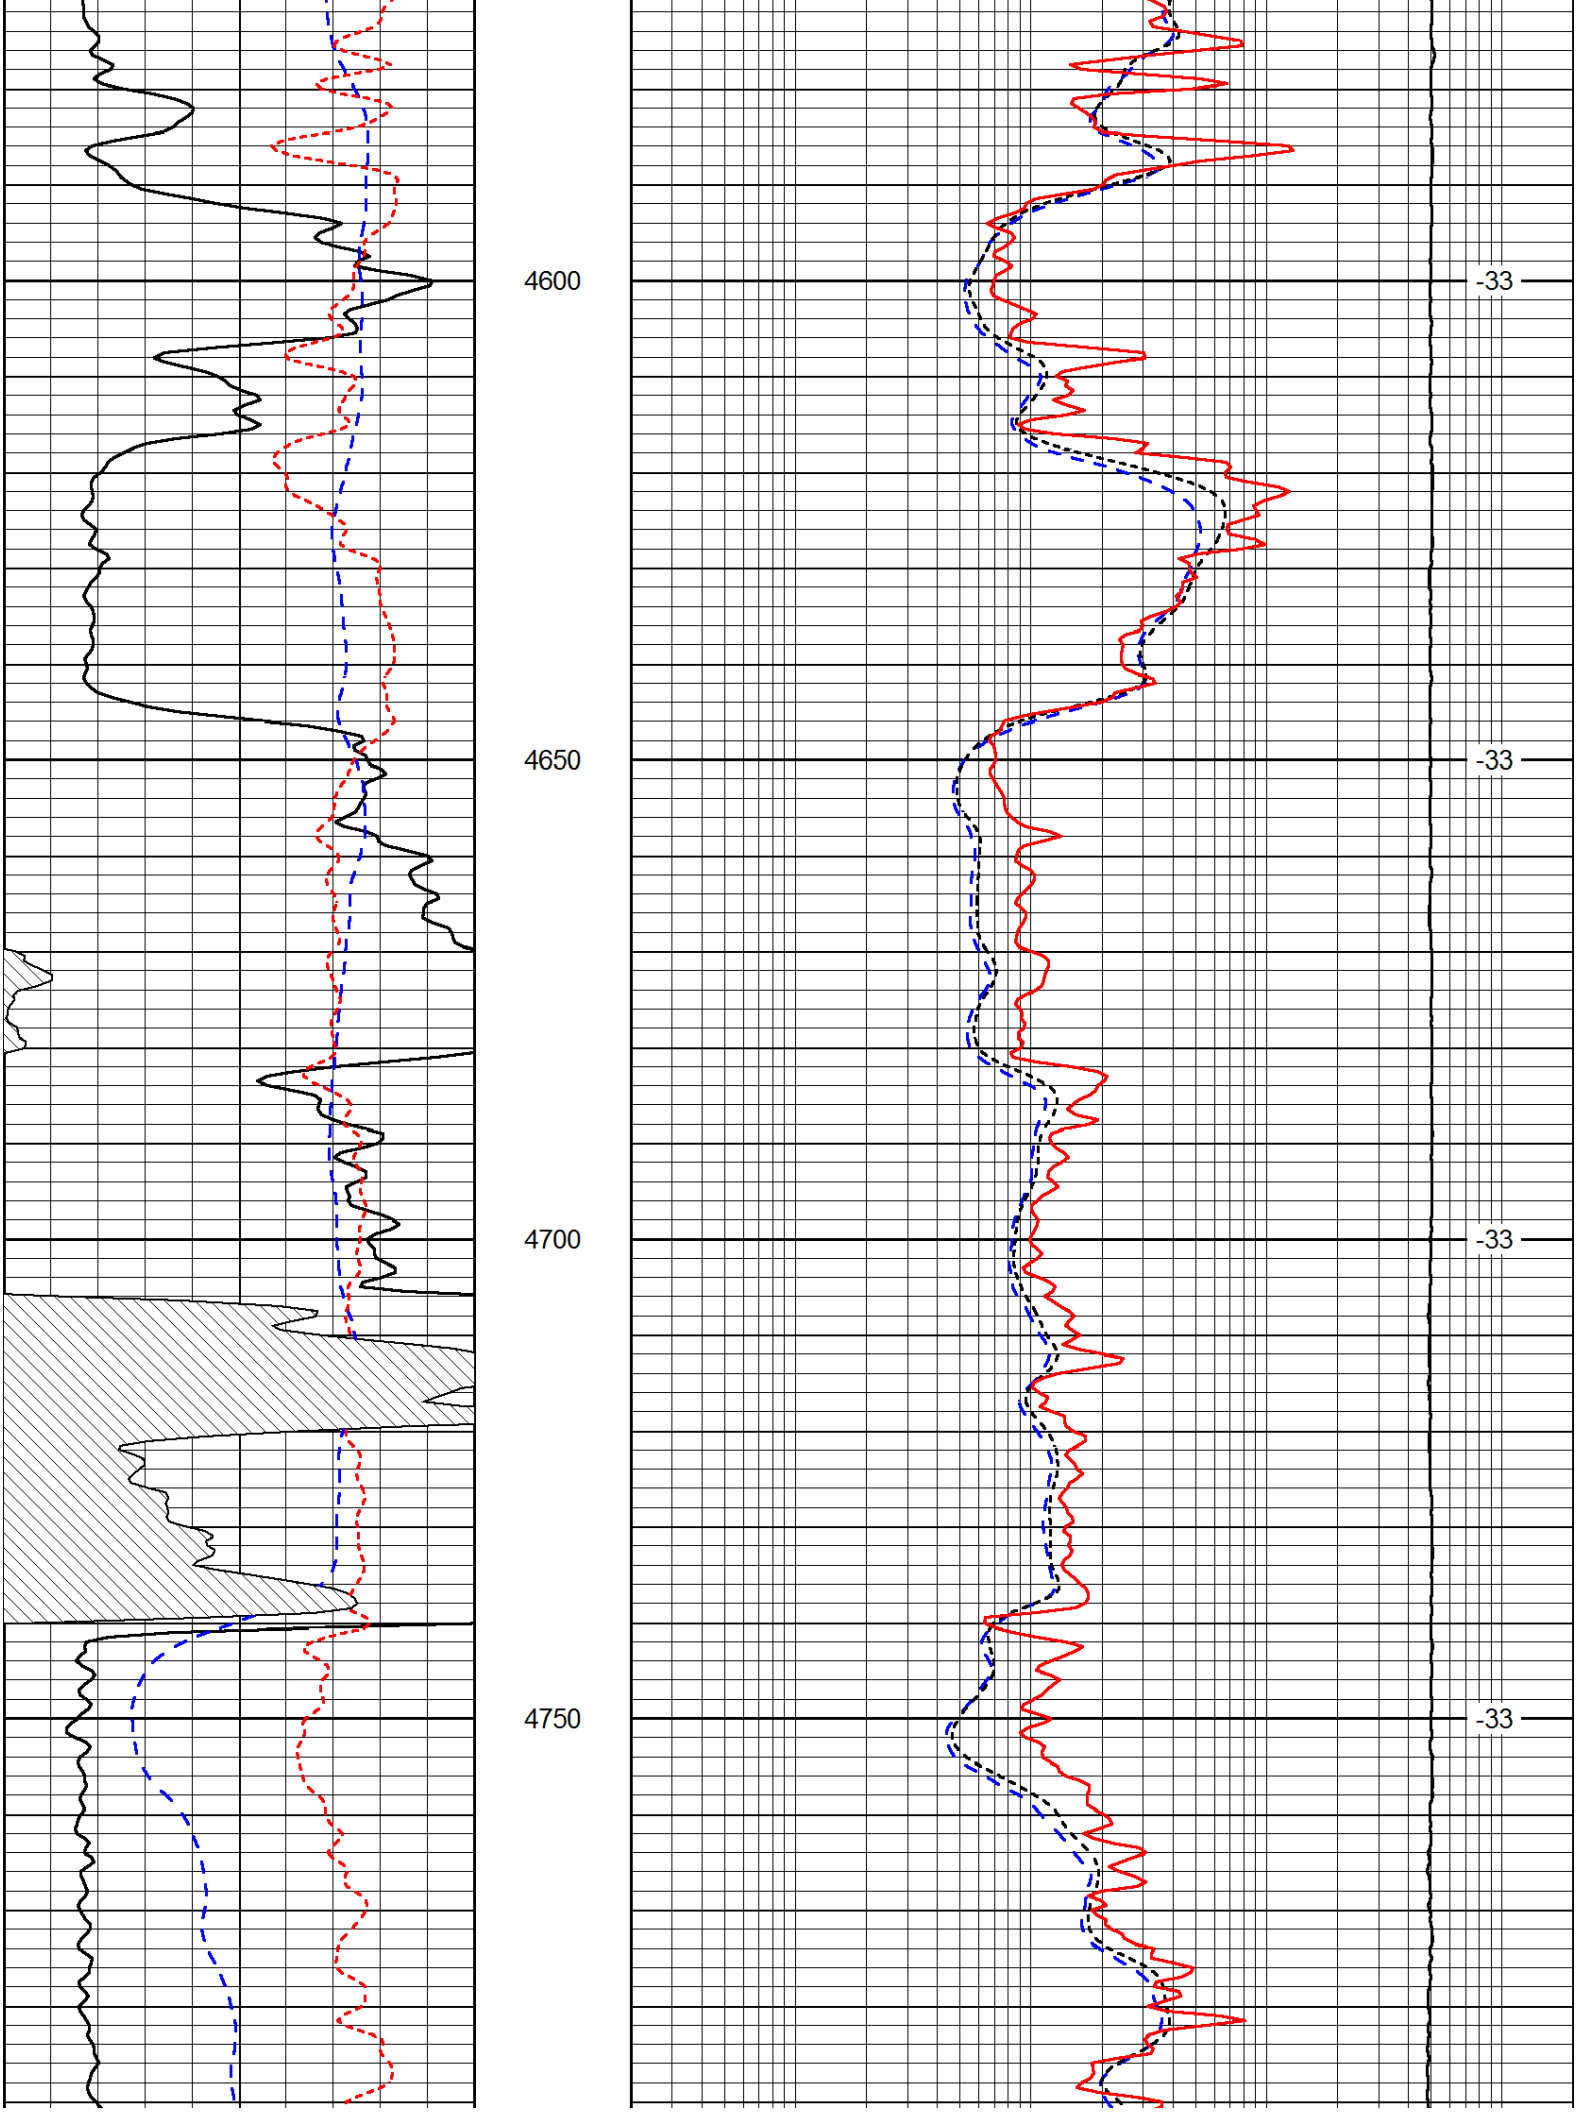

3500
3550
3600
3650
-32
-32
-33
-34

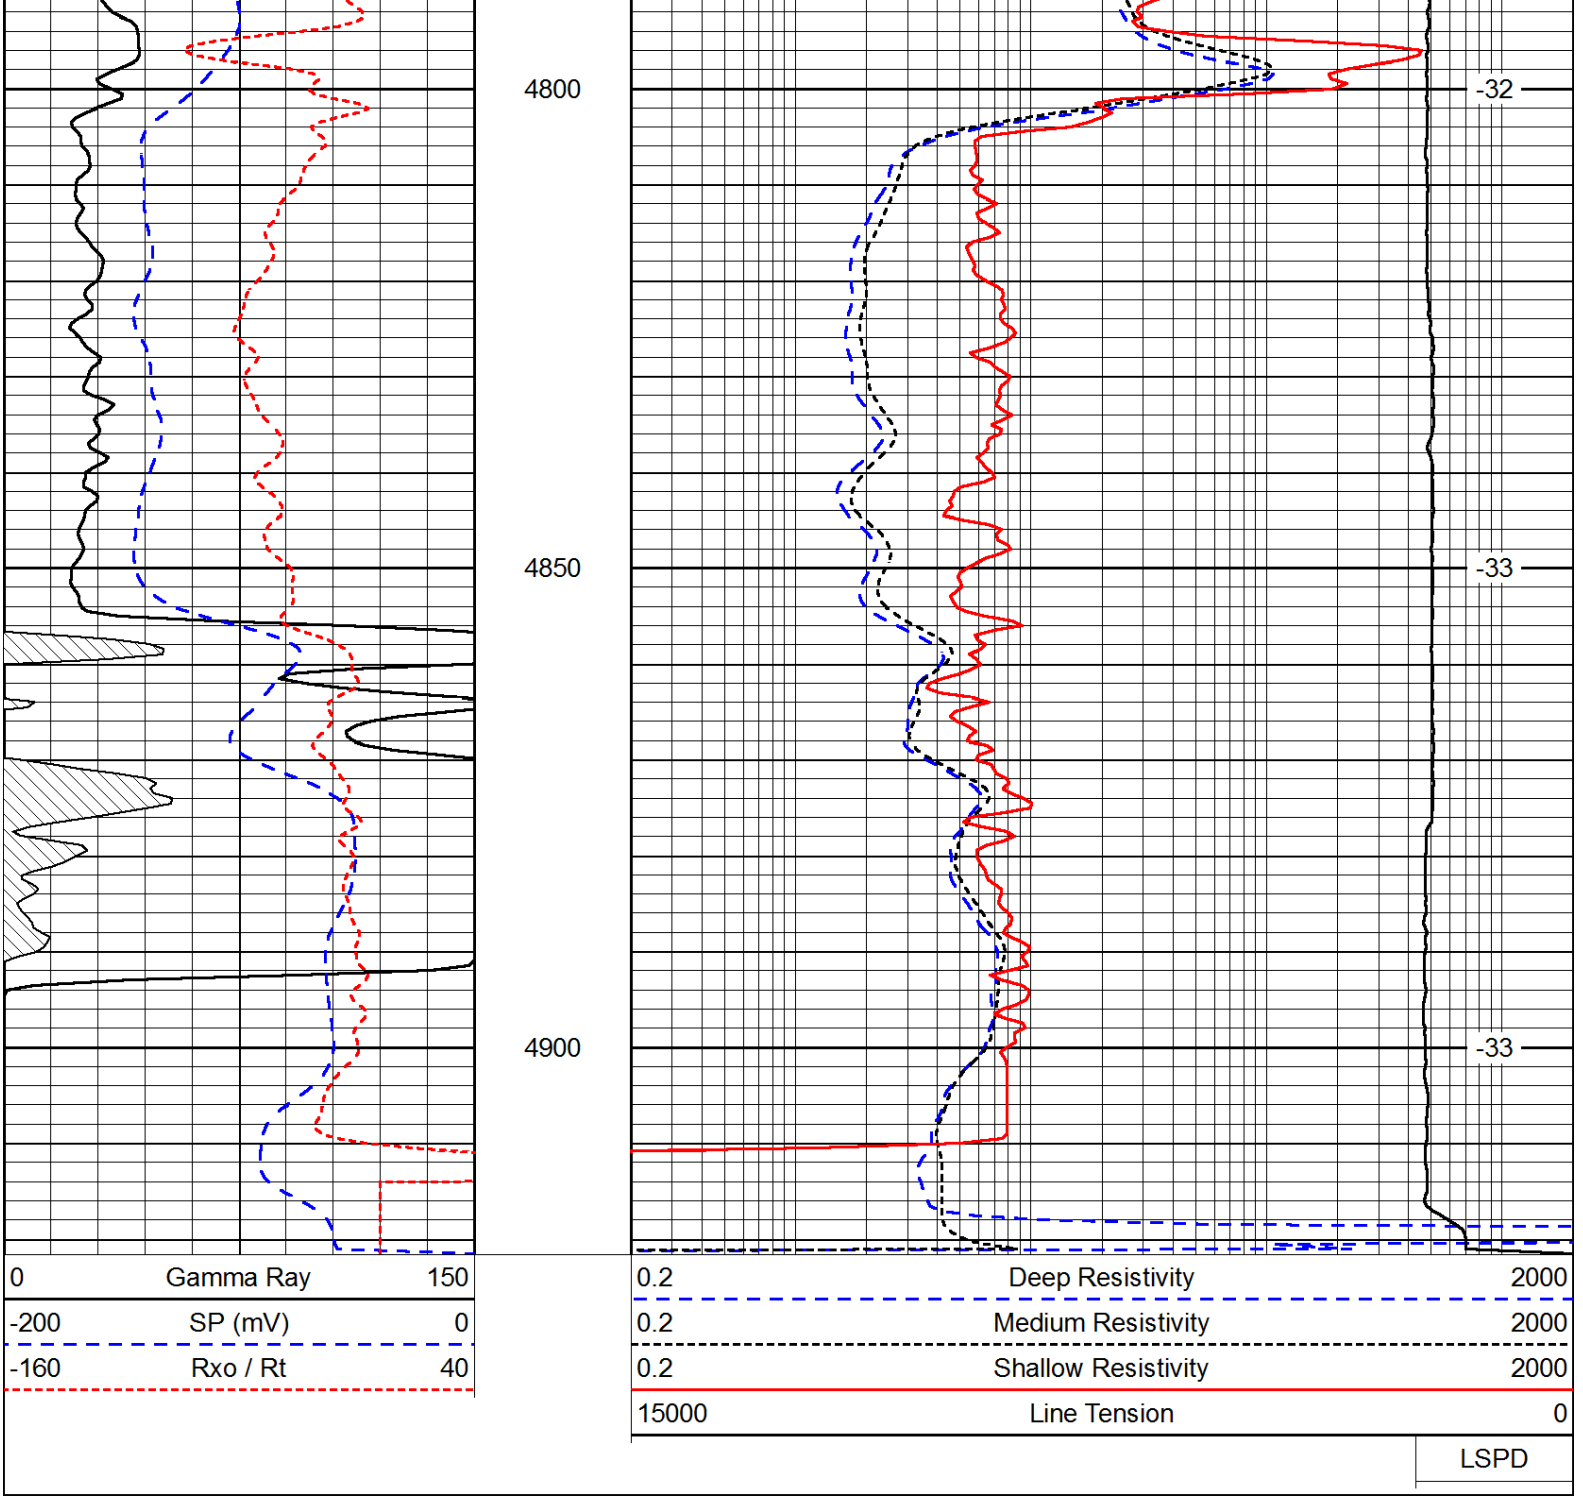

3700
3750
3800
3850
3900
-34
-33
-34
-33
-33


3950
4000
4050
4100
-34
-34
-32
-33


4150
4200
4250
4300
4350
-32
-31
-31
-31
-31


4400
4450
4500
4550
-31
-33
-33
-33


4600
4650
4700
4750
-33
-33
-33
-33


4800
4850
4900
-32
-33
-33
0
Gamma Ray
150
-200
SP (mV)
0
-160
Rxo / Rt
40
0.2
Deep Resistivity
2000
0.2
Medium Resistivity
2000
0.2
Shallow Resistivity
2000
15000
Line Tension
0
LSPD