LOG-TECH

DIGITAL LOG (785) 625-3858

Dual Compensated Porosity Log

API No. 15-077-21850-00-00

Company R & B Oil & Gas

Well Albright #3

Field Spivey-Grabs

County Harper State Kansas

Location NW SW SE 990' FSL / 2310' FEL

Sec: 17 Twp: 31S Rge: 8W

Permanent Datum Ground Level Elevation 1610

Log Measured From Kelly Bushing 10 Ft. Above Perm. Datum

Drilling Measured From Kelly Bushing

Other Services: DIL

Elevation: K.B. 1620, D.F., G.L. 1610

Date	6/20/2012
Run Number	One
Type Log	CNL / CDL
Depth Driller	4915
Depth Logger	4916
Bottom Logged Interval	4895
Top Logged Interval	2400
Type Fluid In Hole	Chemical
Salinity, PPM CL	3000
Density	9.4
Level	Full
Max. Rec. Temp. F	125
Operating Rig Time	4 Hours
Equipment -- Location	15 Hays
Recorded By	R. Barnhart
Witnessed By	Tim Pierce

Borehole Record

Run No.	Bit	From	To
1	12.25	00	255
2	7.875	255	4915

Casing Record

Size	Wgt.	From	To
8.625	24#	00	255

<<< Fold Here >>>

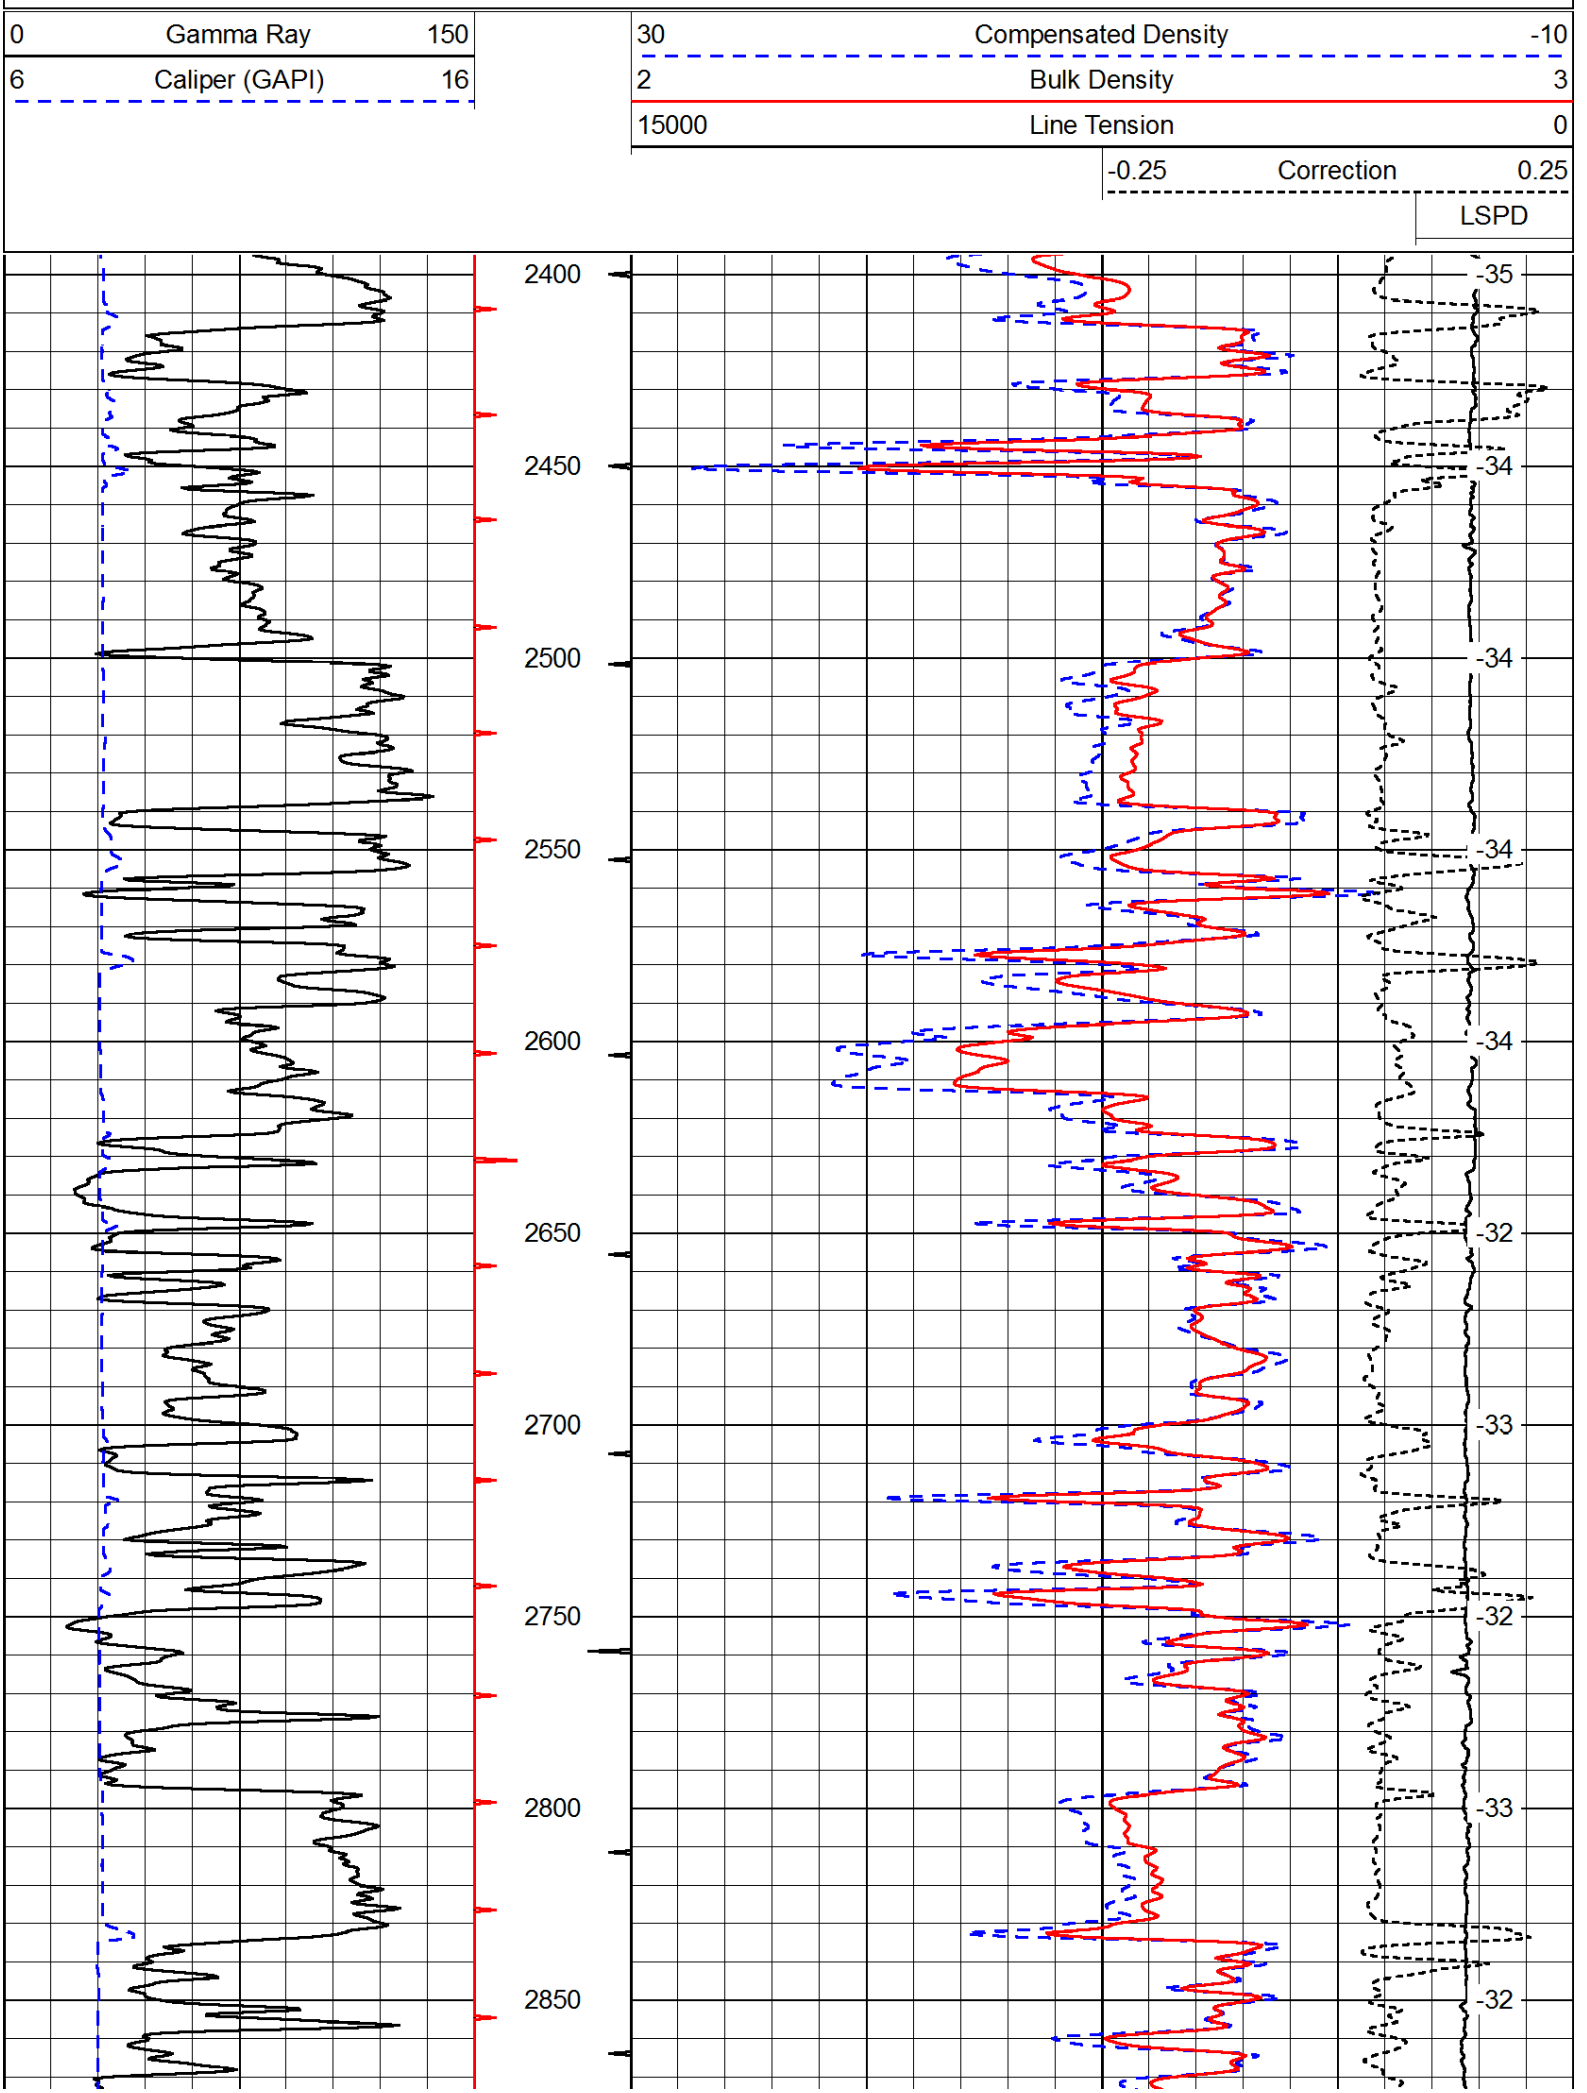
All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

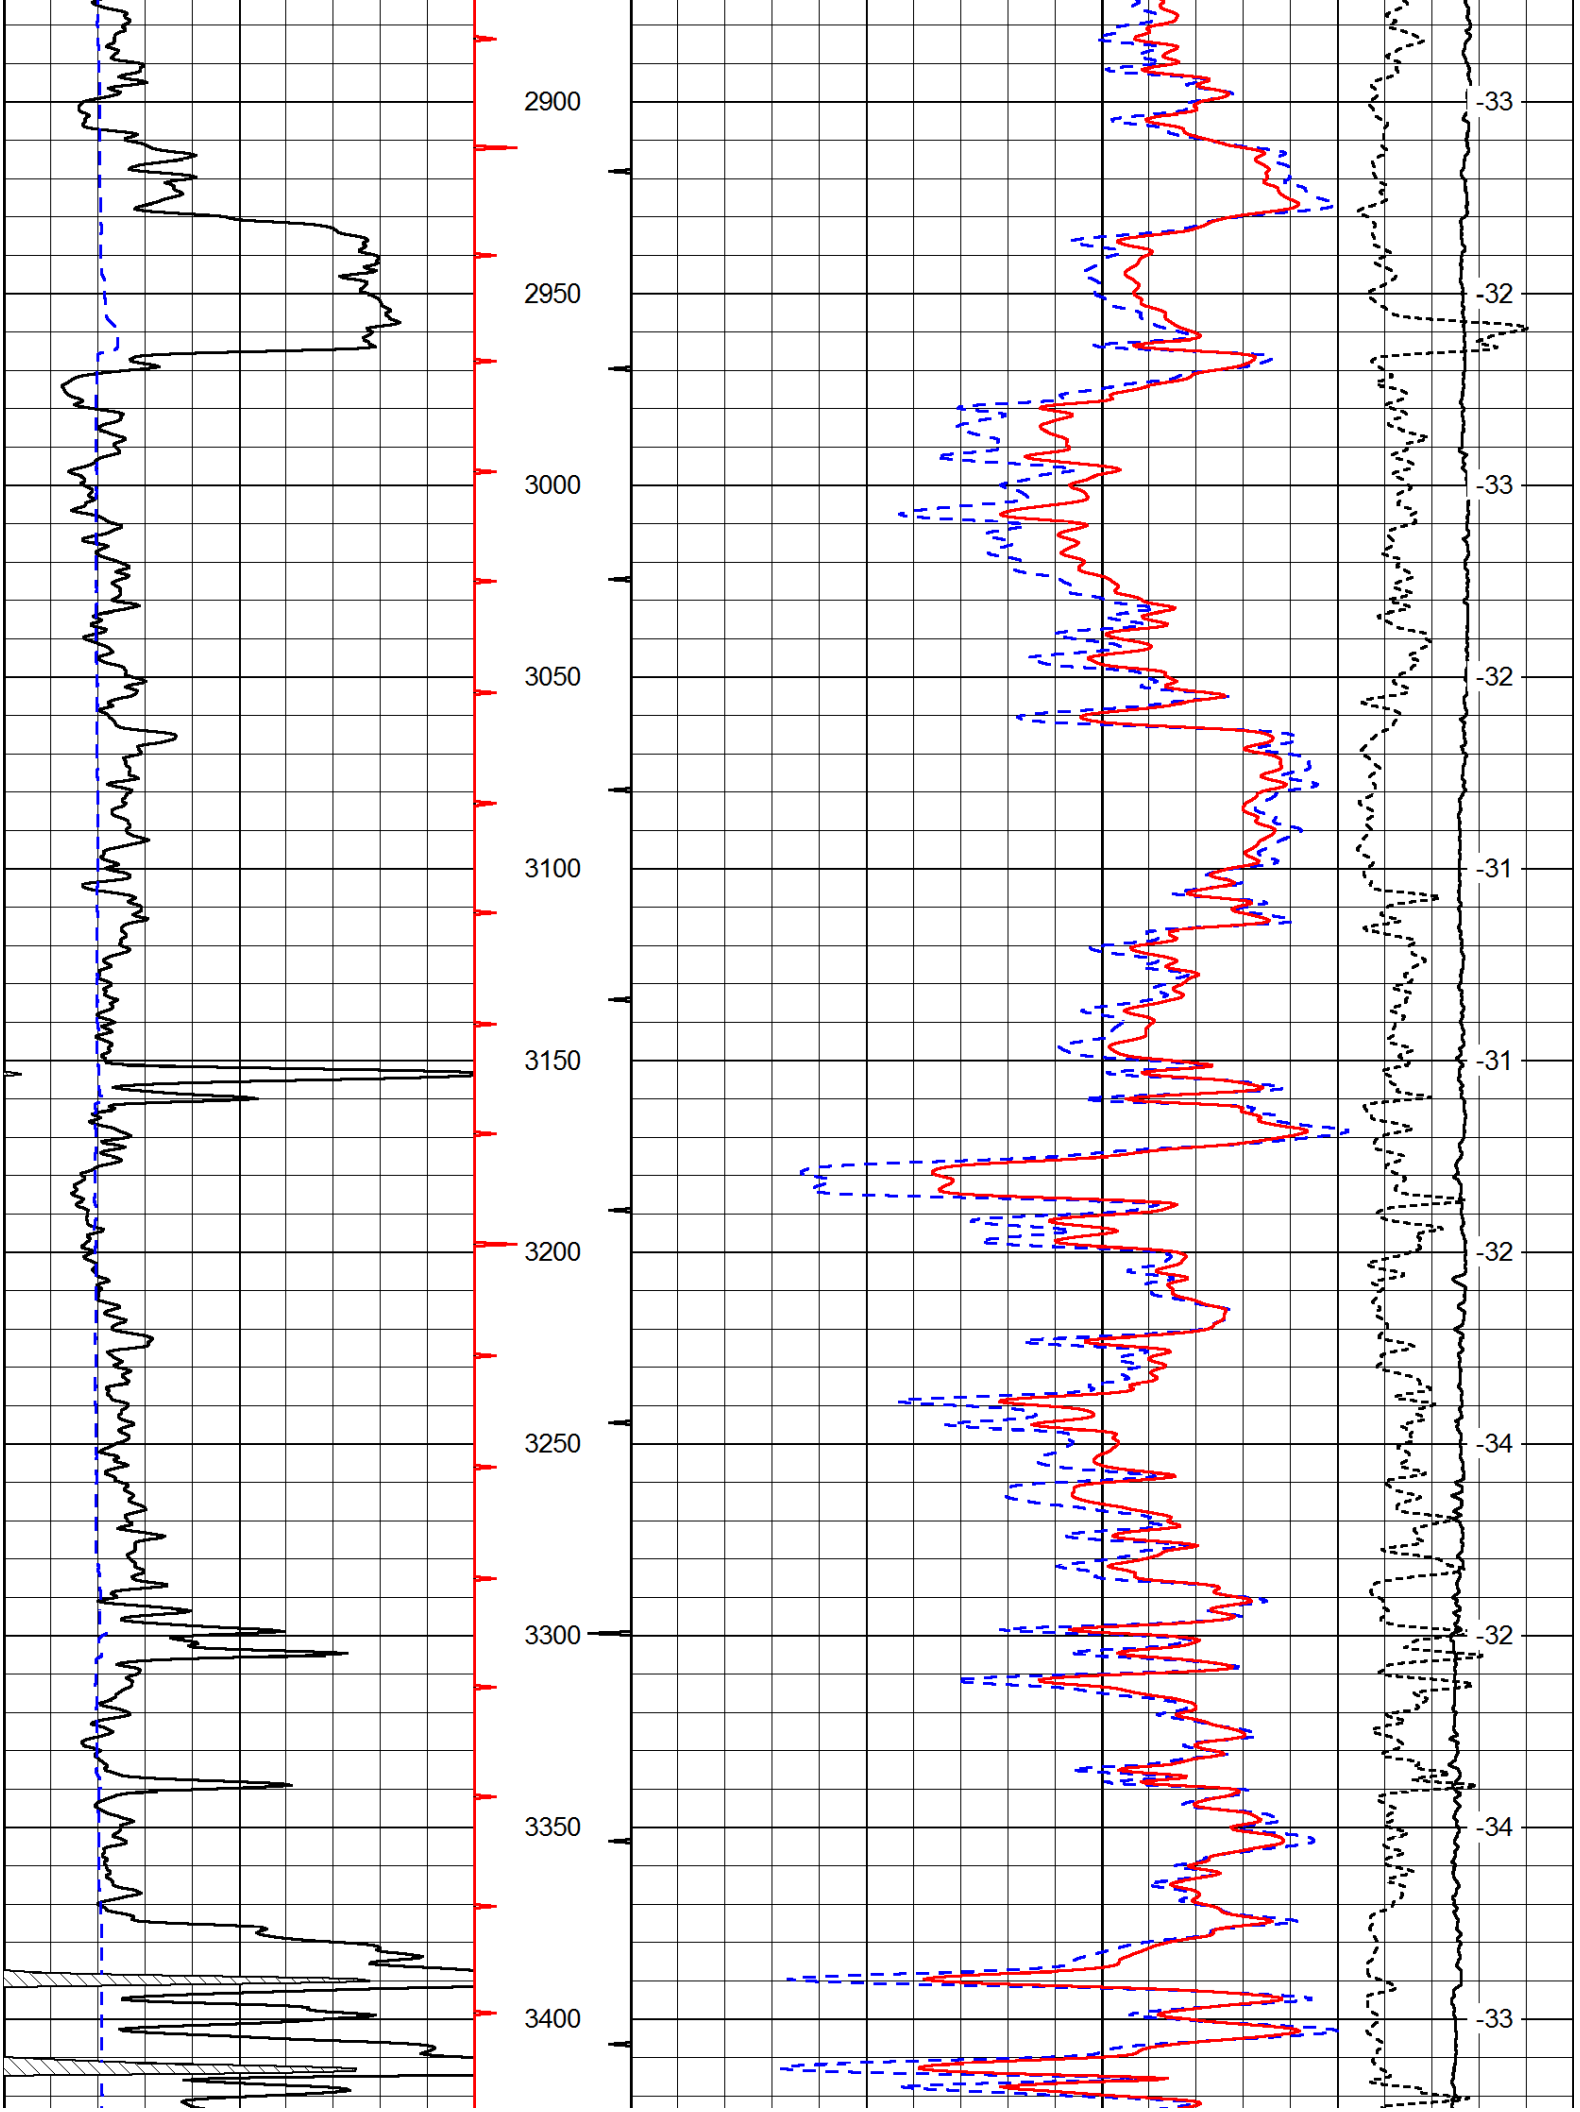
Comments

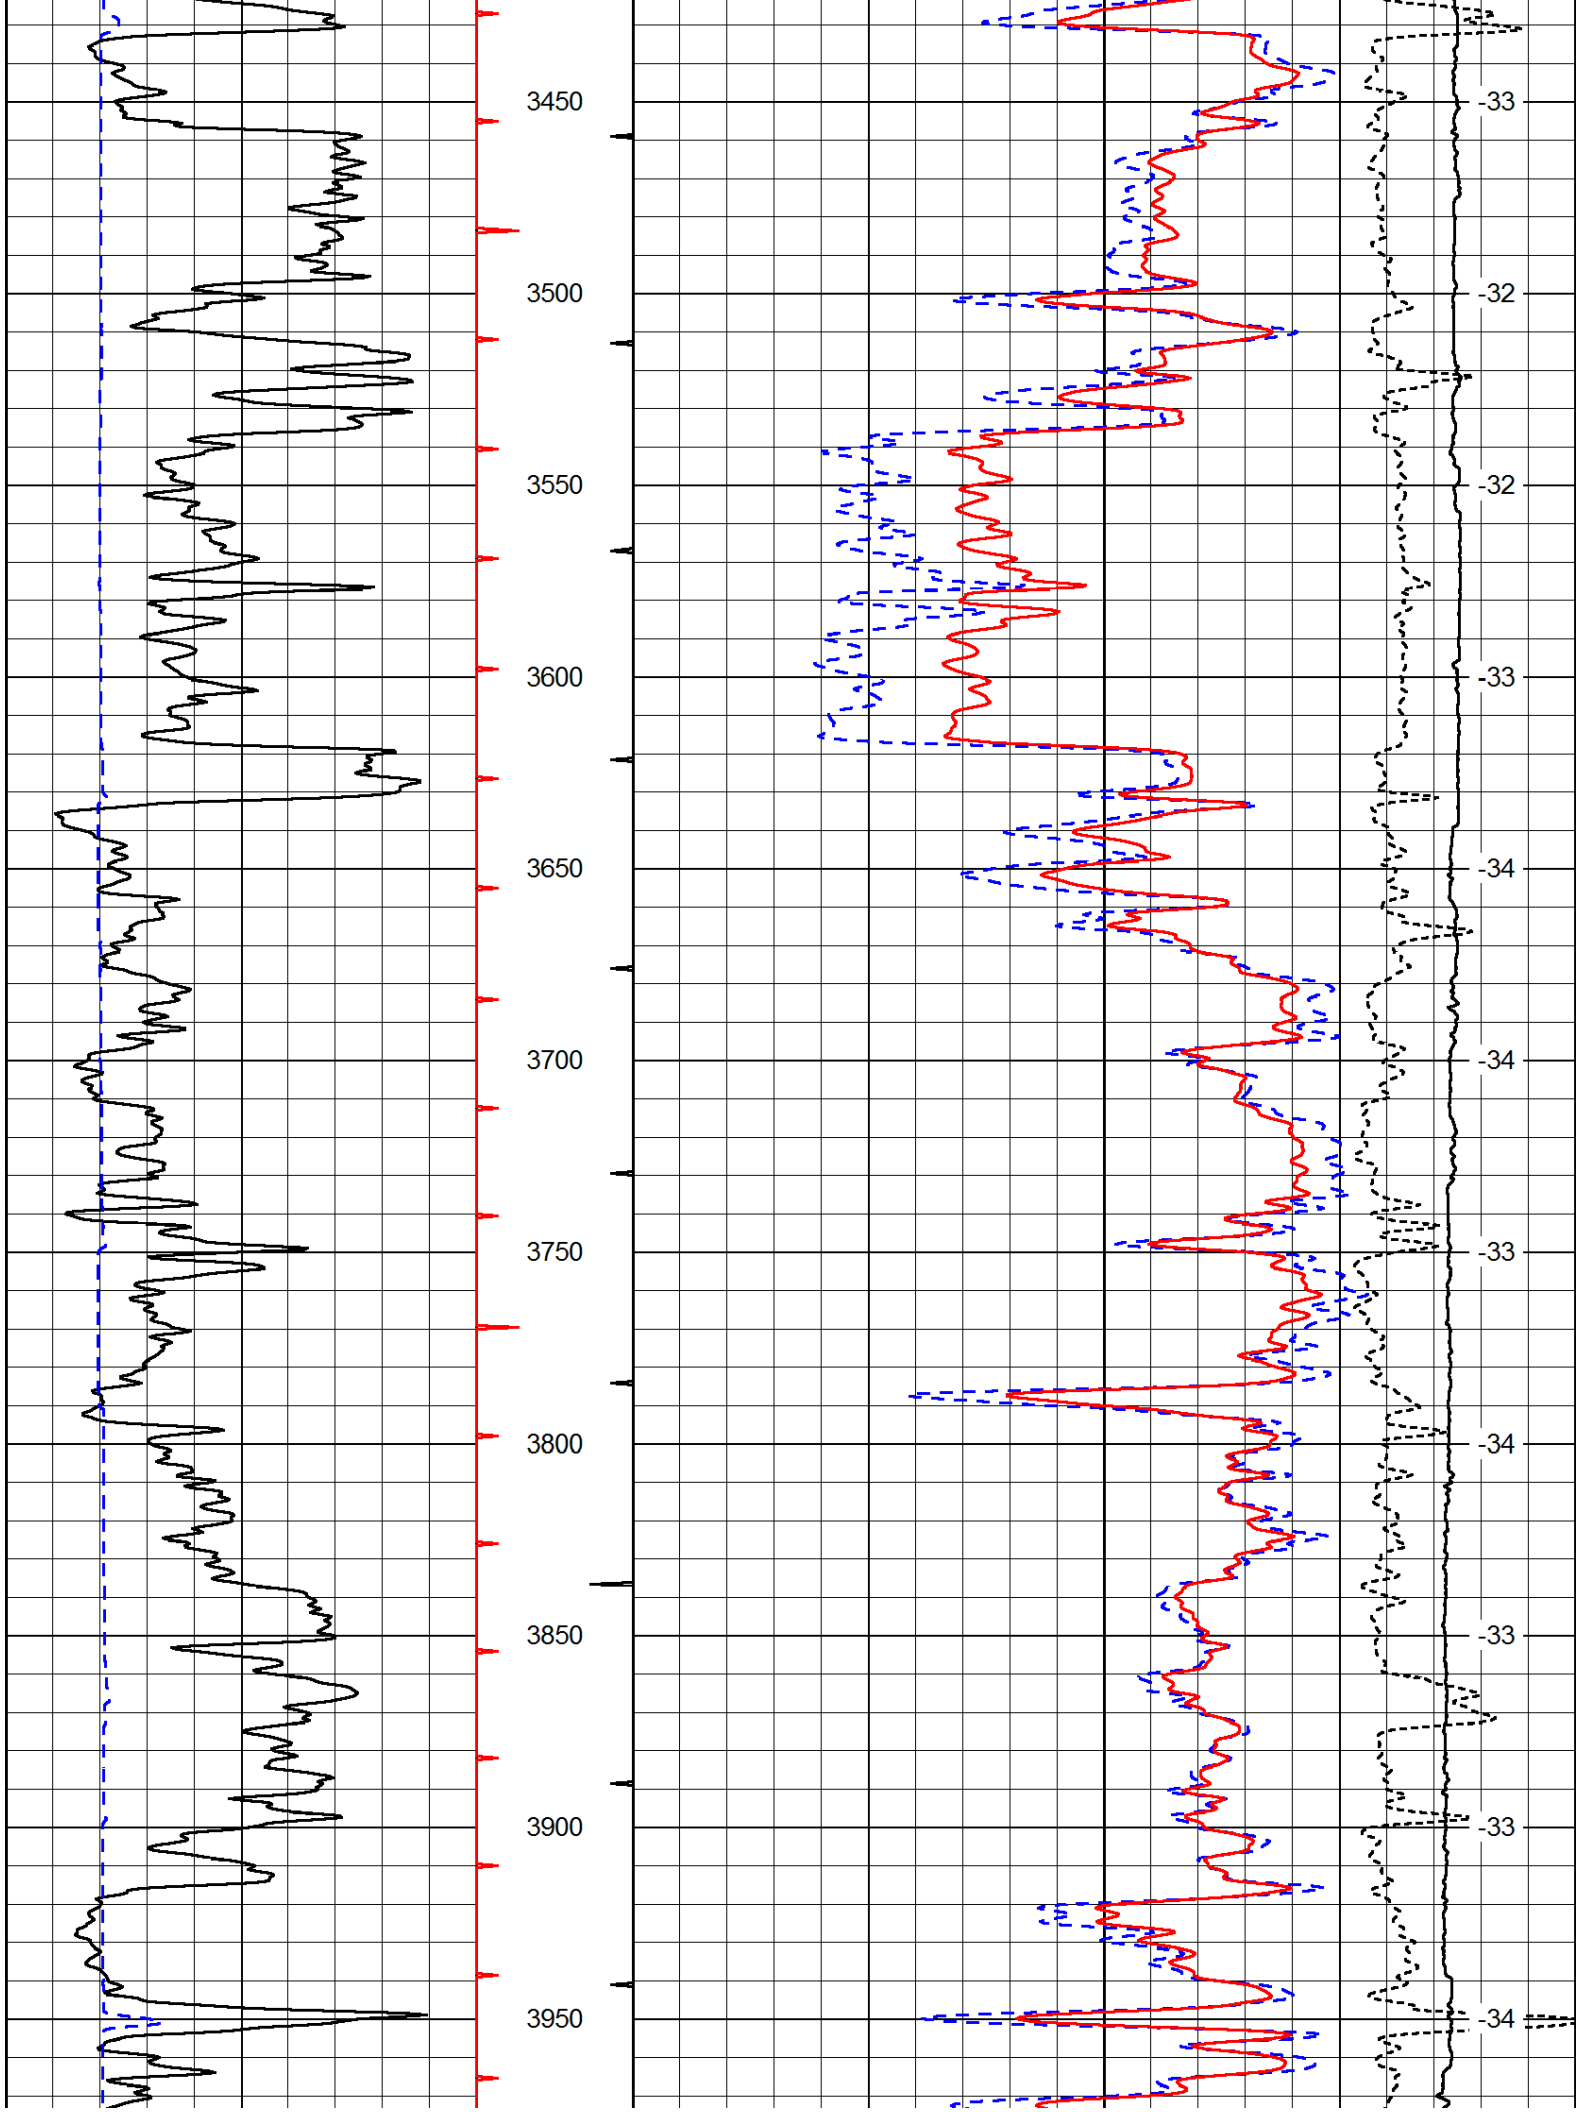
Thank you for using Log-Tech, Inc.
(785) 625-3858

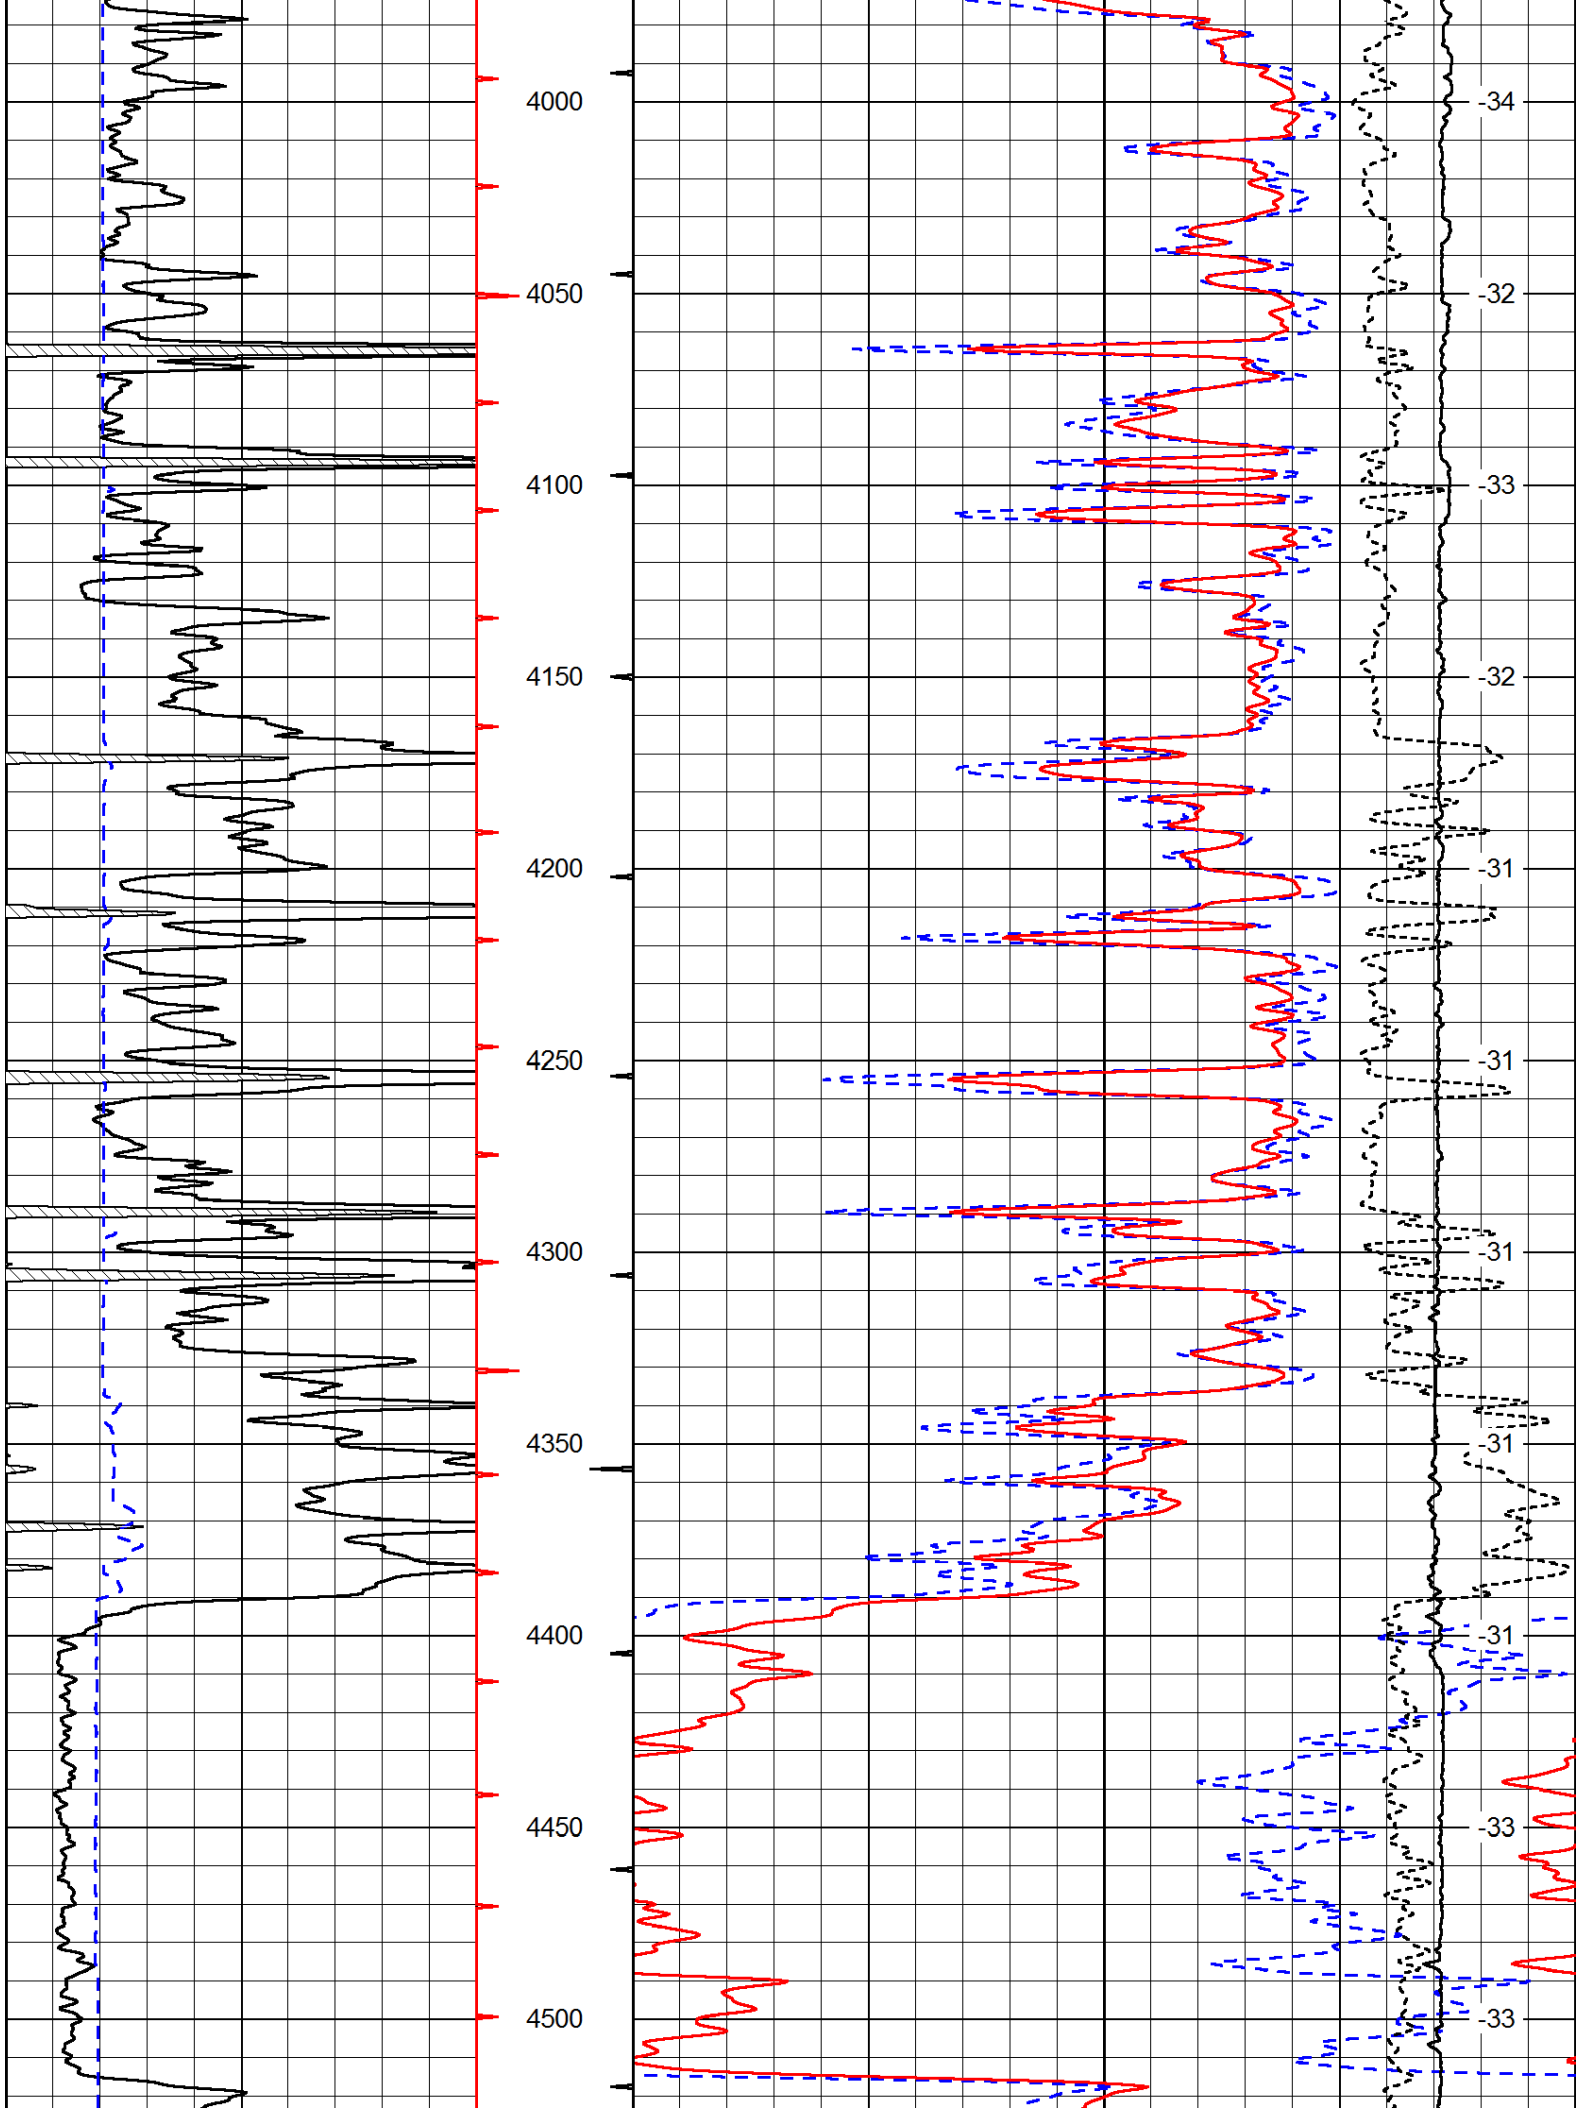
Zenda, KS:
4E to Blktop, 4S,
1W, 2S, 1/2E, N into

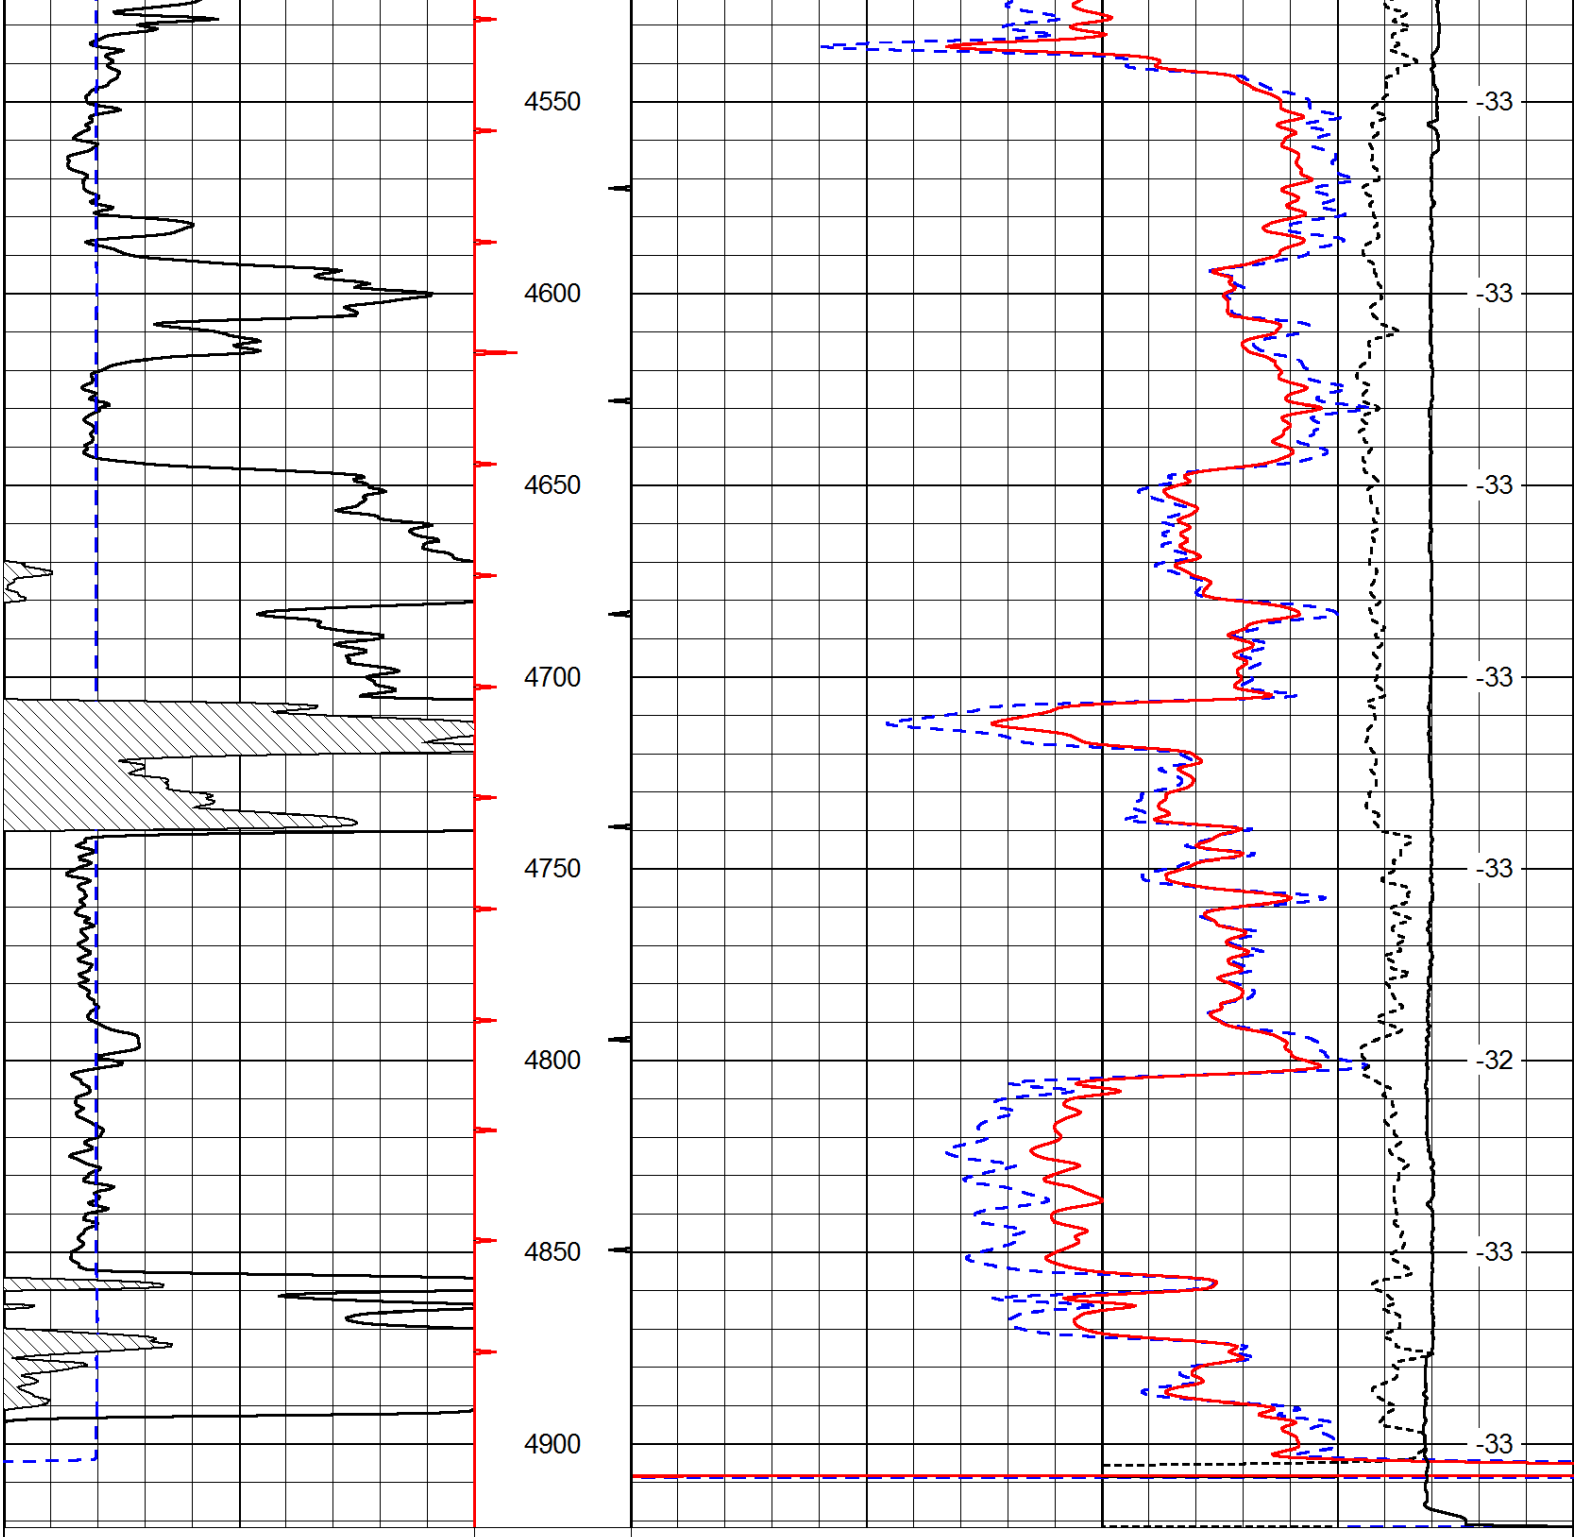
Database File: c:\warrior\data\r&b_albright #3\r&bhd.db
Dataset Pathname: dil/rbmain
Presentation Format: cdl
Dataset Creation: Wed Jun 20 20:24:59 2012
Charted by: Depth in Feet scaled 1:600


0
Gamma Ray
150
6
Caliper (GAPI)
16
30
Compensated Density
-10
2
Bulk Density
3
15000
Line Tension
0
-0.25
Correction
0.25
LSPD
2400
2450
2500
2550
2600
2650
2700
2750
2800
2850
-35
-34
-34
-34
-34
-32
-33
-32
-33
-32


2900
2950
3000
3050
3100
3150
3200
3250
3300
3350
3400
-33
-32
-33
-32
-31
-31
-32
-34
-32
-34
-33


3450
3500
3550
3600
3650
3700
3750
3800
3850
3900
3950
-33
-32
-32
-33
-34
-34
-33
-34
-33
-33
-34


4000
4050
4100
4150
4200
4250
4300
4350
4400
4450
4500
-34
-32
-33
-32
-31
-31
-31
-31
-33
-33



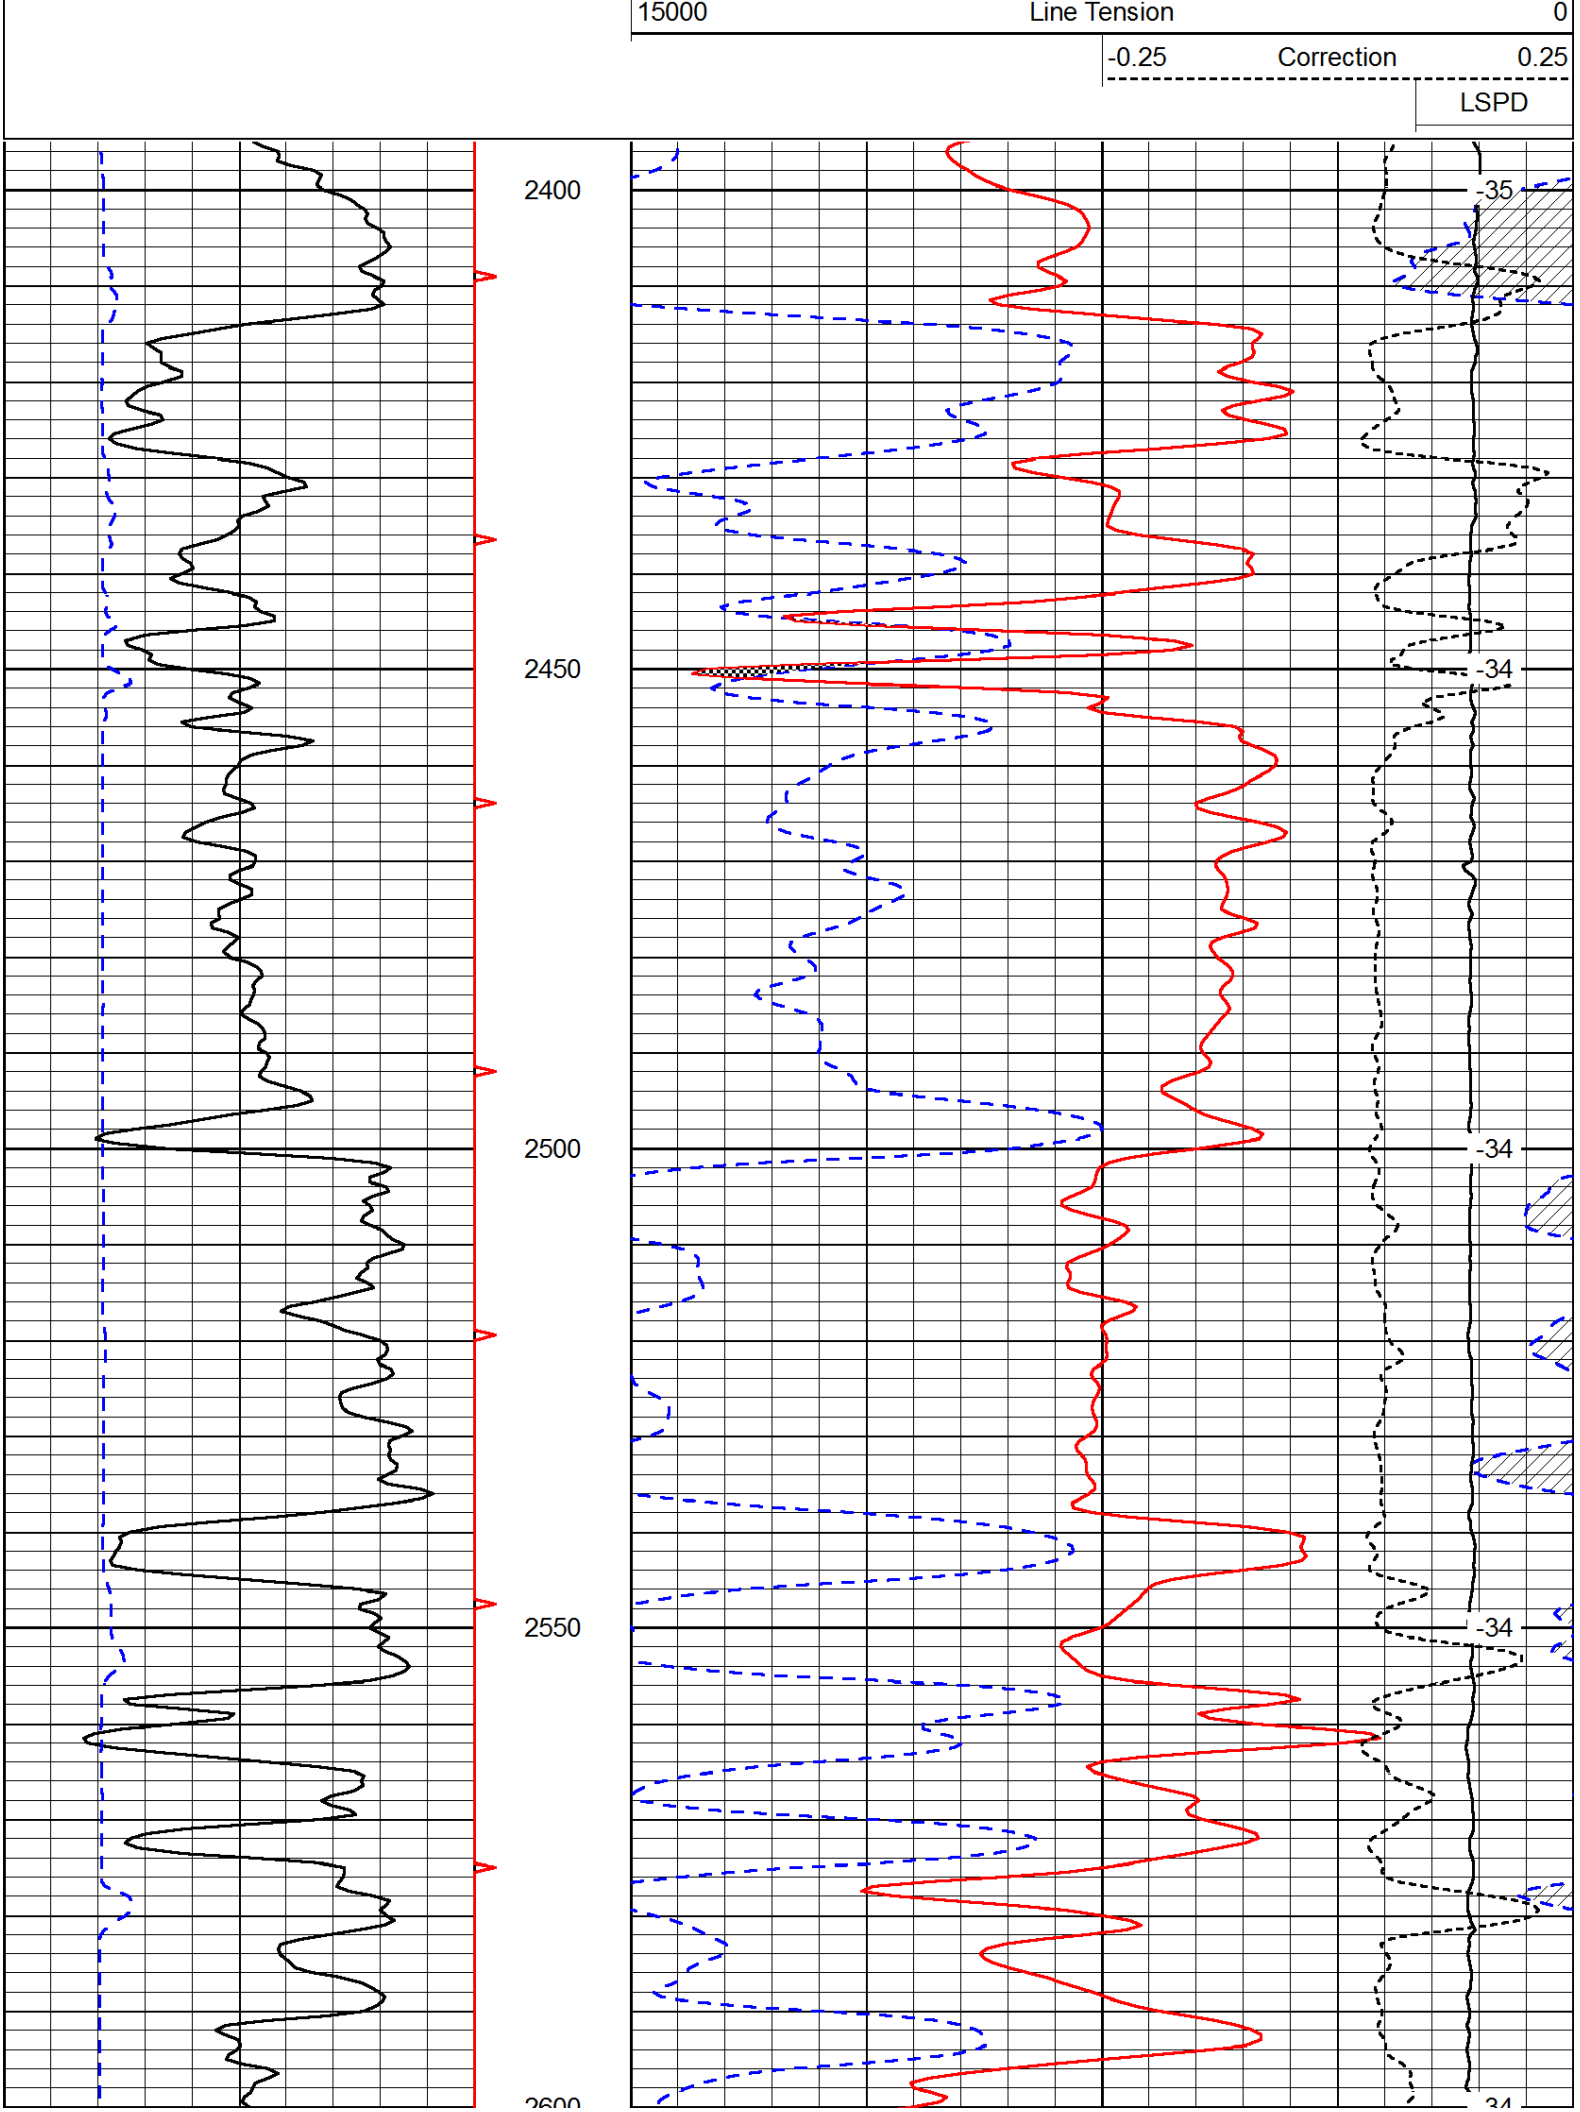
0	Gamma Ray	150
6	Caliper (GAPI)	16

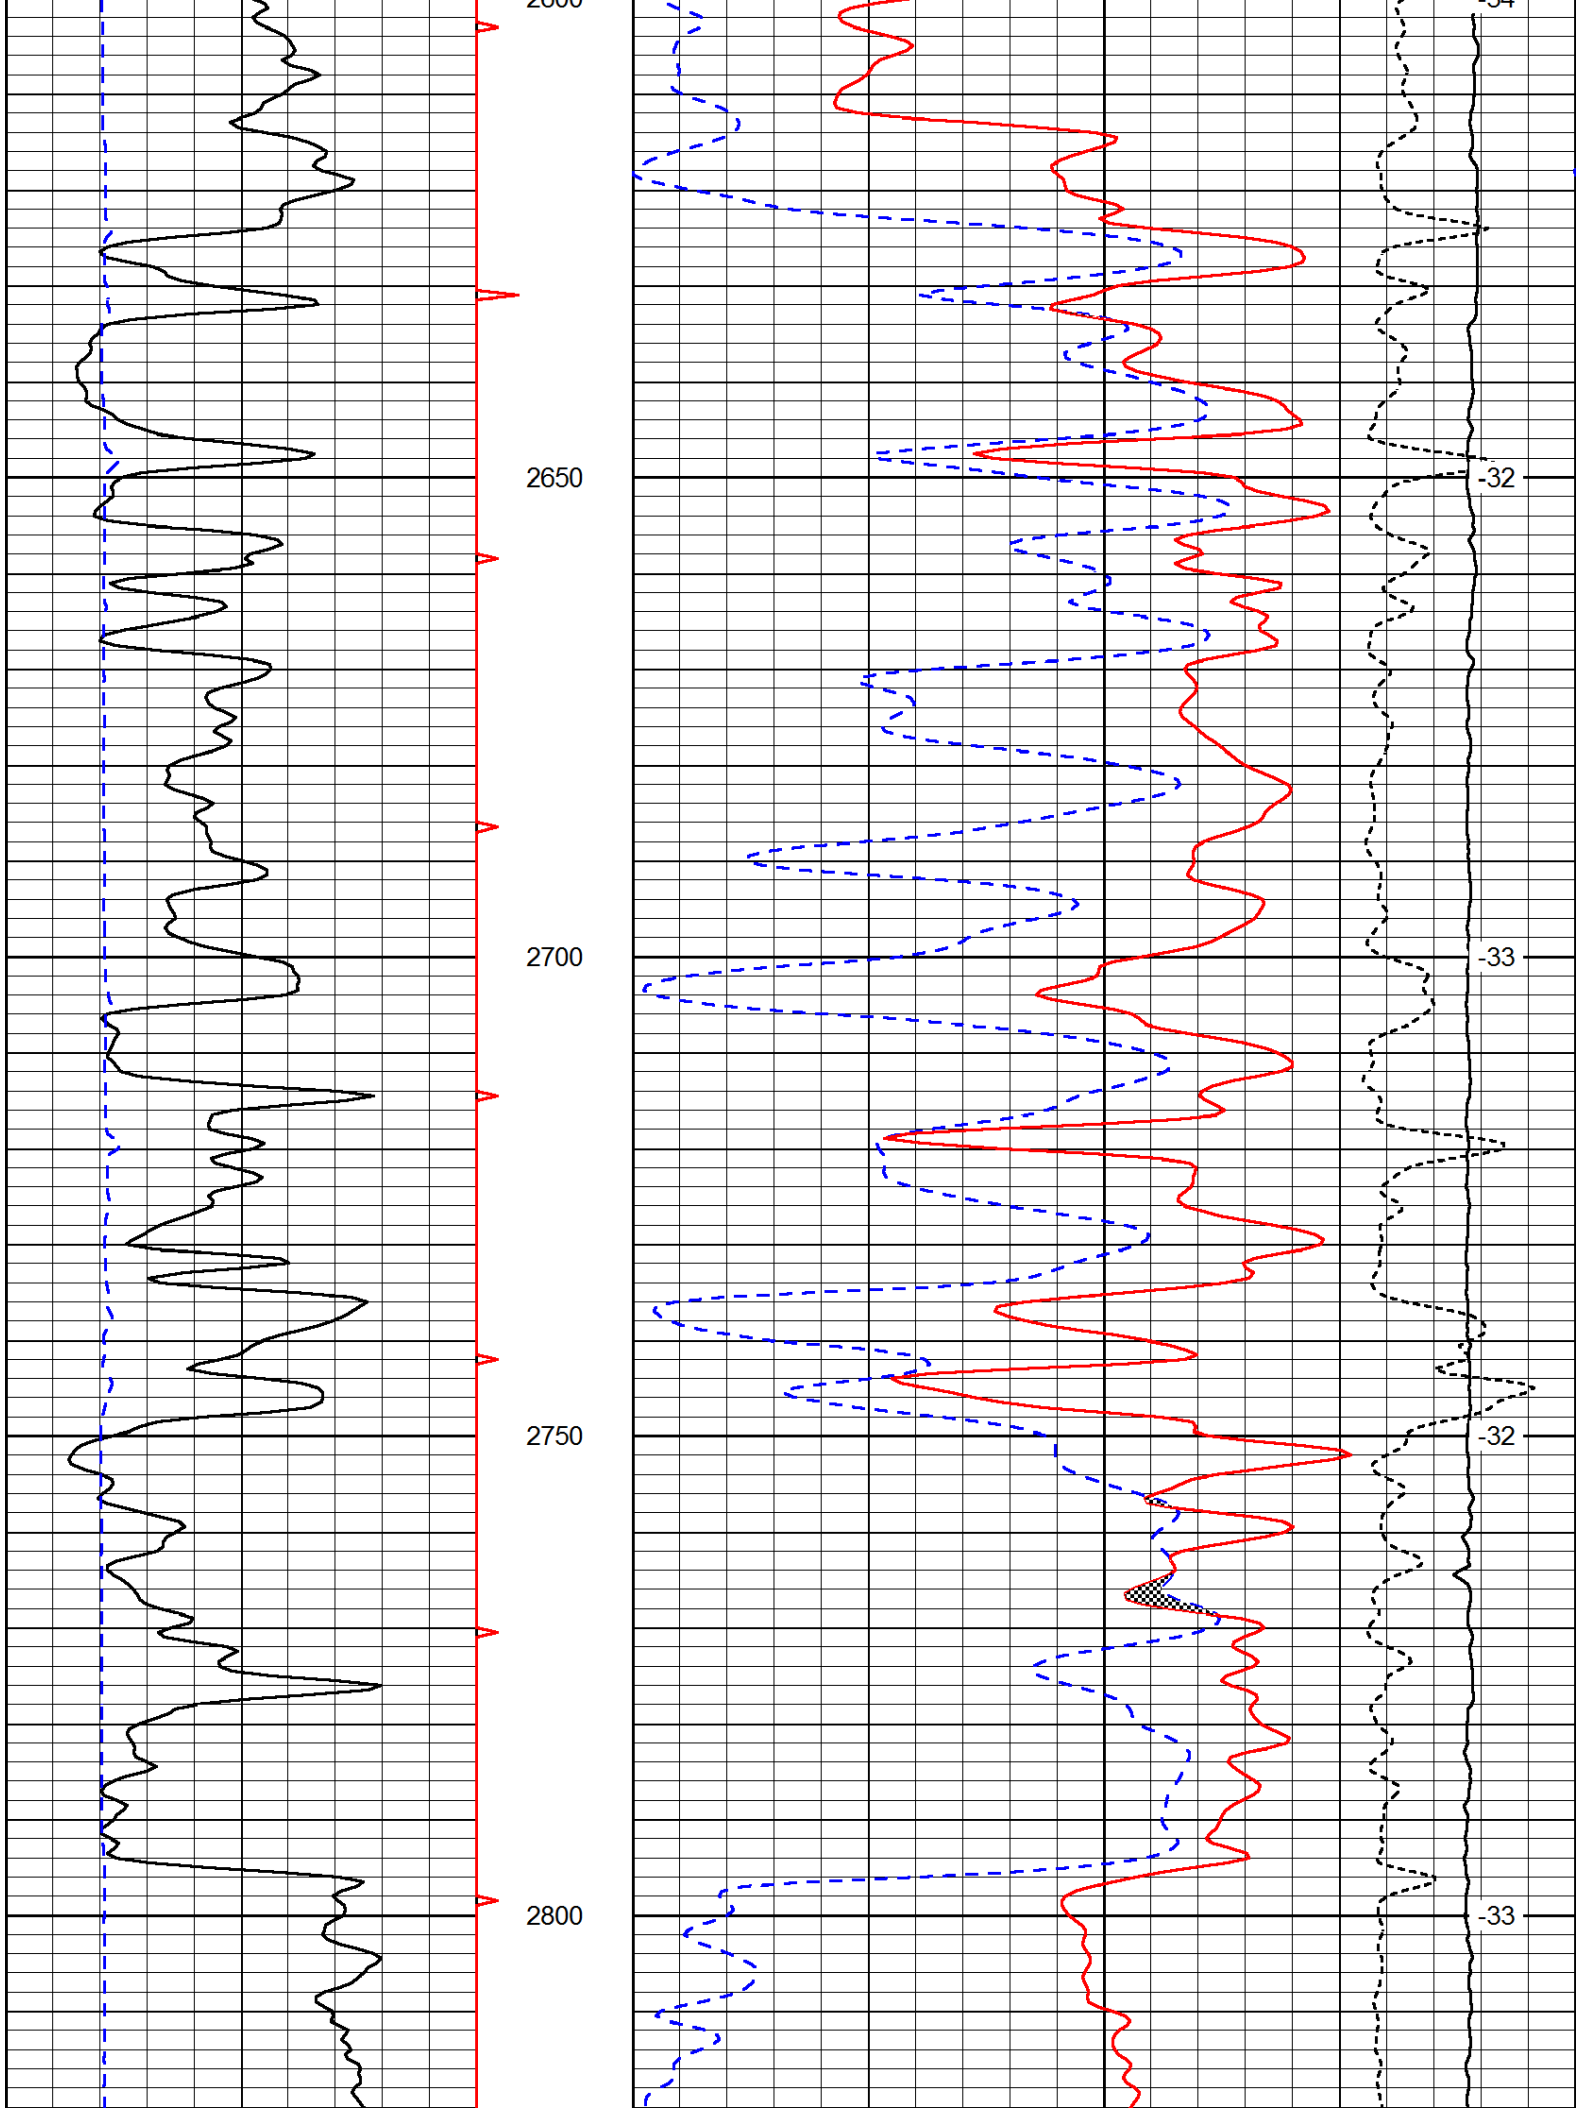
30	Compensated Density	-10
2	Bulk Density	3
15000	Line Tension	0
-0.25	Correction	0.25
	LSPD	

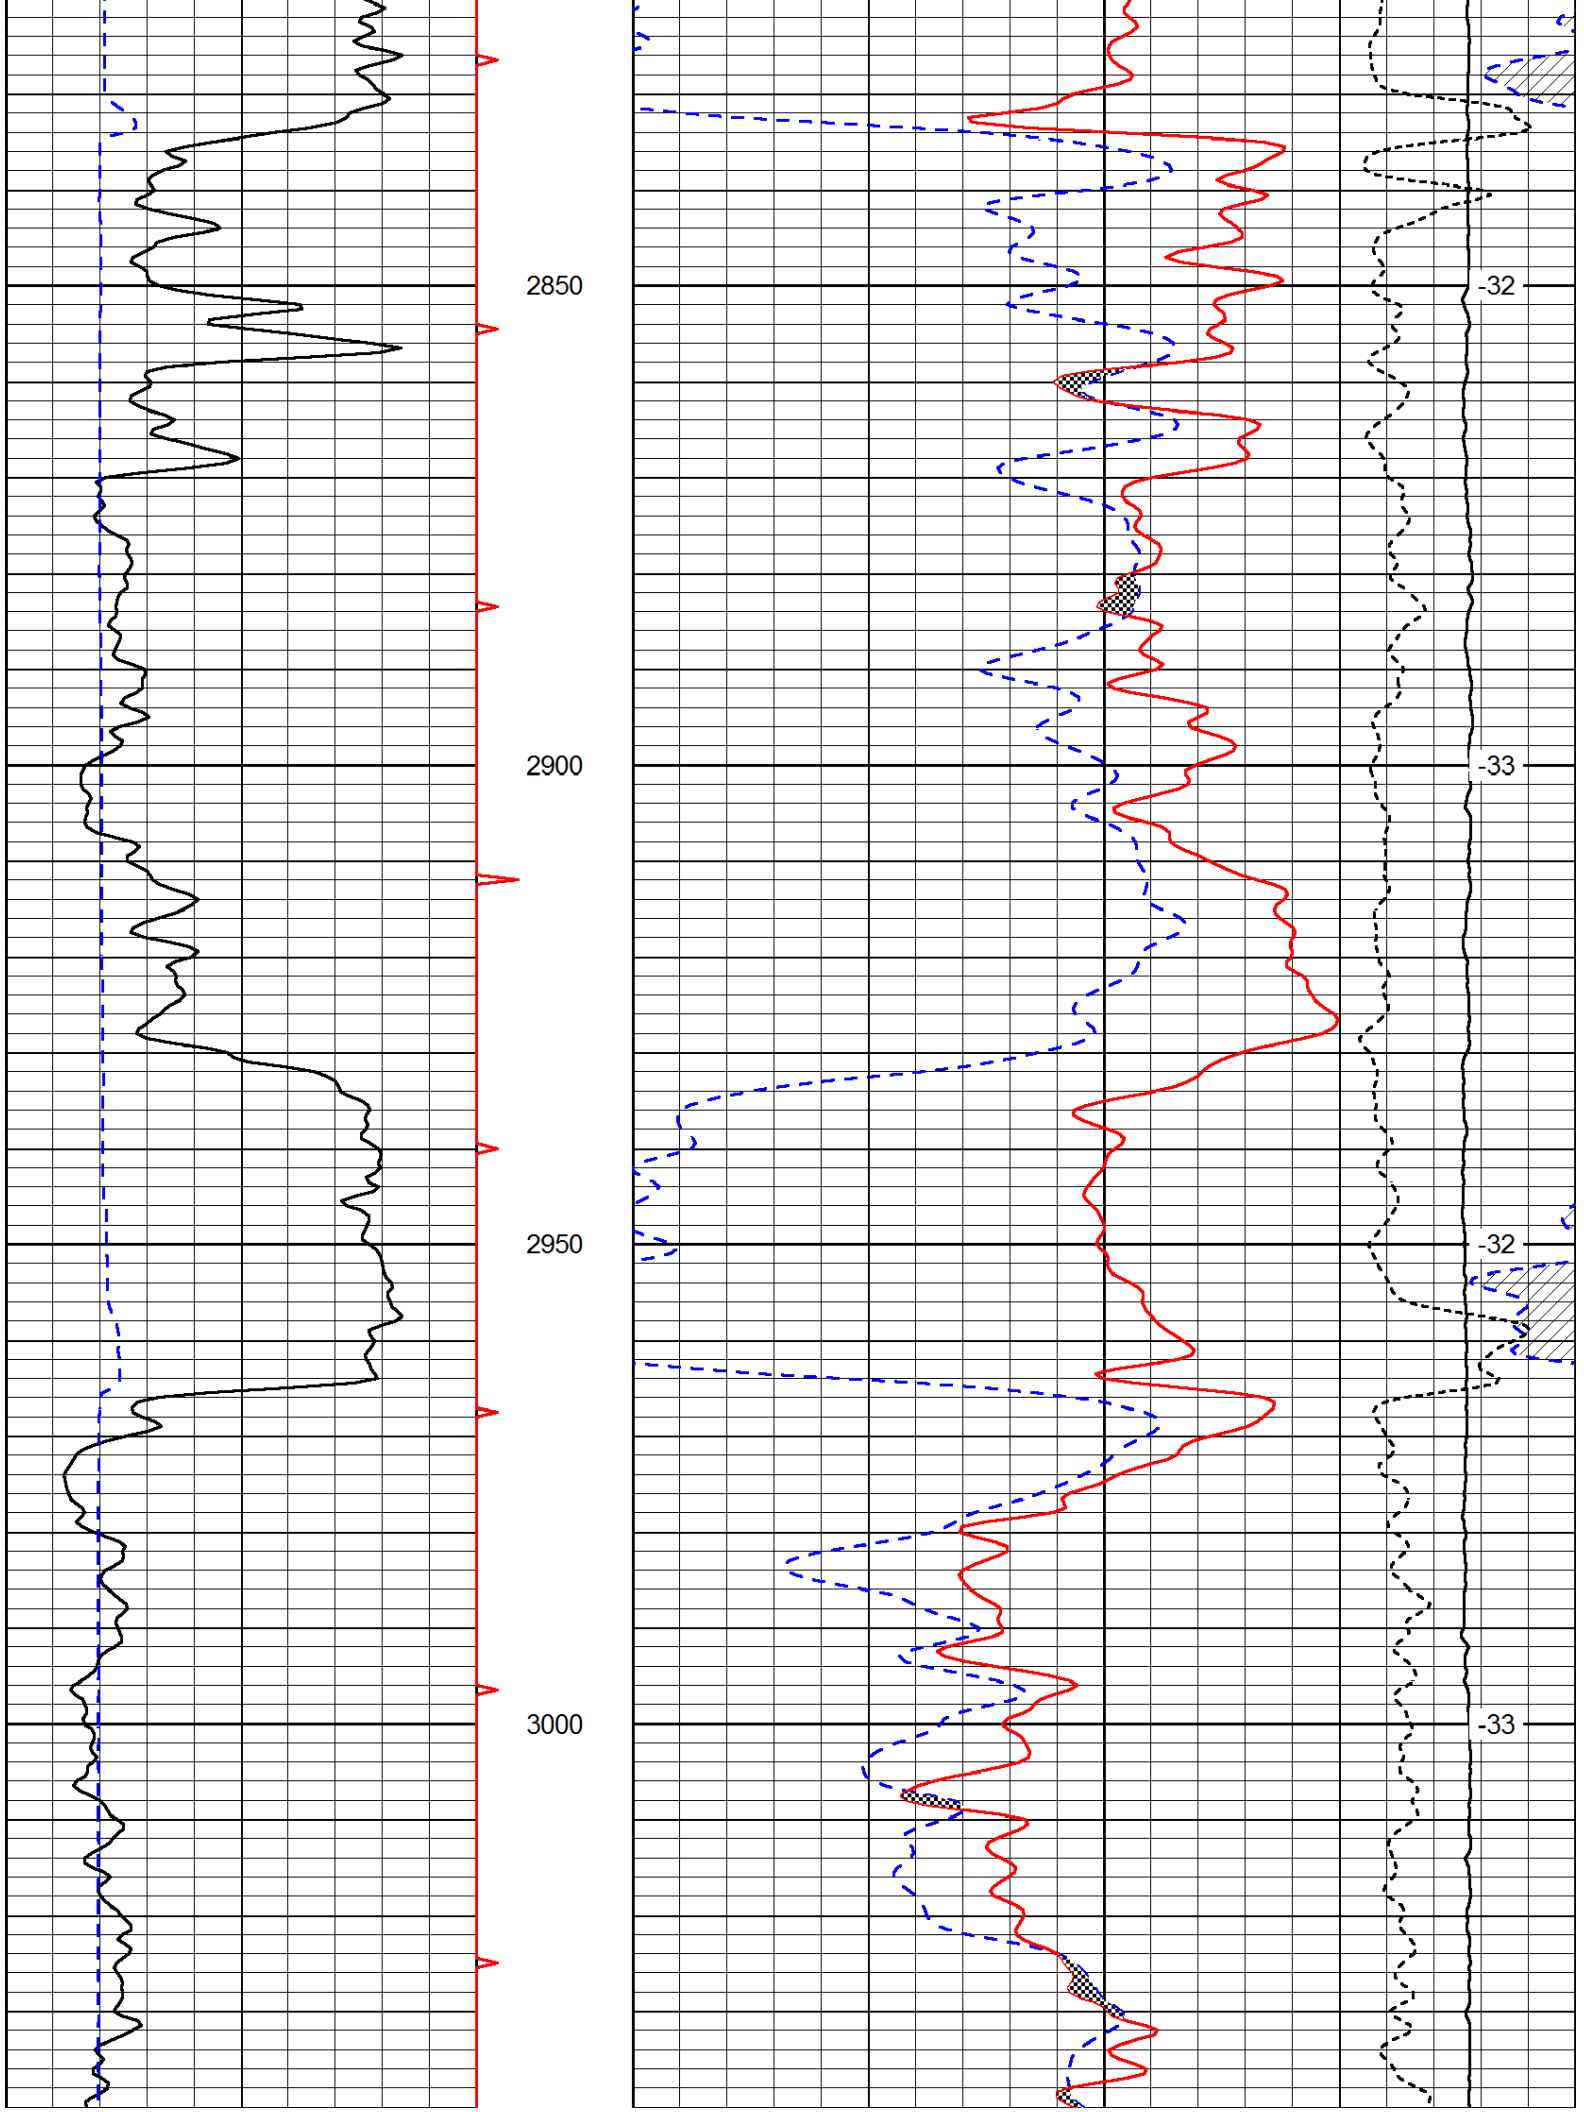
Database File:	c:\warrior\data\r&b_albright #3\r&bhd.db
Dataset Pathname:	dil/rbmain
Presentation Format:	cndlspec
Dataset Creation:	Wed Jun 20 20:24:59 2012
Charted by:	Depth in Feet scaled 1:240

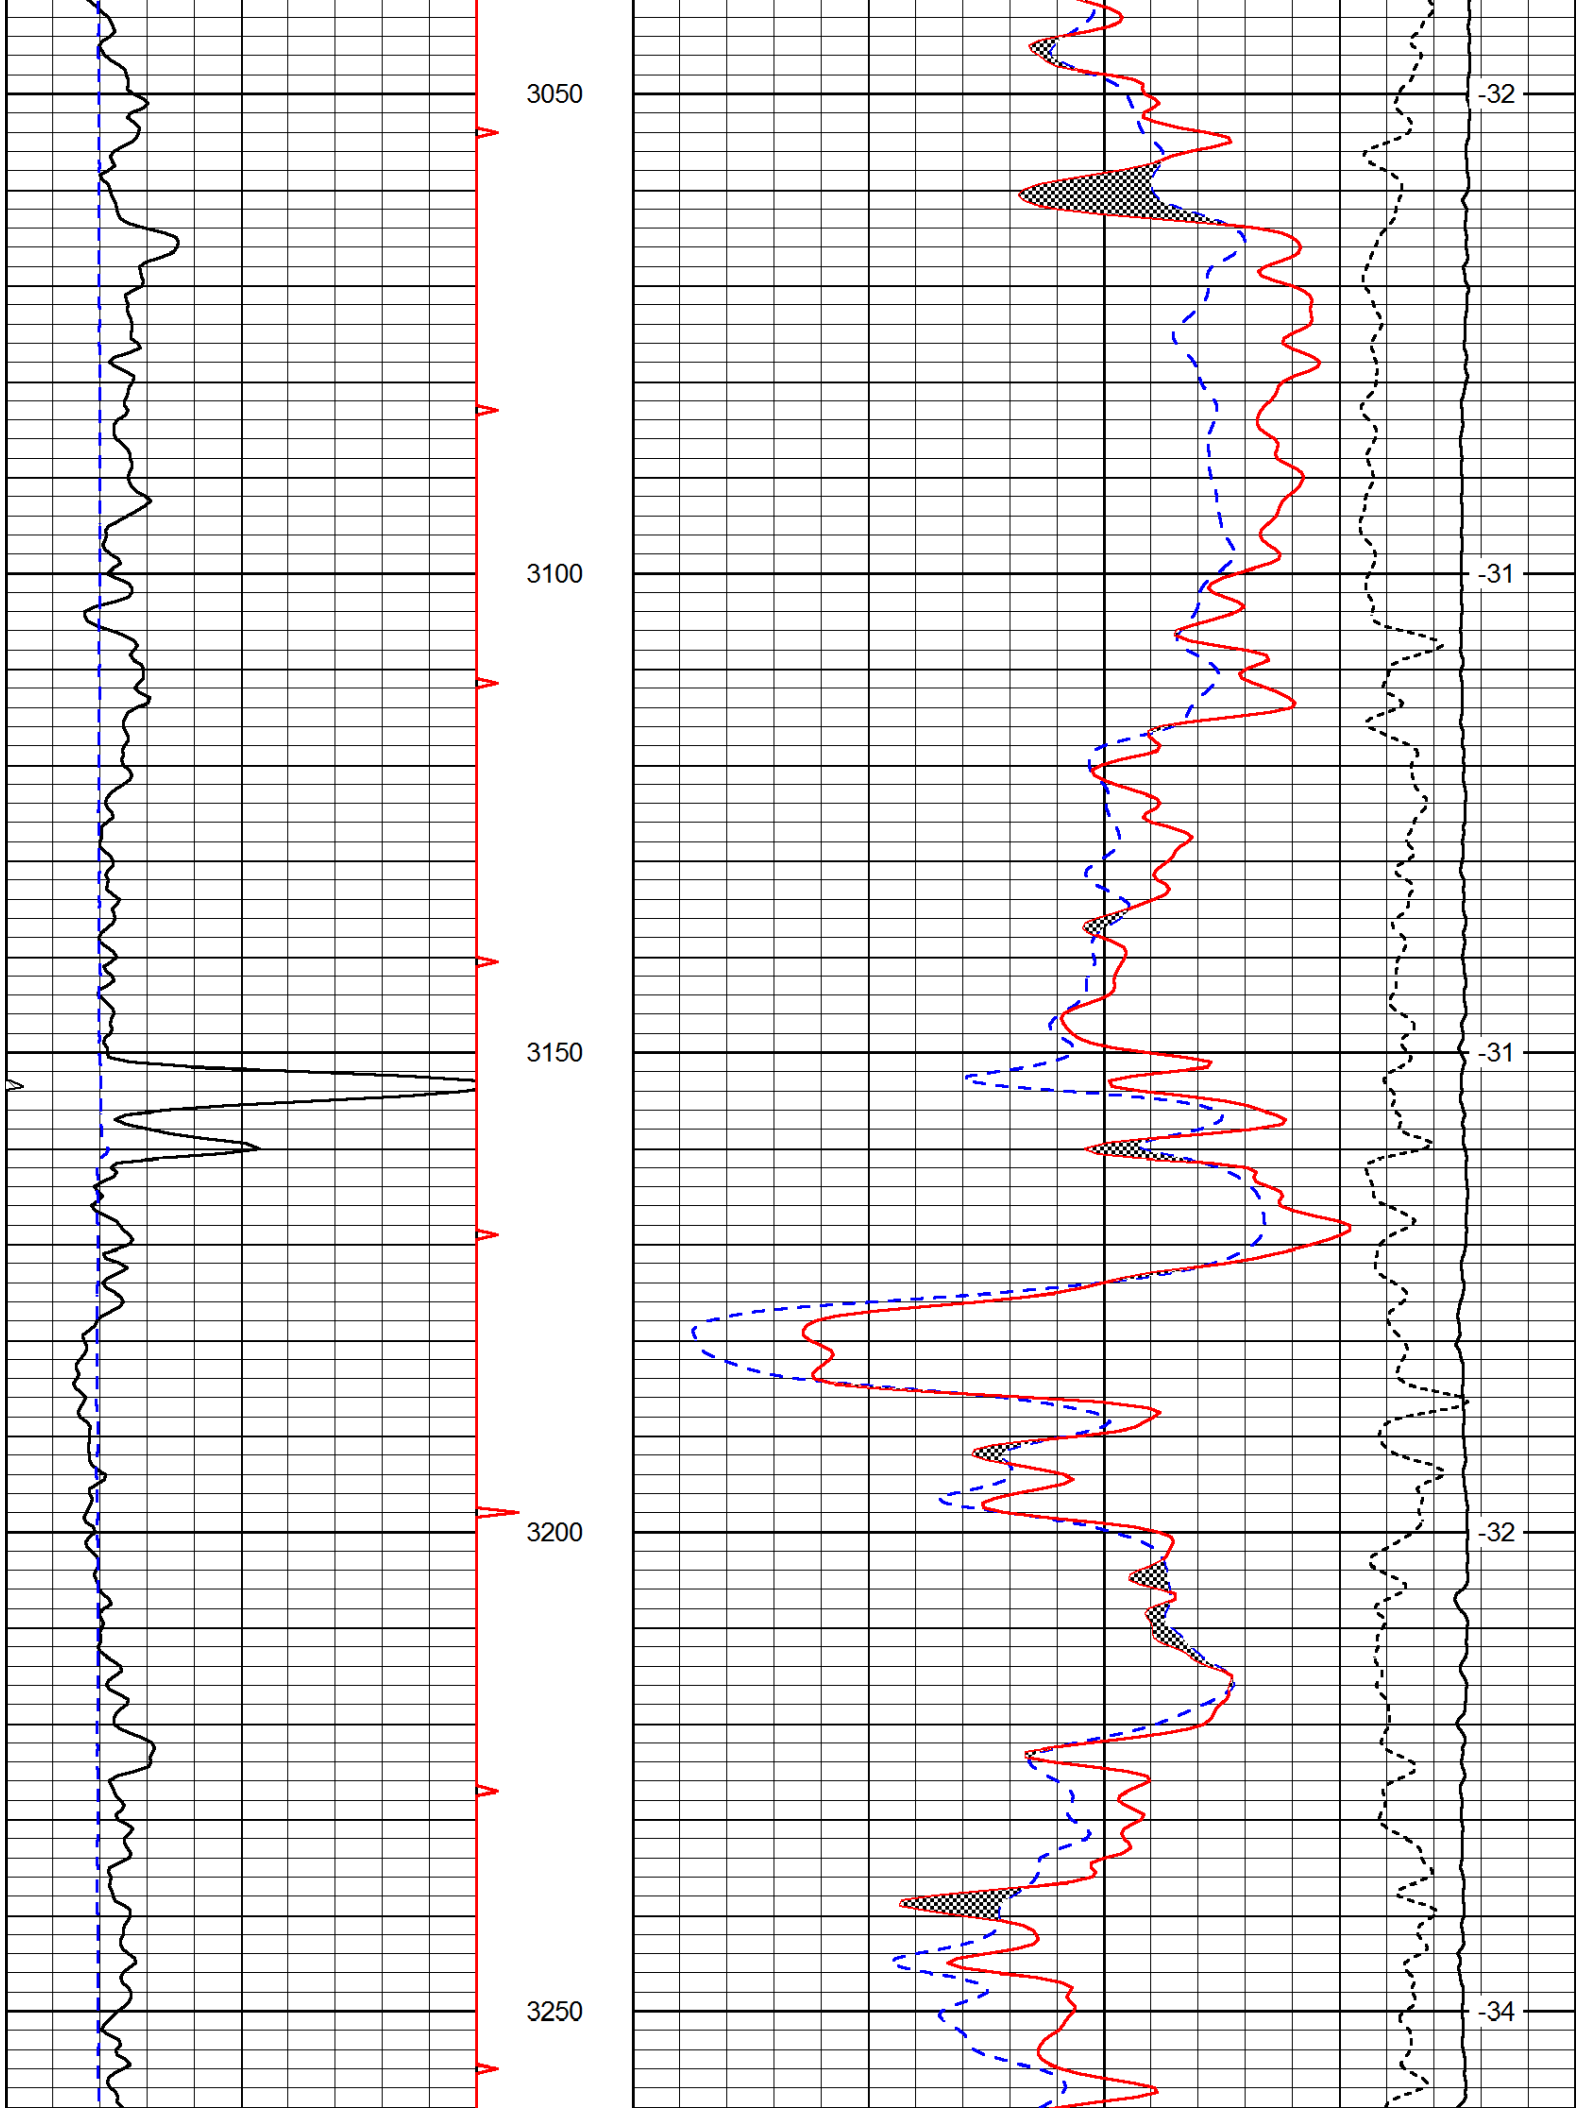
0	Gamma Ray	150
6	Caliper (GAPI)	16

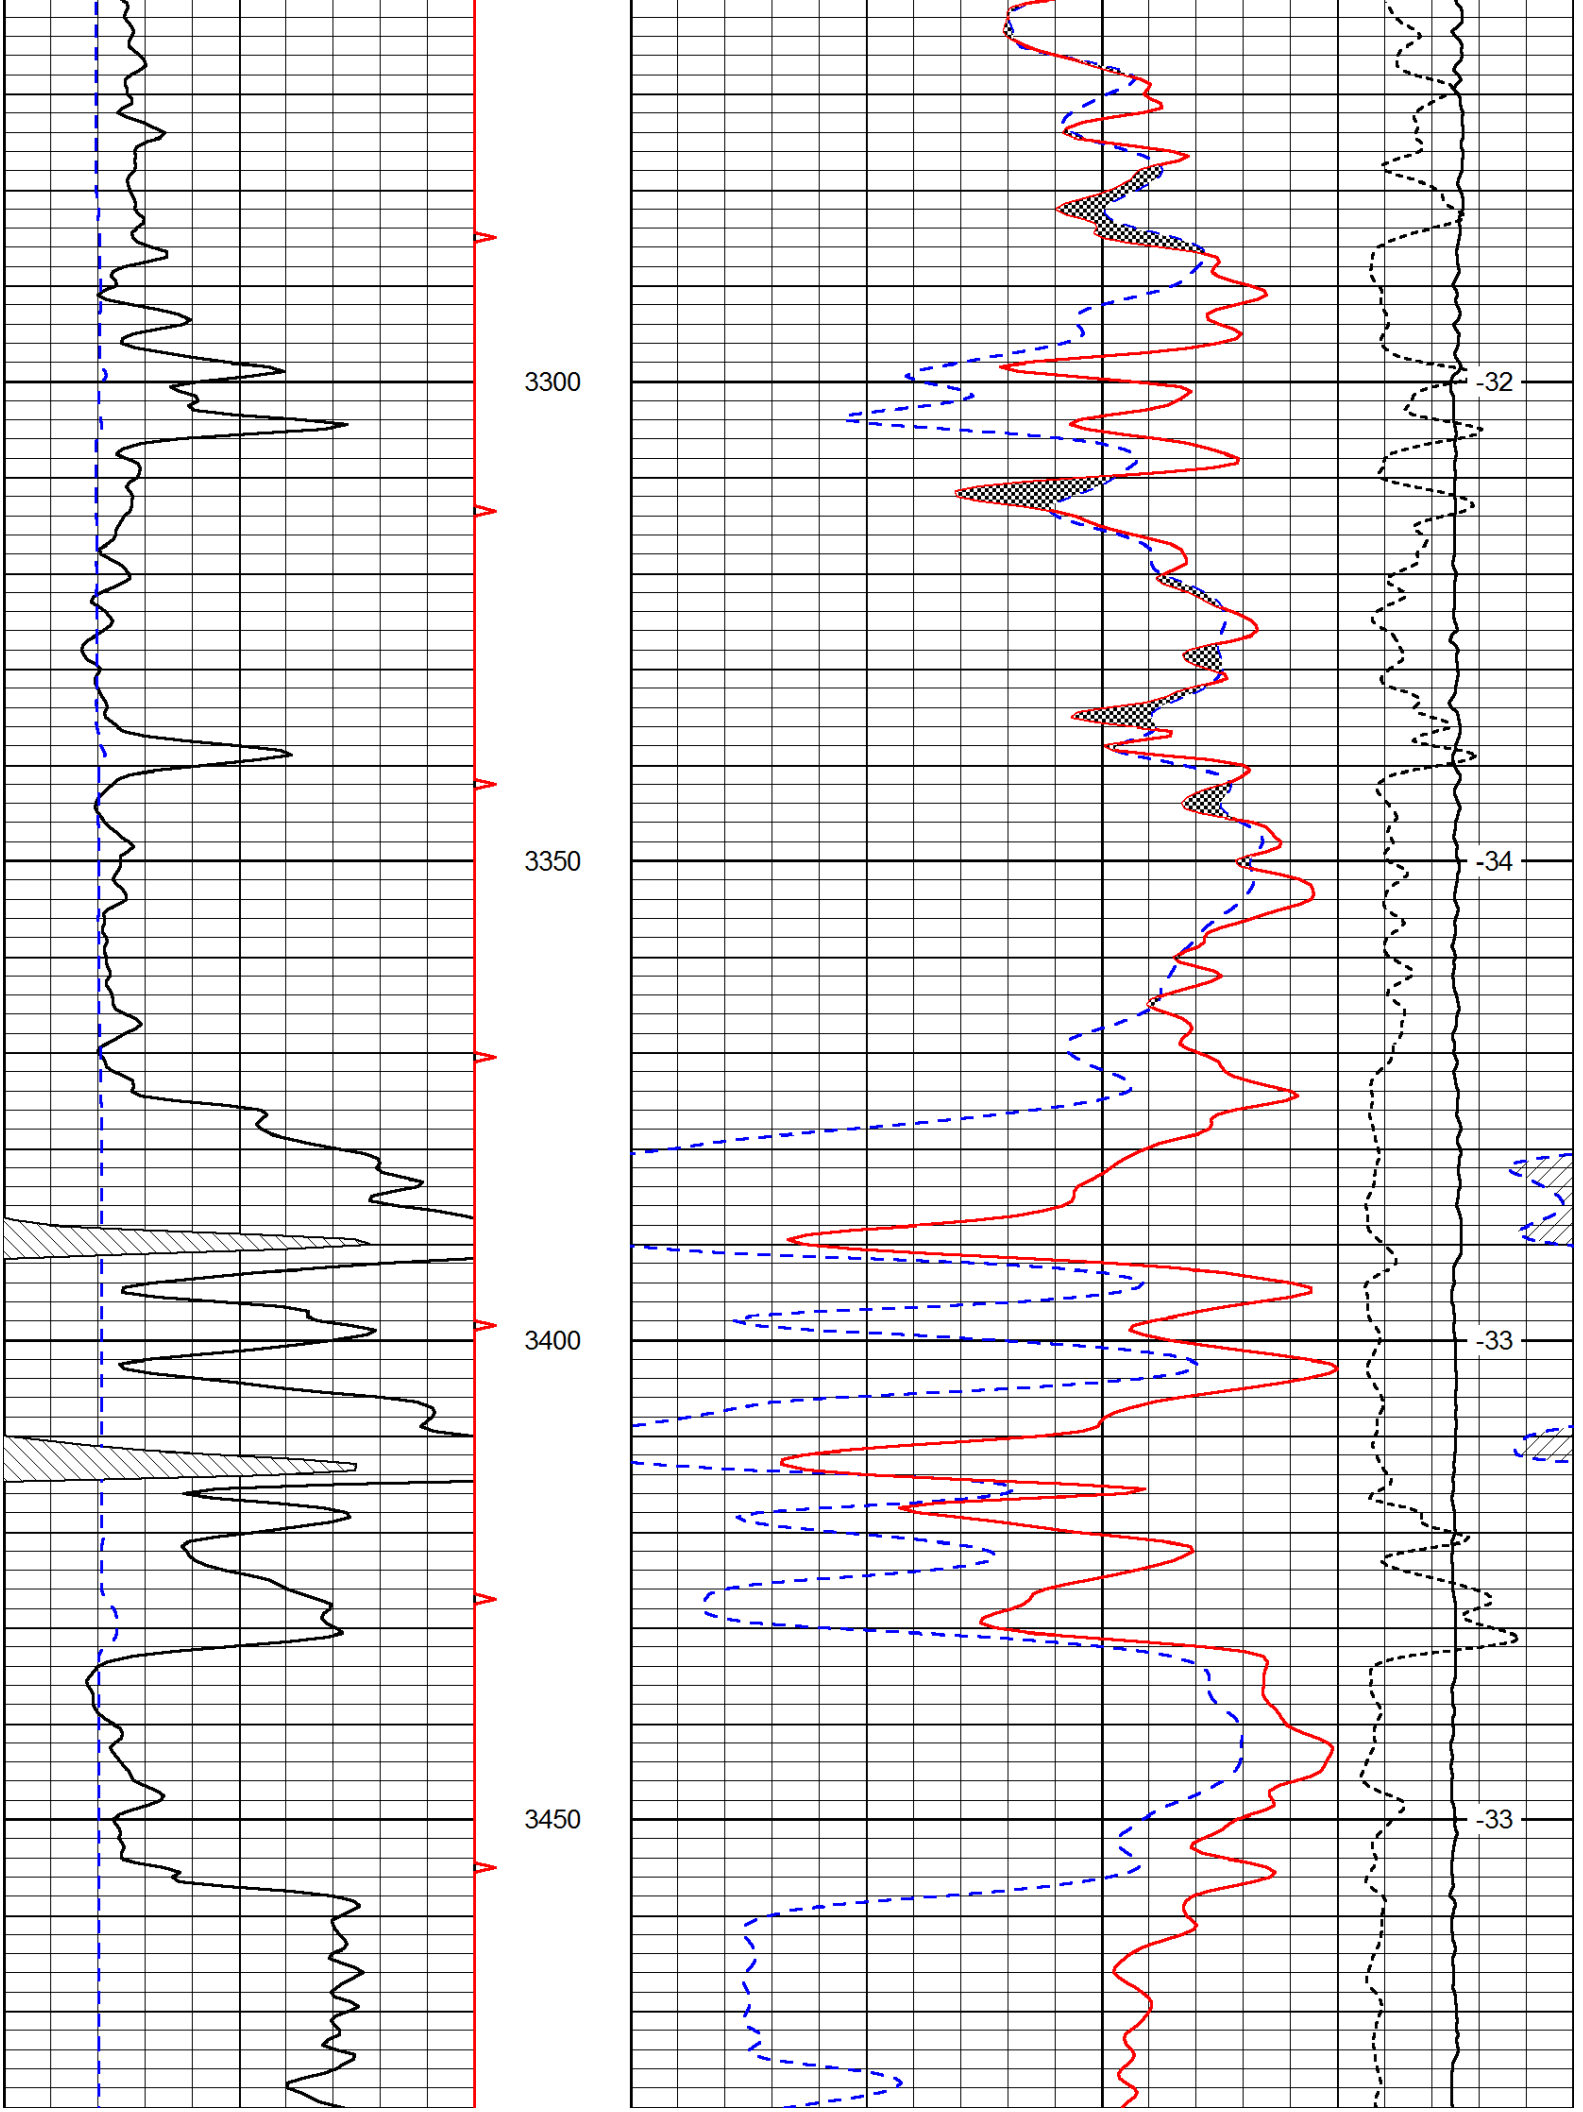
30	Compensated Neutron (Limestone)	-10
30	Compensated Density (Limestone)	-10

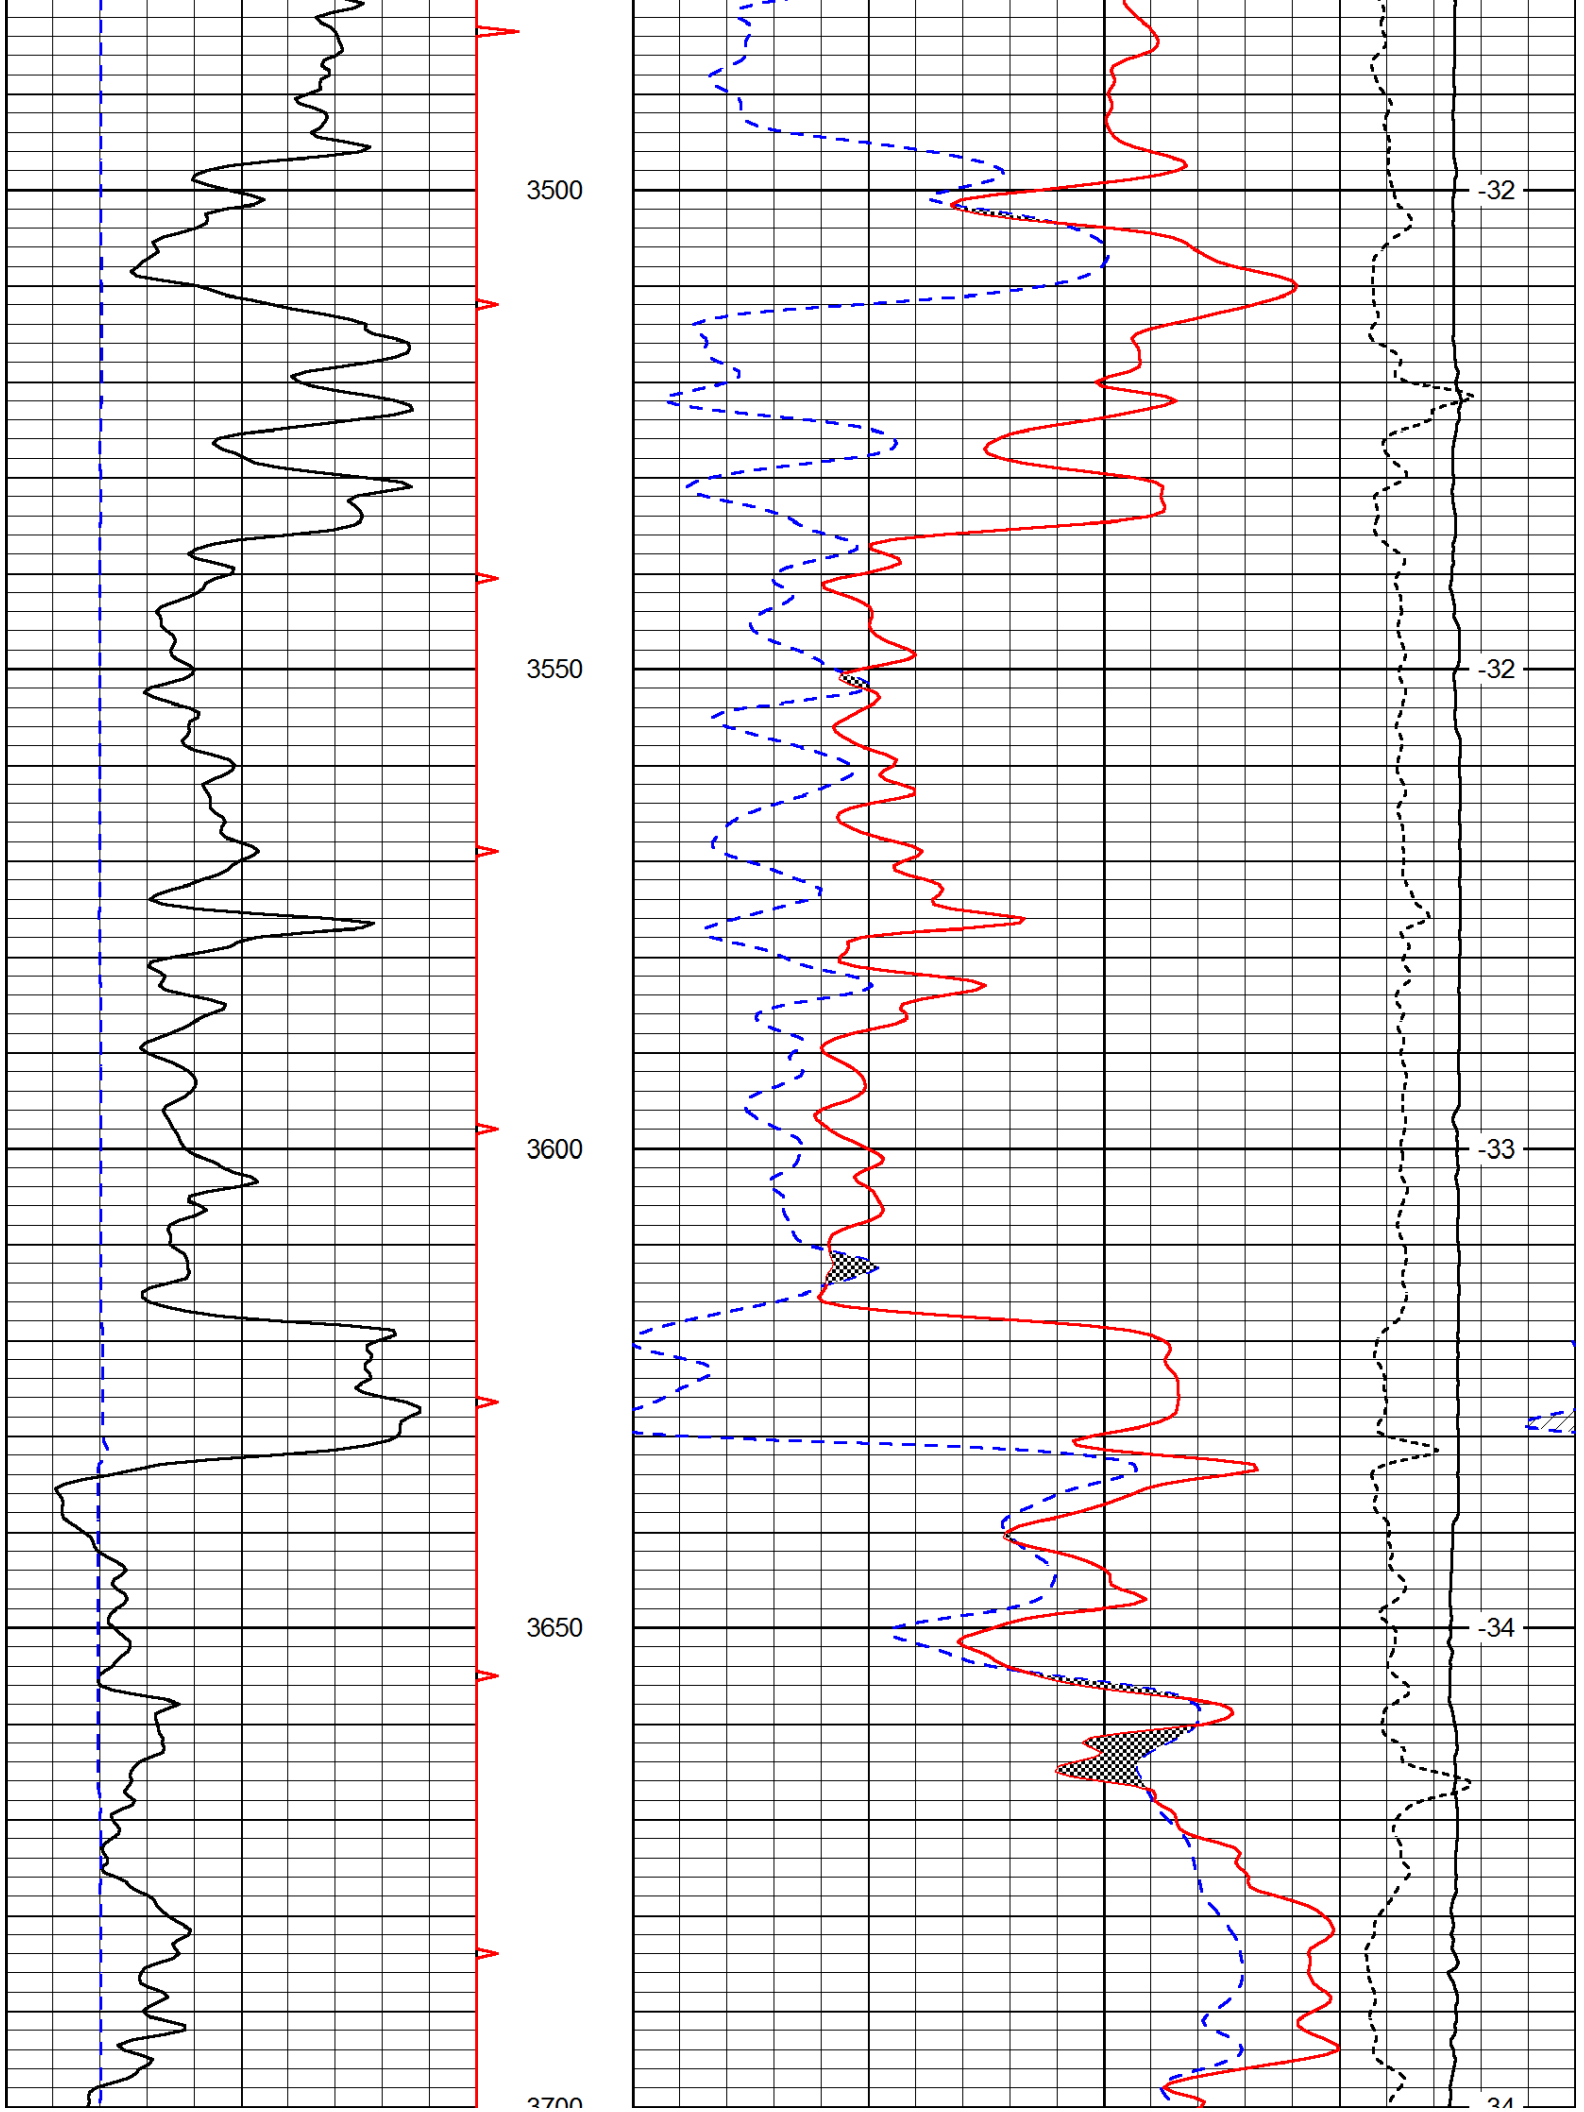

15000
Line Tension
0
-0.25
Correction
0.25
LSPD
2400
2450
2500
2550
2600
-35
-34
-34
-34
-34

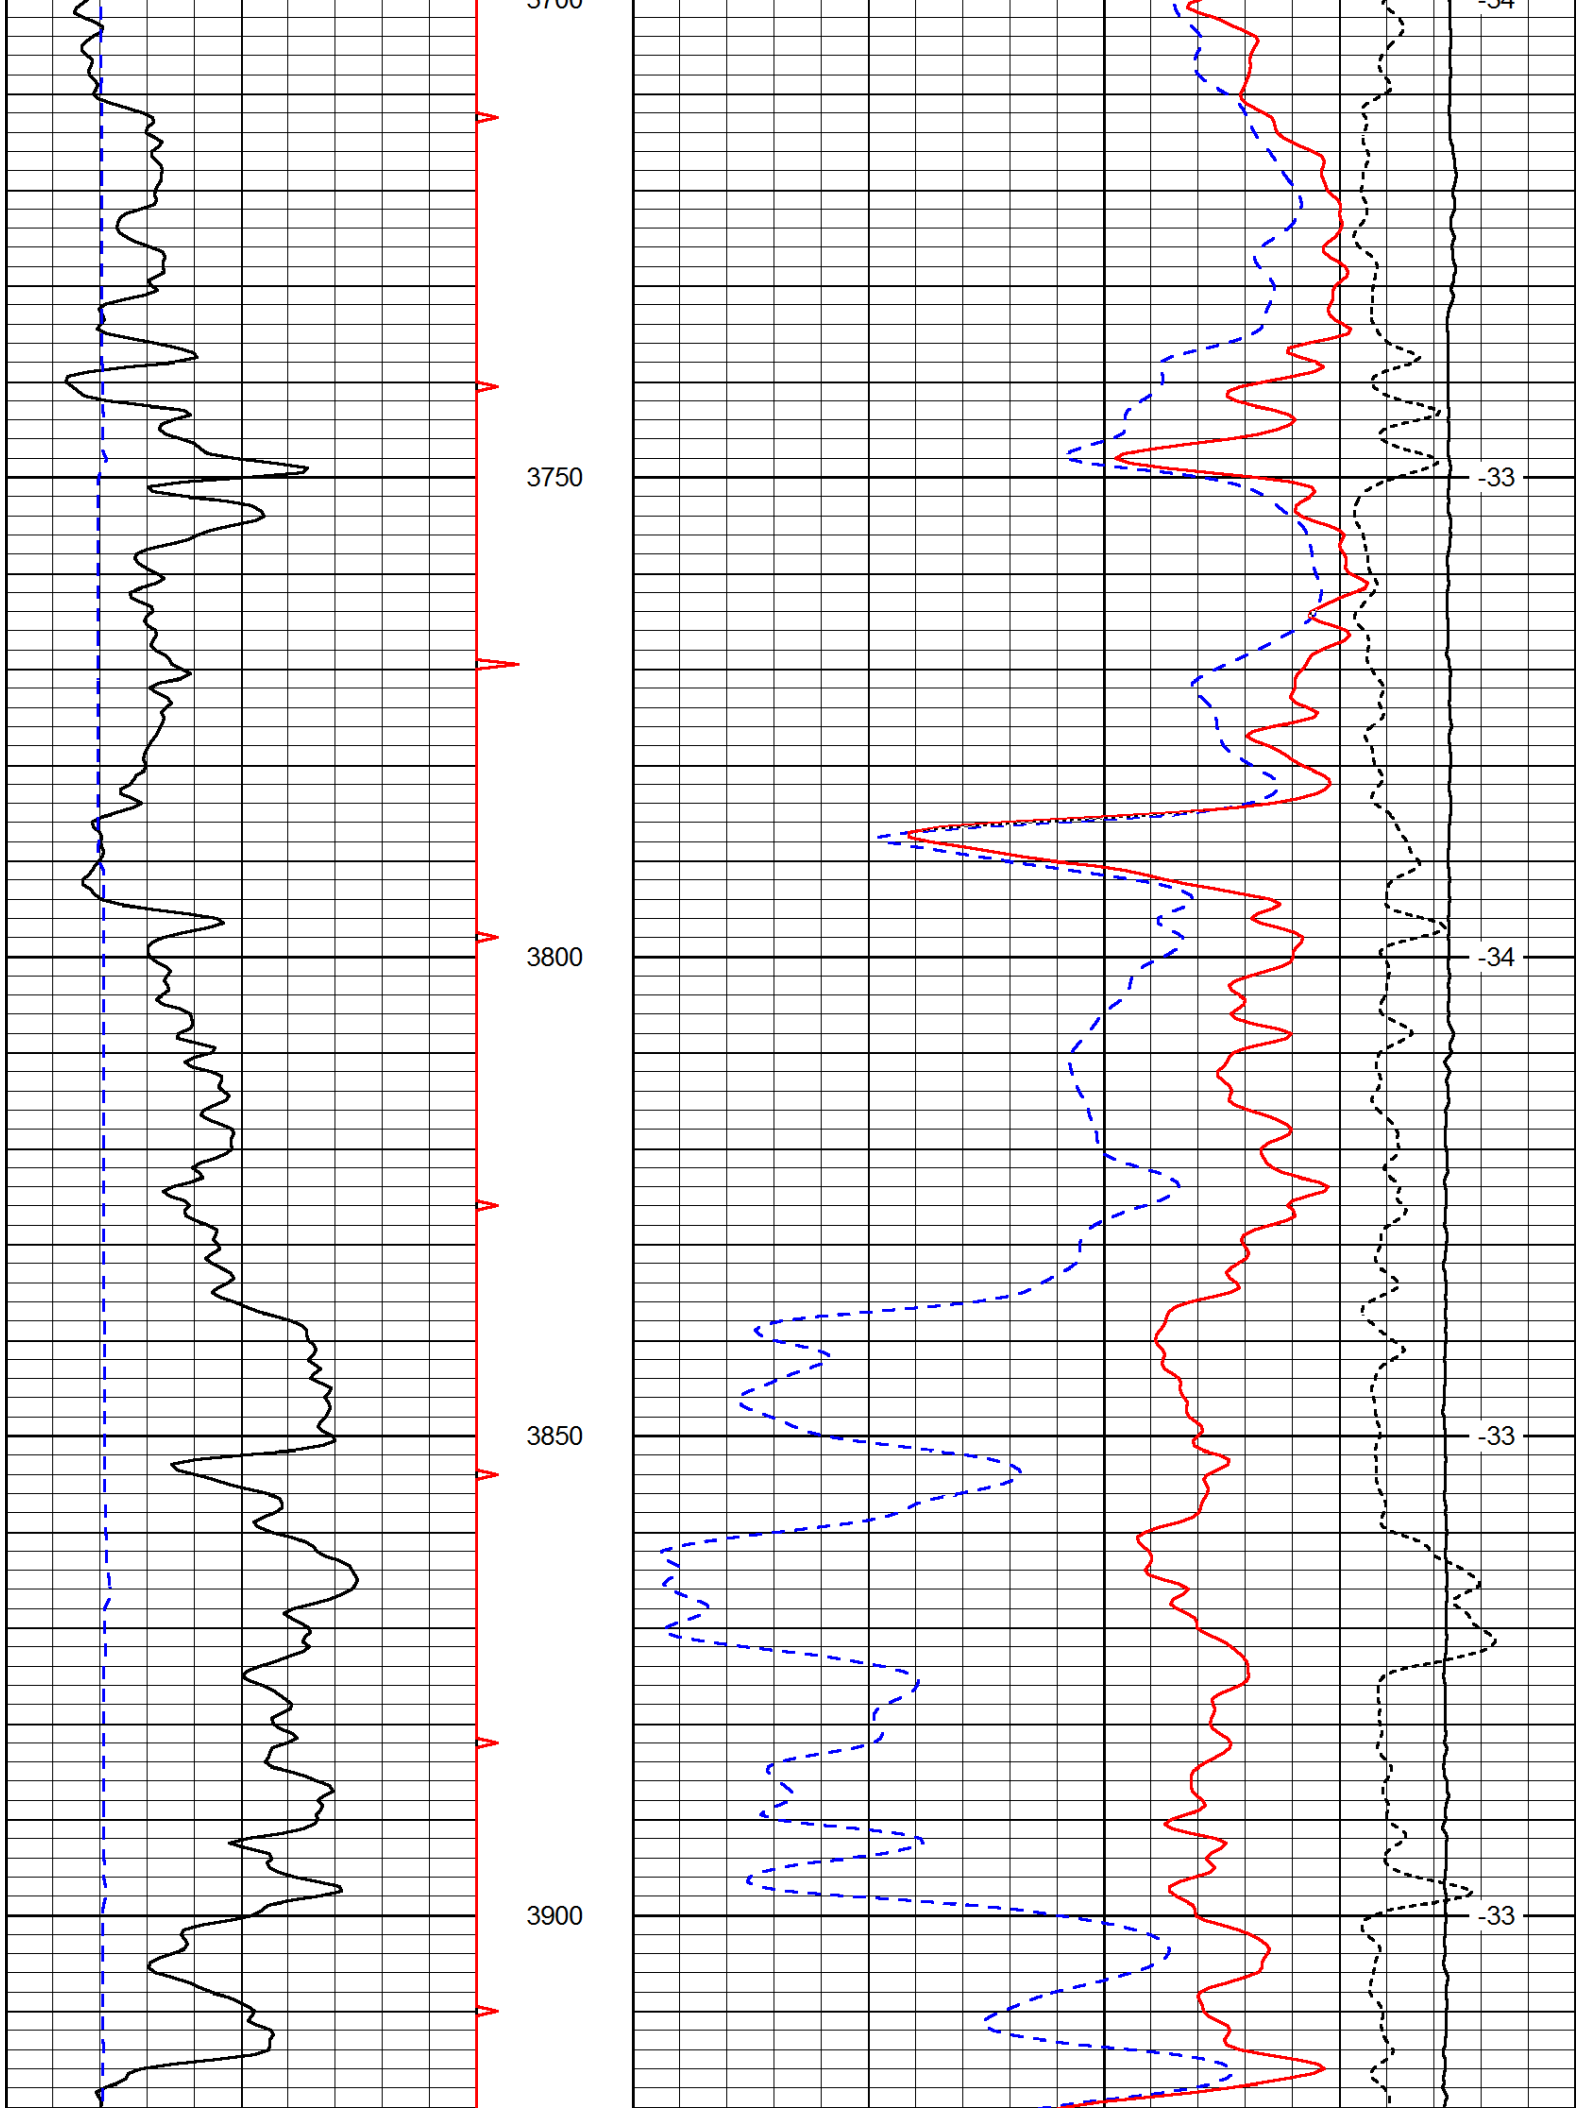

2650
2700
2750
2800
-32
-33
-32
-33

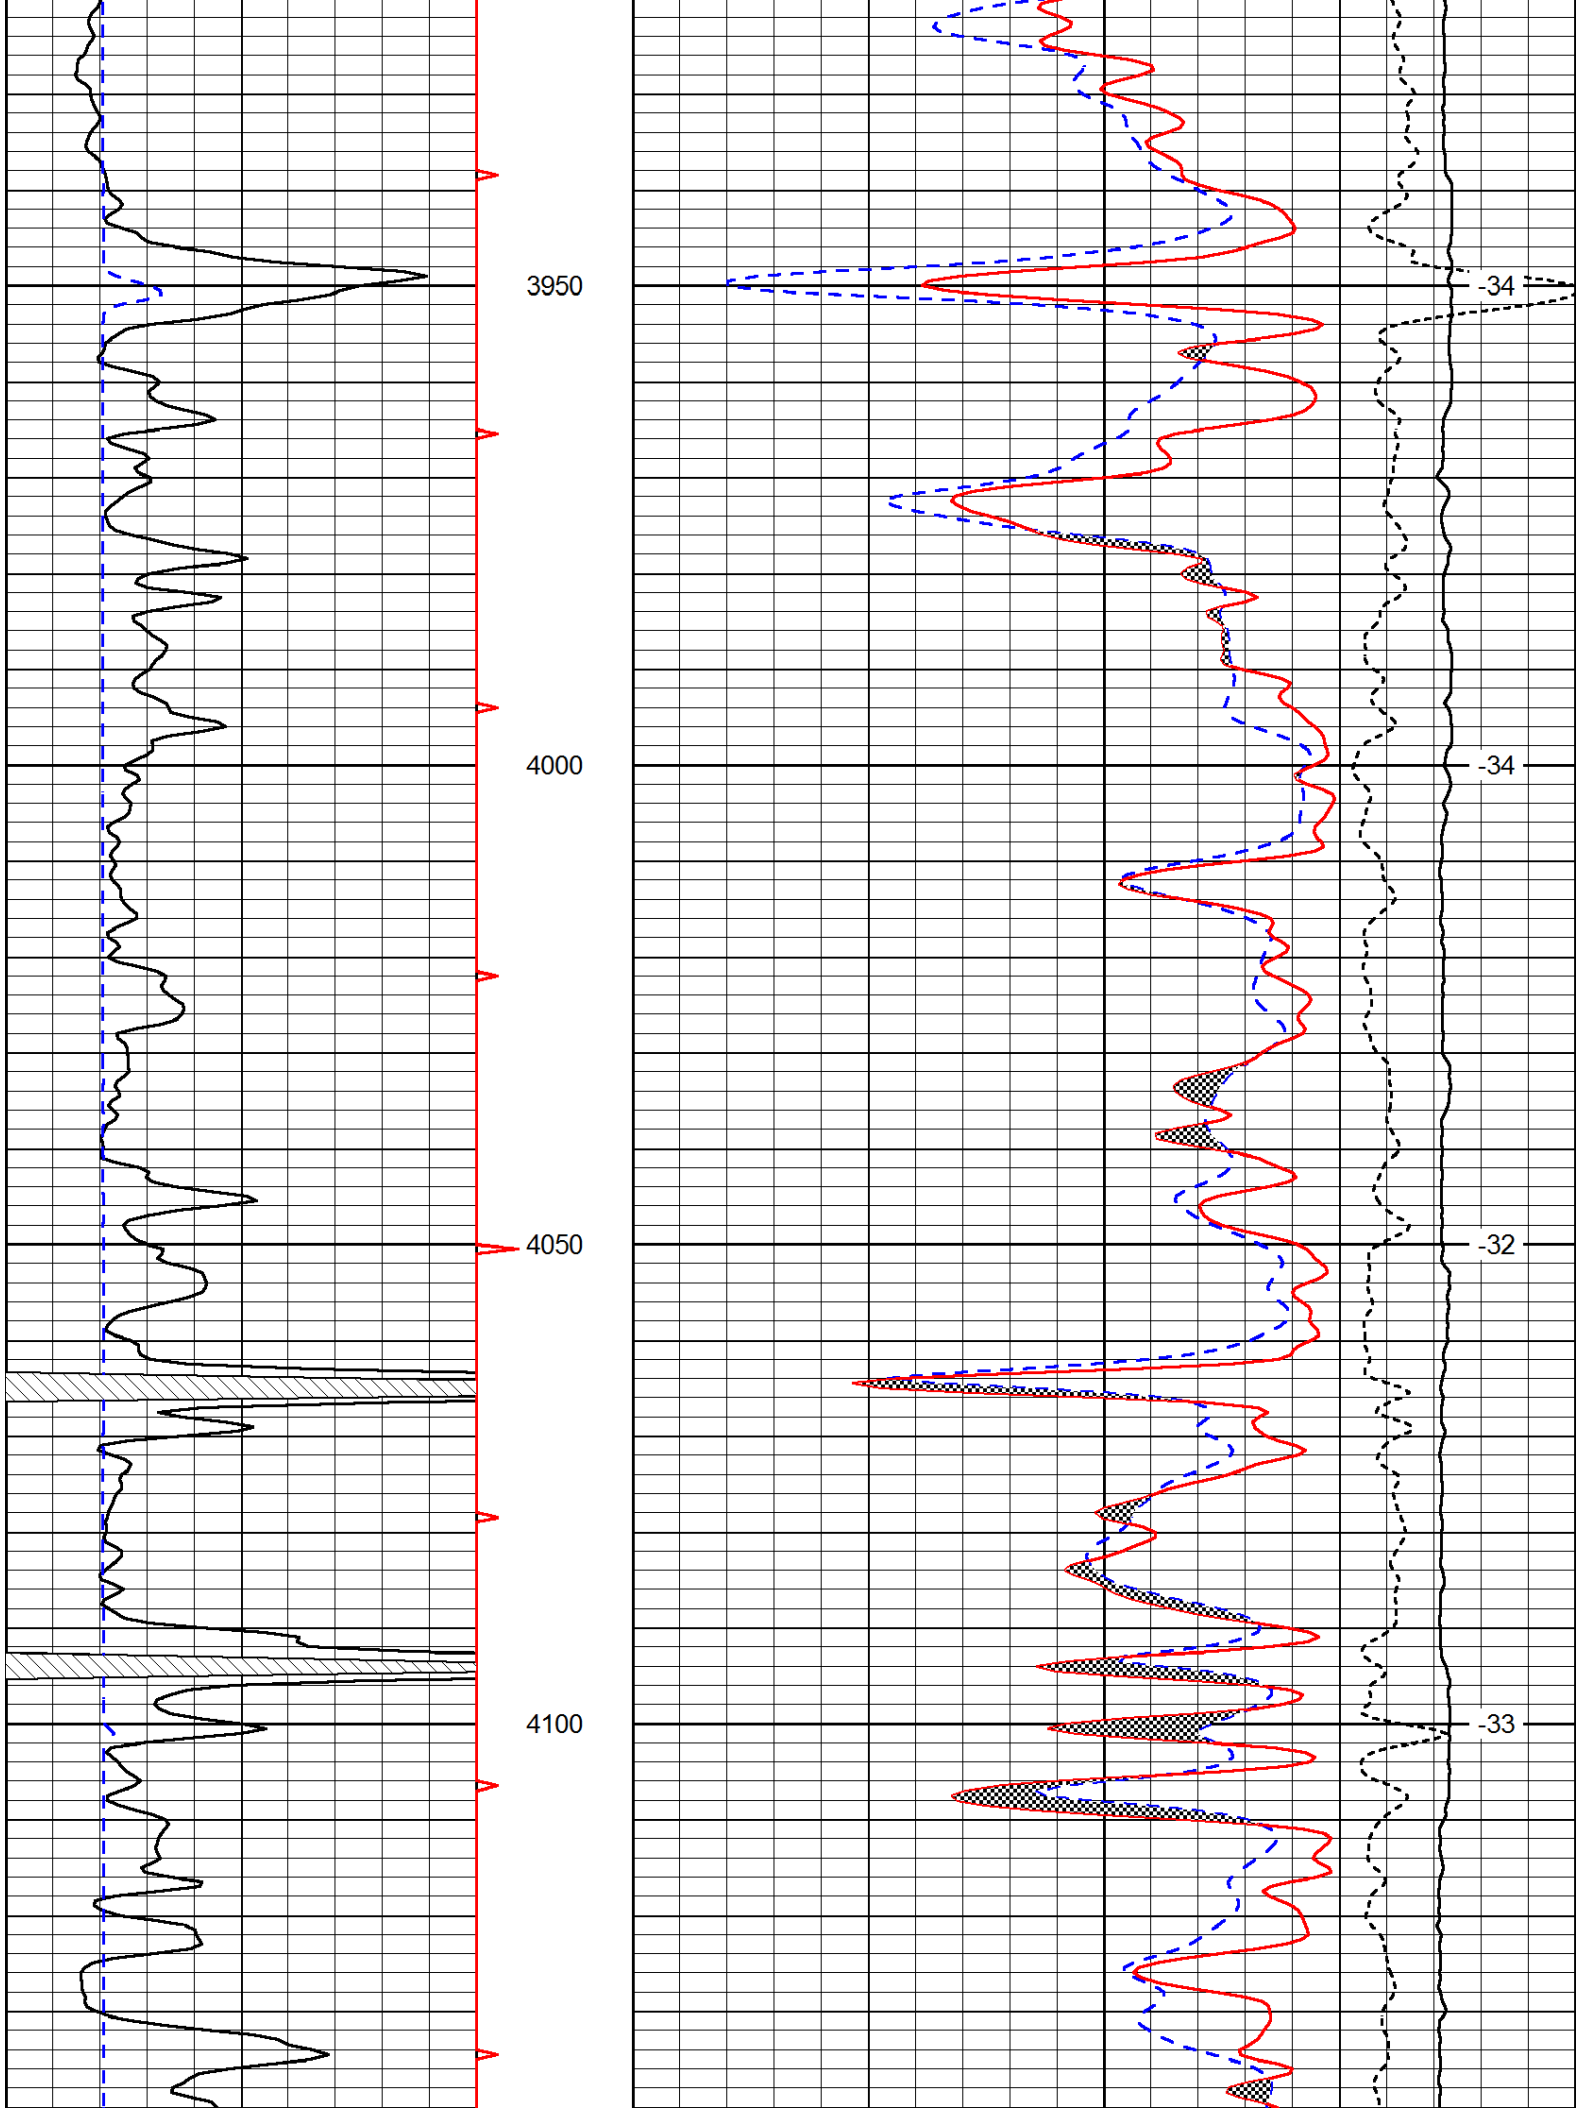

2850
2900
2950
3000
-32
-33
-32
-33

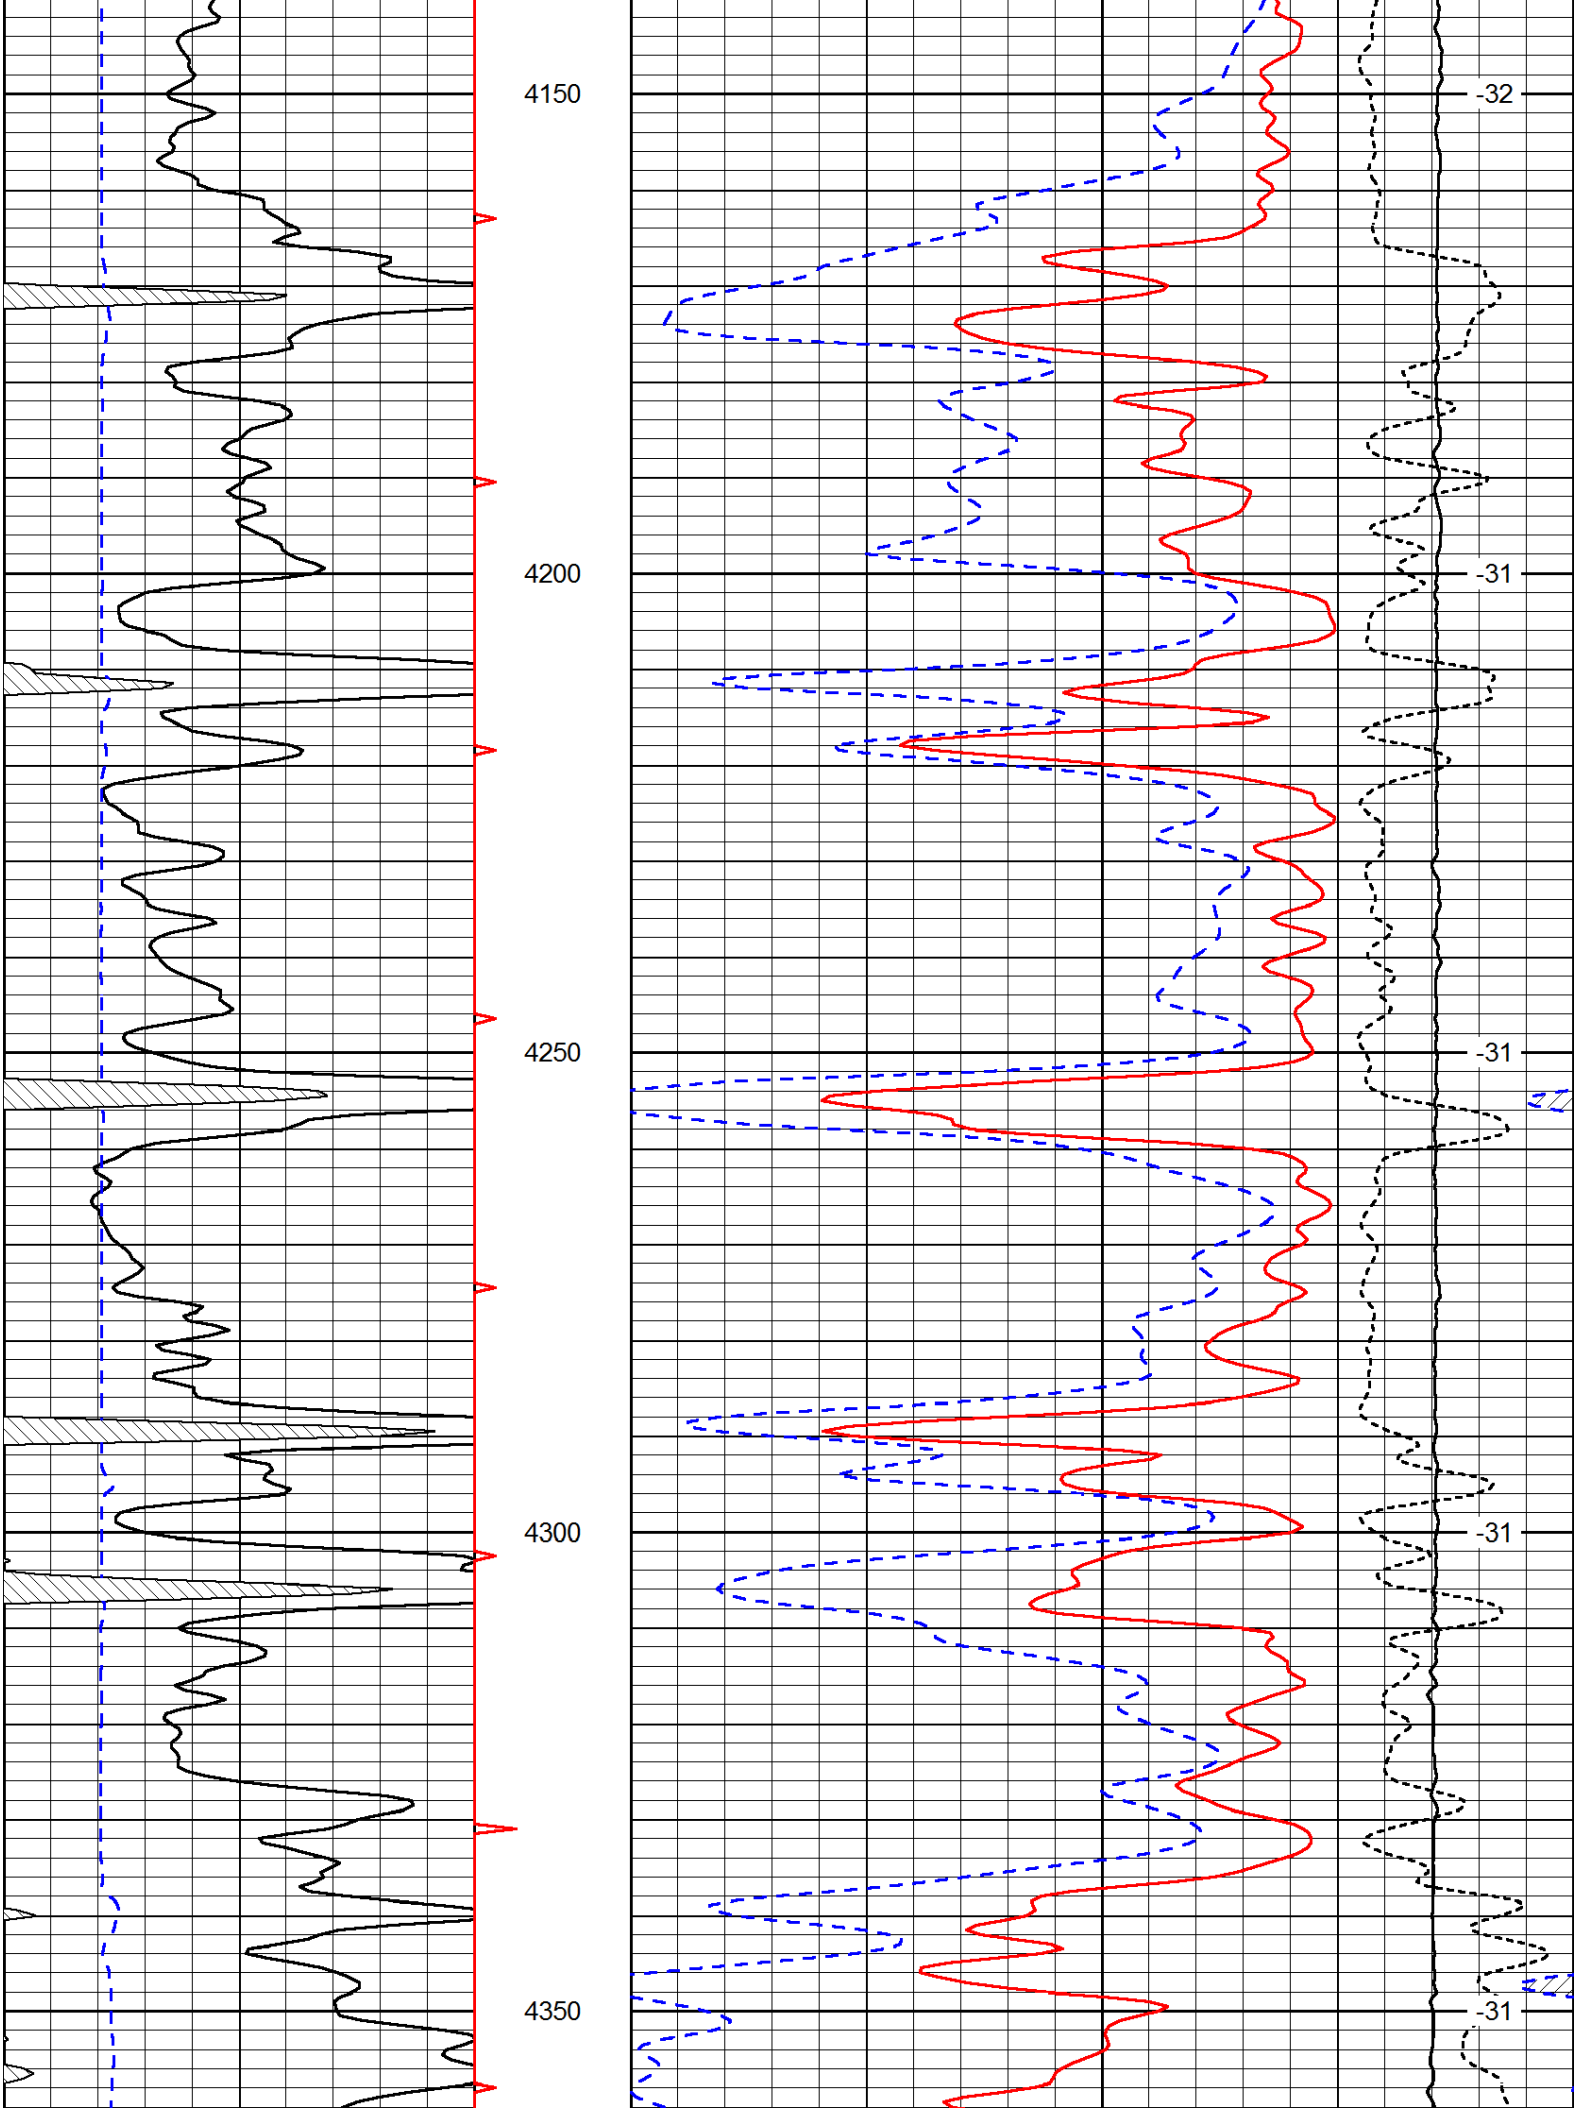

3050
3100
3150
3200
3250
-32
-31
-31
-32
-34

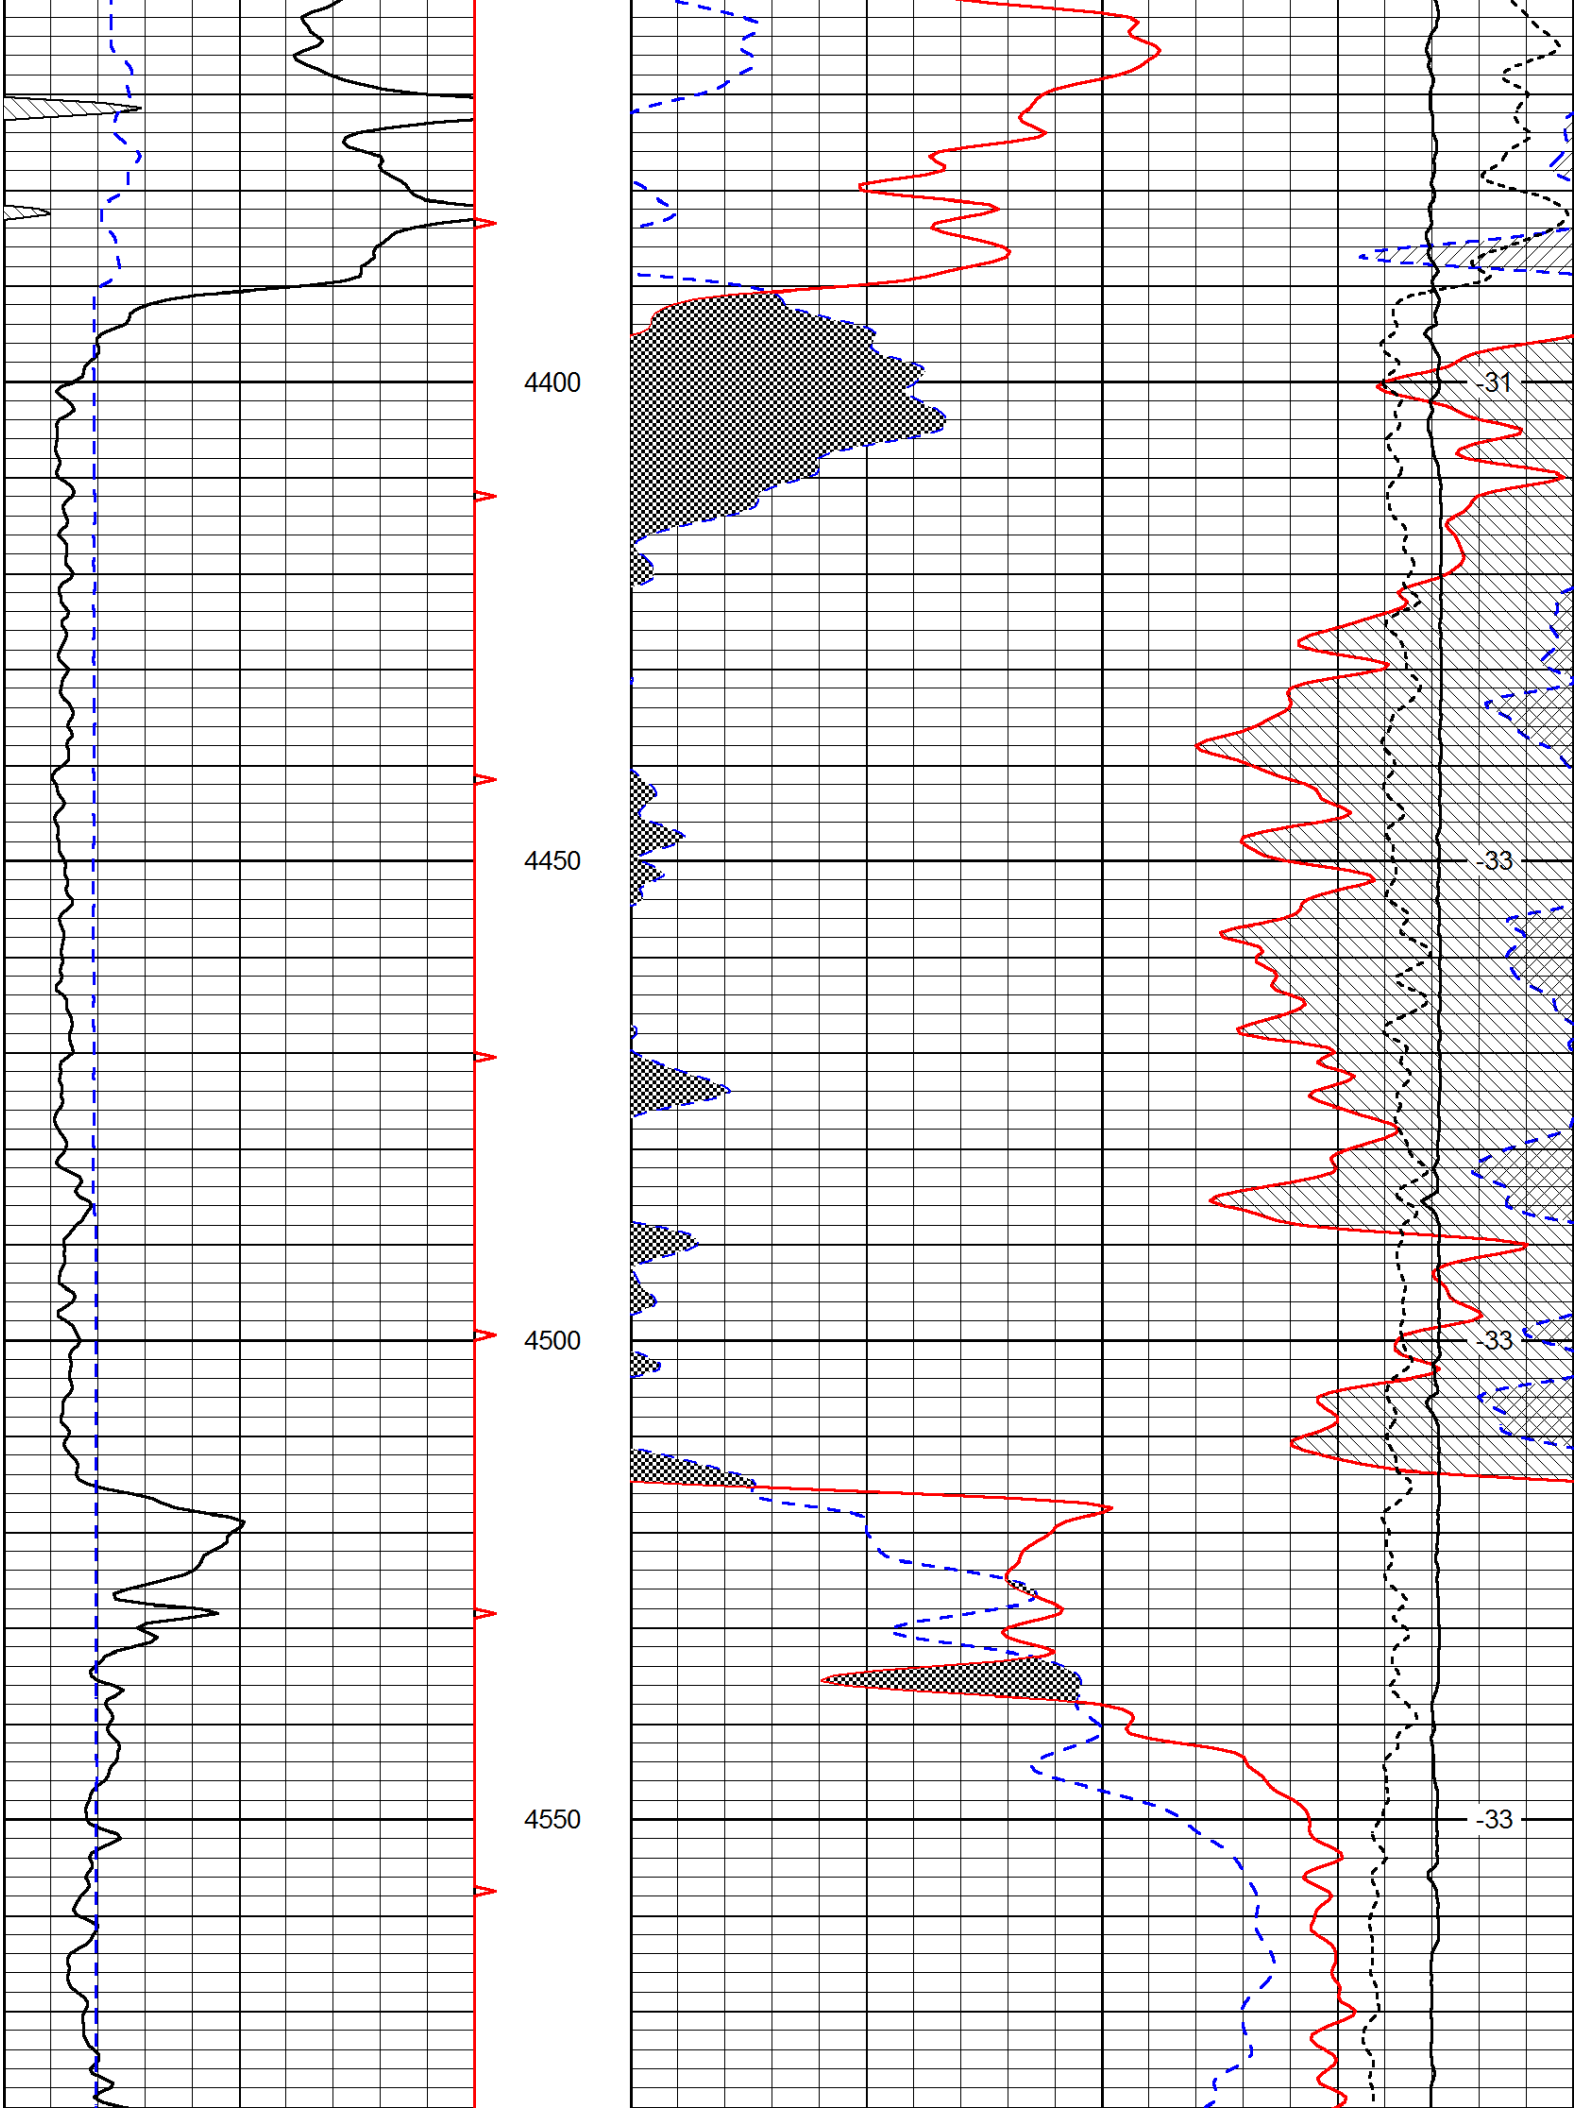

3300
3350
3400
3450
-32
-34
-33
-33

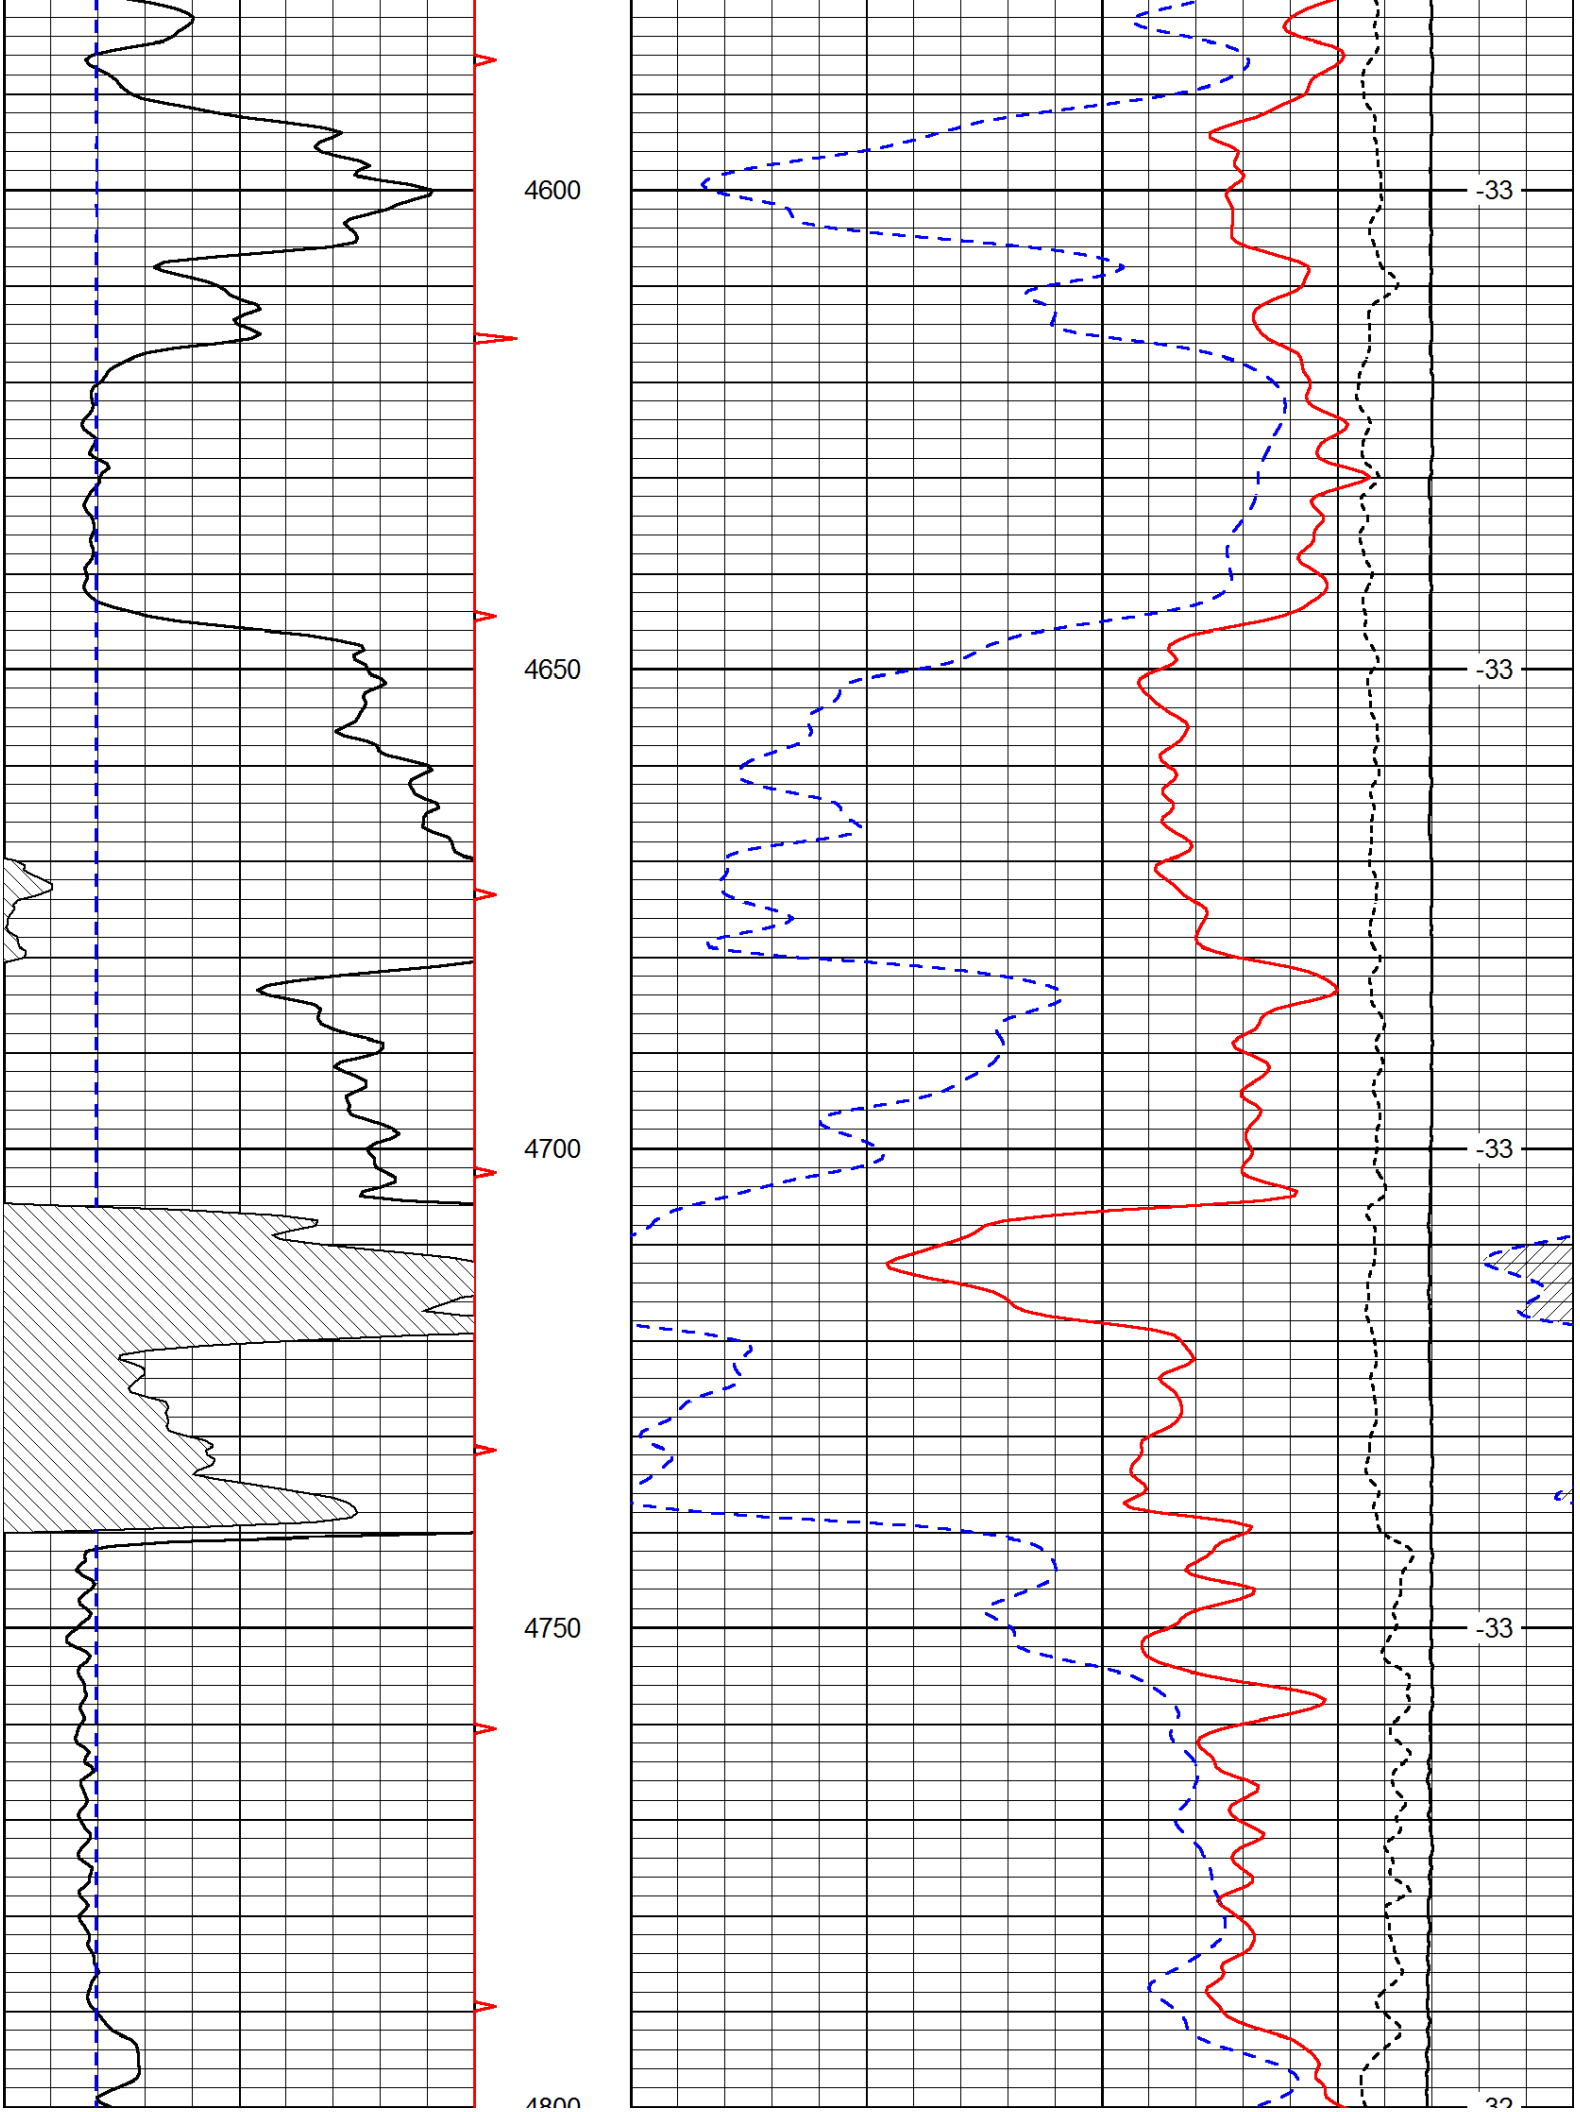

3500
3550
3600
3650
3700
-32
-32
-33
-34
-34

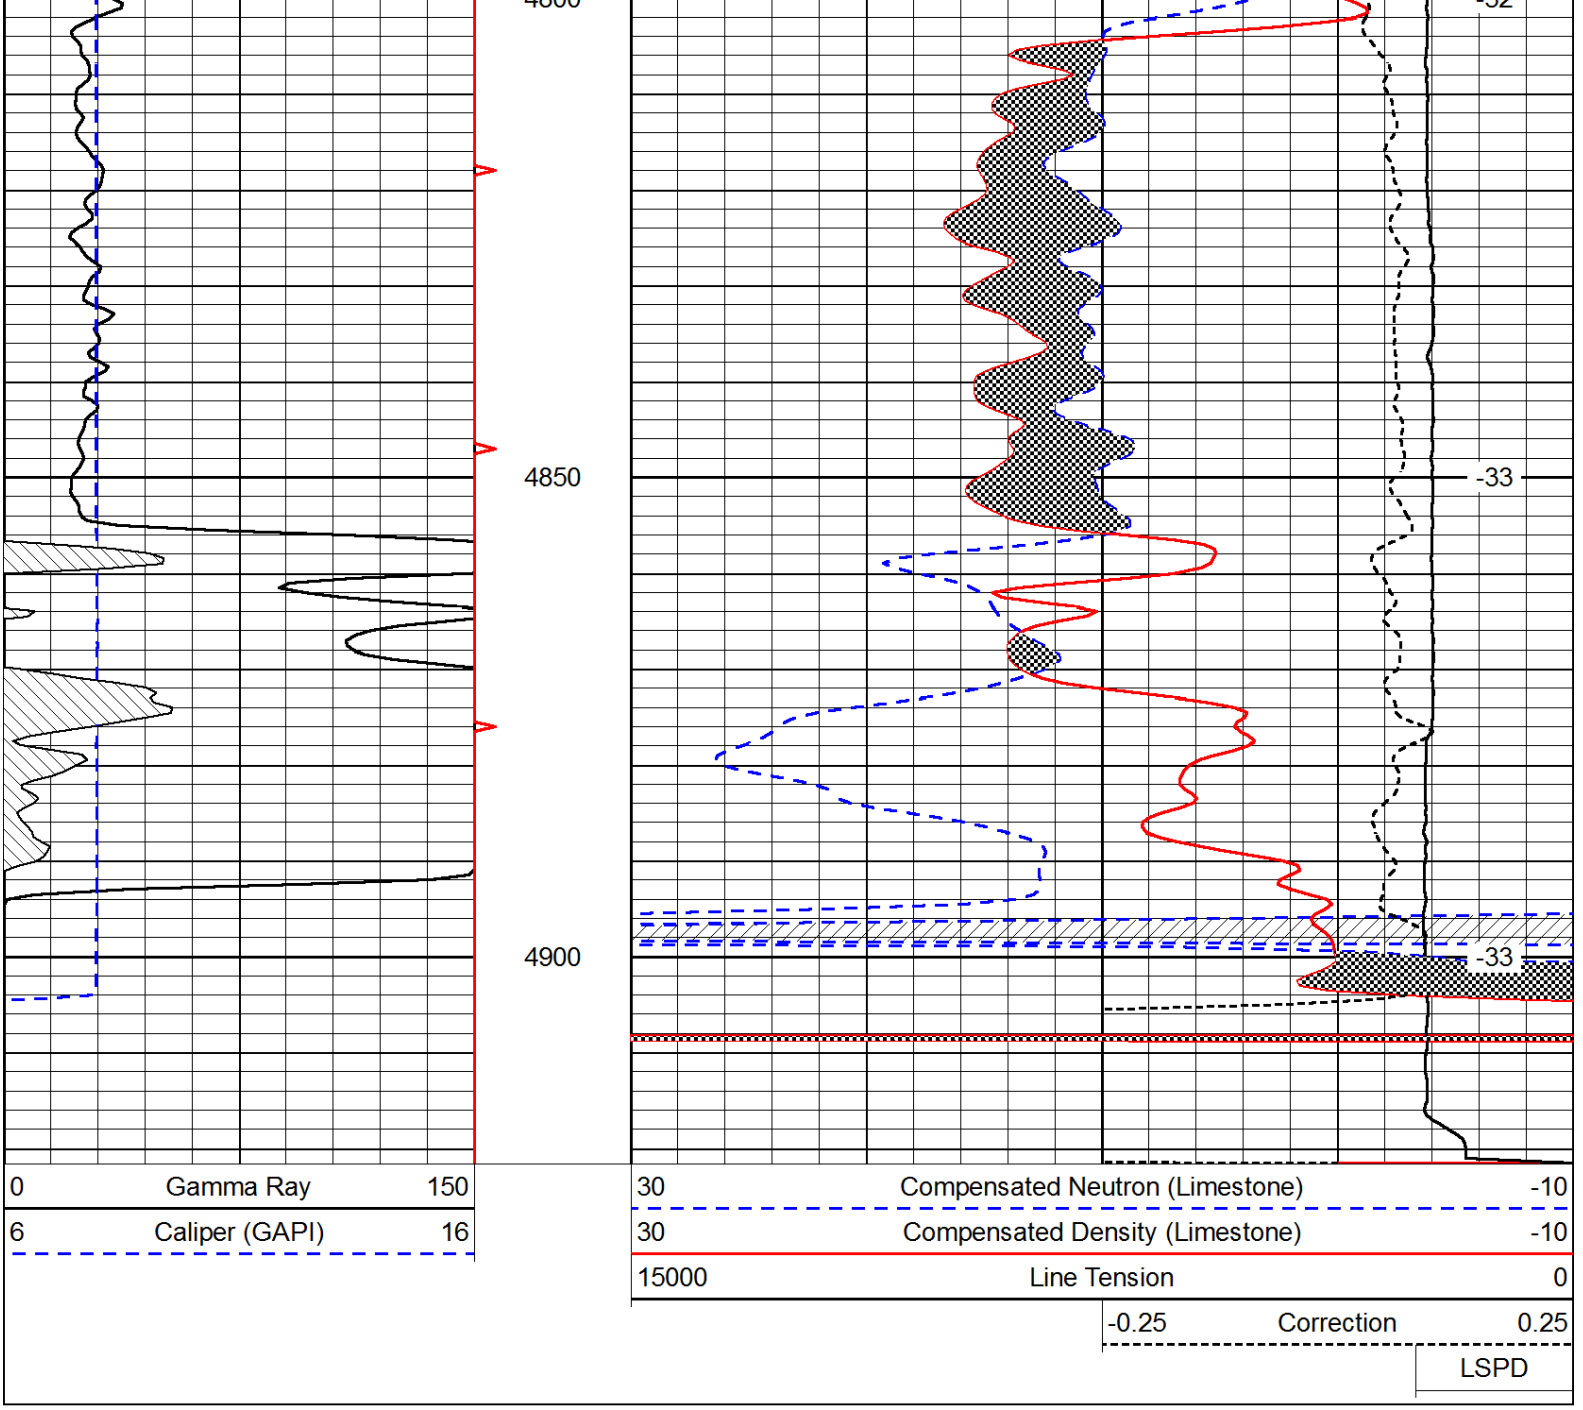

3700
3750
3800
3850
3900
-34
-33
-34
-33
-33


3950
4000
4050
4100
-34
-34
-32
-33


4150
4200
4250
4300
4350
-32
-31
-31
-31
-31


4400
4450
4500
4550
-31
-33
-33
-33


4600
4650
4700
4750
4800
-33
-33
-33
-33
-32


4850
4900
-33
-33
0 Gamma Ray 150
6 Caliper (GAPI) 16
30 Compensated Neutron (Limestone) -10
30 Compensated Density (Limestone) -10
15000 Line Tension 0
-0.25 Correction 0.25
LSPD