



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-057-20810-00-00

Company American Warrior, Inc.

Well Linlor "A" #6

Field Konda Southeast

County Ford State Kansas

Location

NE SW SW SE
425' FSL / 2300' FEL

Other Services
CNL / CDL
DIL

Sec: 14

Twp: 27S

Rge: 22W

Elevation

Permanent Datum Ground Level Elevation 2411

Log Measured From Kelly Bushing 10 Ft. Above Perm. Datum

Drilling Measured From Kelly Bushing

K.B. 2421
D.F.
G.L. 2411

Date 6/10/2012

Run Number Two

Depth Driller 5135

Depth Logger 5132

Bottom Logged Interval 5131

Top Log Interval 3900

Casing Driller 8.625 @ 742

Casing Logger 730

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 6800

Density / Viscosity 9.1 60

pH / Fluid Loss 9.0 9.6

Source of Sample Flowline

Rm @ Meas. Temp 0.45 @ 80

Rmf @ Meas. Temp 0.34 @ 80

Rmc @ Meas. Temp 0.61 @ 80

Source of Rmf / Rmc Charts

Rm @ BHT 0.28 @ 127

Operating Rig Time 4 Hours

Max Rec. Temp. F 127

Equipment Number 15

Location Hays

Recorded By R. Barnhart

Witnessed By Keith Reavis

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments



Thank you for using Log-Tech, Inc.
(785) 625-3858


Ford, KS:
2N to Blktop, 1/2E, 2N,
2 1/2E, N into

Database File: amwarhd.db
Dataset Pathname: dil/amwmain
Presentation Format: micro
Dataset Creation: Sun Jun 10 04:27:10 2012
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	MCAL (GAPI)	16
2.875	Mud Cake (GAPI)	7.875
-200	SP	0

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0
		LSPD

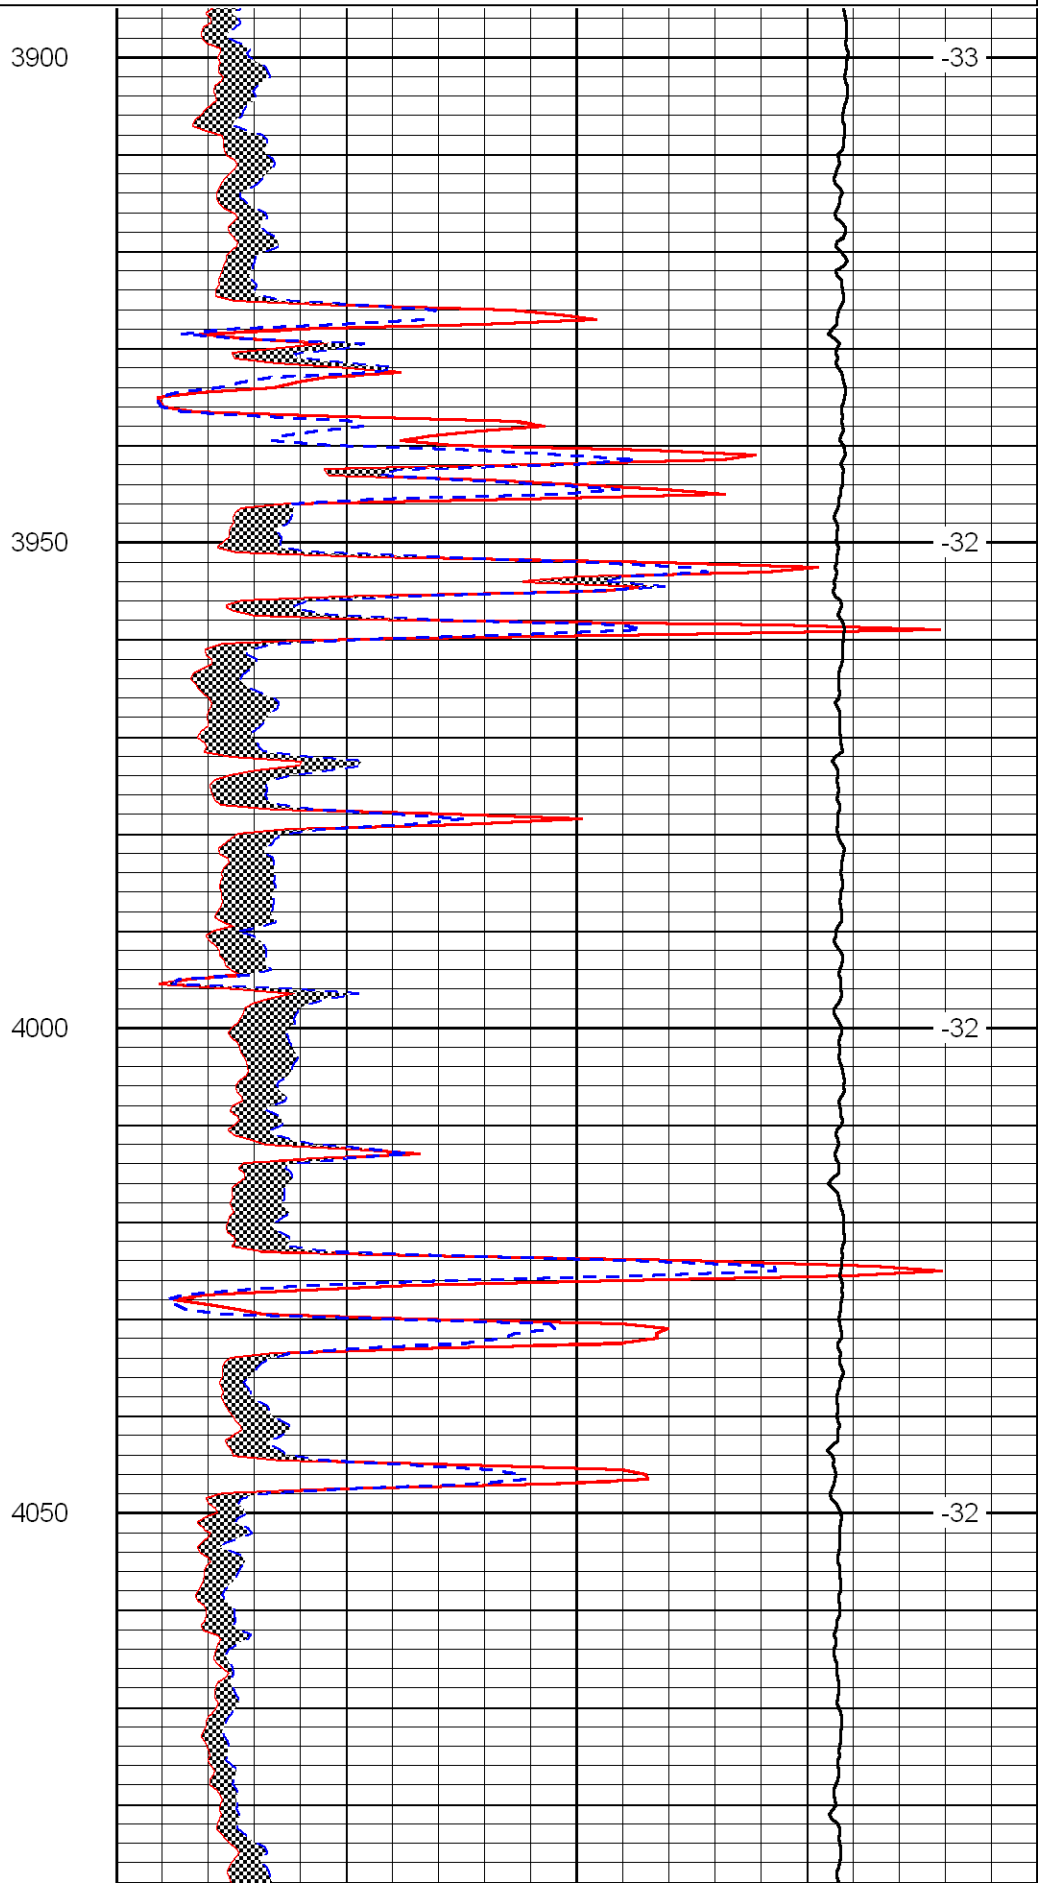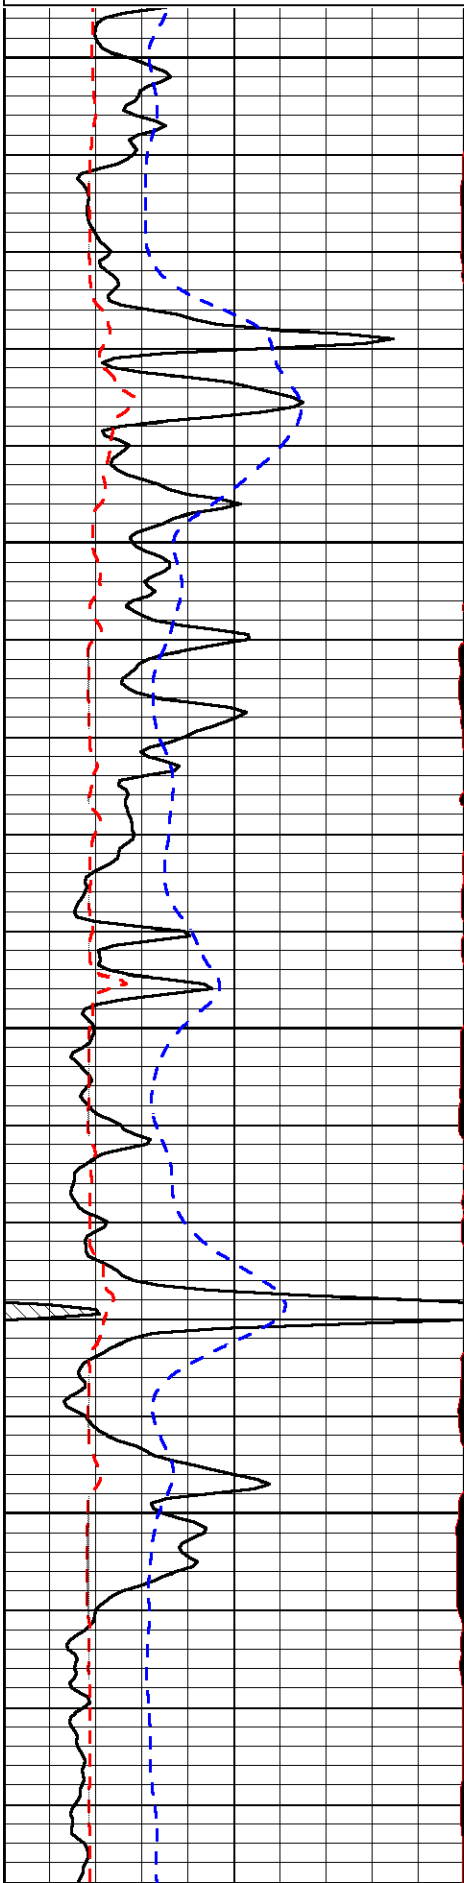

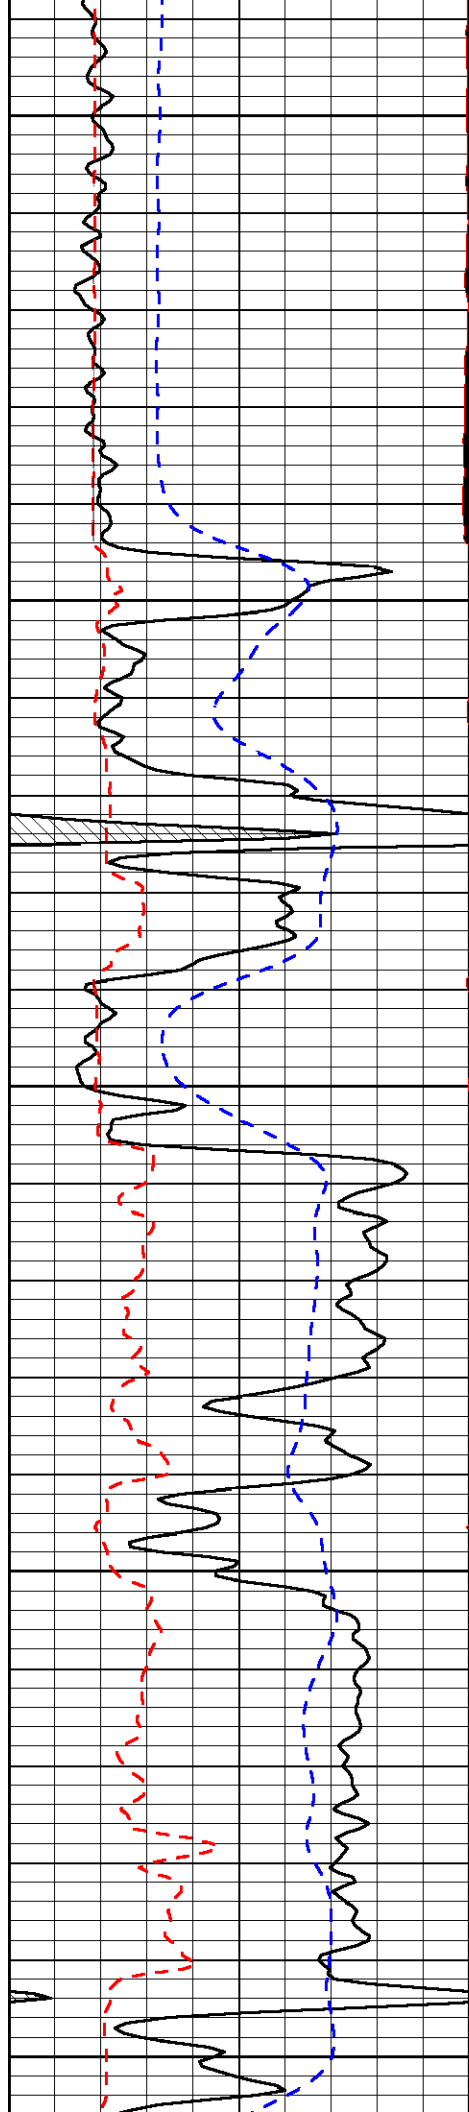


4100

4150

4200

4250

4300

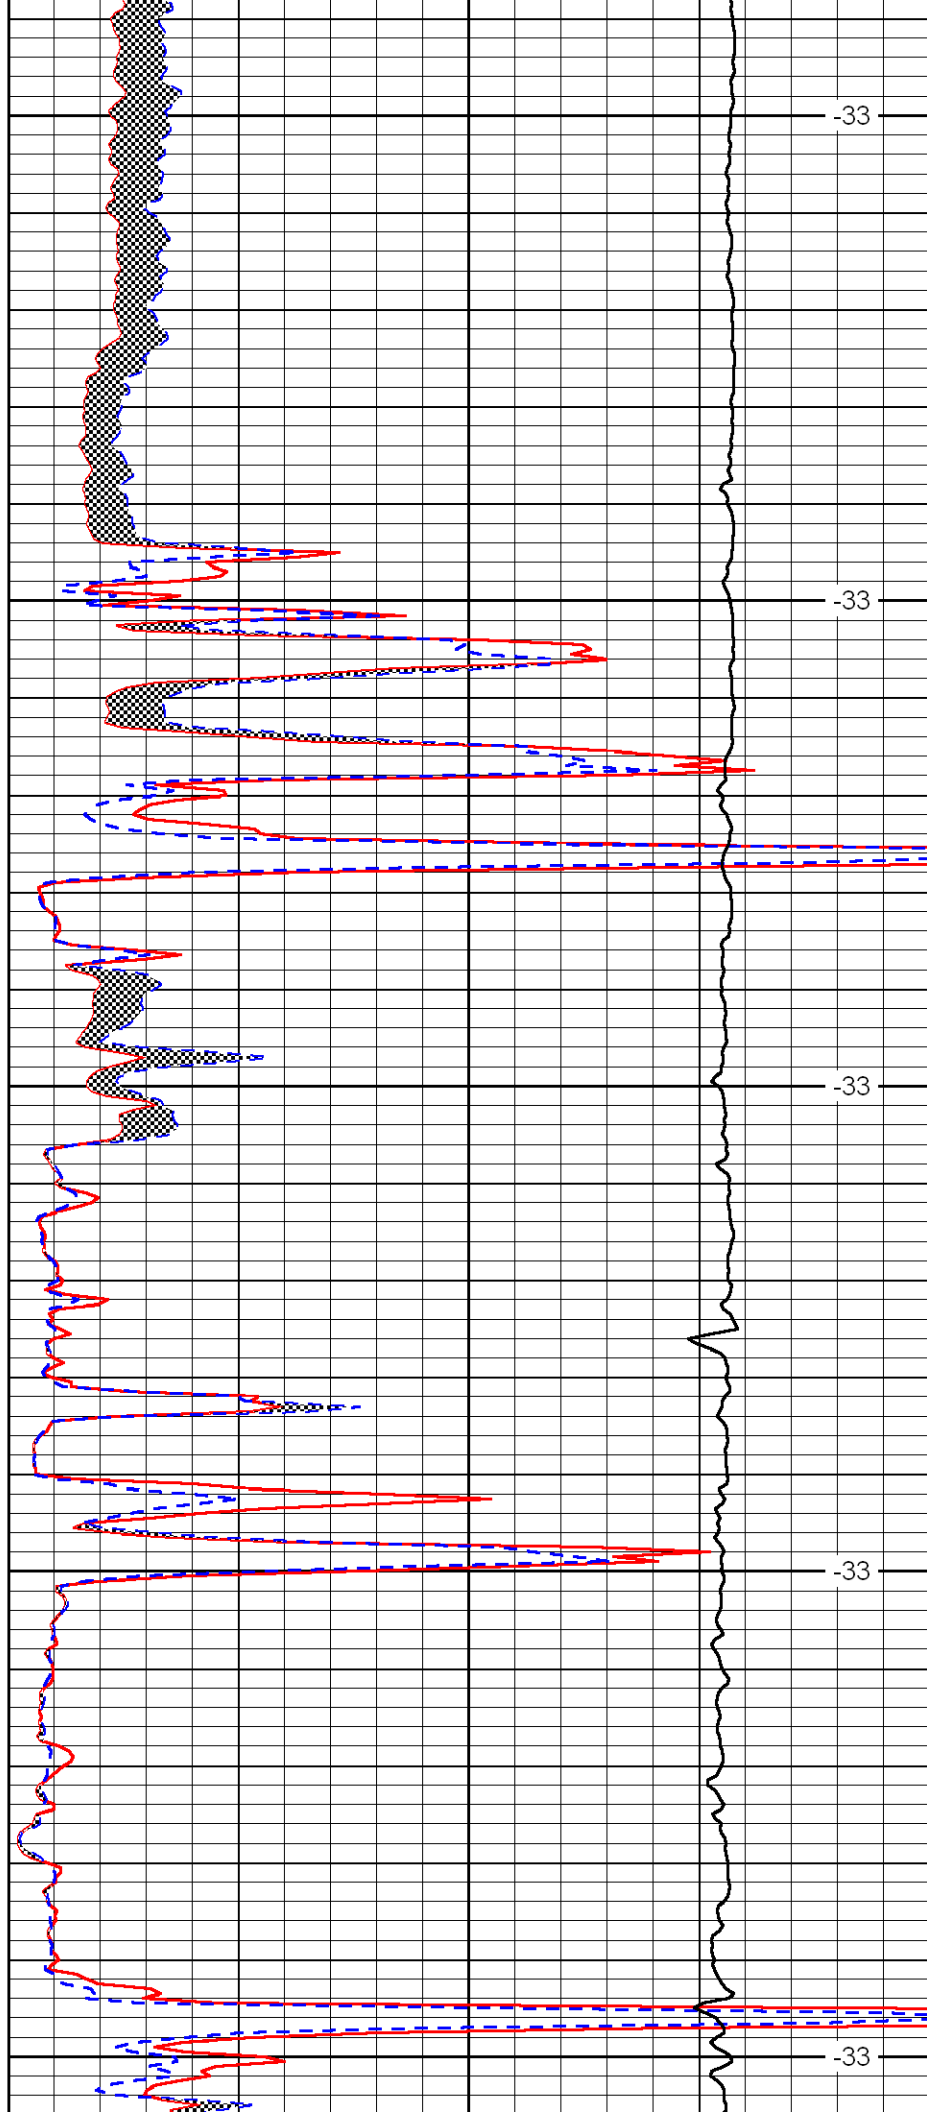


-33

-33

-33

-33

-33

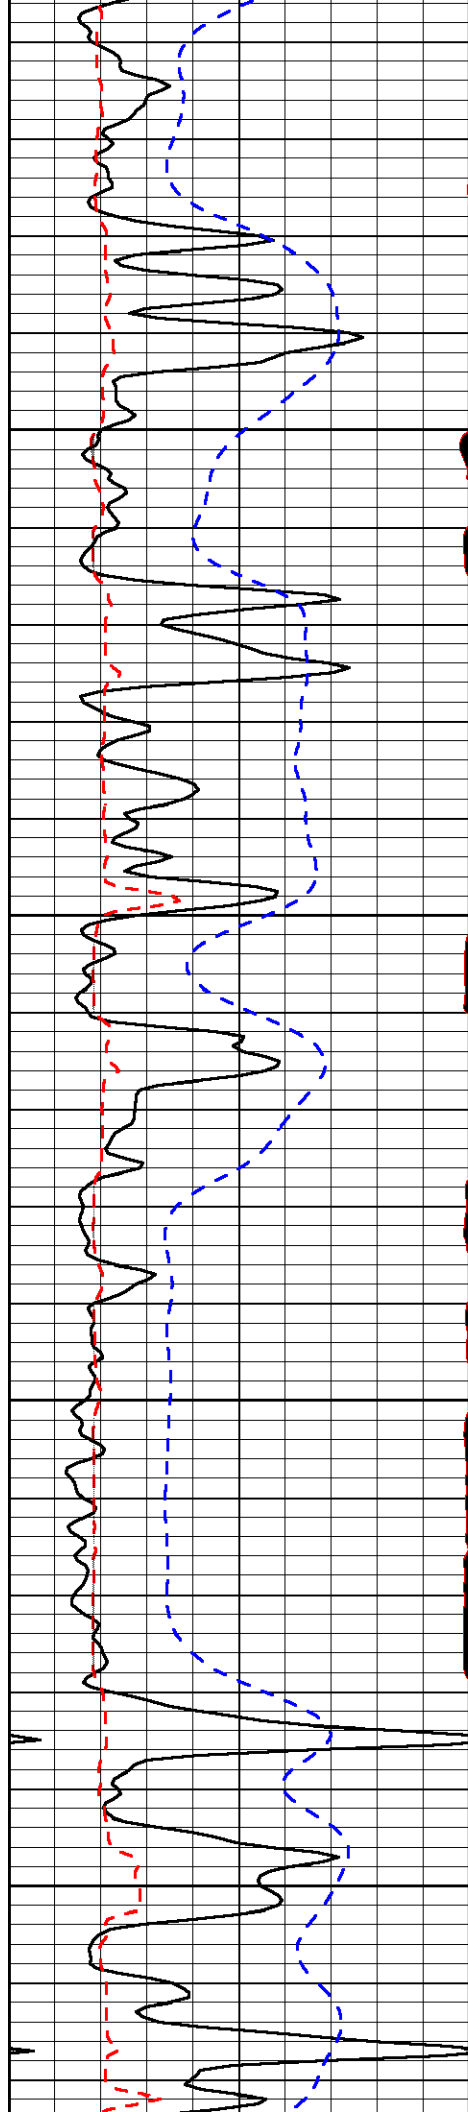



4350

4400

4450

4500

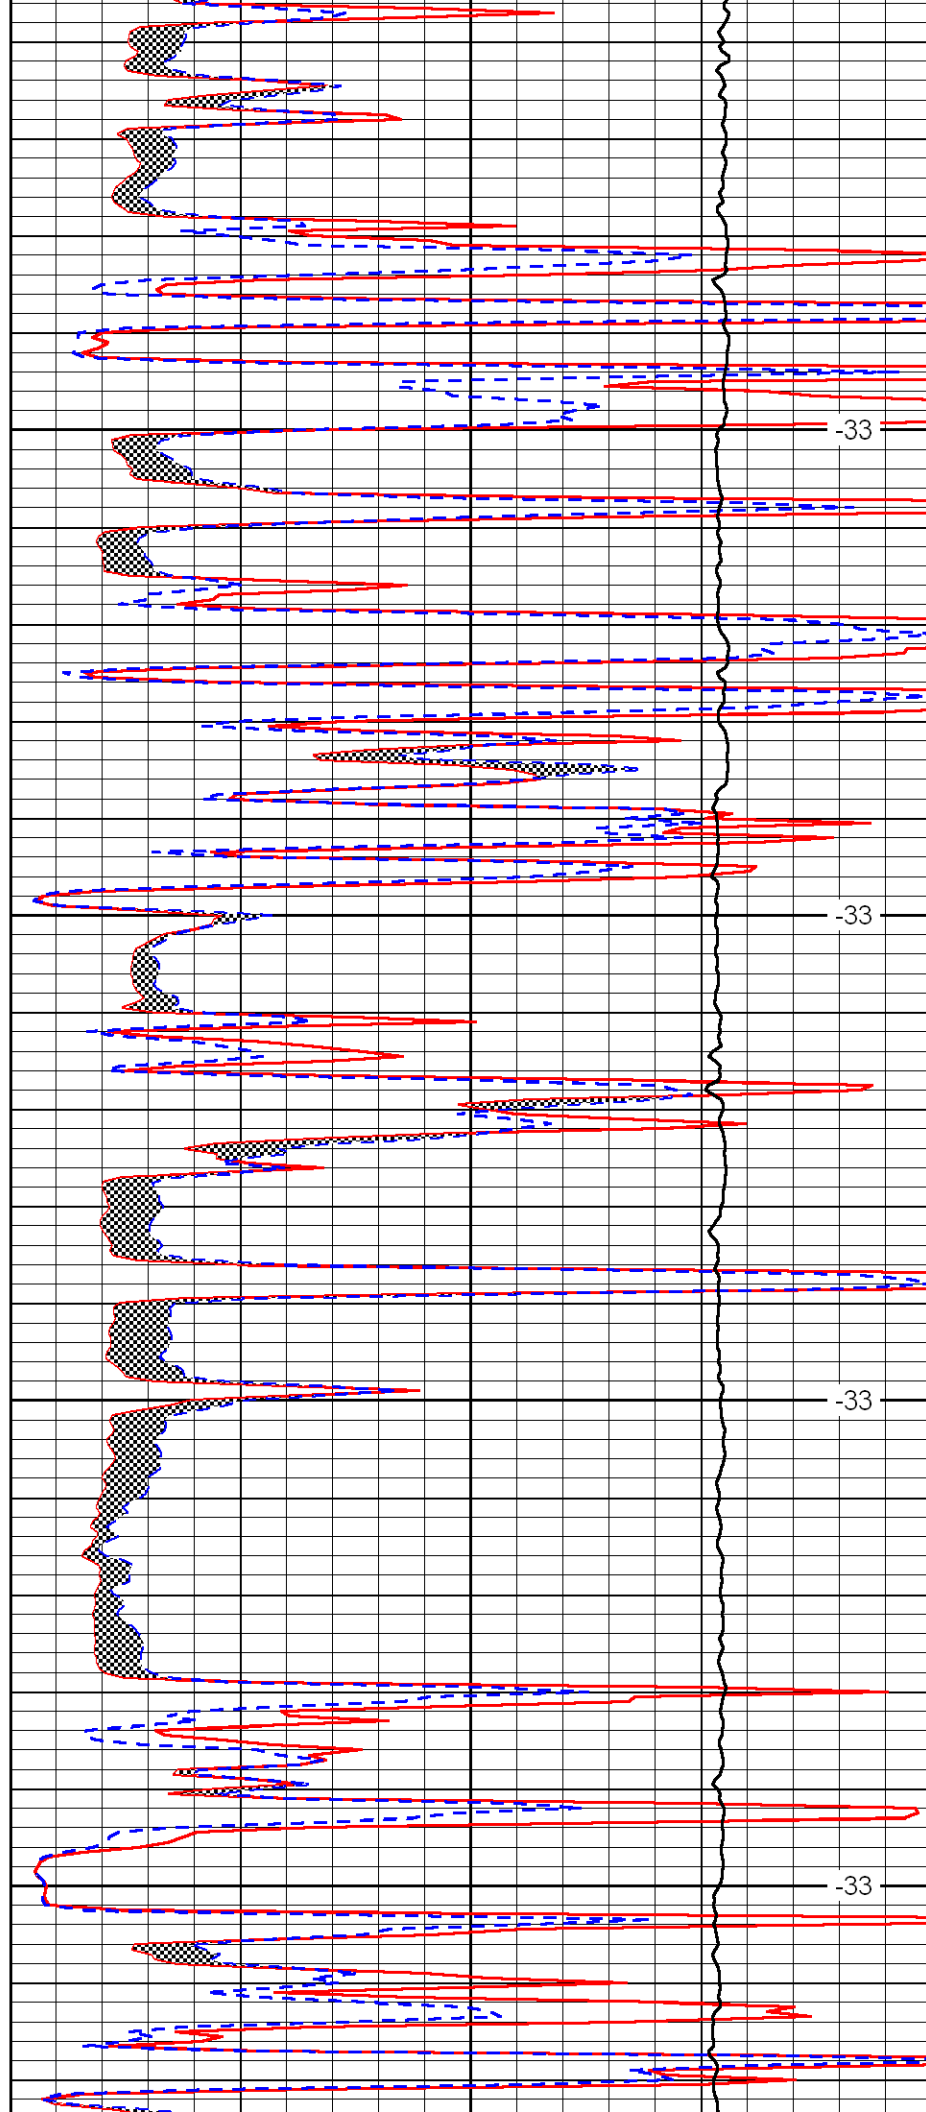

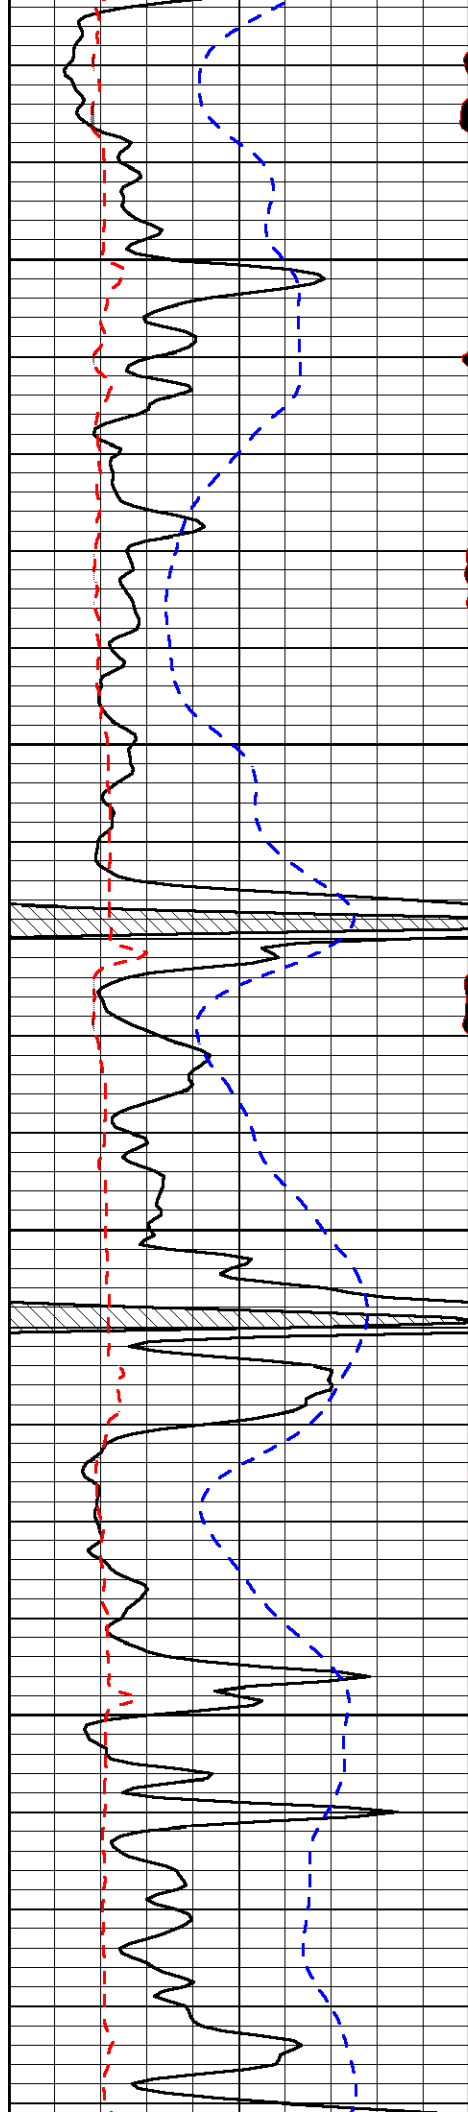


4550

4600

4650

4700

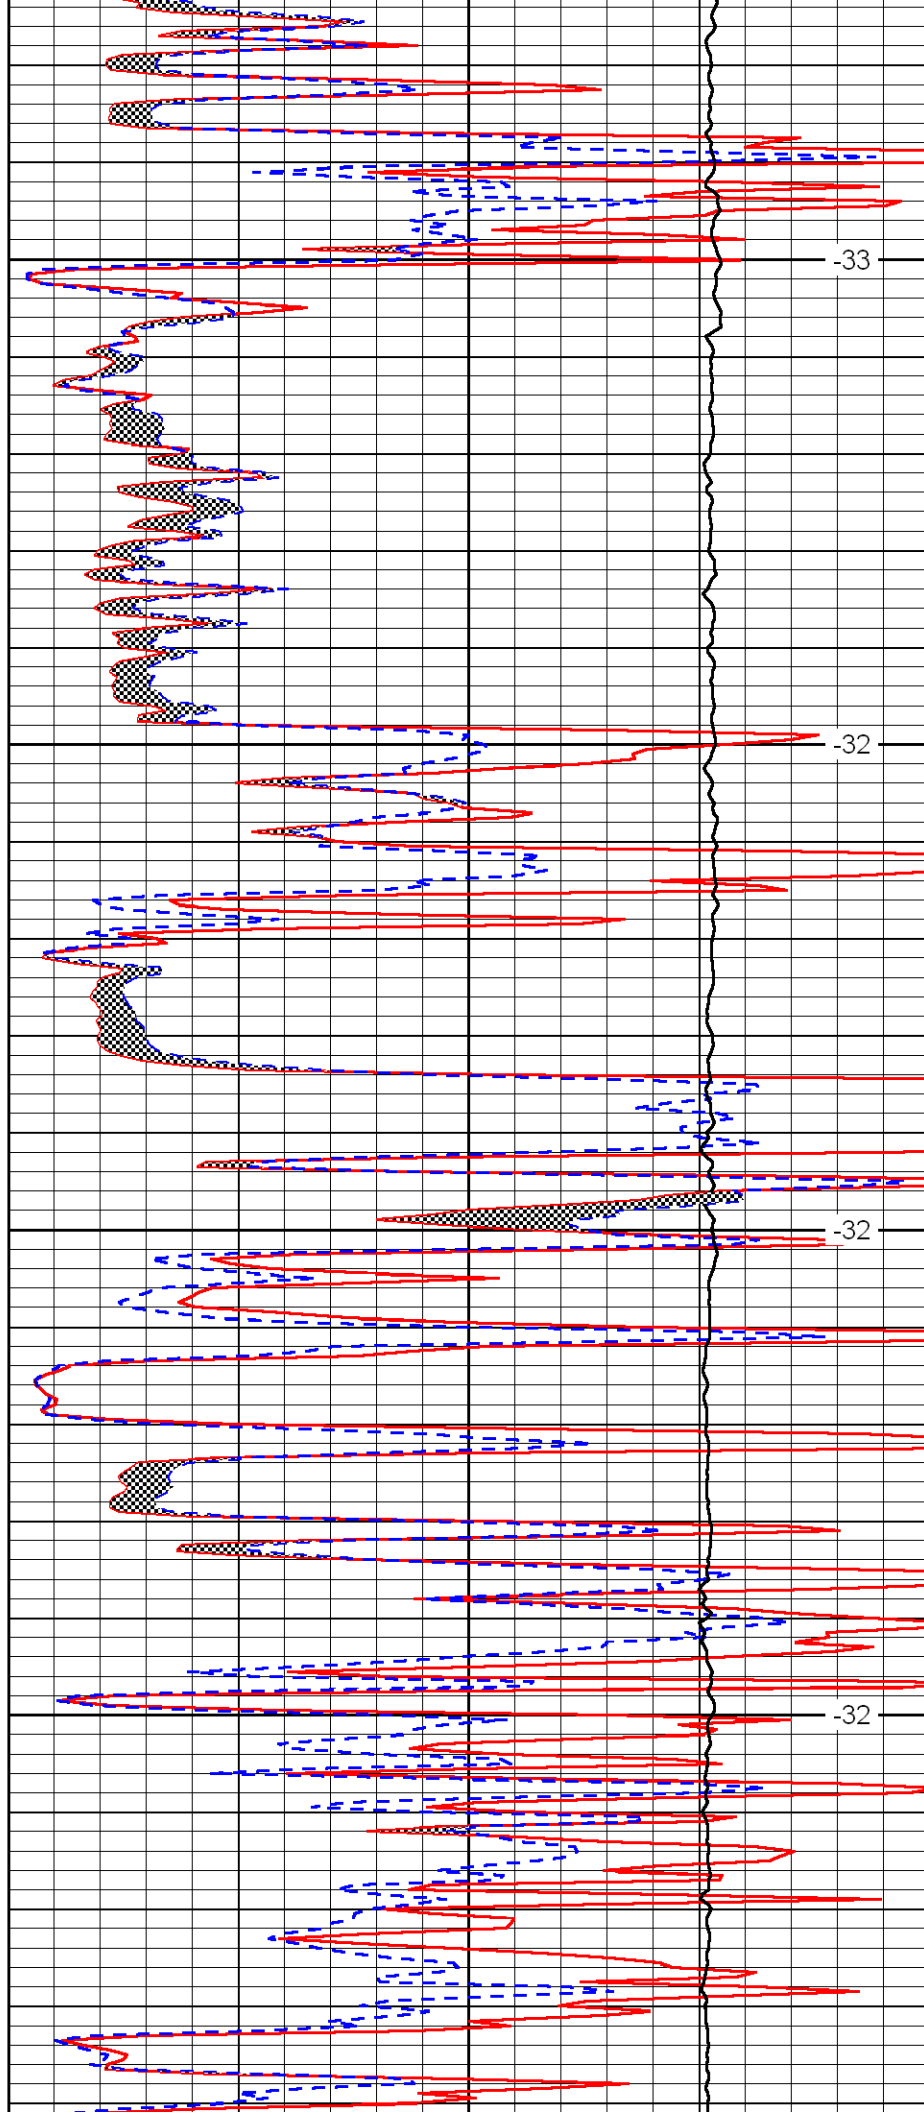


-33

-32

-32

-32

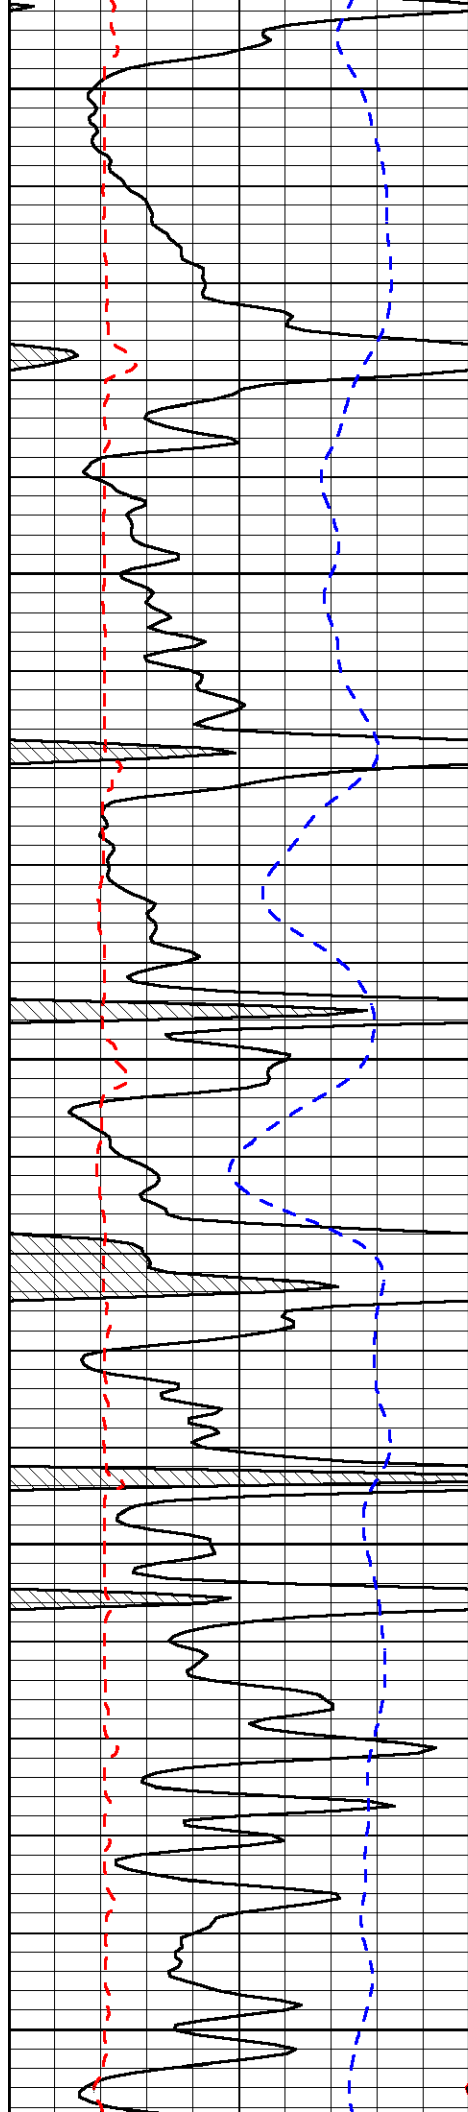


4750

4800

4850

4900

4950

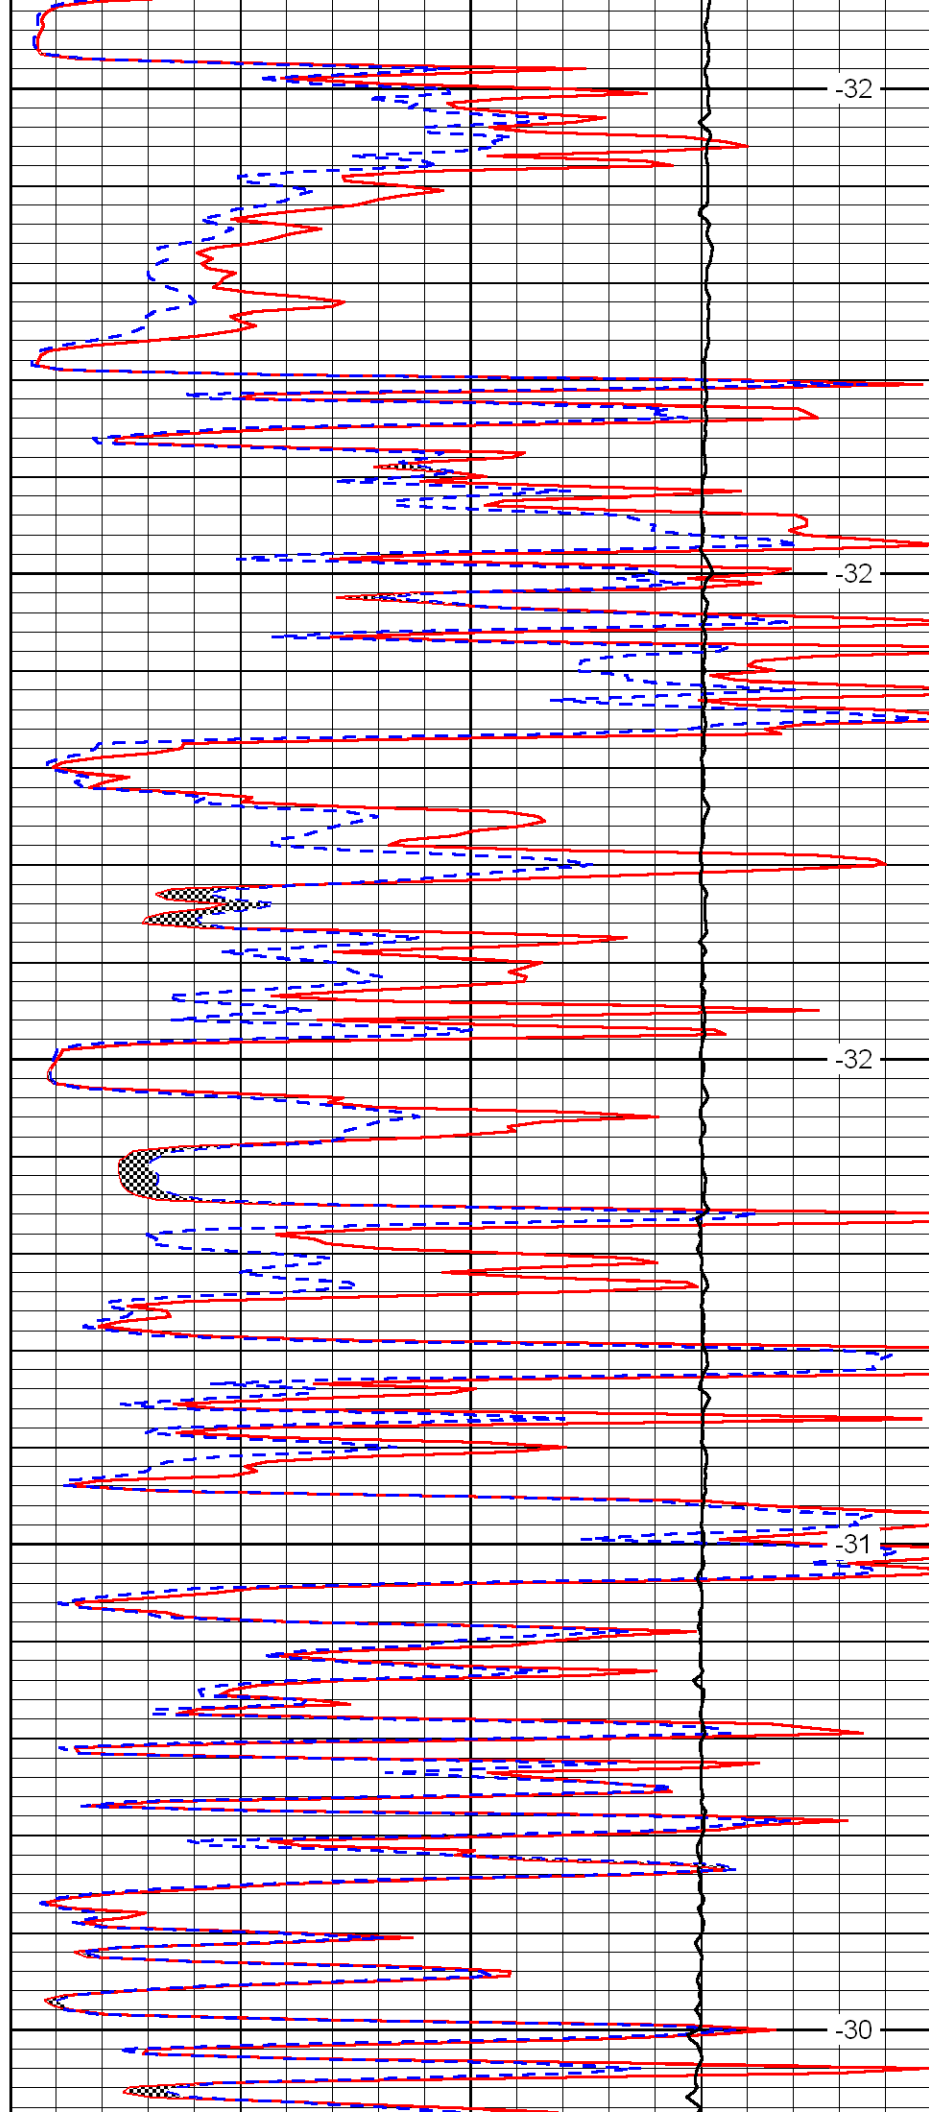


-32

-32

-32

-31

-30

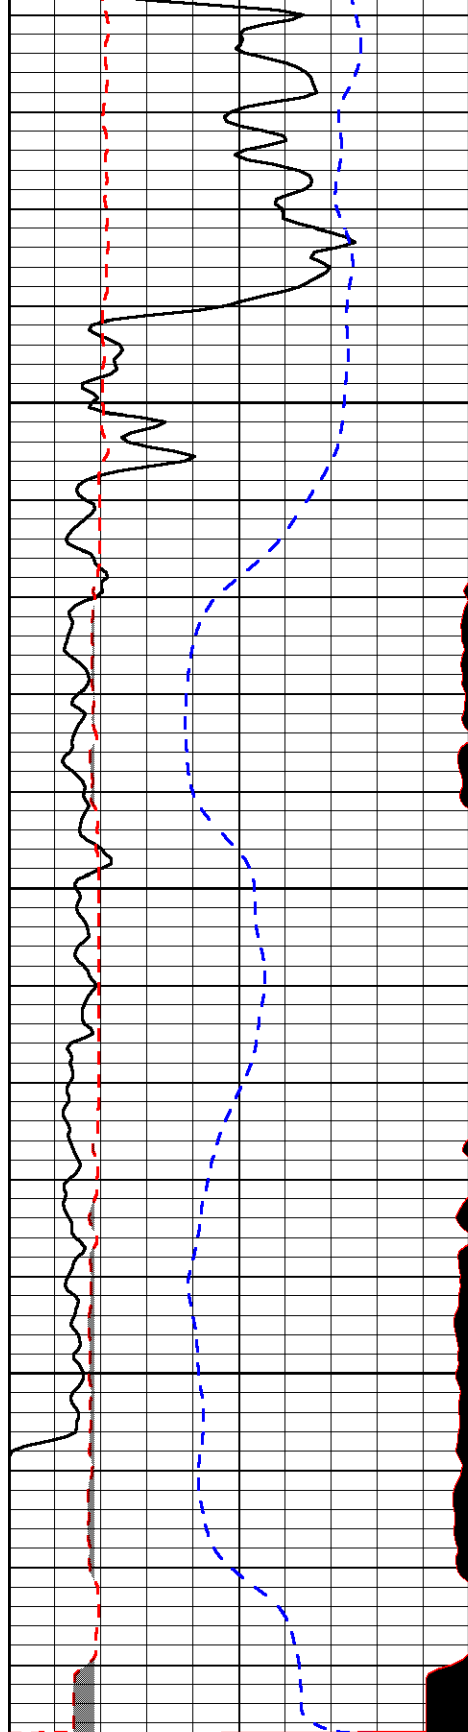


0	Gamma Ray	150
6	MCAL (GAPI)	16
2.875	Mud Cake (GAPI)	7.875
-200	SP	0

5000

5050

5100

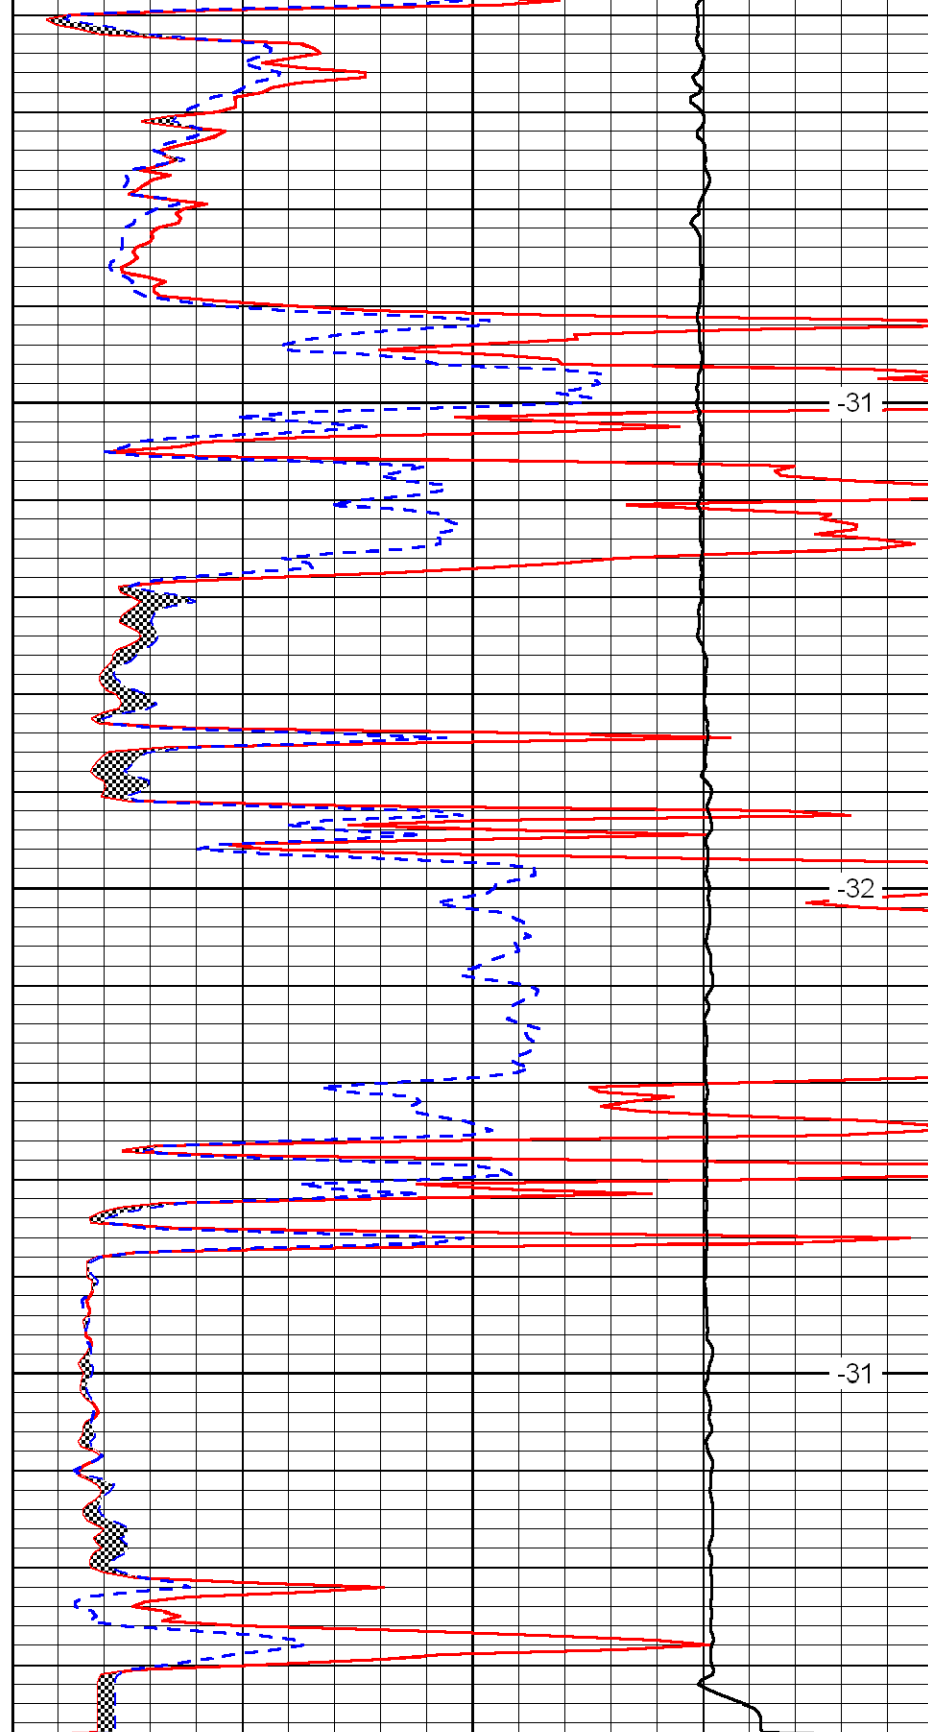

0	Micro Inverse 1 X 1	40
0	Micro Normal 2''	40
10000	Line Weight	0

LSPD