

LOG-TECH



DIGITAL LOG

(785) 625-3858

Radiation Guard
Log

API No.

15-063-21,999-00-00

Company Pickrell Drilling Company, Inc.

Well Miller 'L' #1

Field Wildcat

County Gove State Kansas

Location

1400' FNL & 400' FEL

Other Services

None

Sec: 15 Twp: 15 S Rge: 26 W

Permanent Datum Ground Level Elevation 2402
Log Measured From Kelly Bushing 7 Ft. Above Perm. Datum
Drilling Measured From Kelly BushingElevation
K.B. 2409
D.F. 2402
G.L. 2402

Date 6/8/2012

Run Number One

Depth Driller 4327

Depth Logger 4328

Bottom Logged Interval 4327

Top Log Interval 250

Casing Driller 8.625 @ 268

Casing Logger 266

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 2000

Density / Viscosity 9.3 48

pH / Fluid Loss 9.5 10.4

Source of Sample Flowline

Rm @ Meas. Temp 0.56 @ 65

Rmf @ Meas. Temp 0.42 @ 65

Rmc @ Meas. Temp 0.76 @ 65

Source of Rmf / Rmc Charts

Rm @ BHT 0.30 @ 121

Operating Rig Time 3 Hours

Max Rec. Temp. F 121

Equipment Number 91

Location Hays

Recorded By D. Schmidt

Witnessed By Jerry A. Smith

<<< Fold Here >>>



All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Utica,
1/4 W to D rd, 4 N to county line, 1 W, 3 1/2 N,
W into

Database File: pickrell_060812hd.db
Dataset Pathname: rag/pickrag
Presentation Format: rag2in
Dataset Creation: Fri Jun 08 13:18:39 2012
Charted by: Depth in Feet scaled 1:600

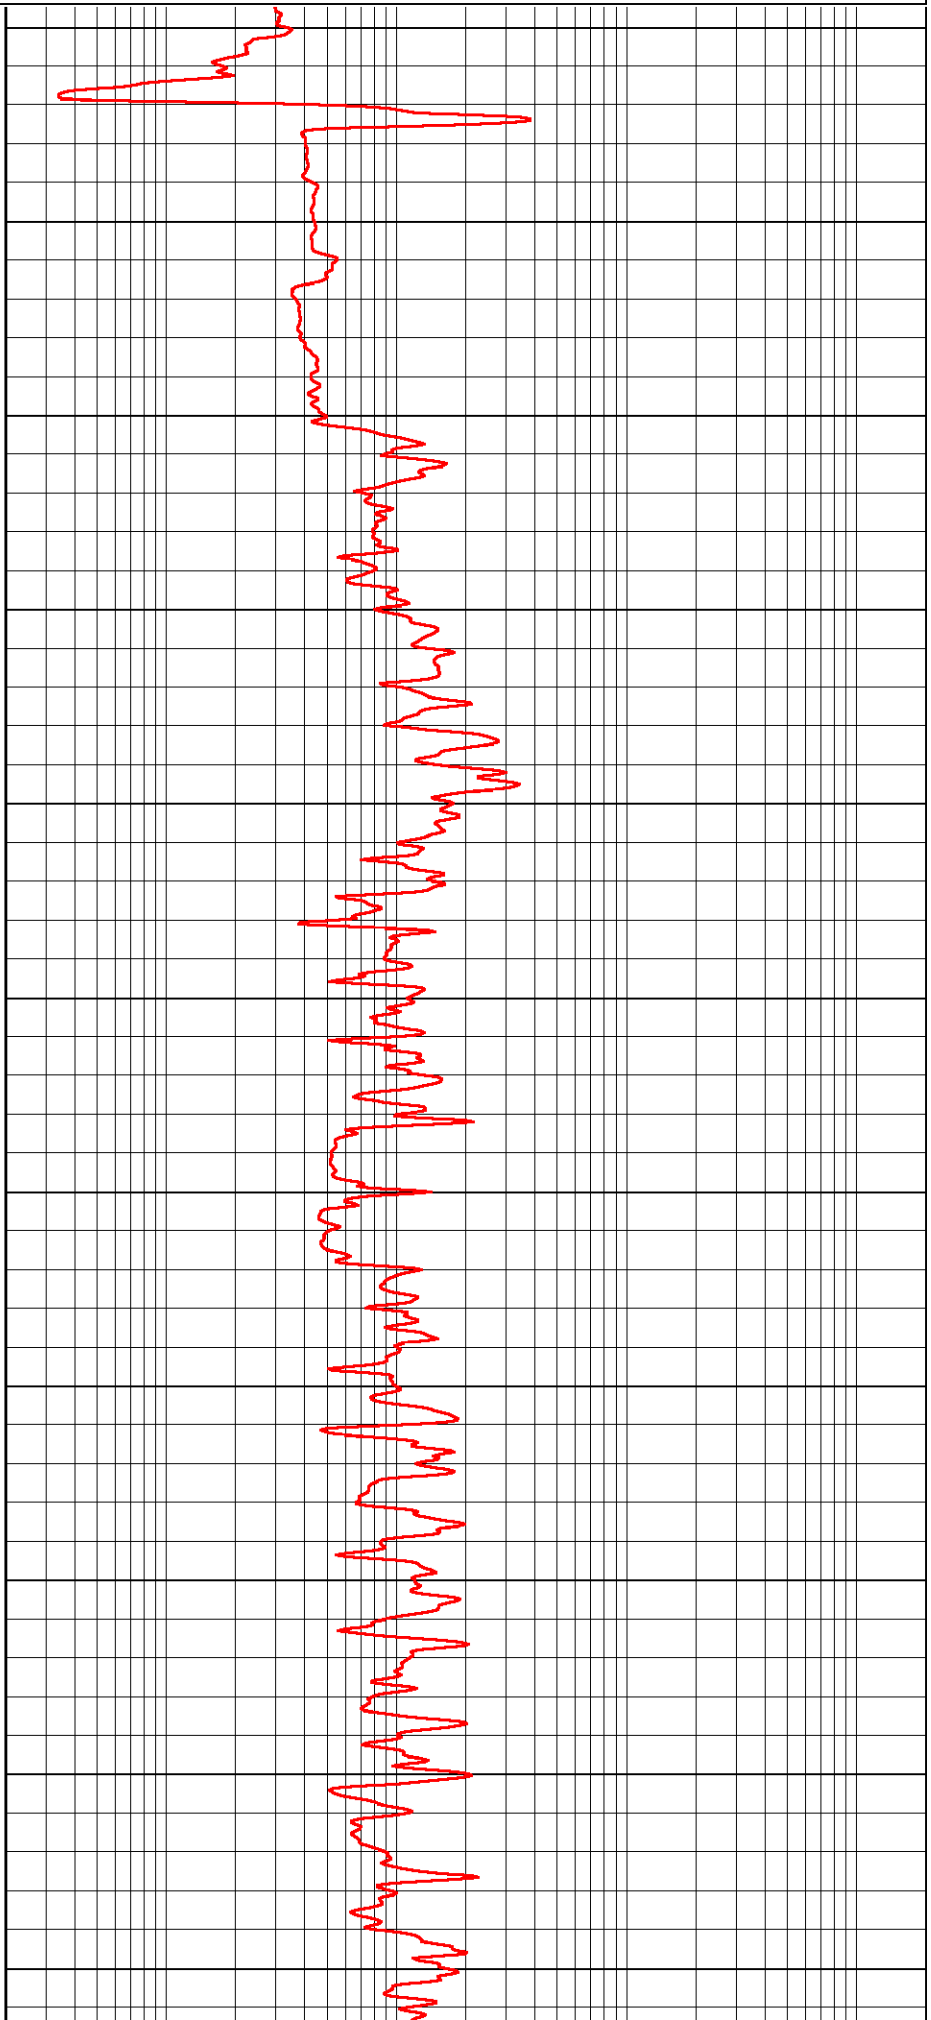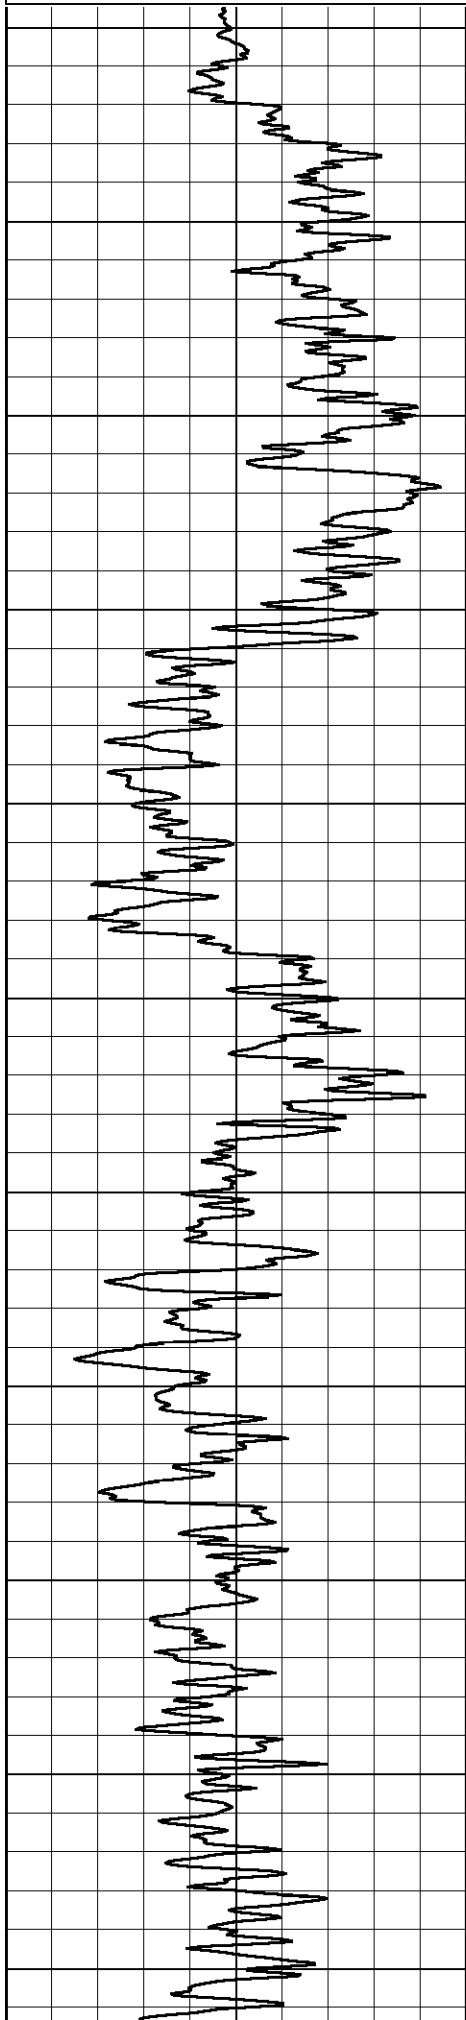

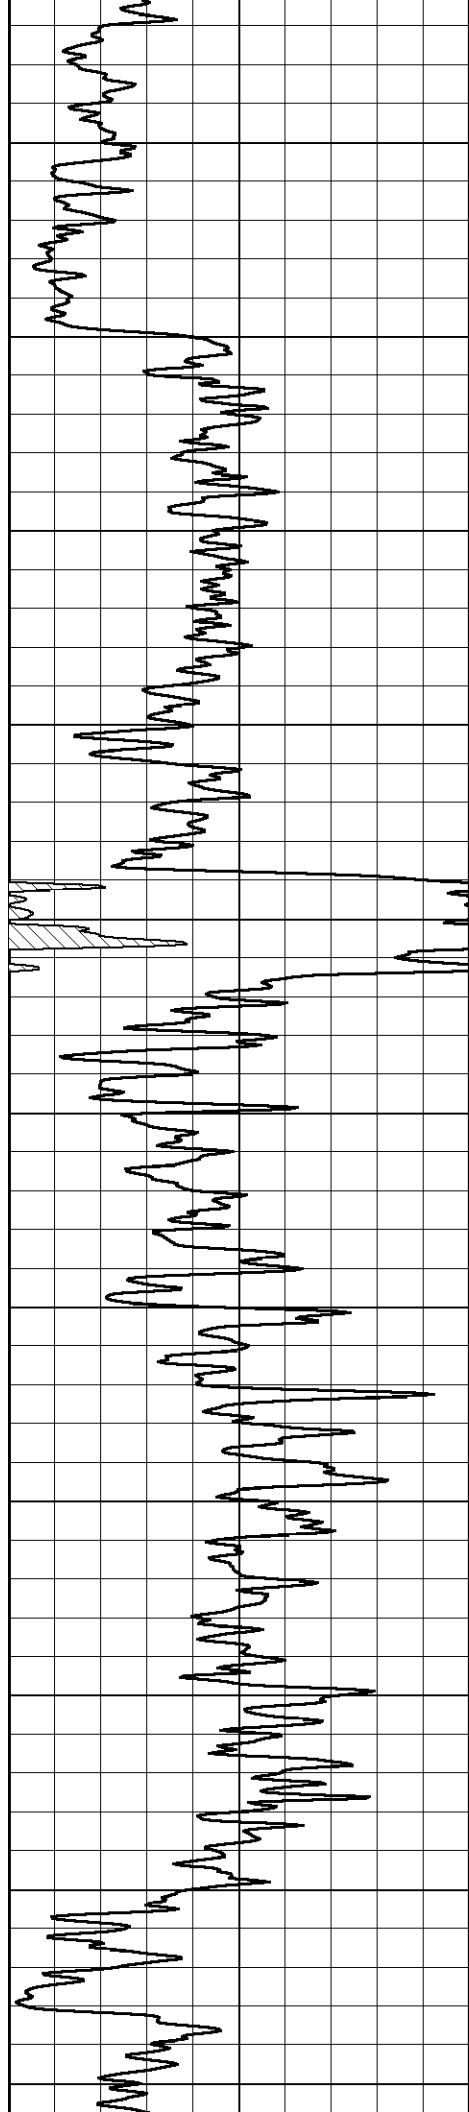

800

850

900

950

1000

1050


1100


1150

1200

1250

1300

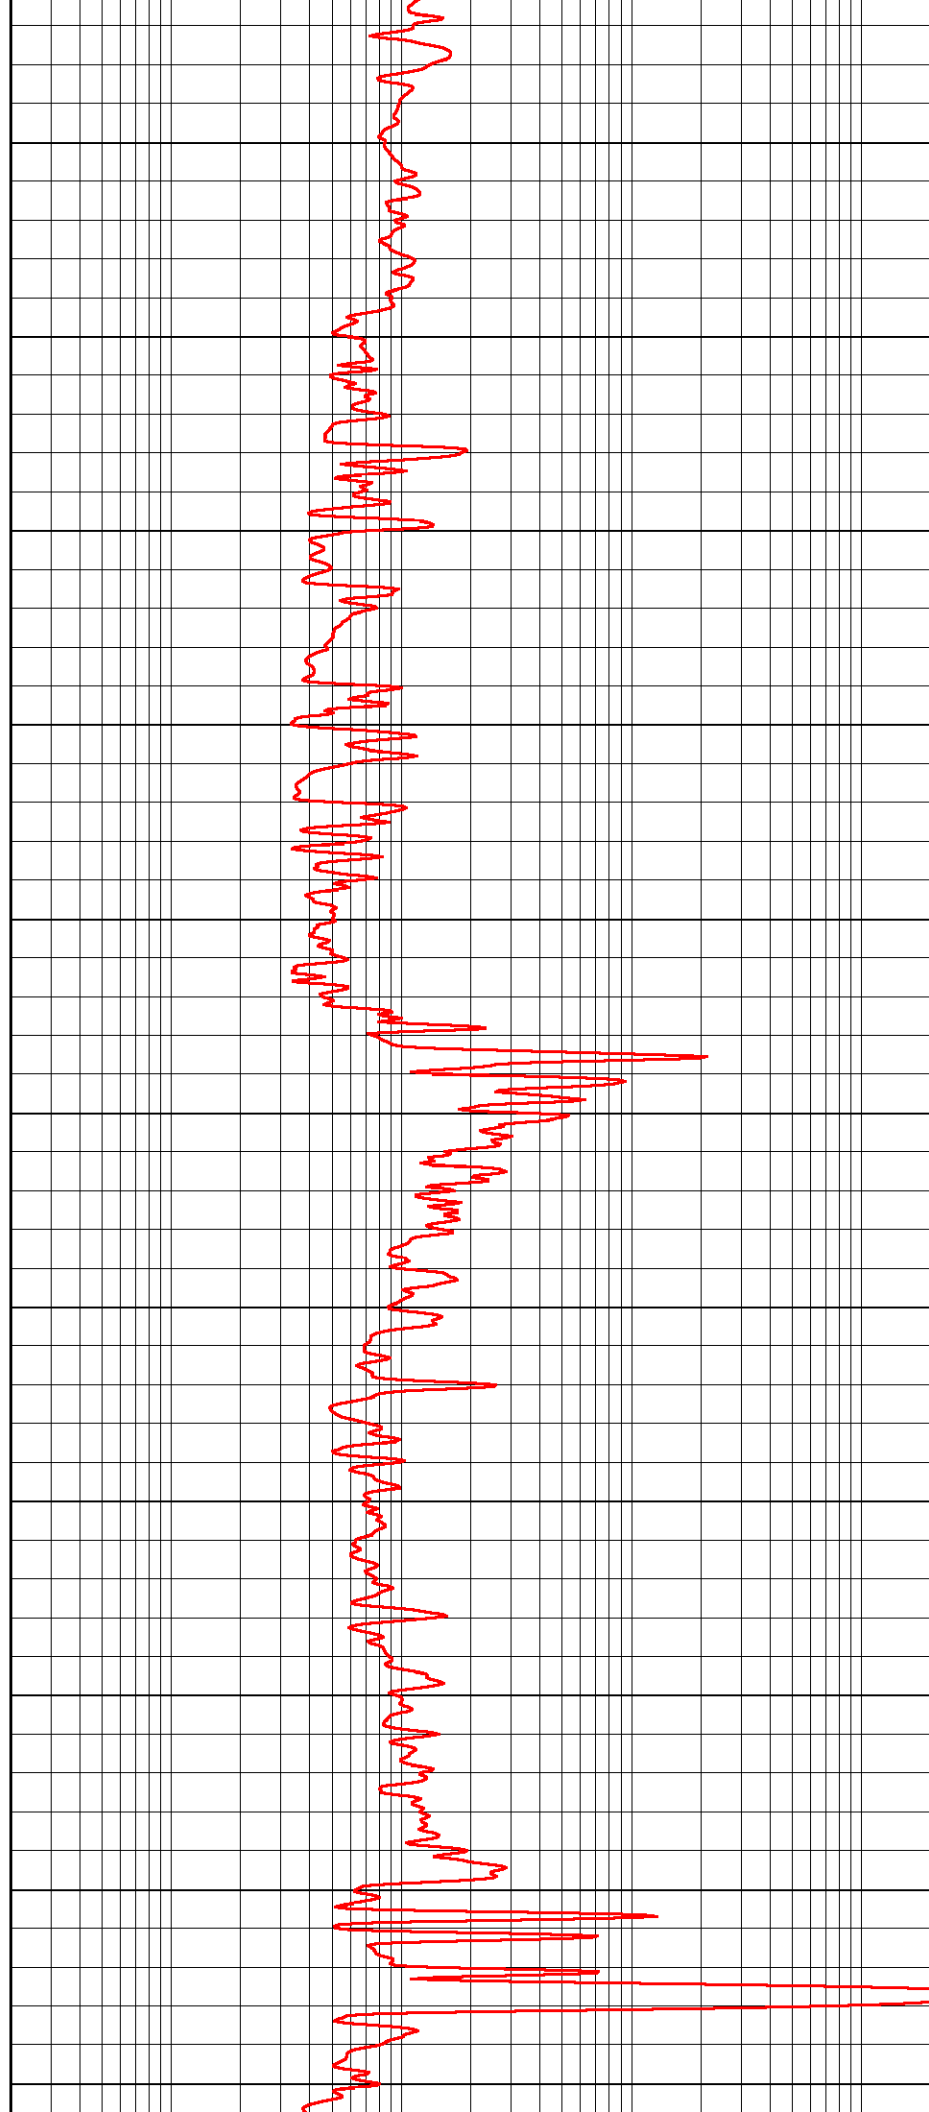

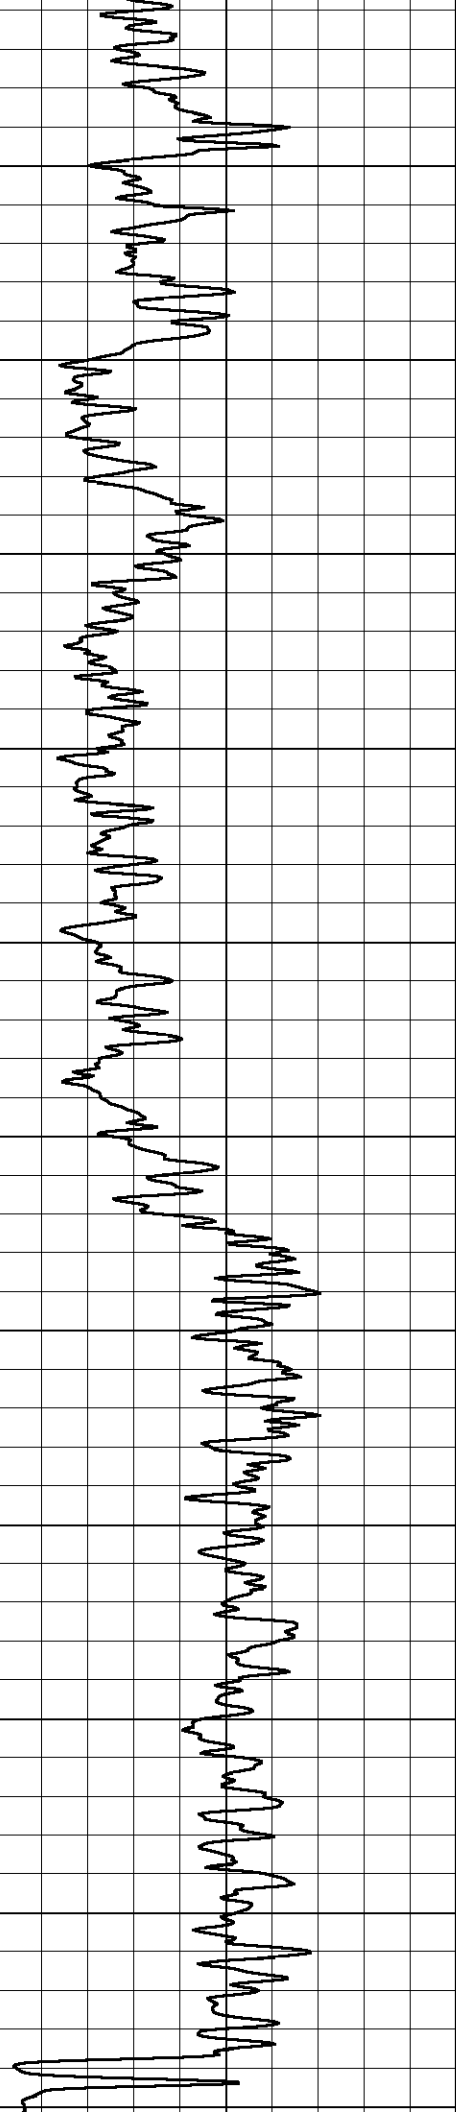

1350

1400

1450

1500

1550

1600


1650



1700


1750

1800


1850

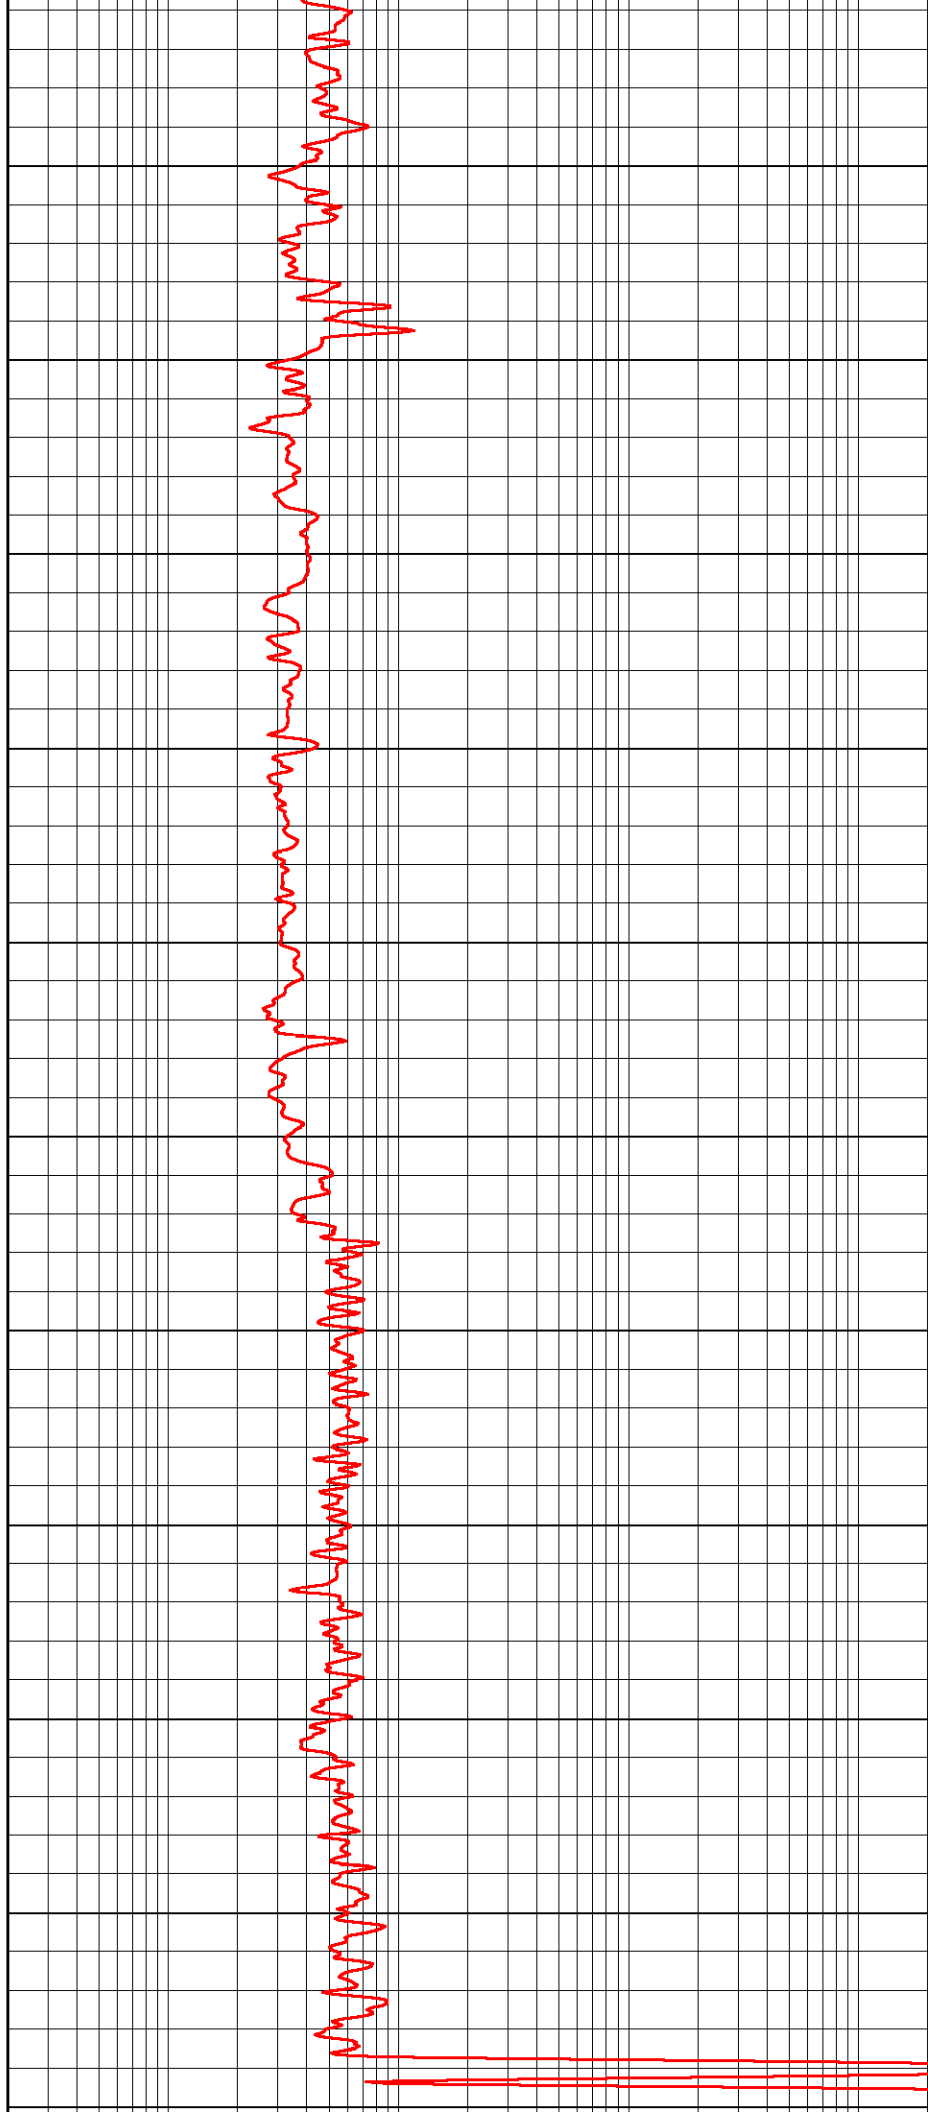


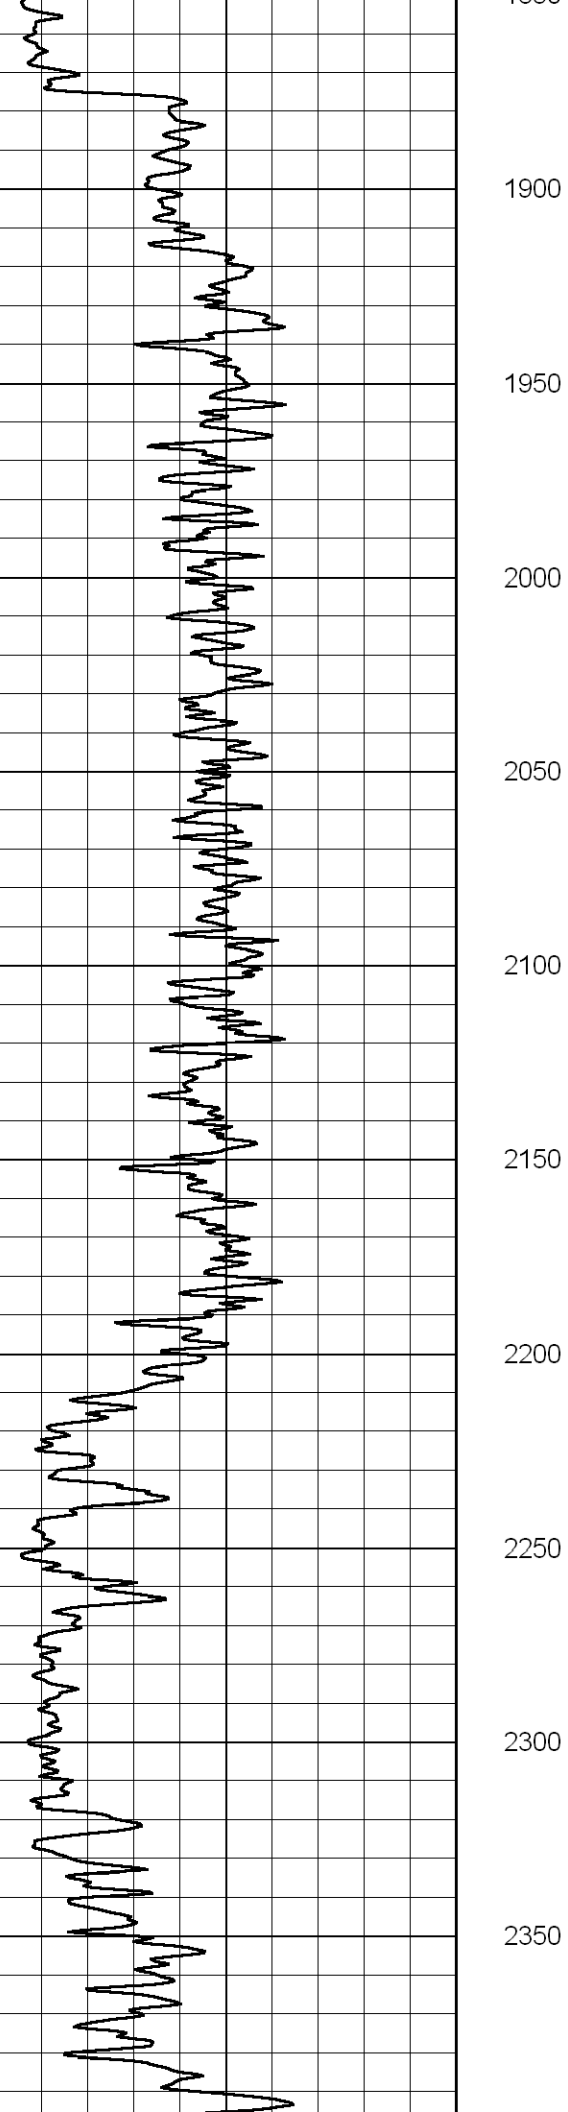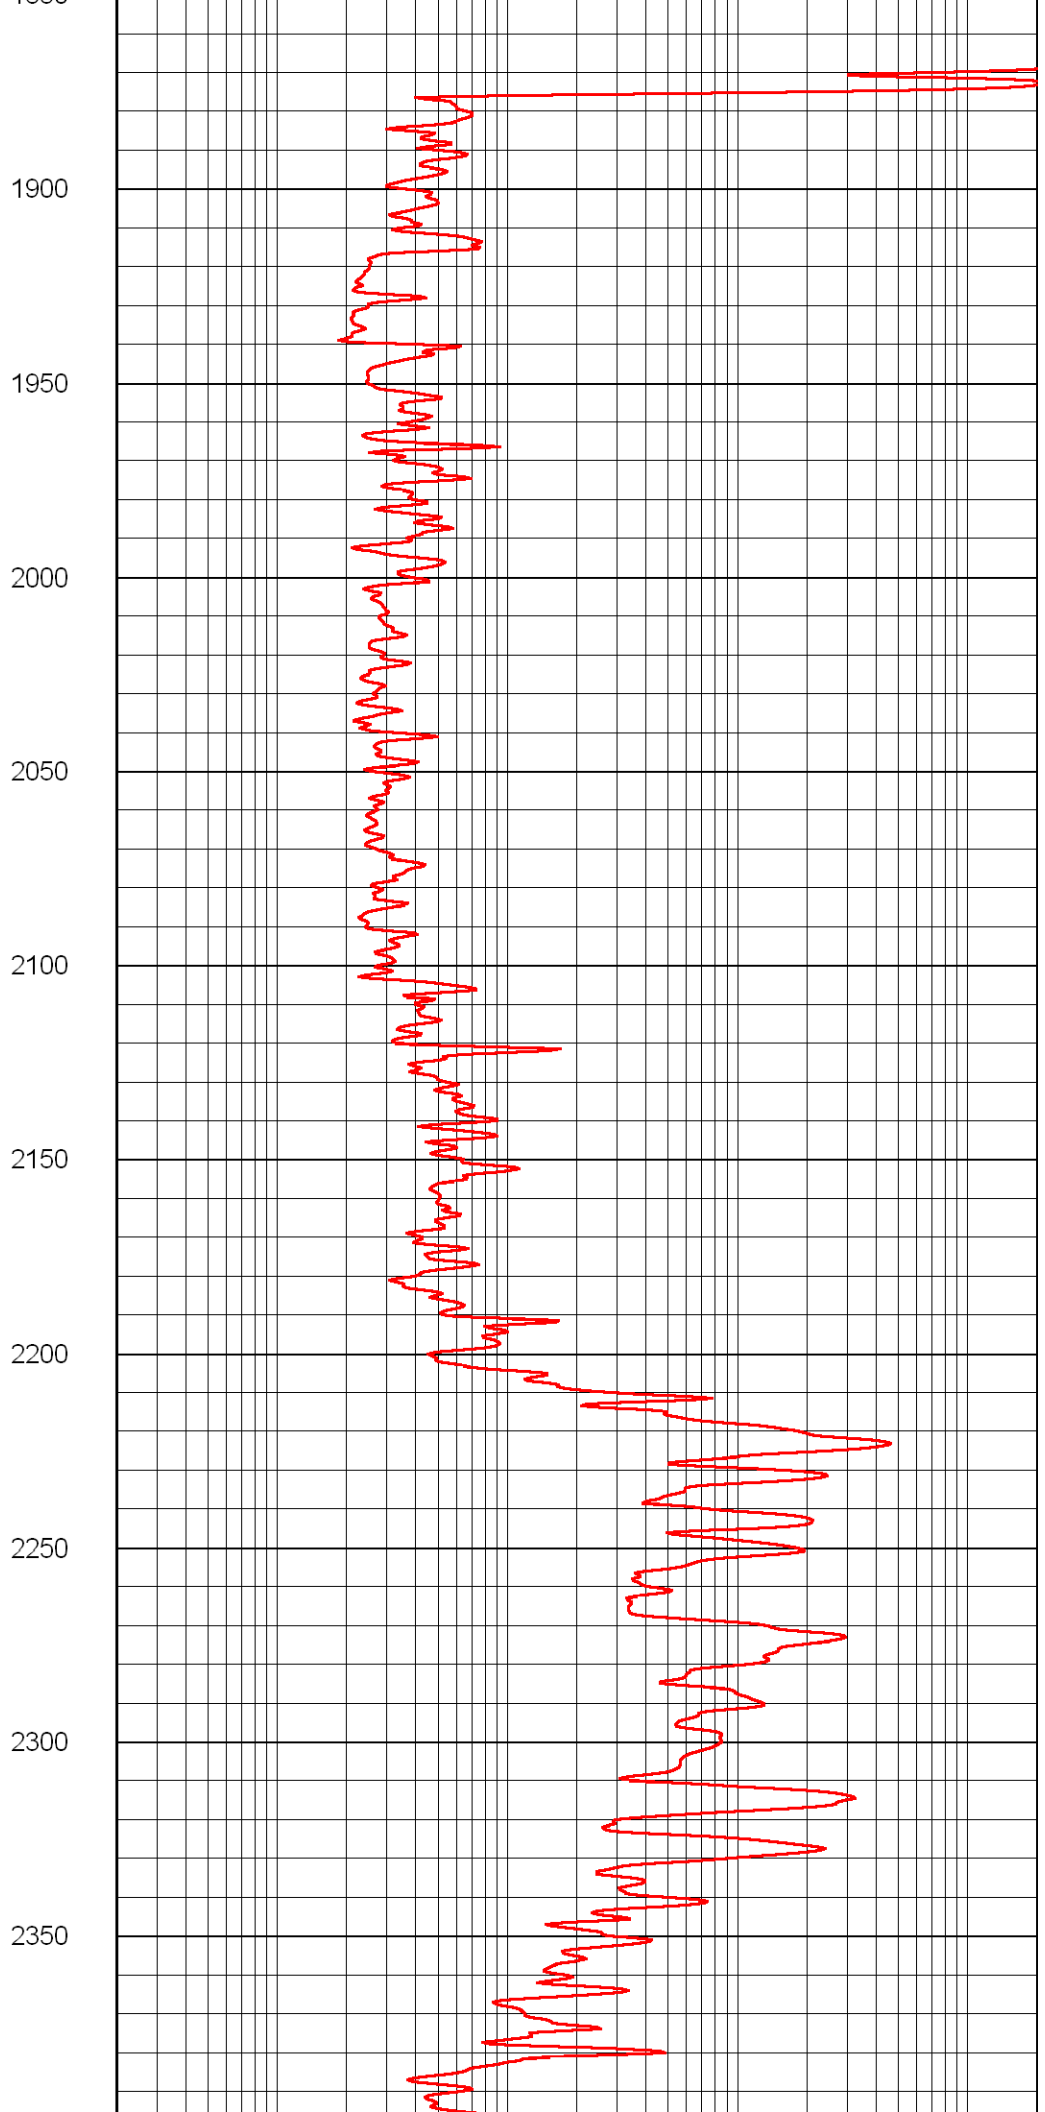

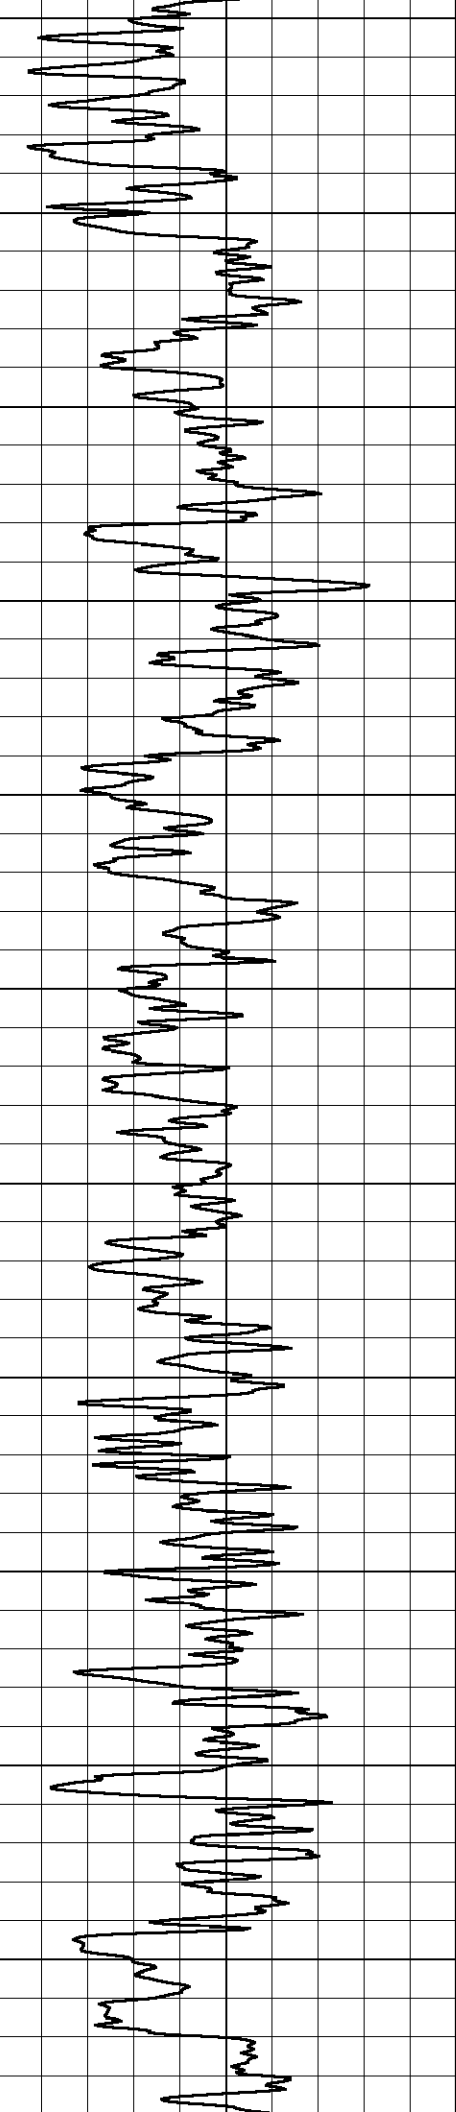

2400
2450
2500
2550
2600
2650
2700
2750
2800
2850
2900

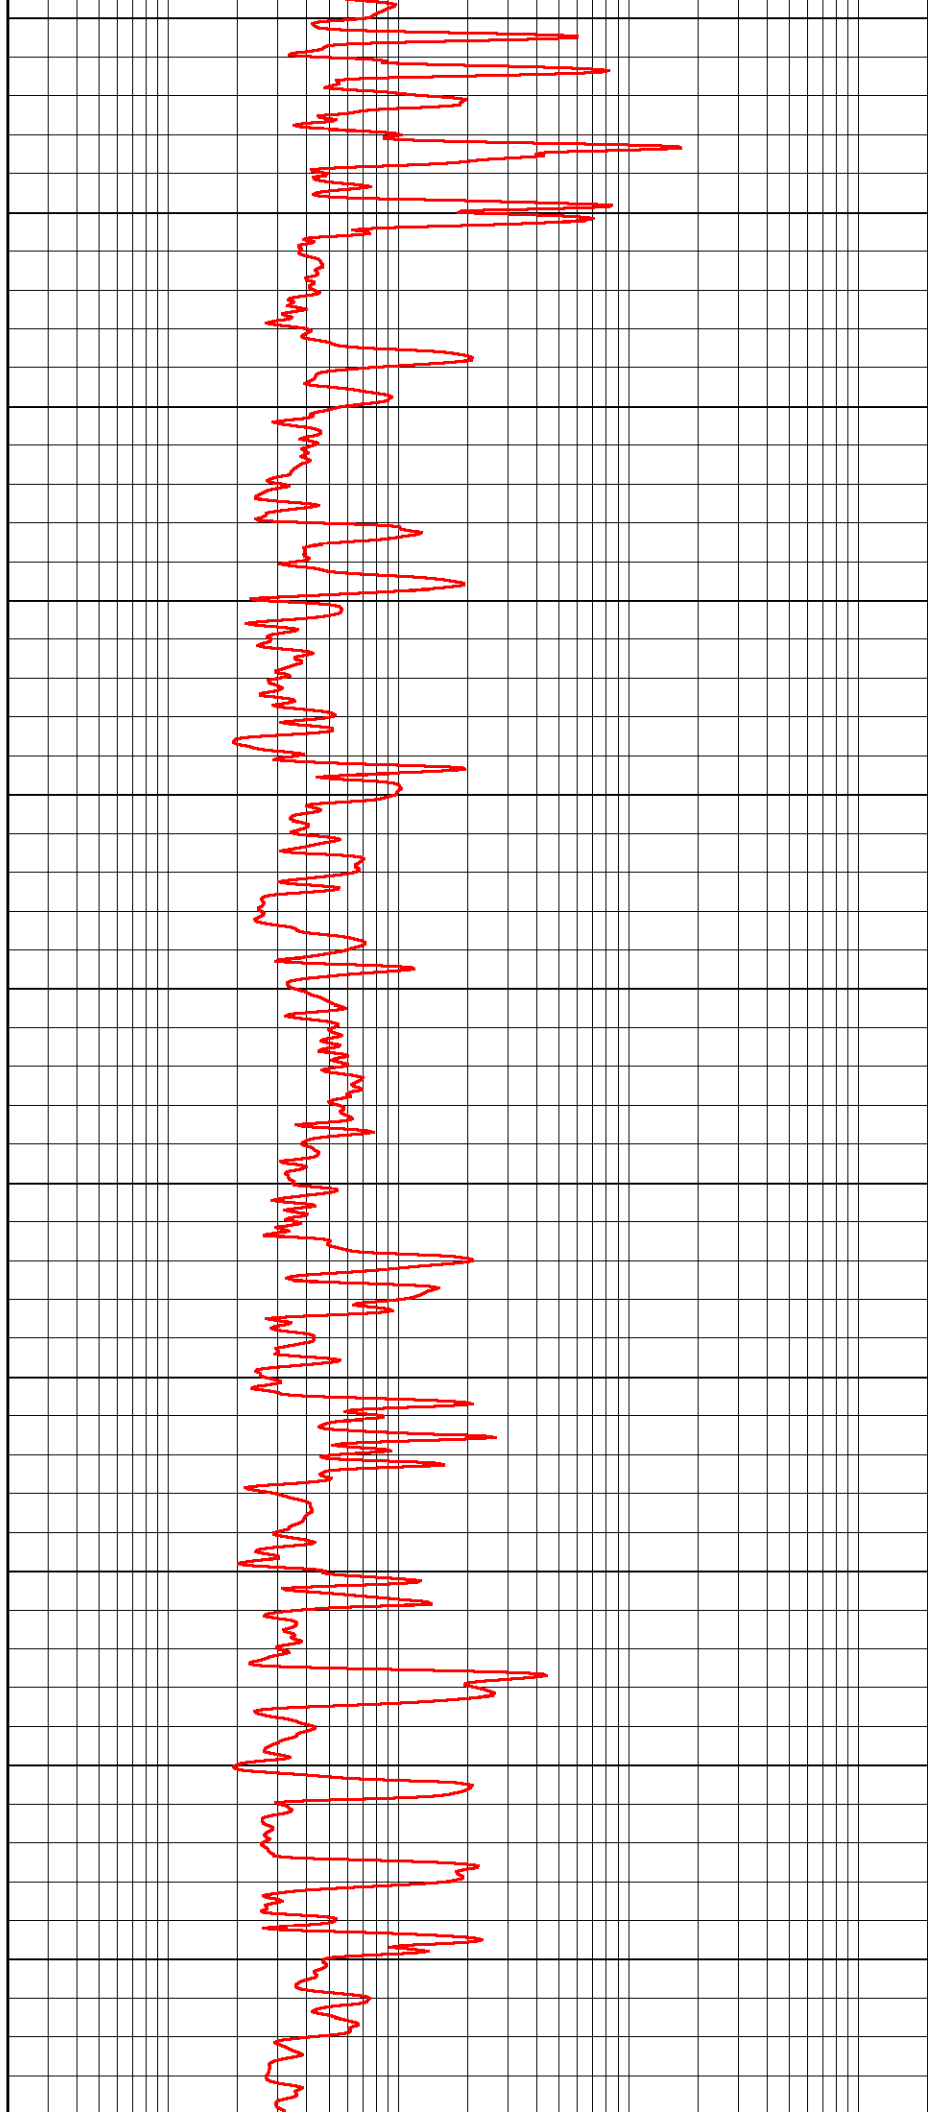

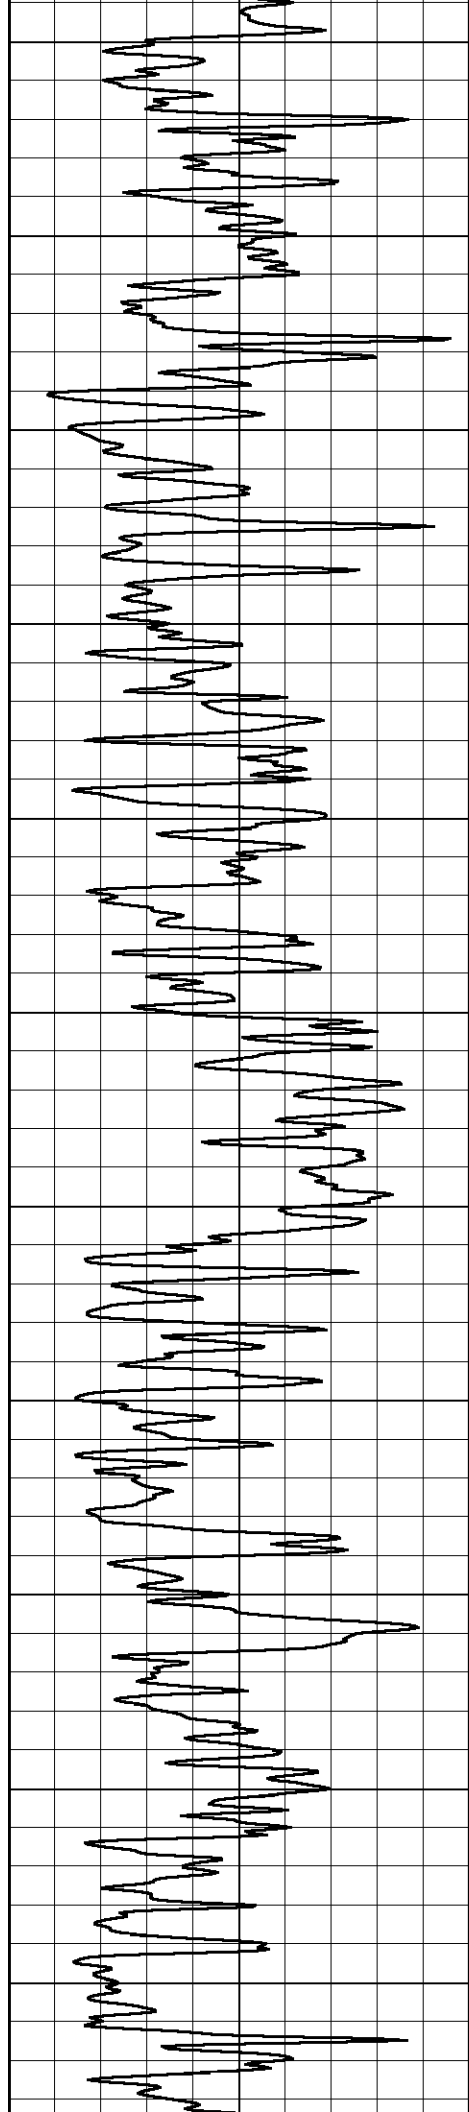

2950

3000

3050

3100

3150

3200


3250


3300

3350

3400

3450

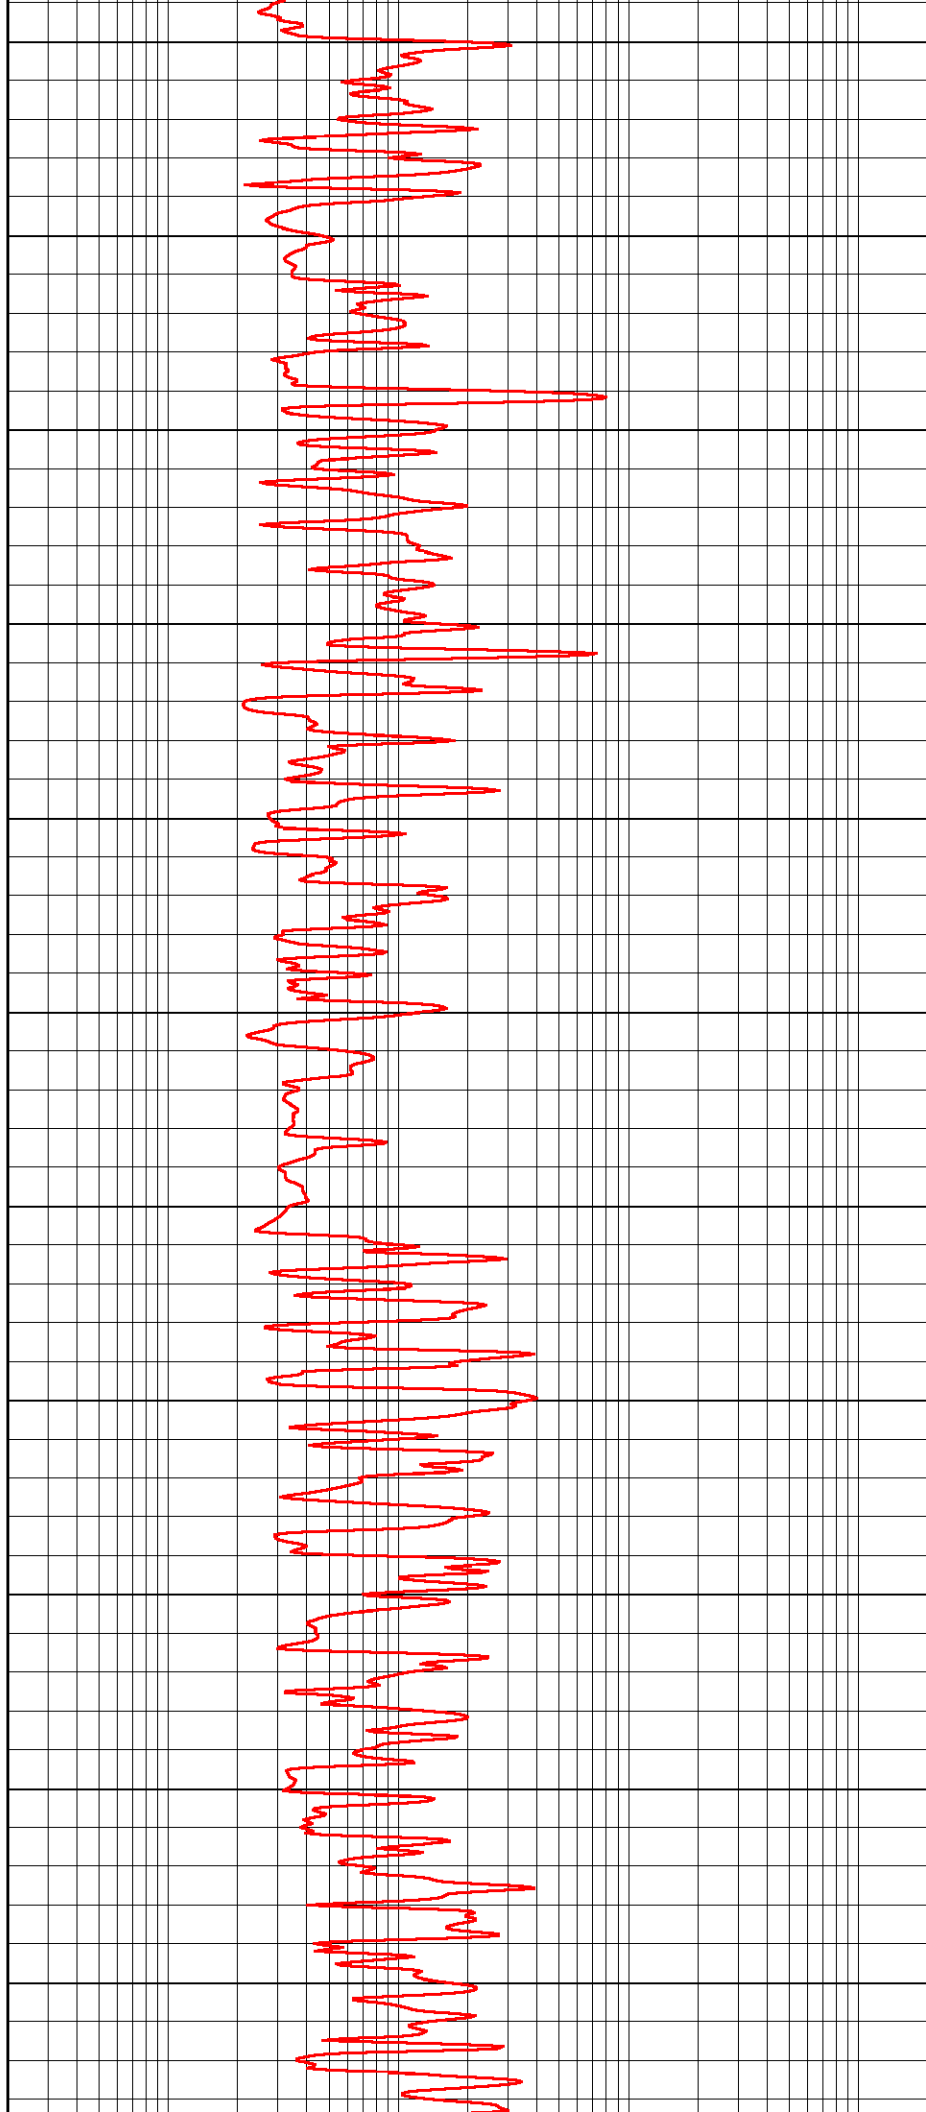

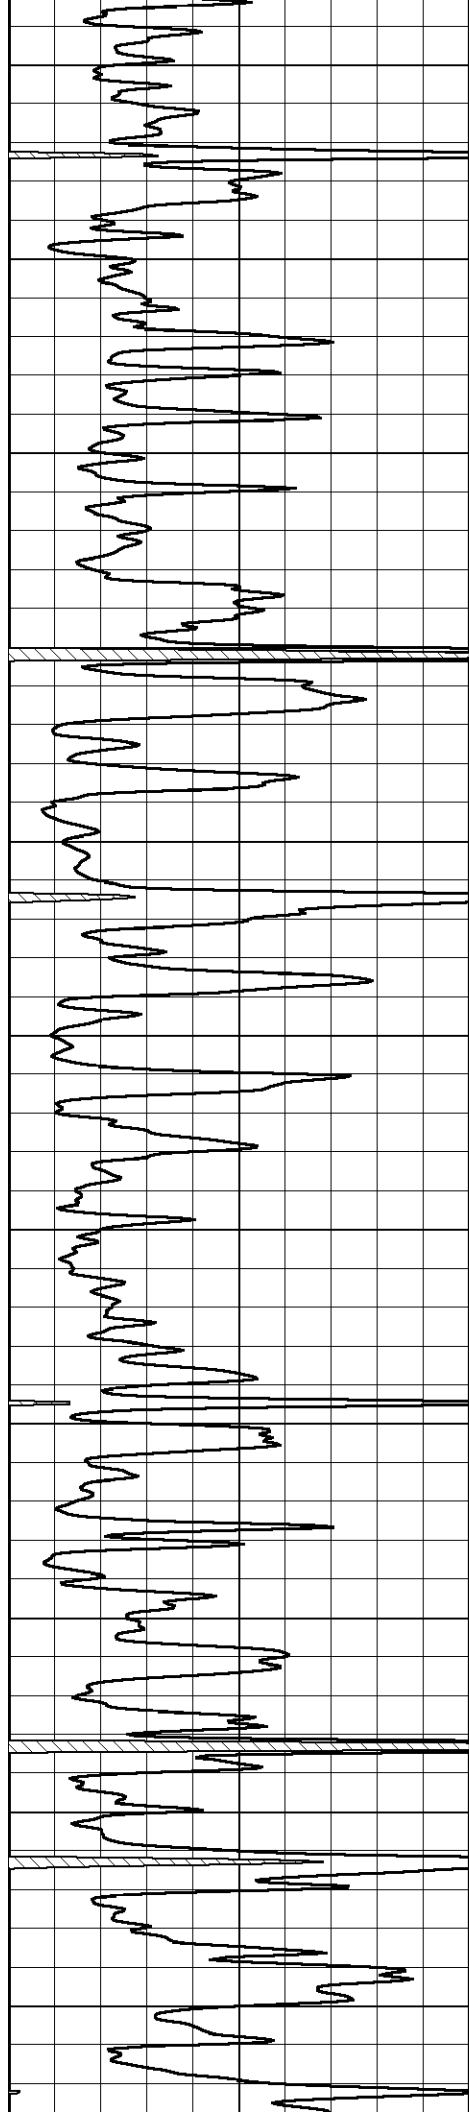

3500

3550

3600

3650

3700

3750


3800


3850

3900

3950


4000

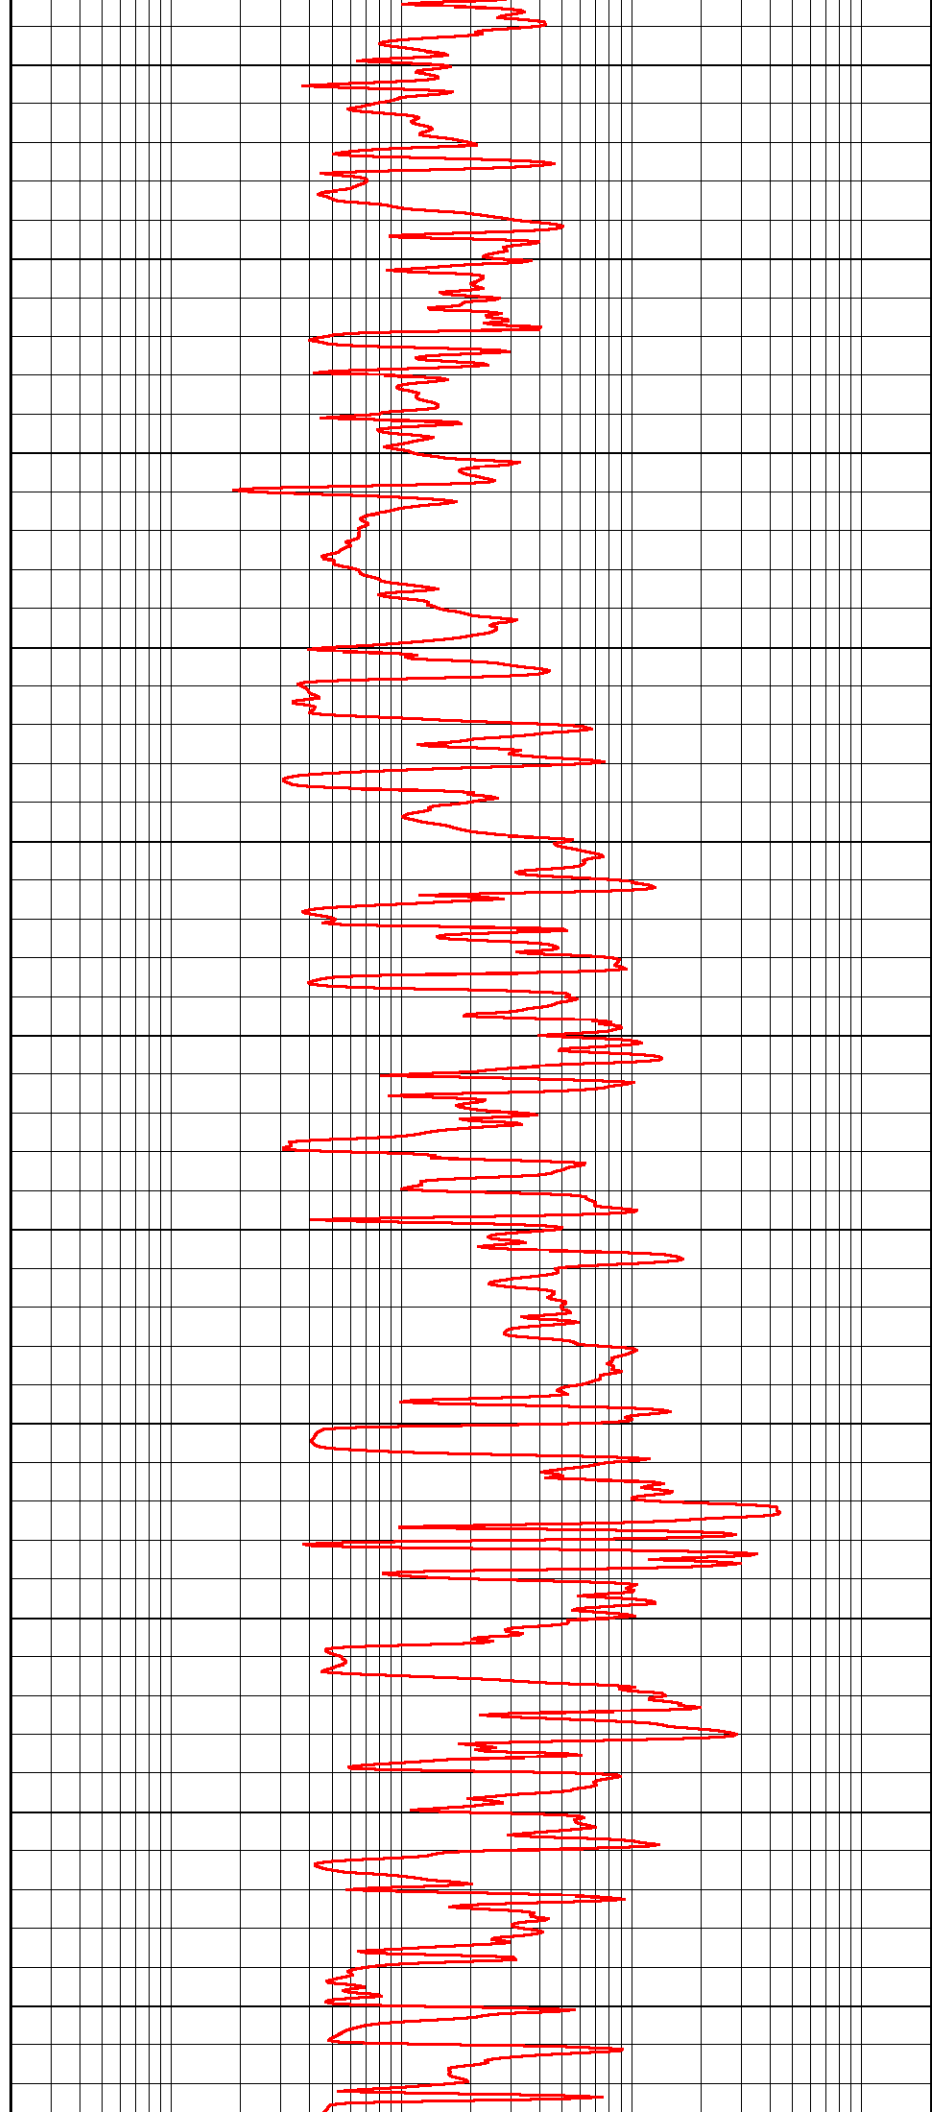


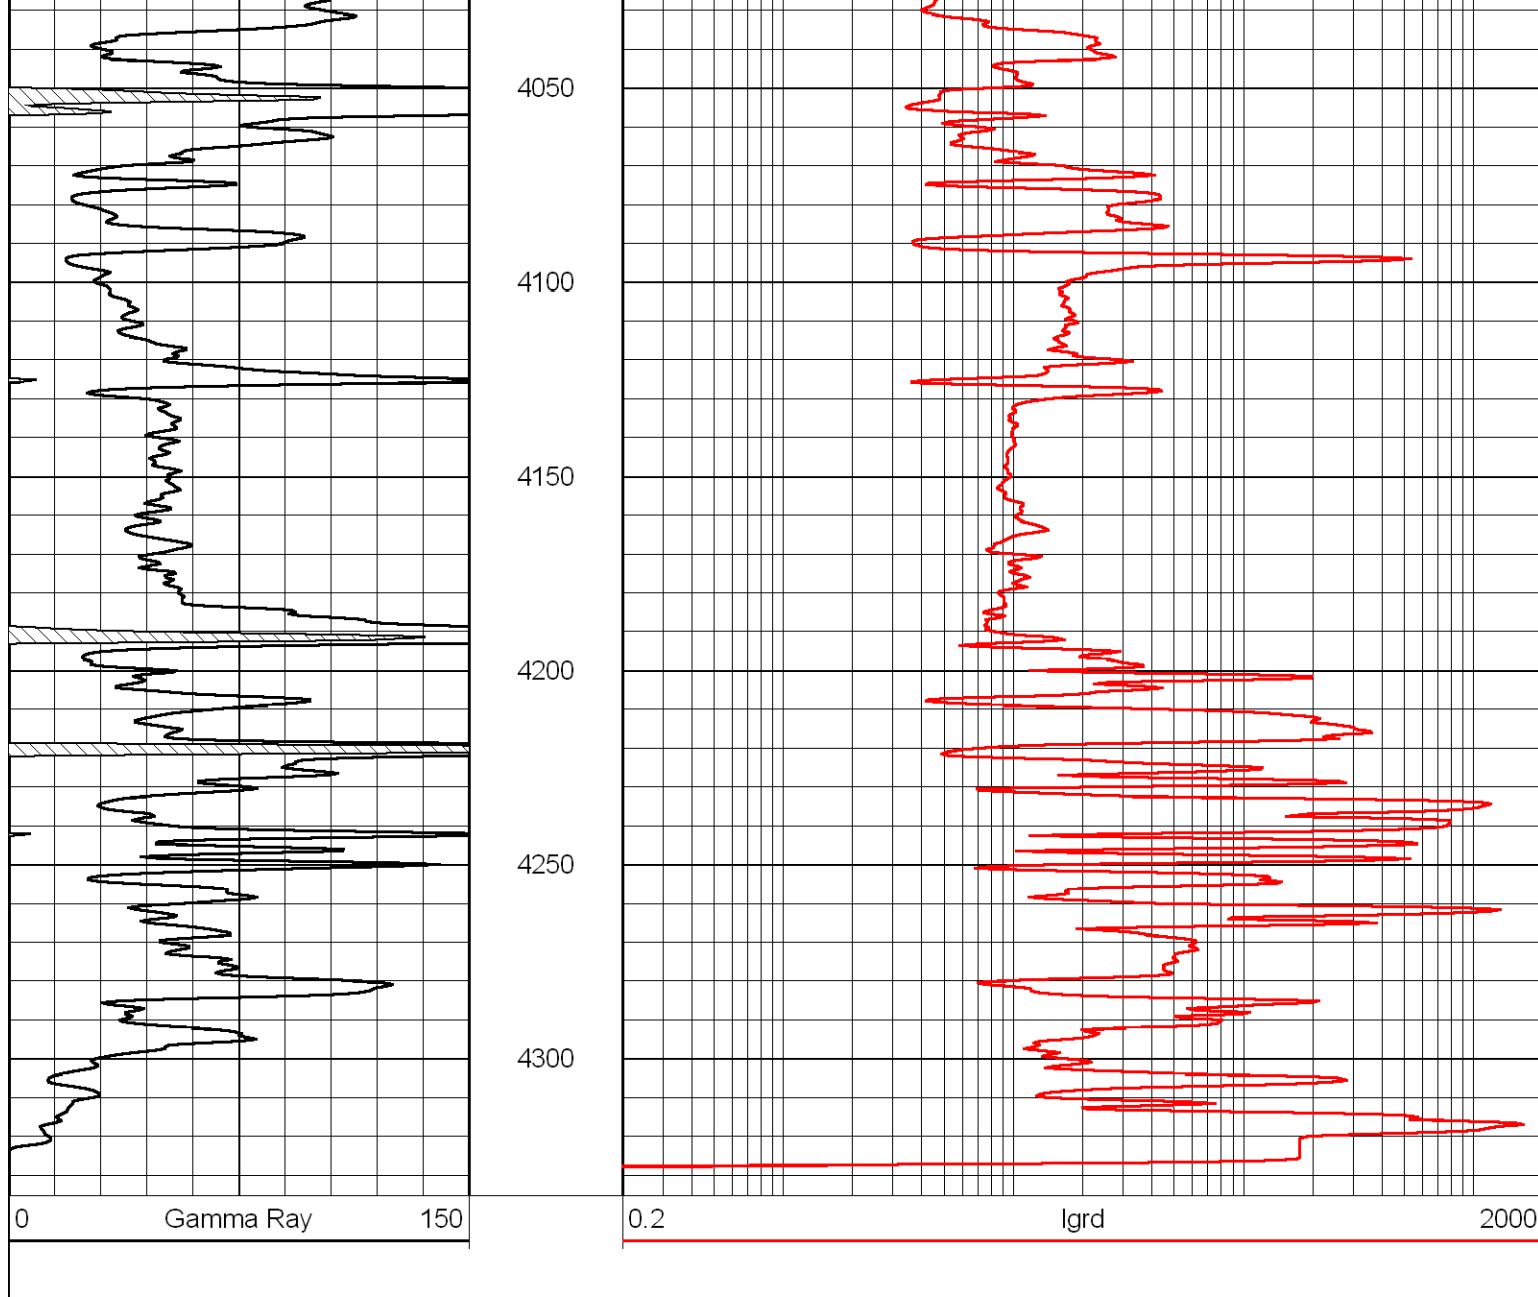



Database File: pickrell_060812hd.db
 Dataset Pathname: rag/pickrag
 Presentation Format: rag
 Dataset Creation: Fri Jun 08 13:18:39 2012
 Charted by: Depth in Feet scaled 1:240


0	Gamma Ray	150	0.2	LGRD	2000
6	Caliper (GAPI)	16	560	SWNC	2160
-200	sp	0	15000	Line Tension	0
				LSPD	

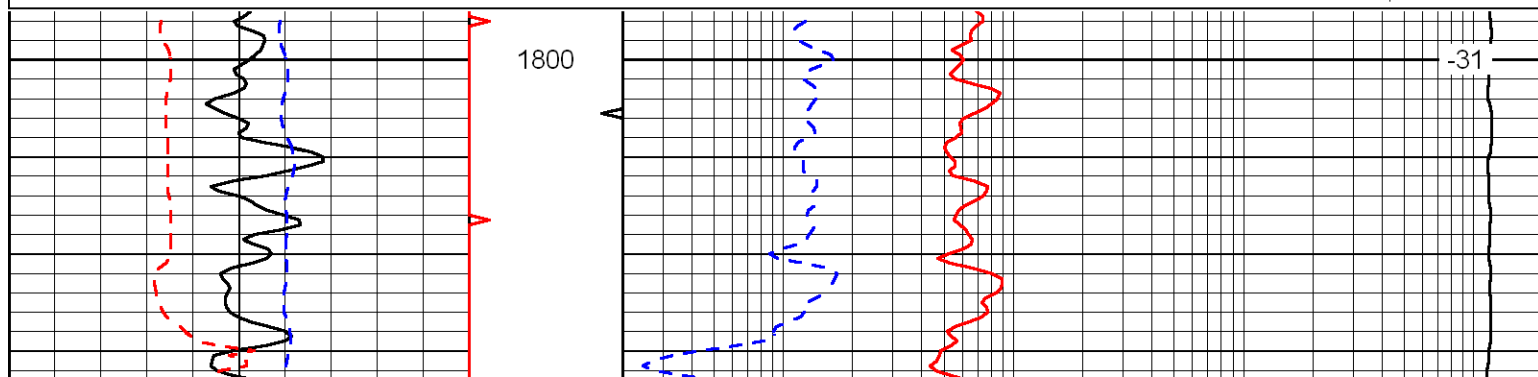




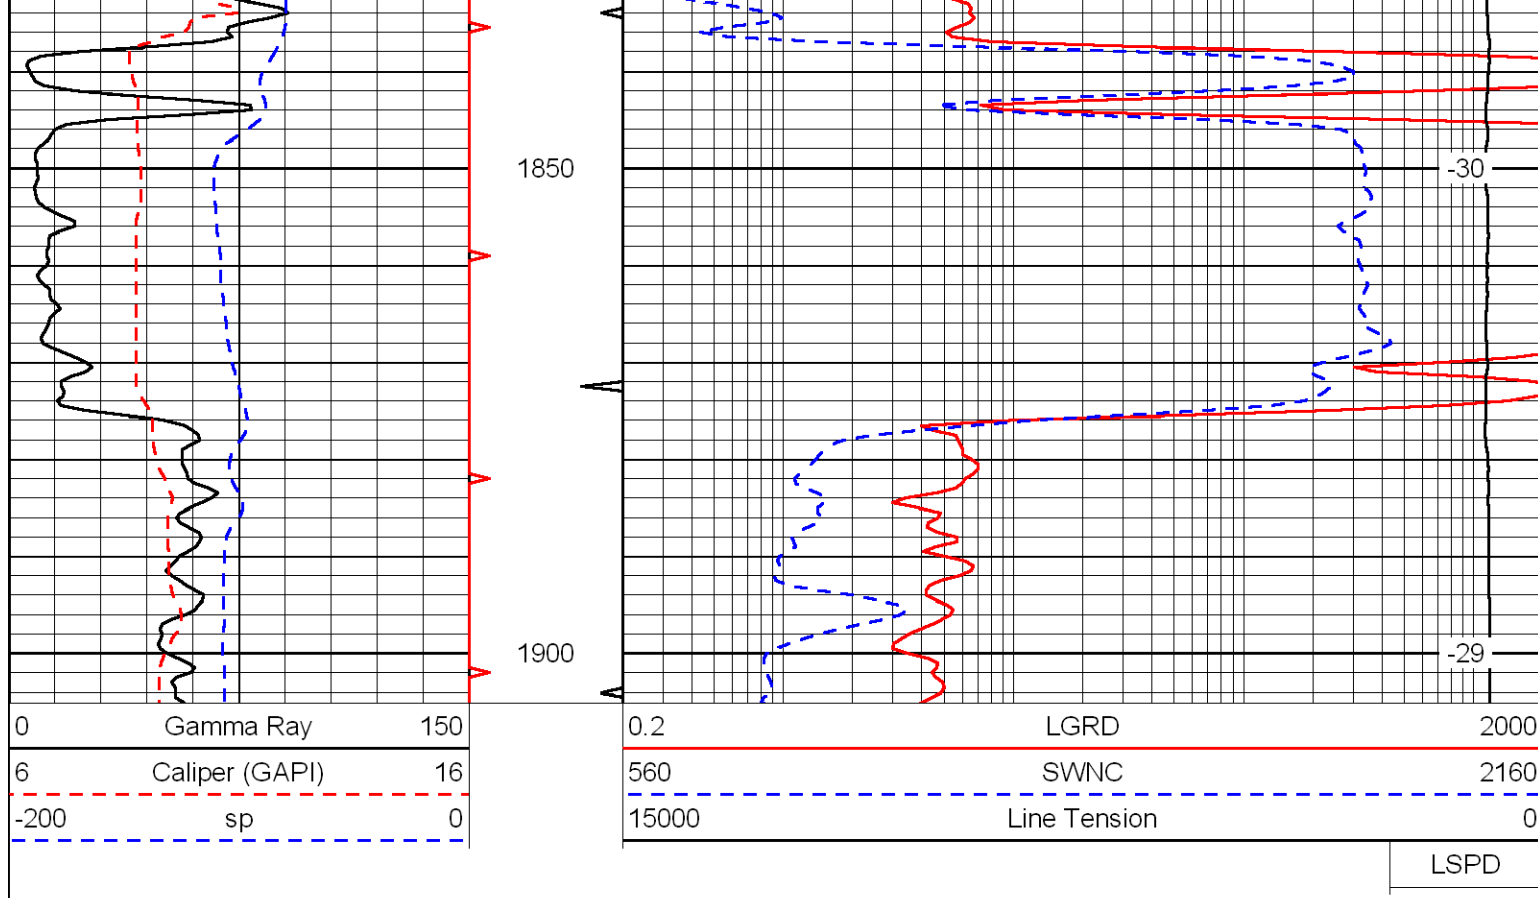


Database File: pickrell_060812hd.db
Dataset Pathname: rag/pickrag
Presentation Format: rag
Dataset Creation: Fri Jun 08 13:18:39 2012
Charted by: Depth in Feet scaled 1:240

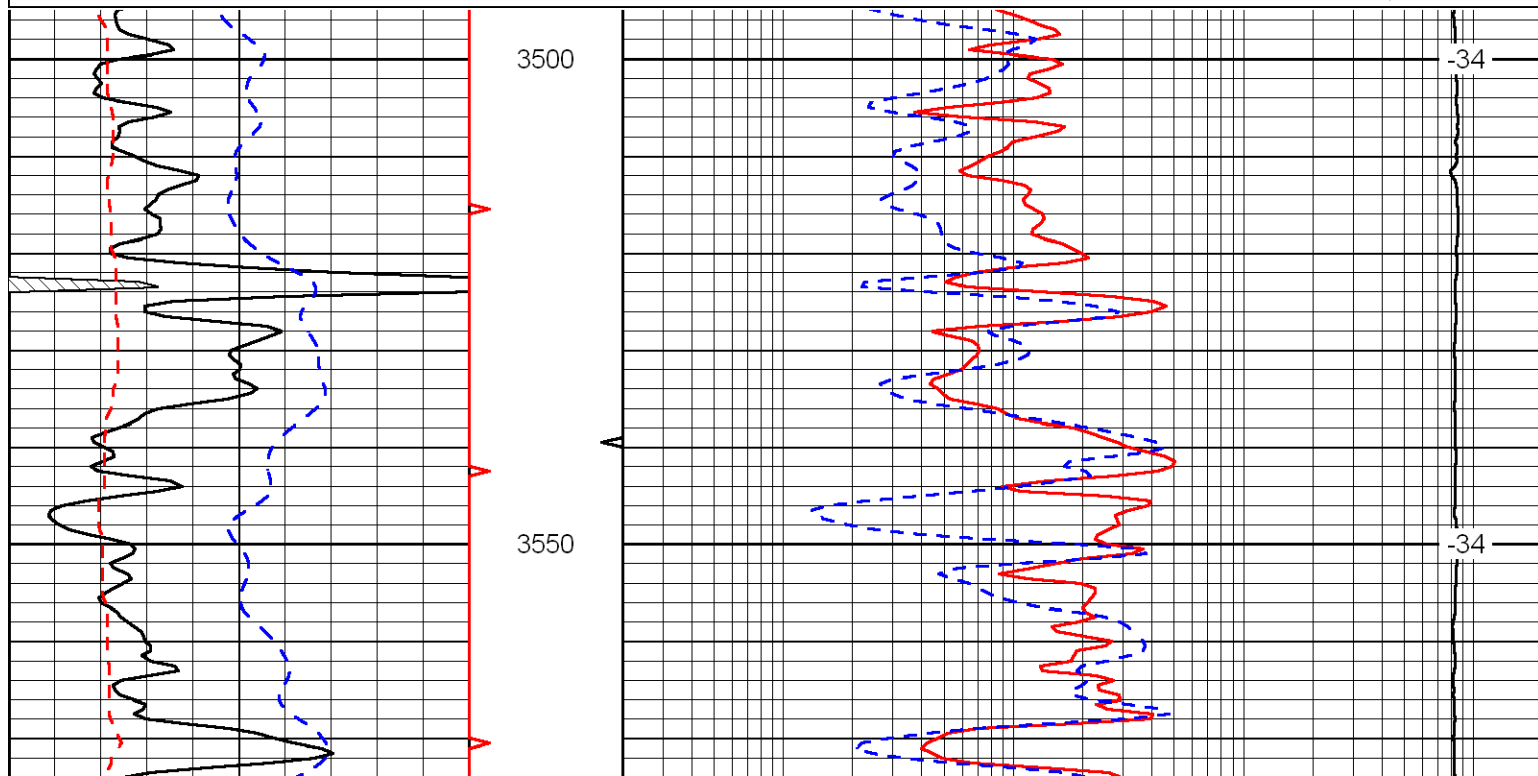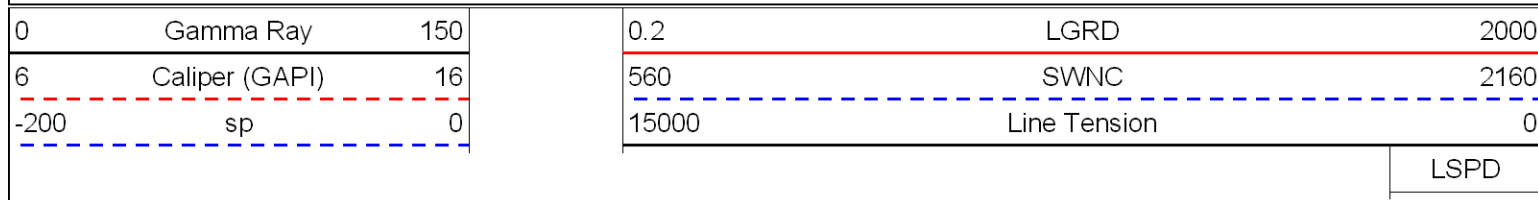


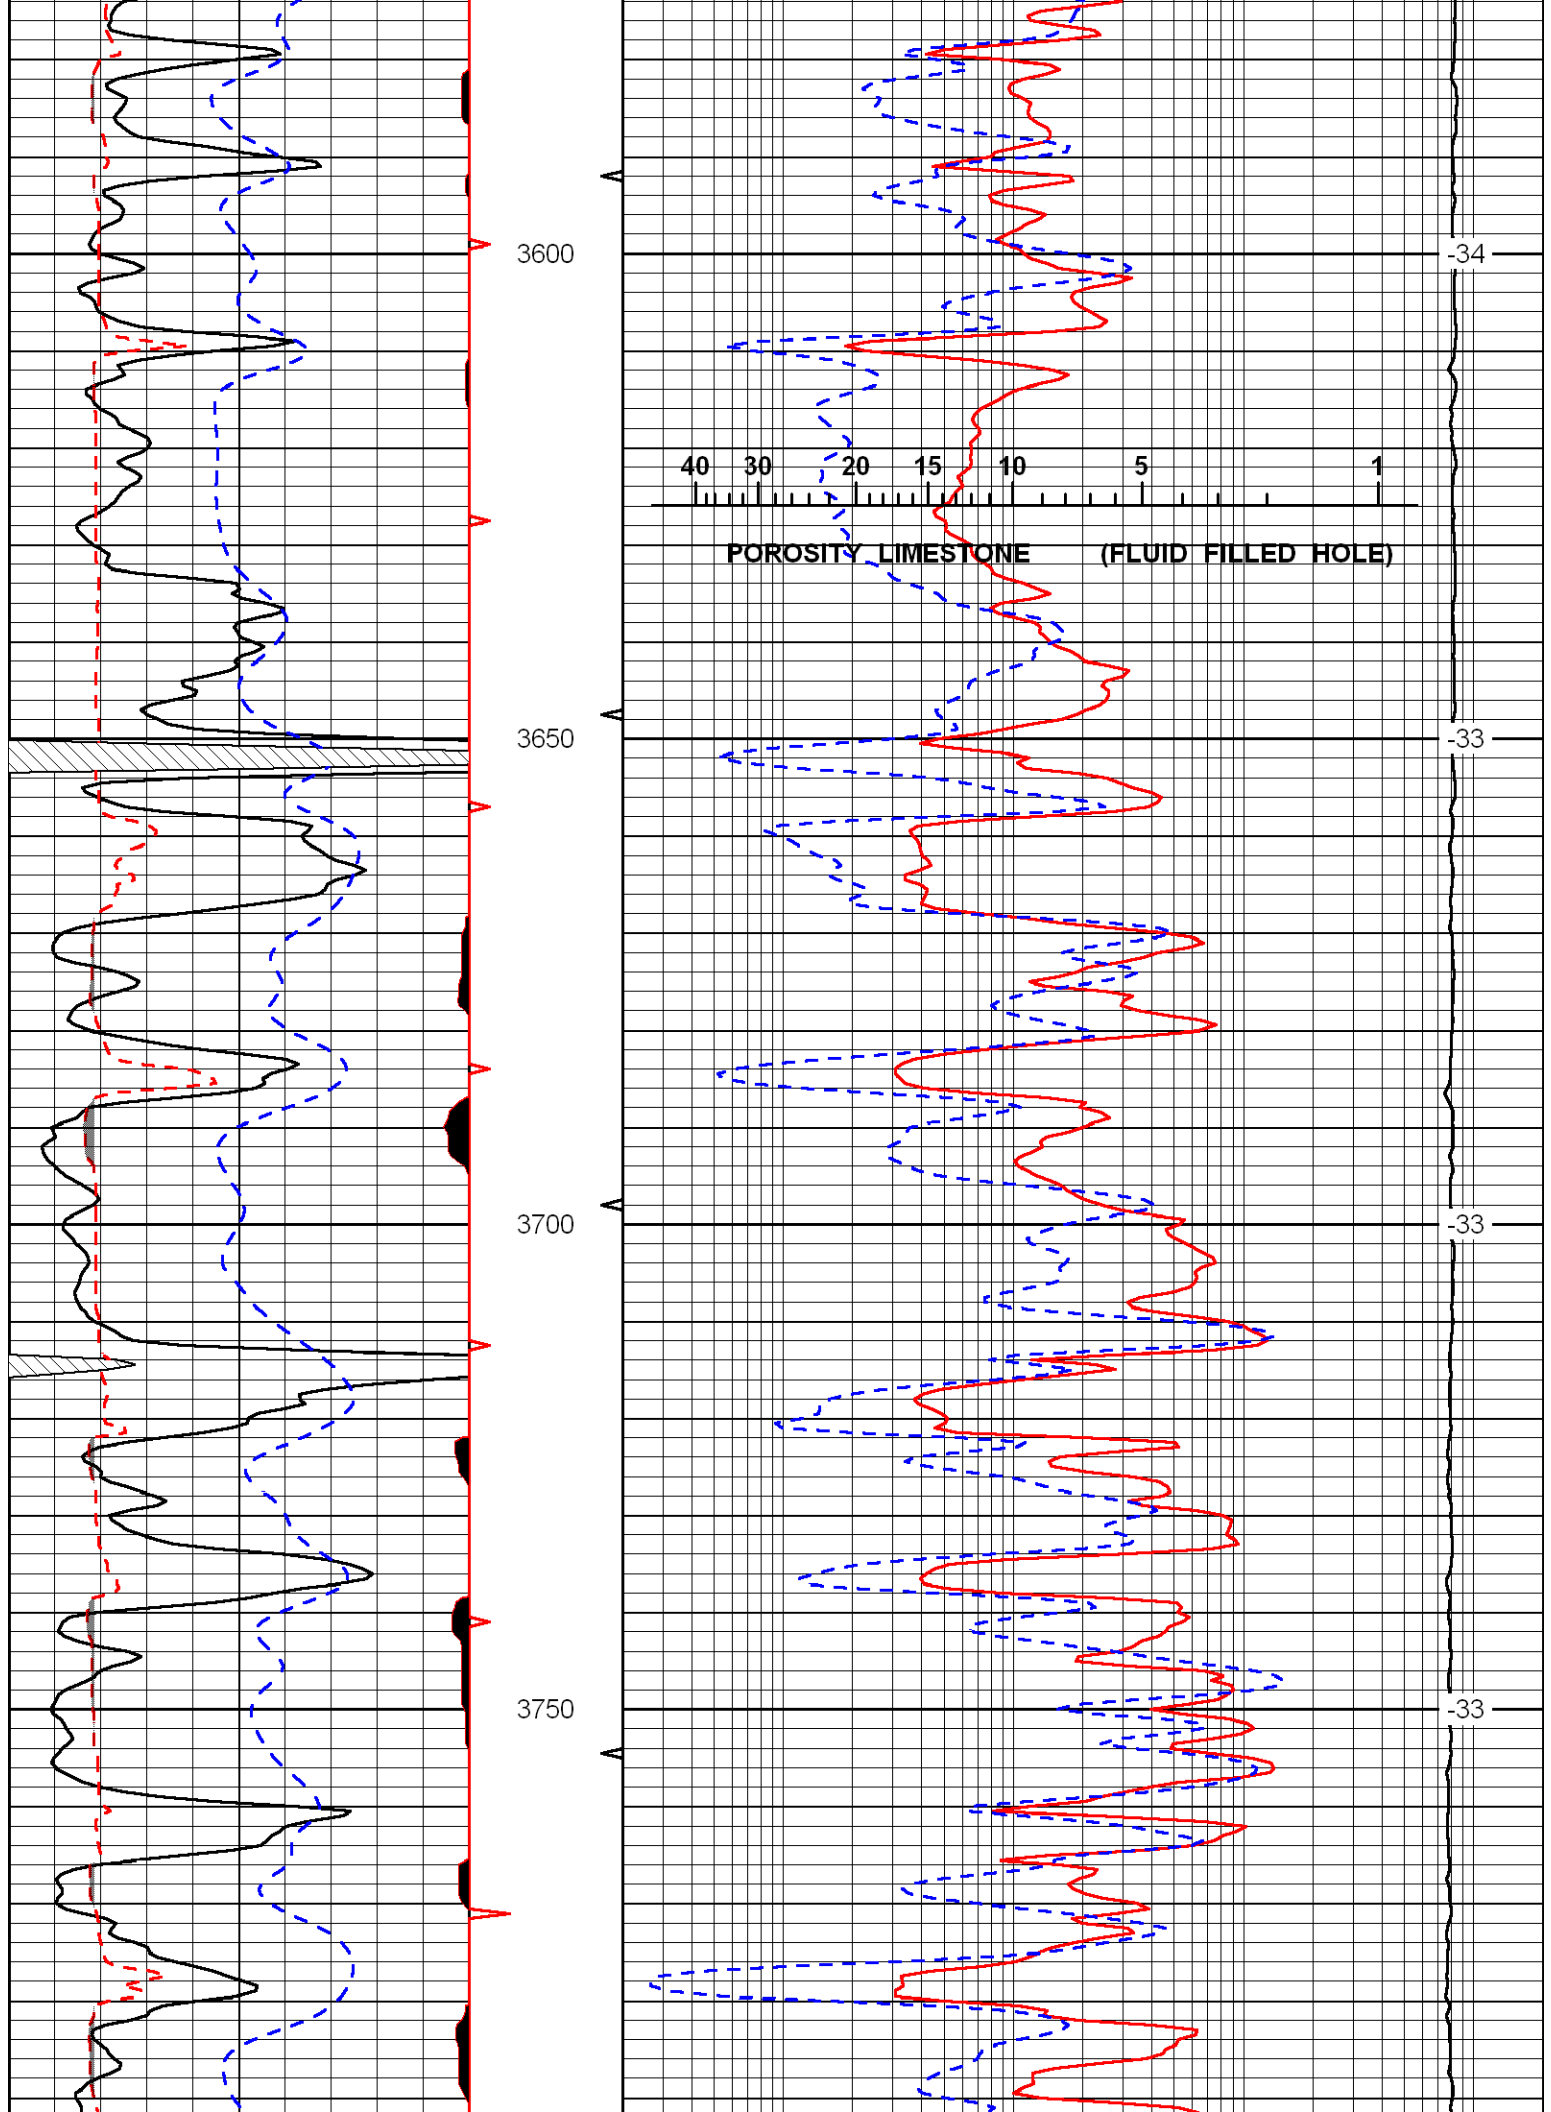

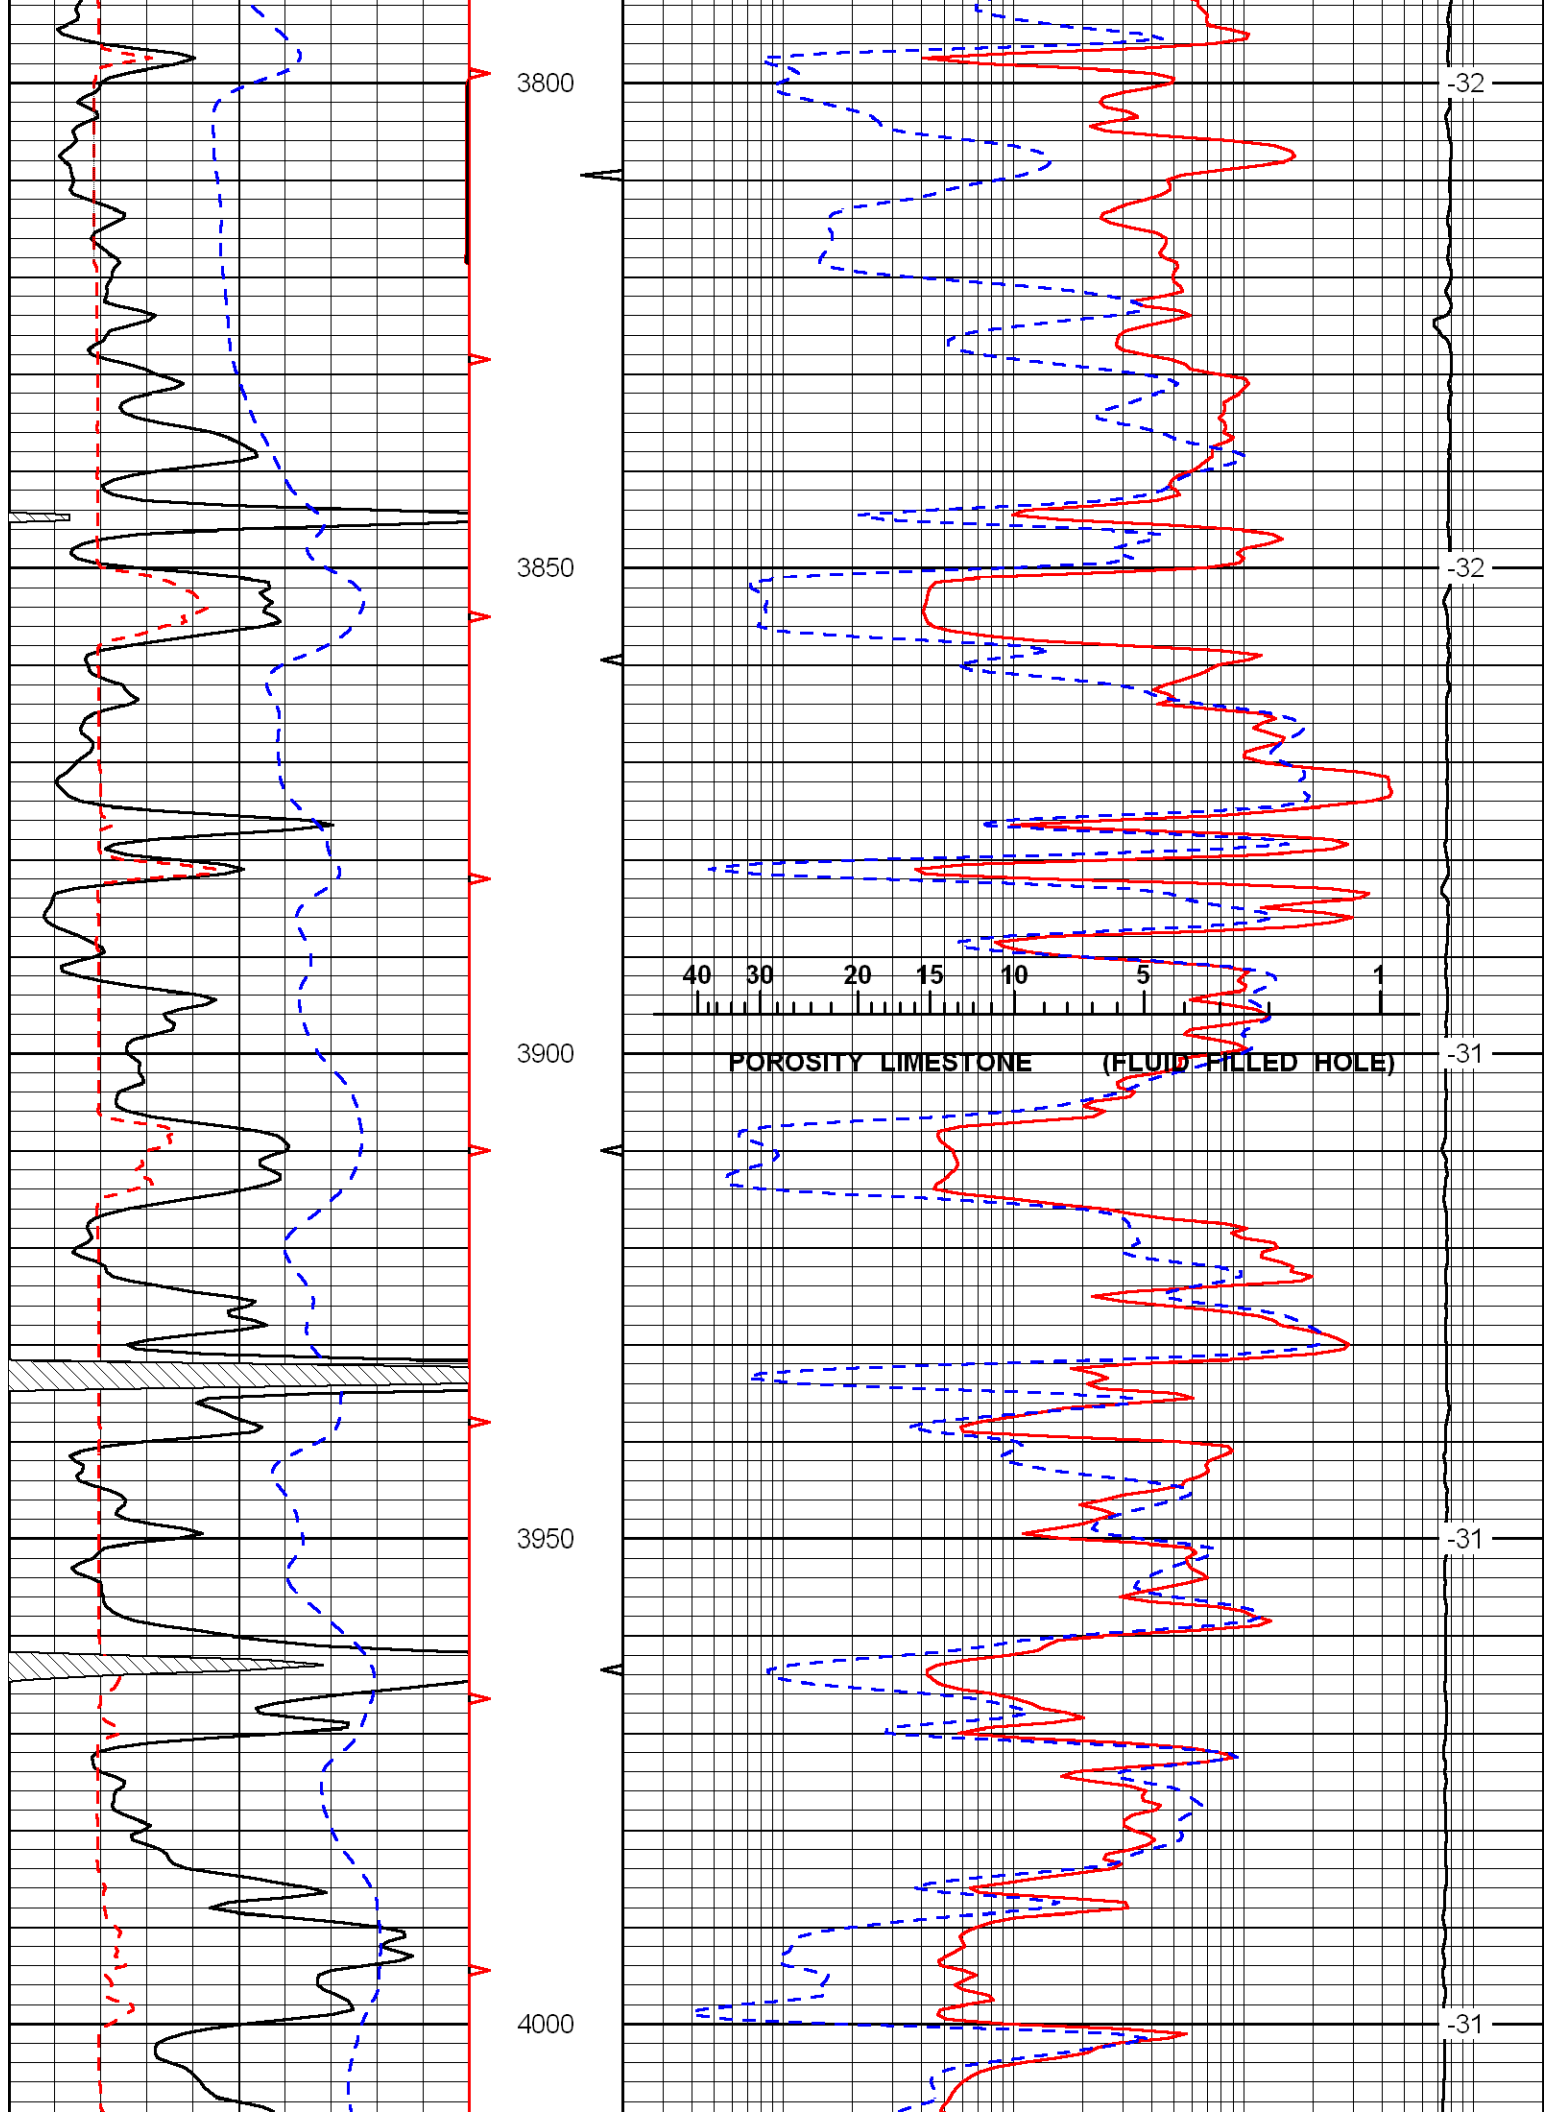

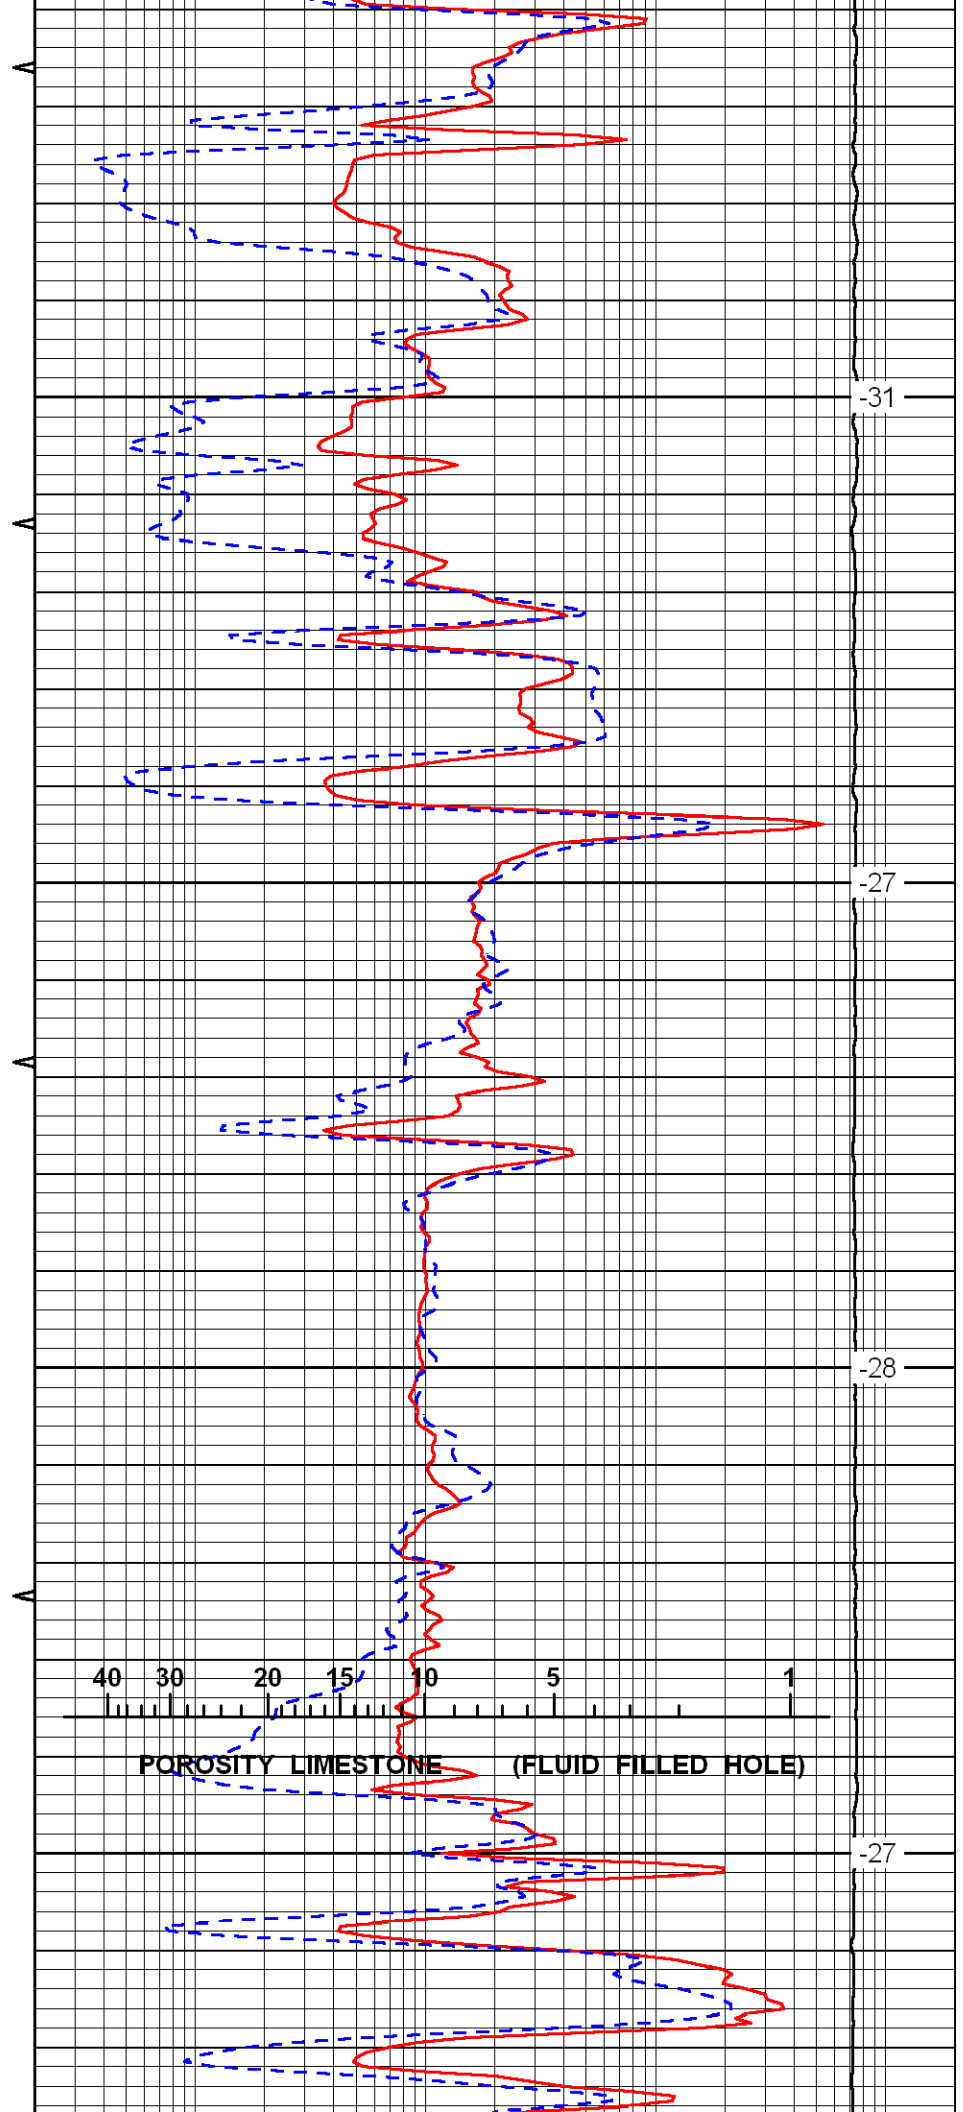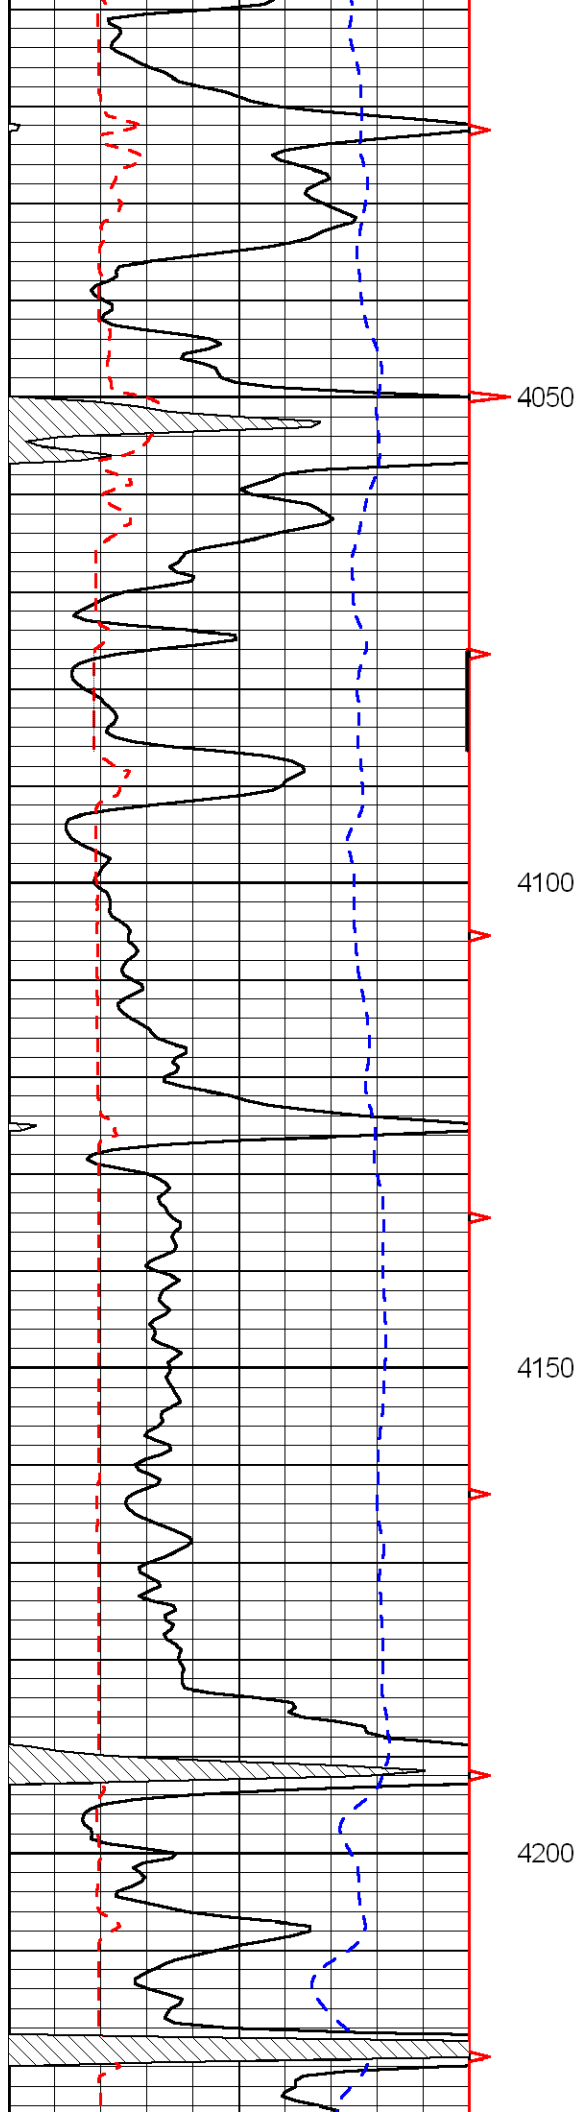


POROSITY LIMESTONE (FLUID FILLED HOLE)

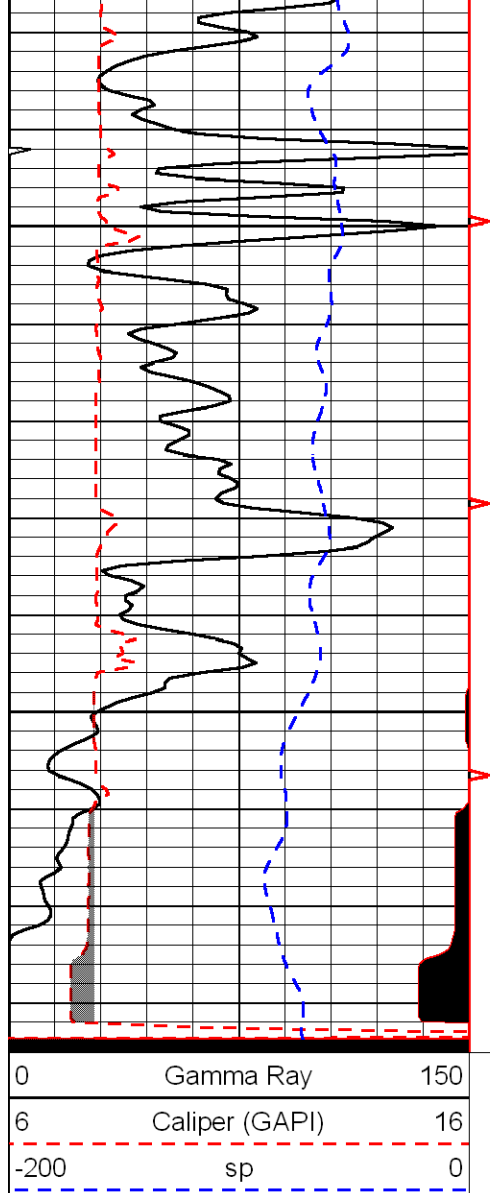

4250

4300

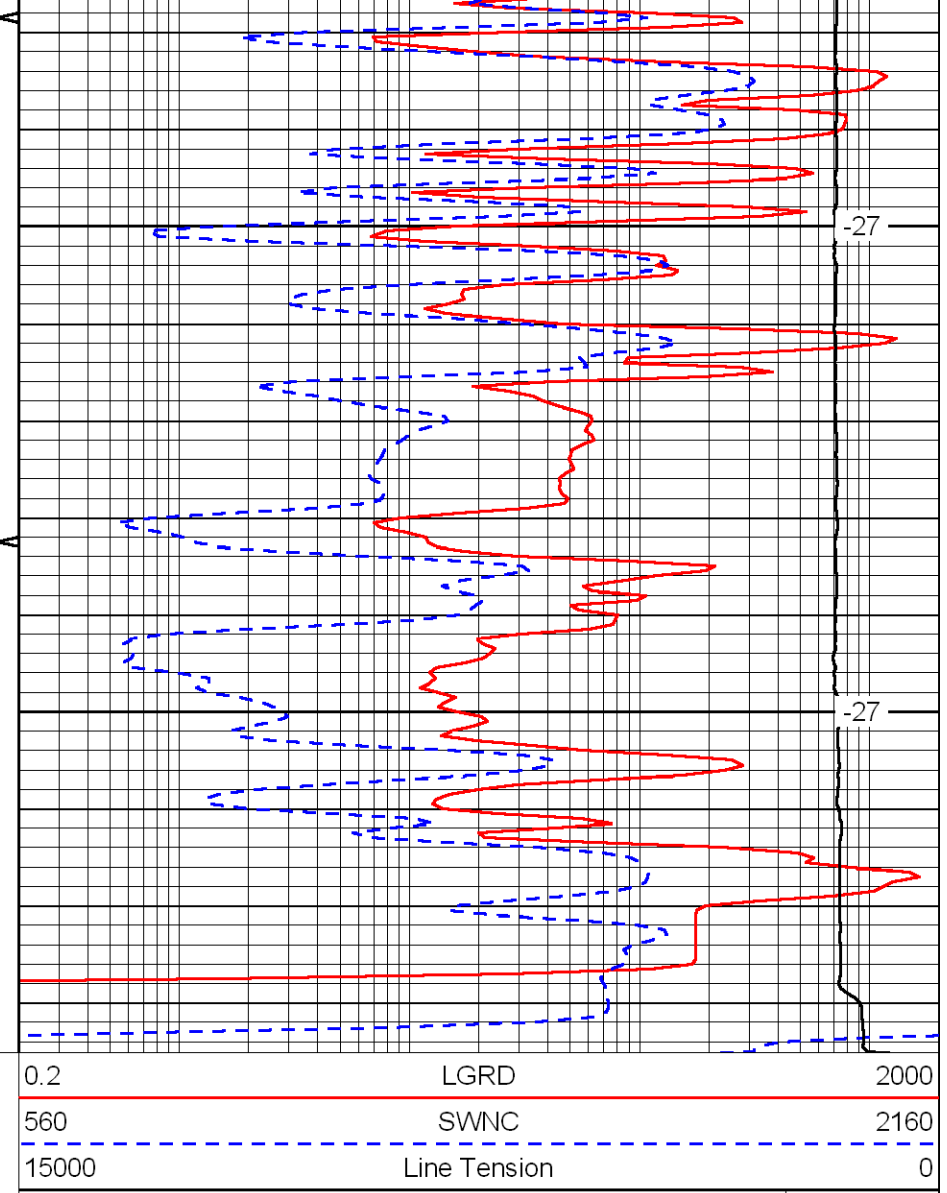

-27

-27

LSPD