

LOG-TECH



DIGITAL LOG (785) 625-3858

Microresistivity Log

API No. 15-015-23,936-00-00

Company **Vess Oil Corporation**
 Well **Mills A No. 40**
 Field **EI Dorado**
 County **Butler** State **Kansas**

Location **E2 SE SW
660' FSL & 2310' FWL**

Sec: **22** Twp: **25 S** Rge: **5 E**

Other Services
CNL/CDL
DIL

Permanent Datum	Ground Level	Elevation 1340	K.B. 1346
Log Measured From	Kelly Bushing	6 Ft. Above Perm. Datum	D.F. 1340
Drilling Measured From	Kelly Bushing		G.L. 1340
Date	4/27/2012		
Run Number	Two		
Depth Driller	2520		
Depth Logger	2520		
Bottom Logged Interval	2519		
Top Log Interval	250		
Casing Driller	8.625 @ 271		
Casing Logger	267		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	1100		
Density / Viscosity	9.3	52	
pH / Fluid Loss	9.0	8.4	
Source of Sample	Flowline		
Rm @ Meas. Temp	1.60 @ 77		
Rmf @ Meas. Temp	1.20 @ 77		
Rmc @ Meas. Temp	2.16 @ 77		
Source of Rmf / Rmc	Charts		
Rm @ BHT	1.22 @ 101		
Operating Rig Time	5 Hours		
Max Rec. Temp. F	101		
Equipment Number	17		
Location	Hays		
Recorded By	D. Martin		
Witnessed By	Roger Martin		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments



Thank you for using Log-Tech, Inc.
 (785) 625-3858



EI Dorado, KS
 N on 196 to NW 10 Rd.,
 E to Oil Hill Rd., 1 N, E Into



Database File: vesshd.db
 Dataset Pathname: DIL/vesstck
 Presentation Format: micro
 Dataset Creation: Fri Apr 27 19:24:33 2012
 Charted by: Depth in Feet scaled 1:240


0	Gamma Ray	150
6	MCAL (GAPI)	16
2.875	Mud Cake (GAPI)	7.875
-200	SP	0

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0
		LSPD

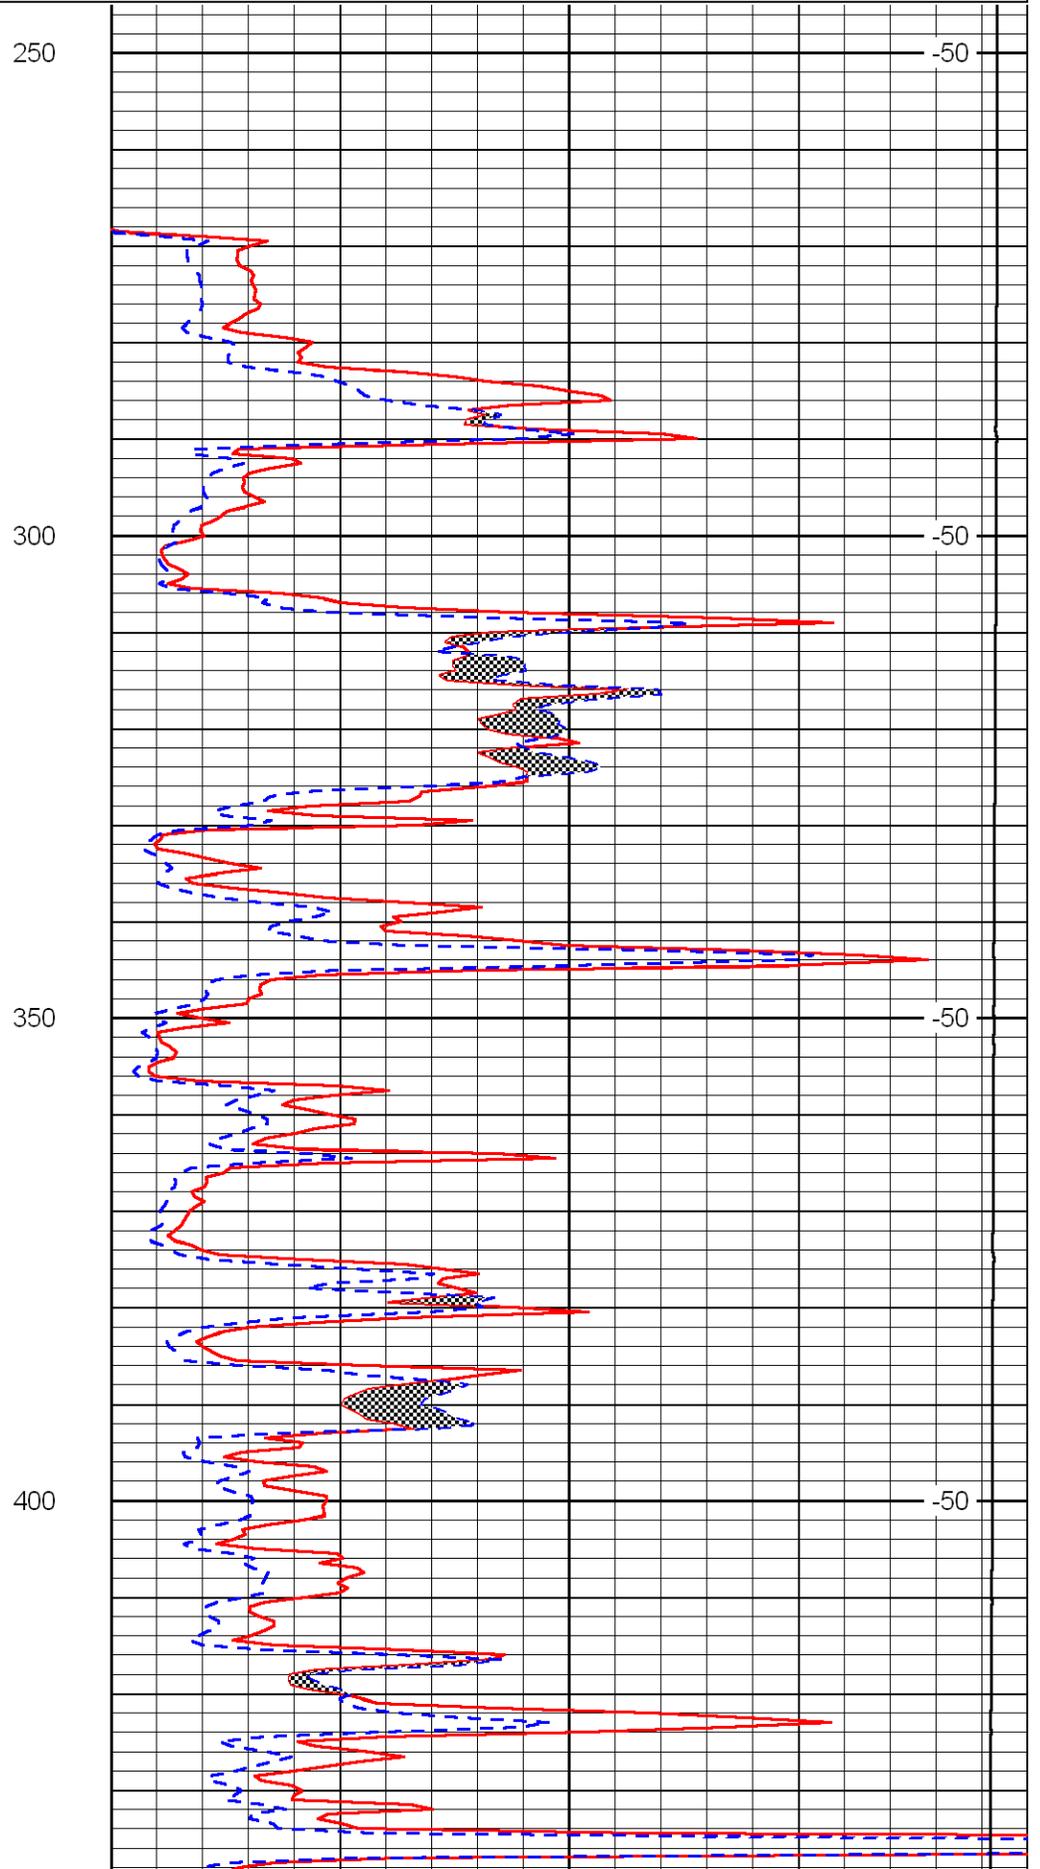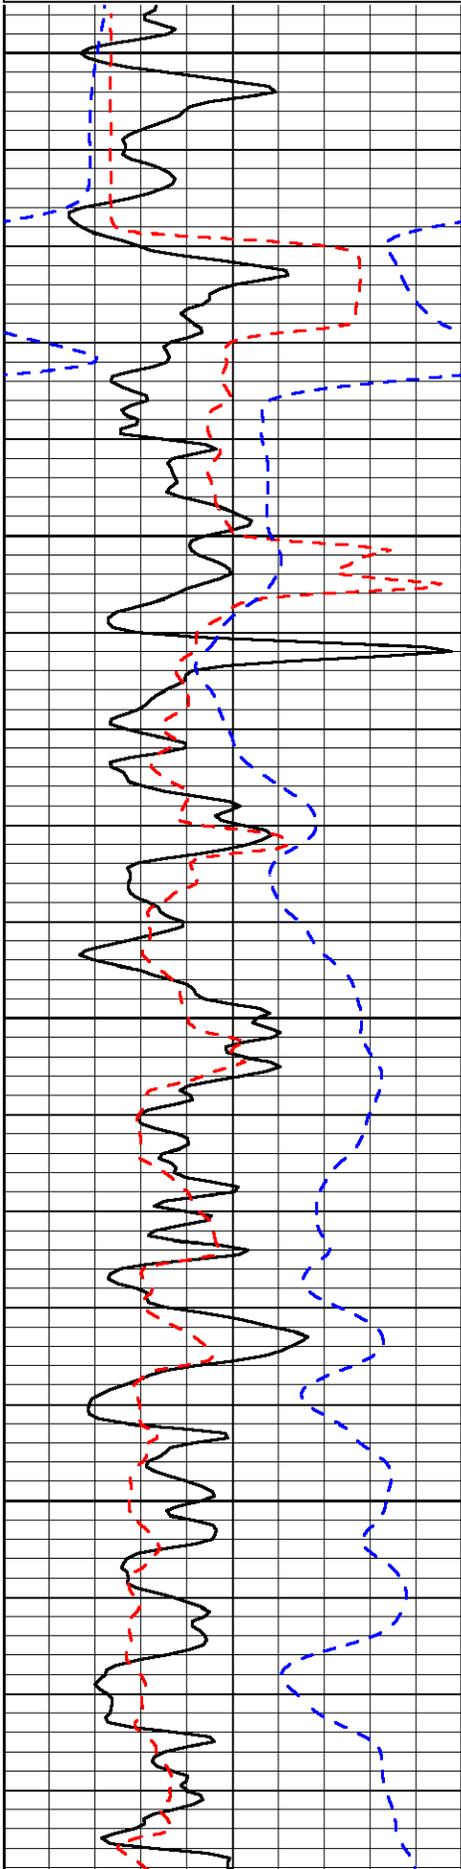

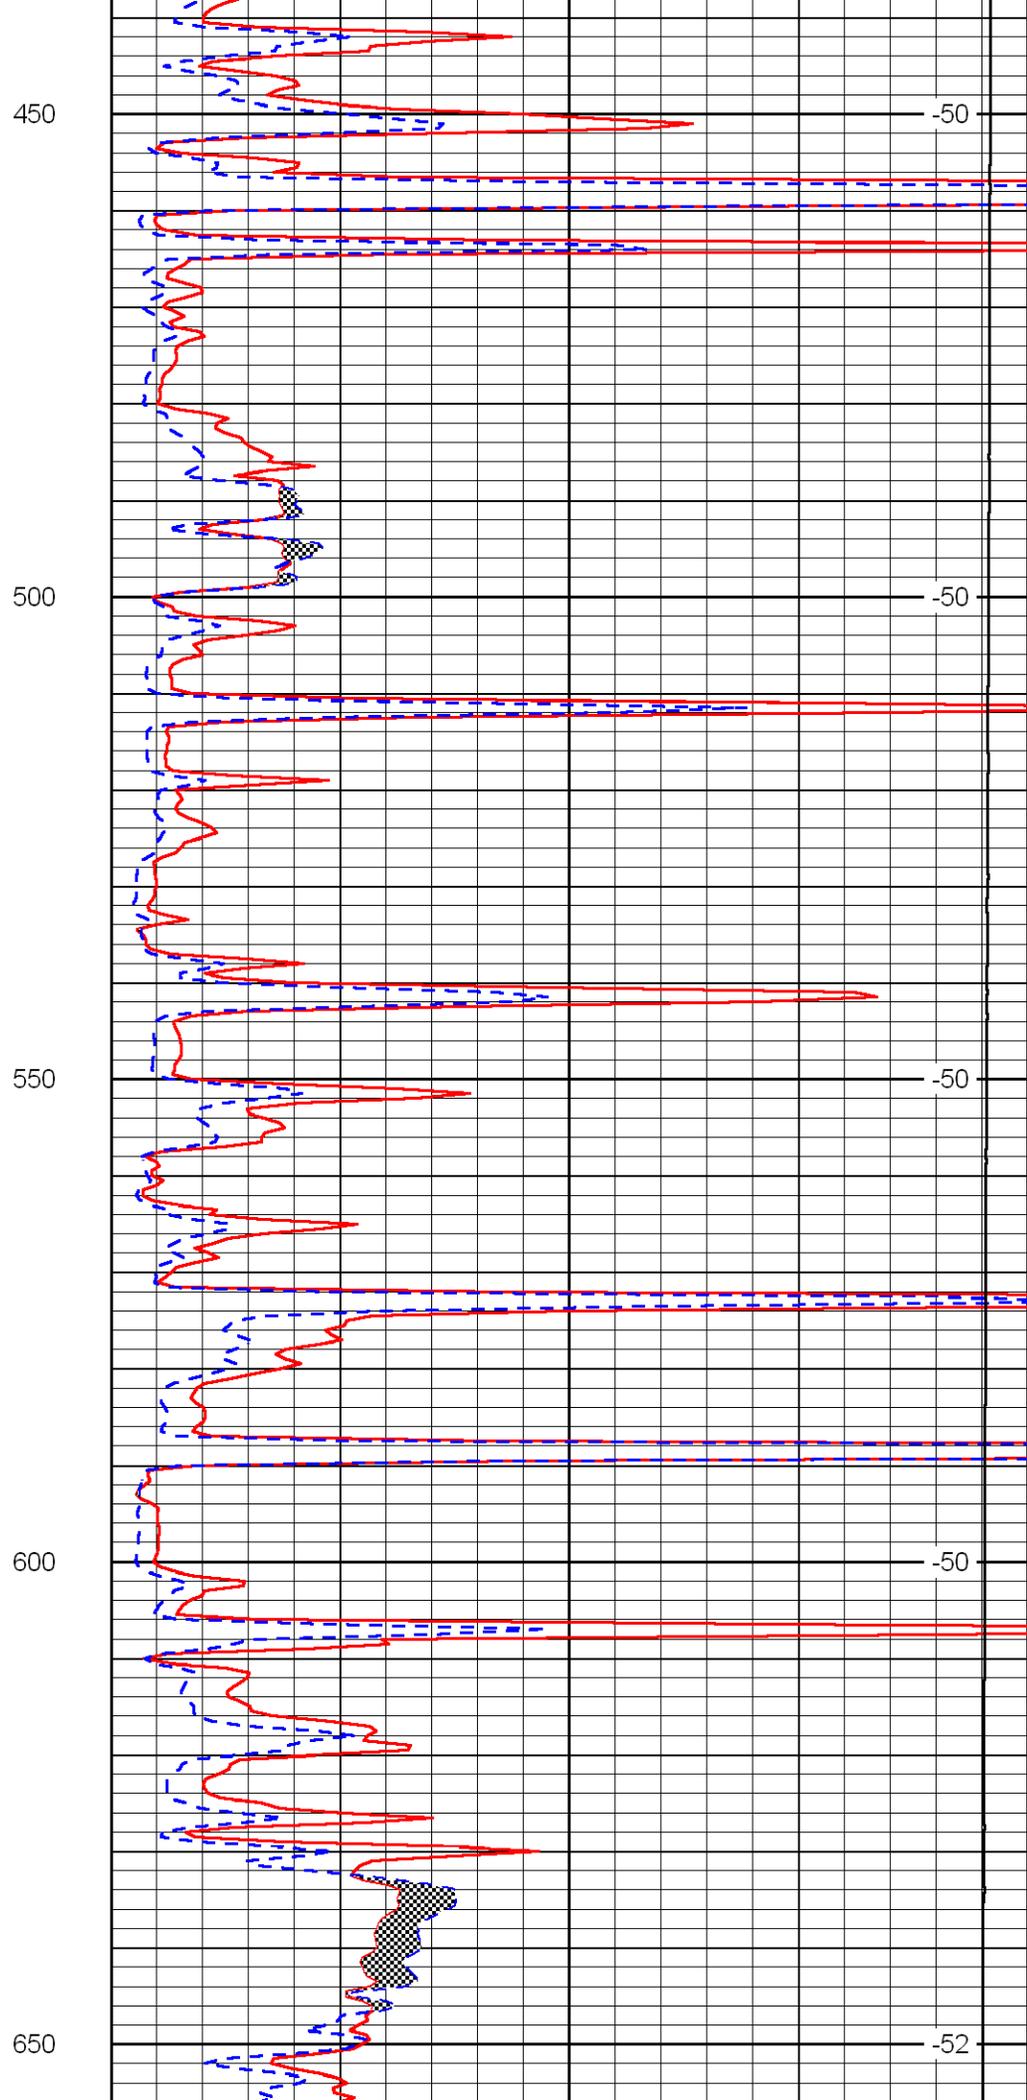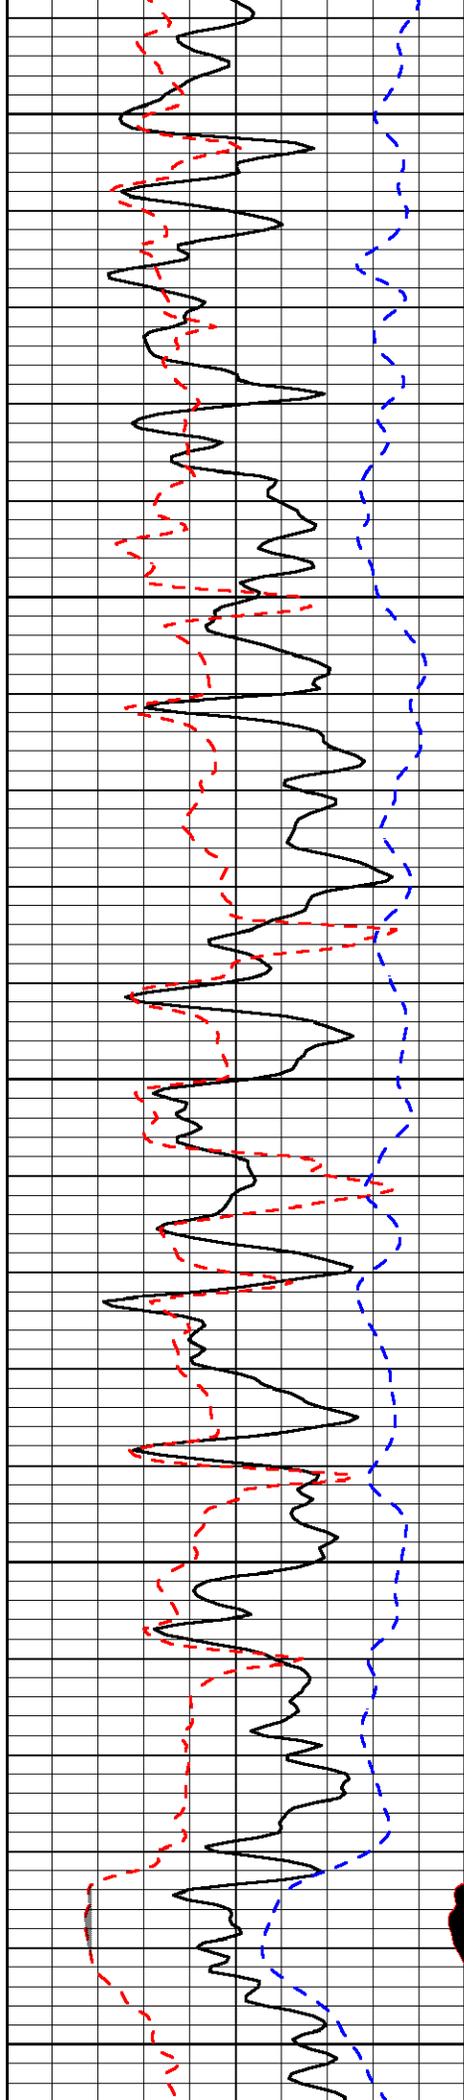

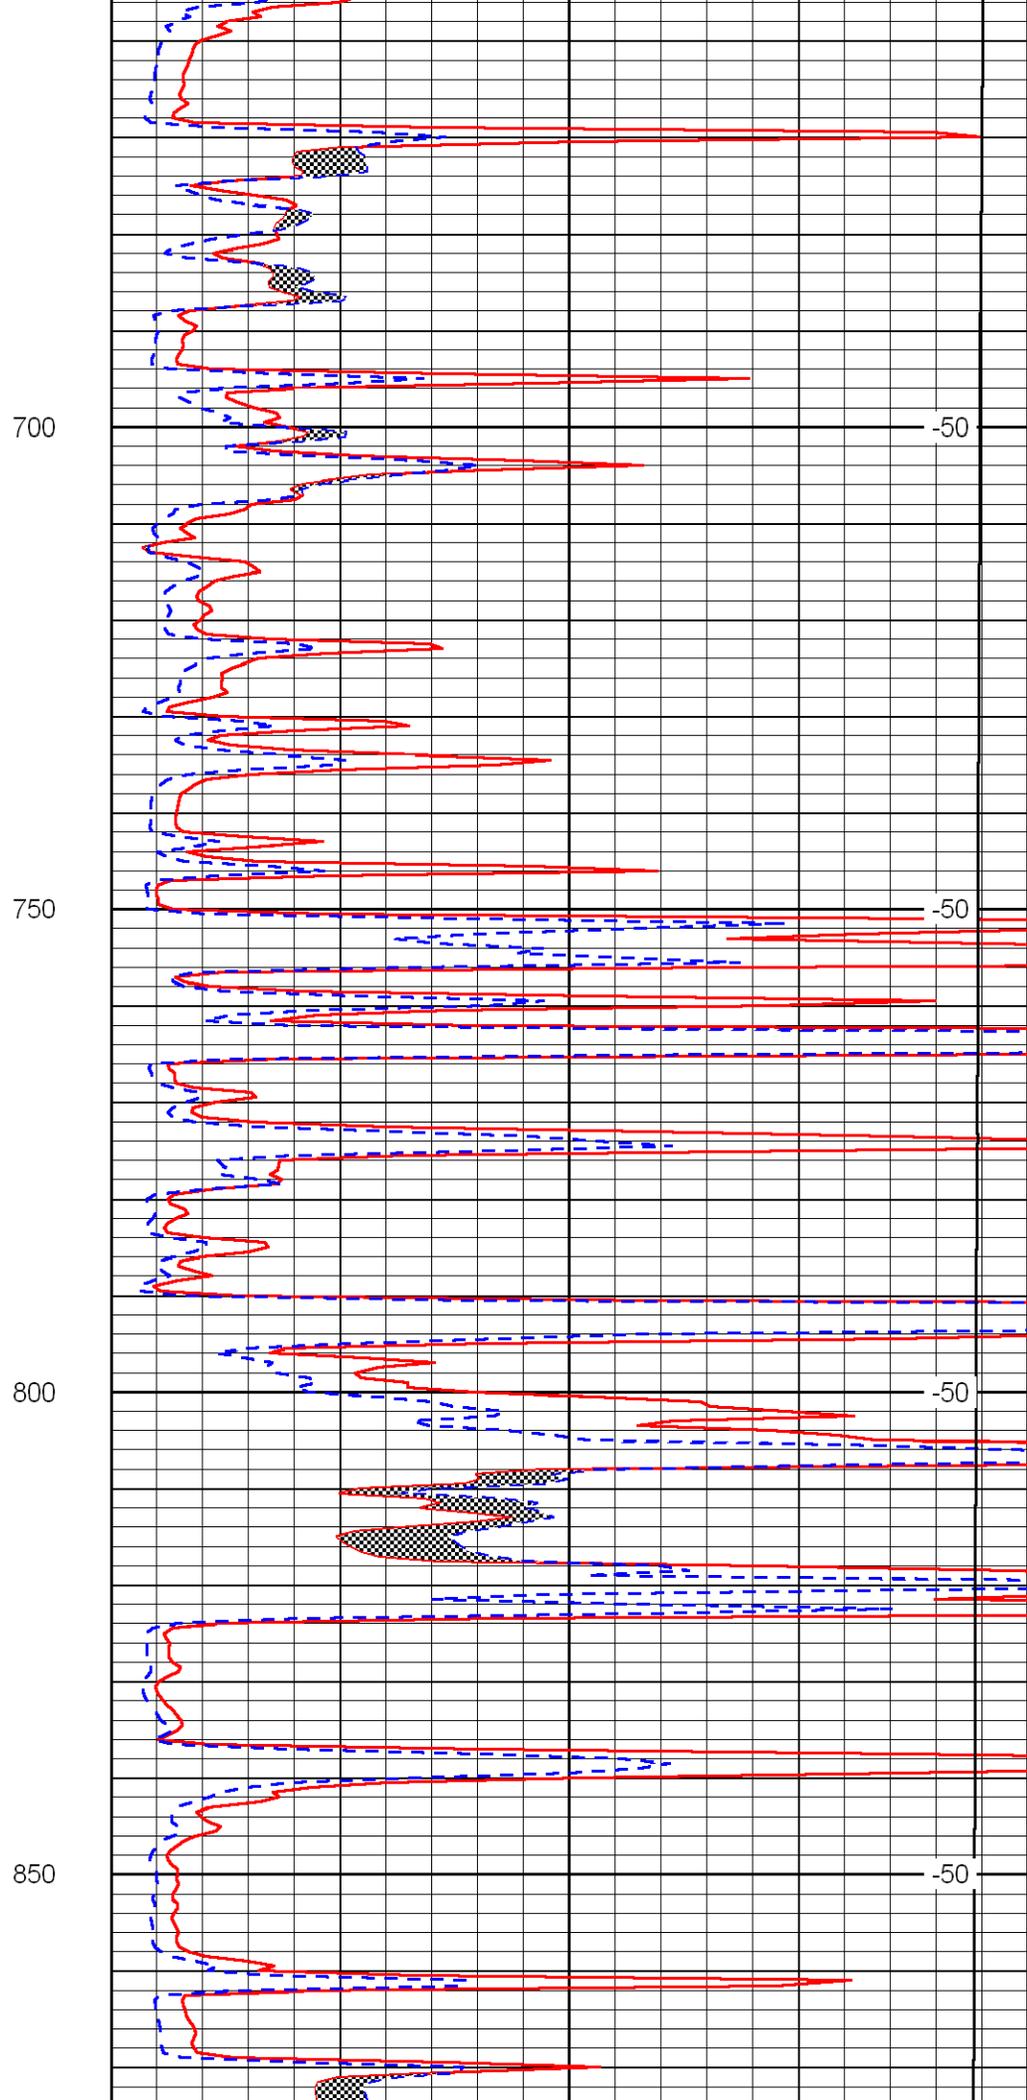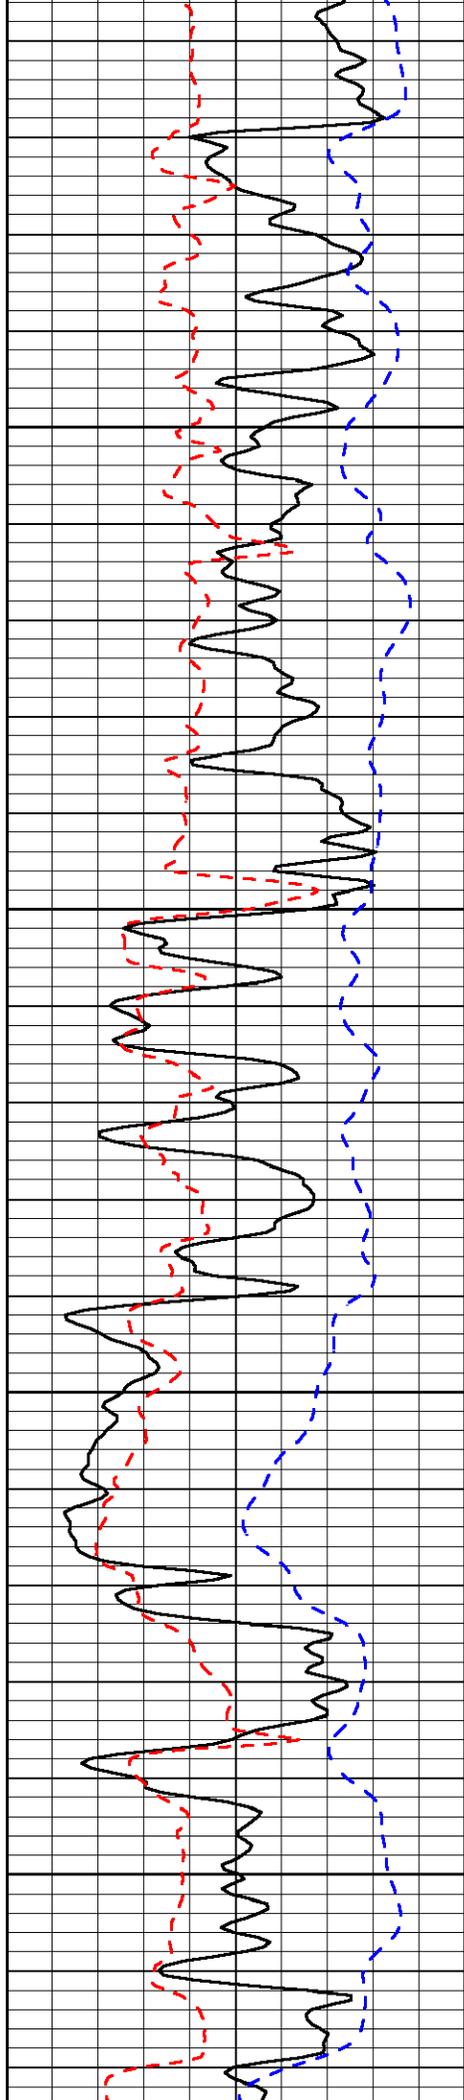

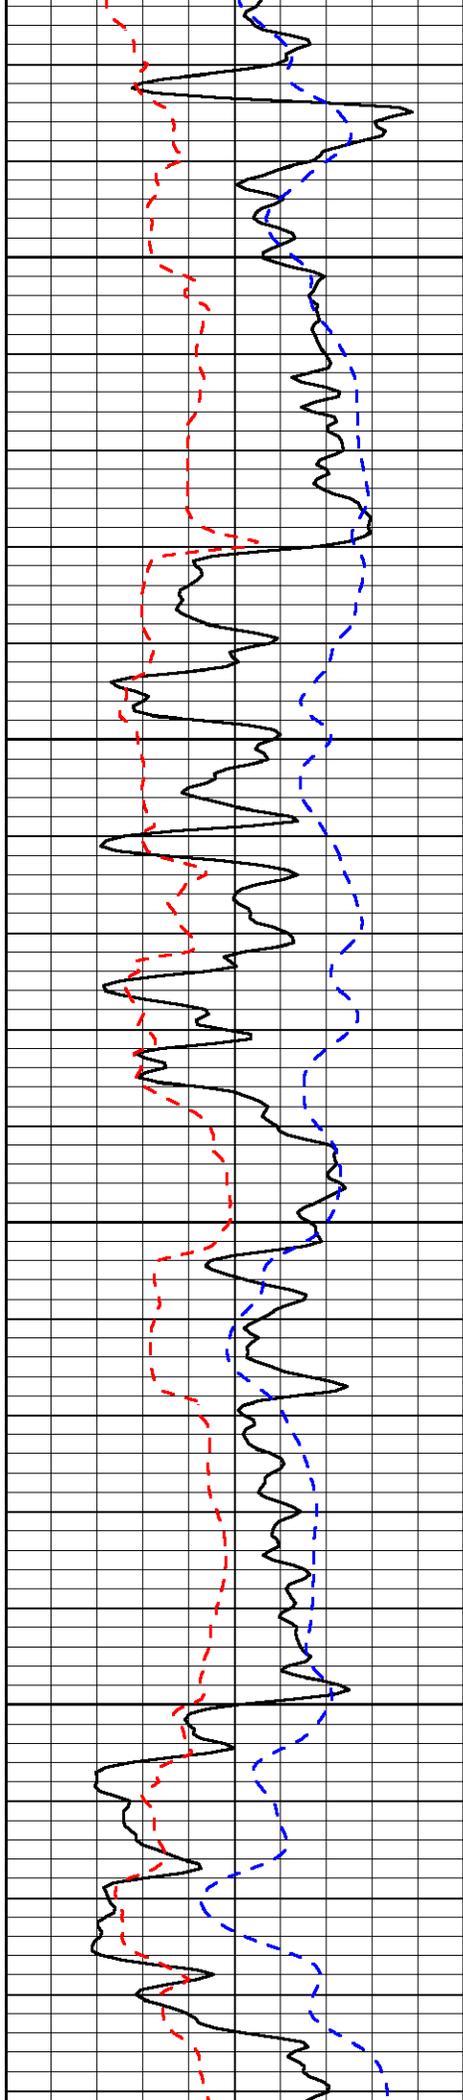


900

950

1000

1050

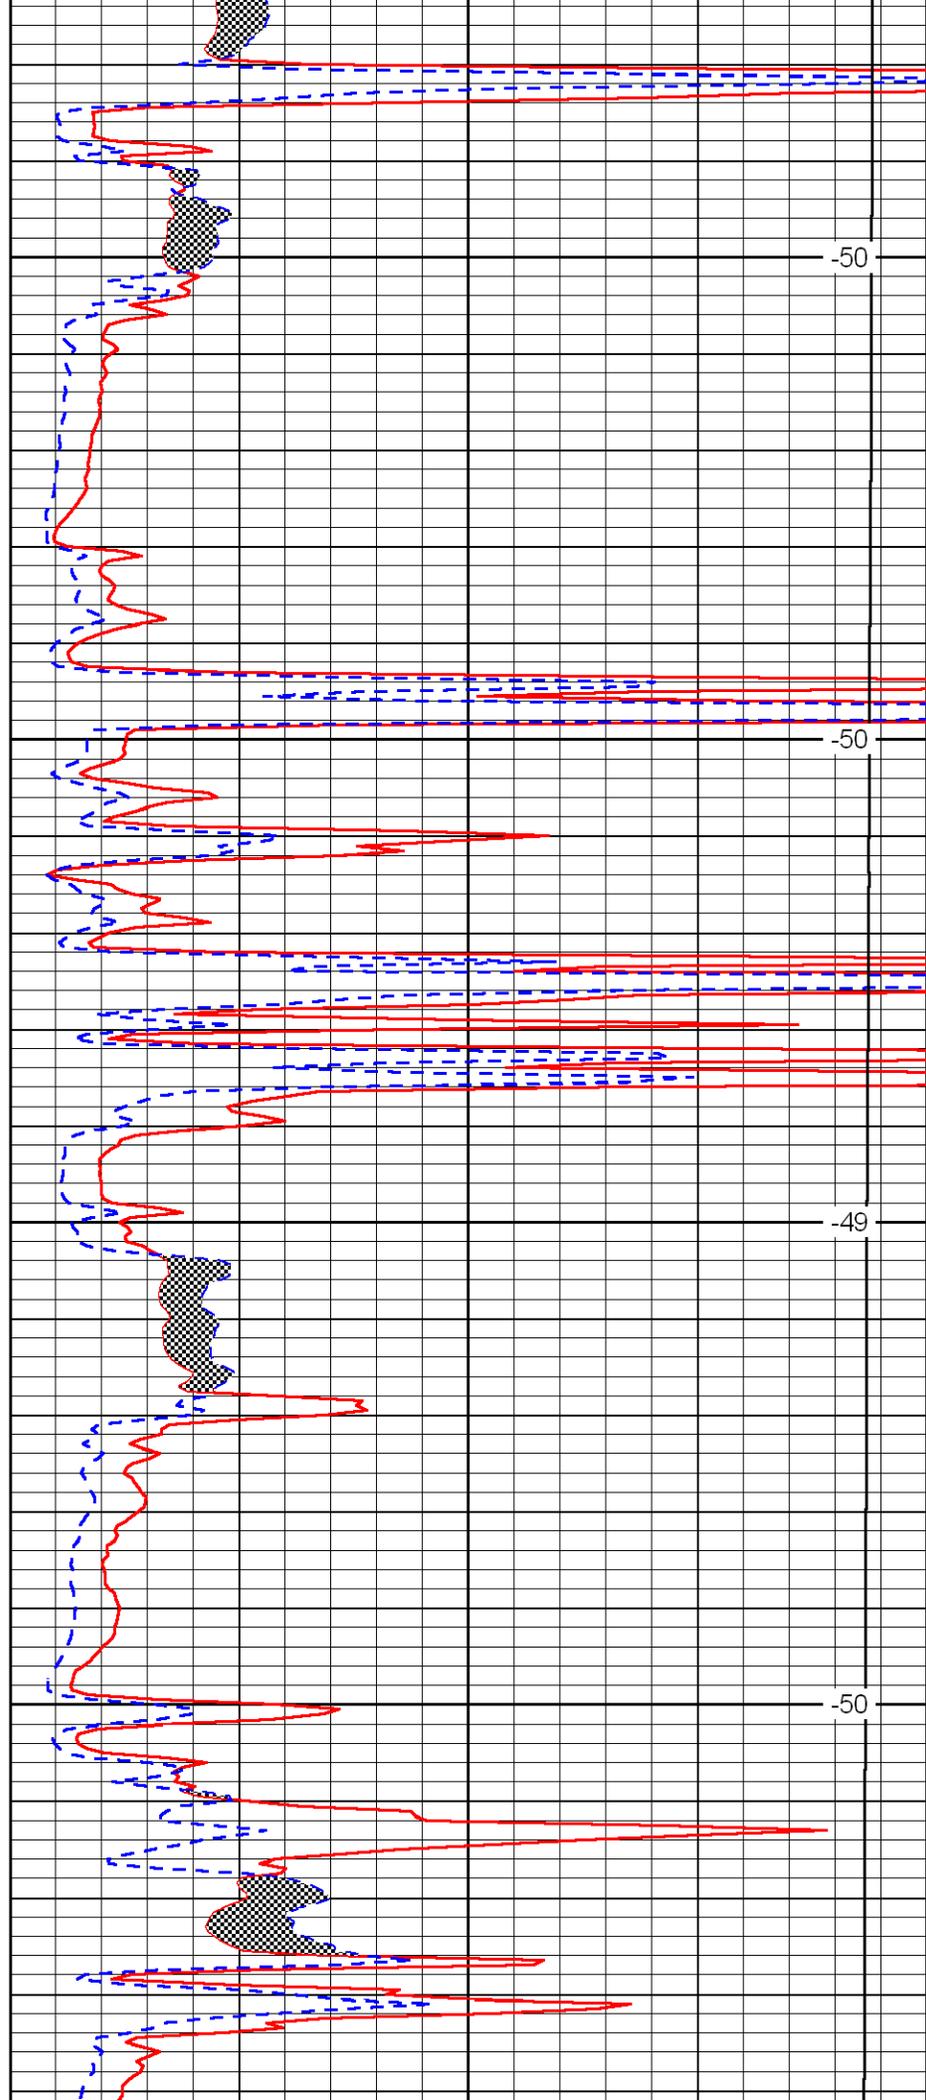


-50

-50

-49

-50

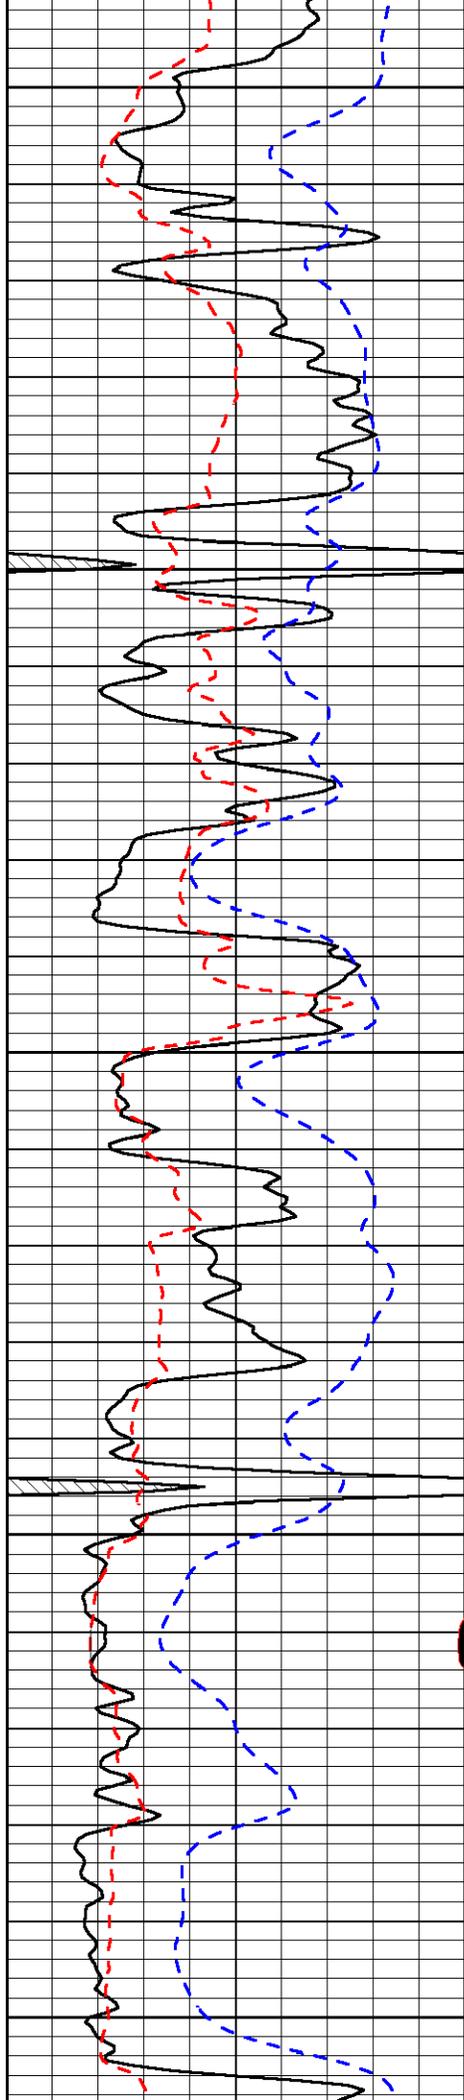


1100

1150

1200

1250

1300

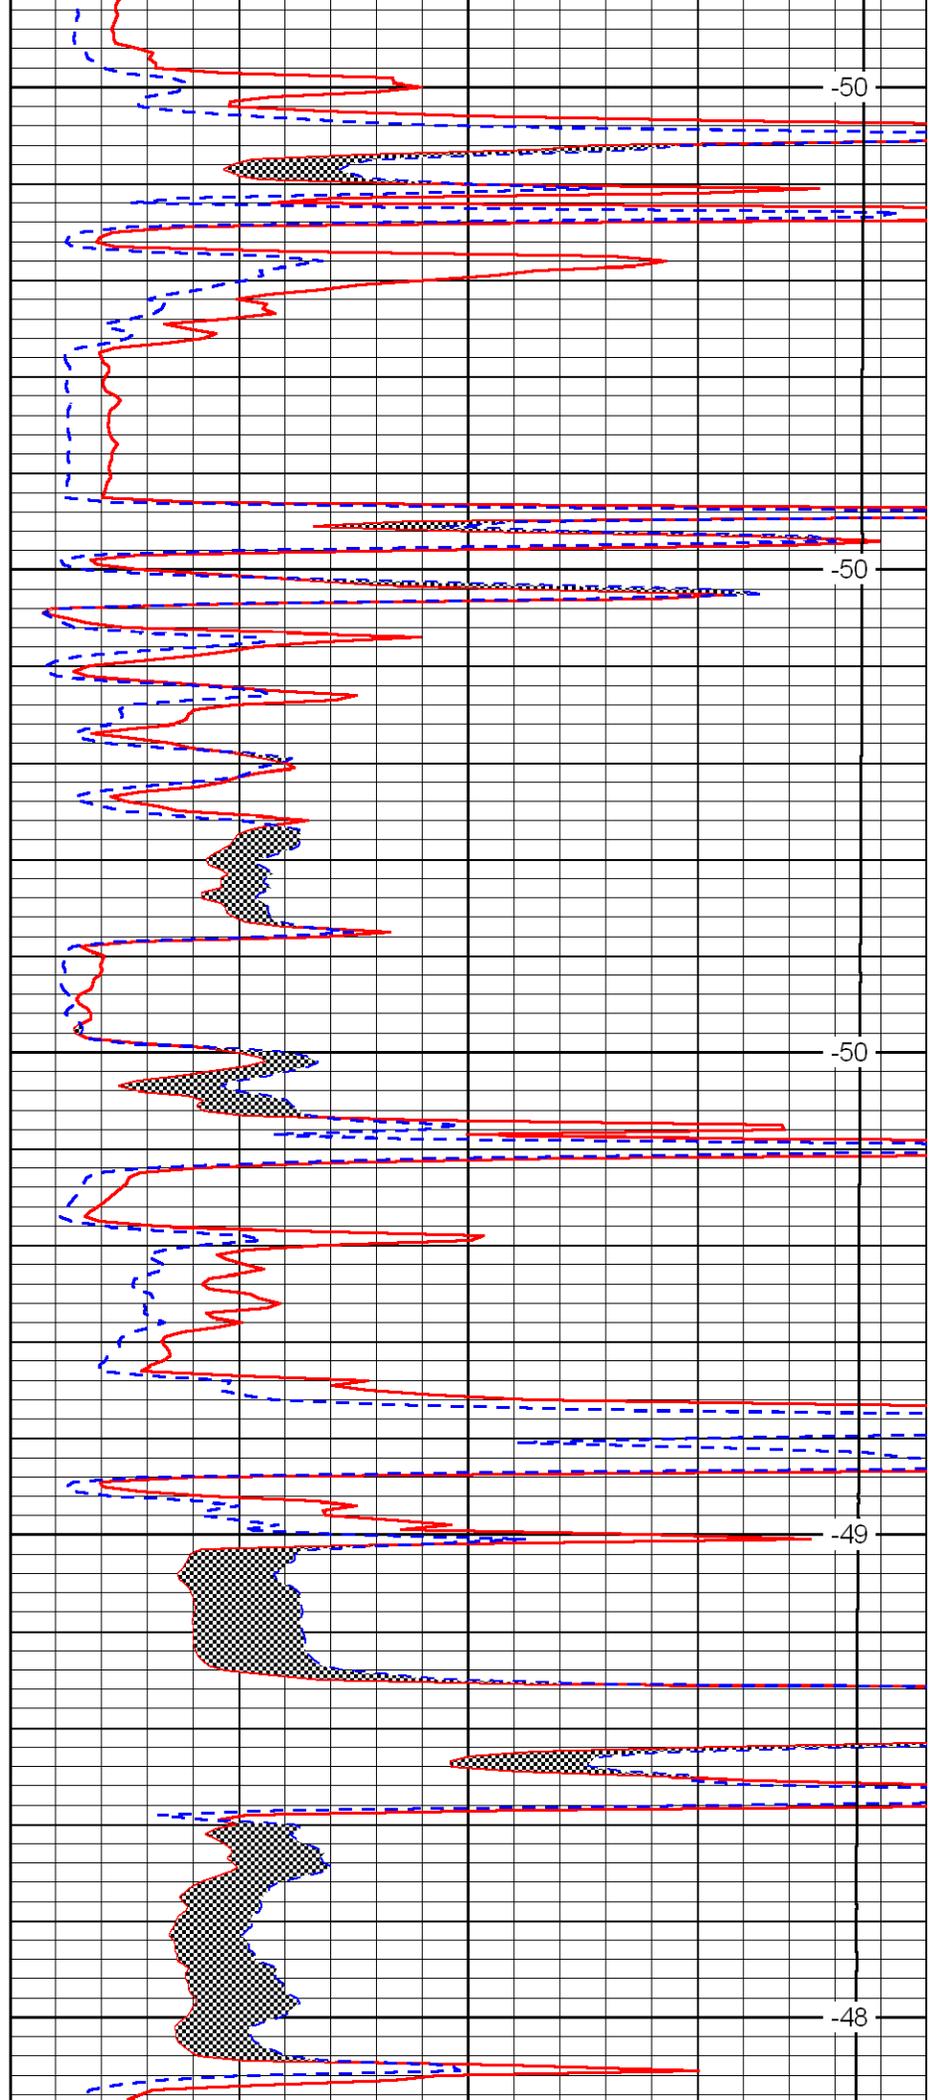


-50

-50

-50

-49

-48

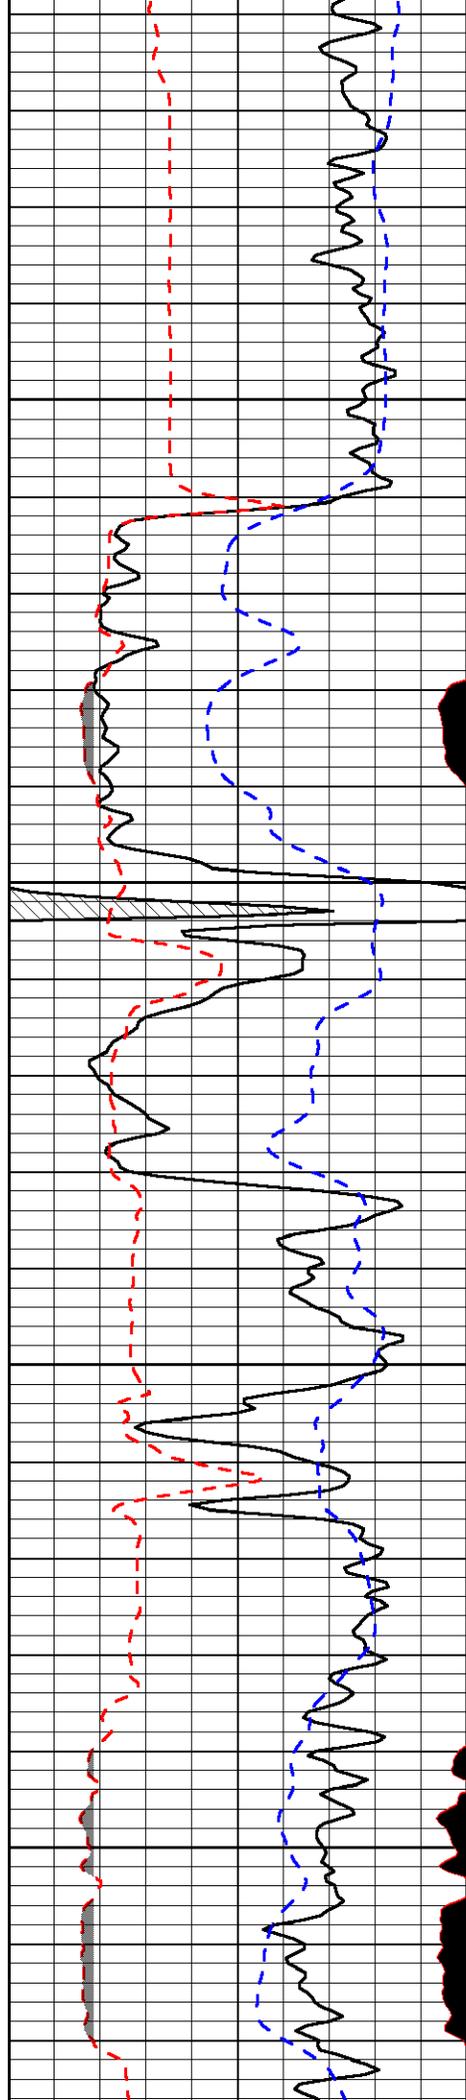


1350

1400

1450

1500

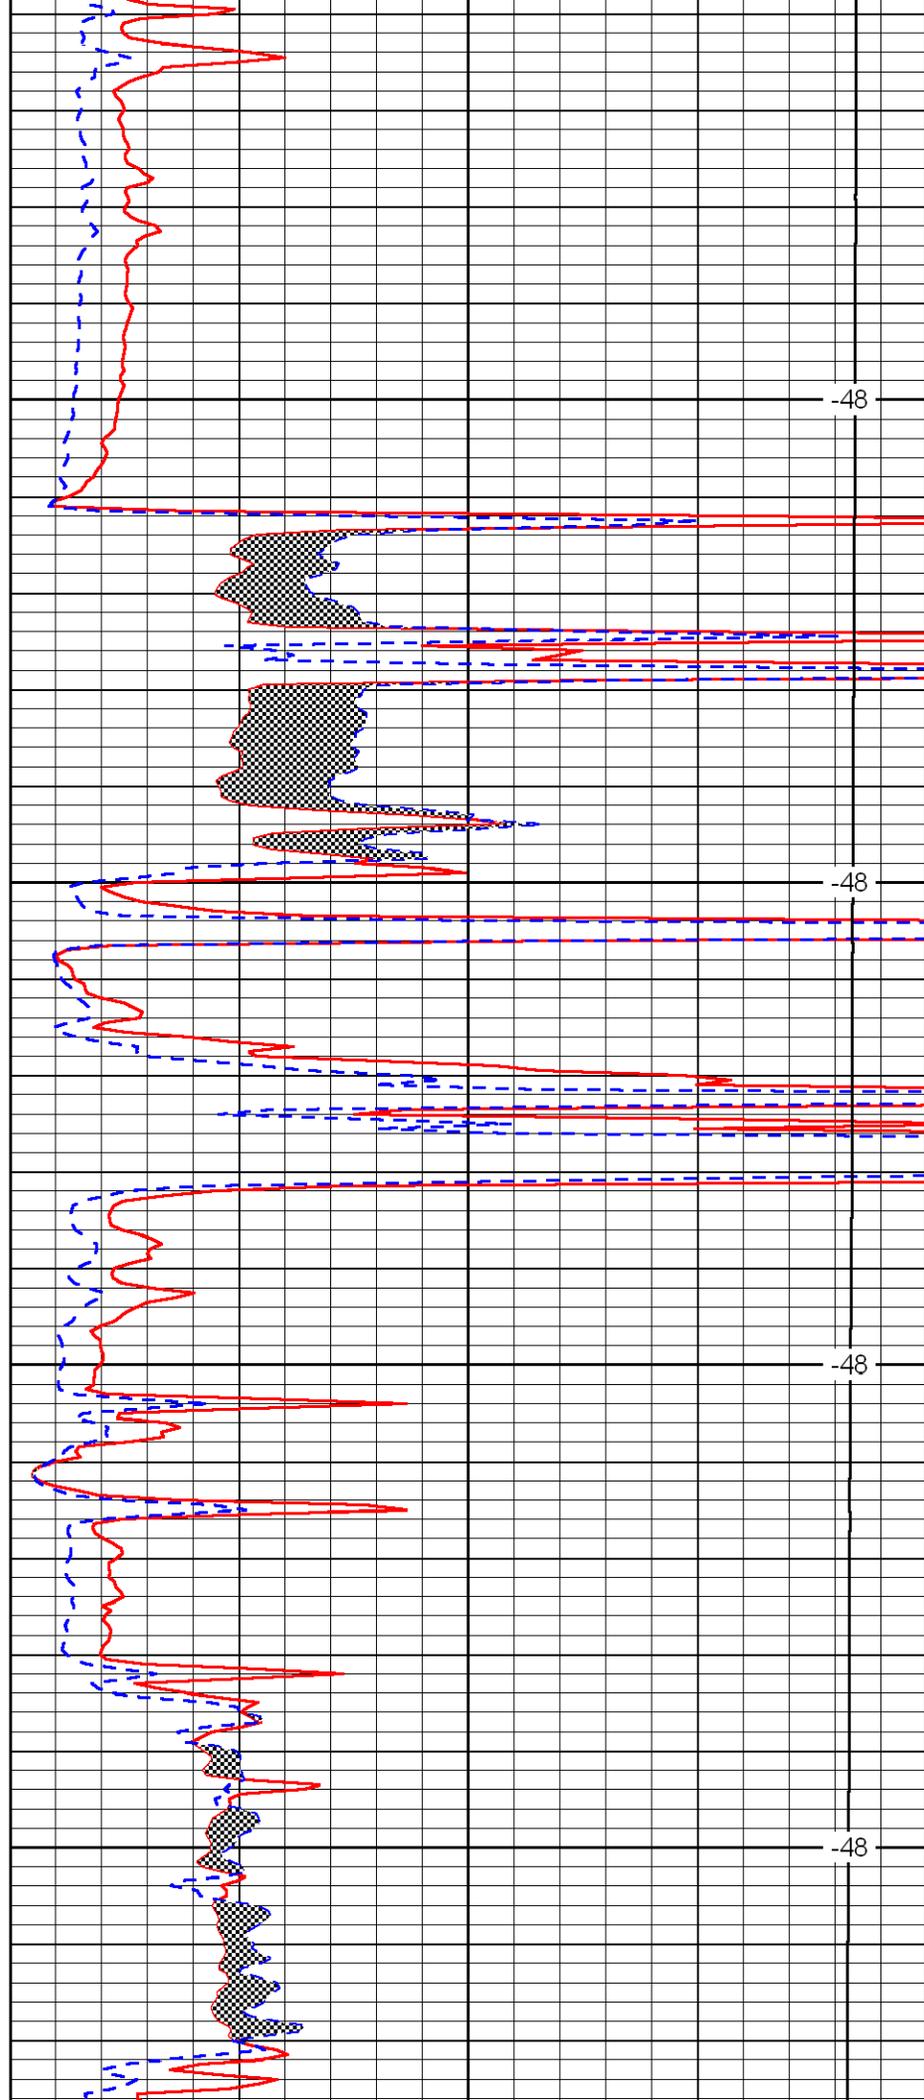


-48

-48

-48

-48

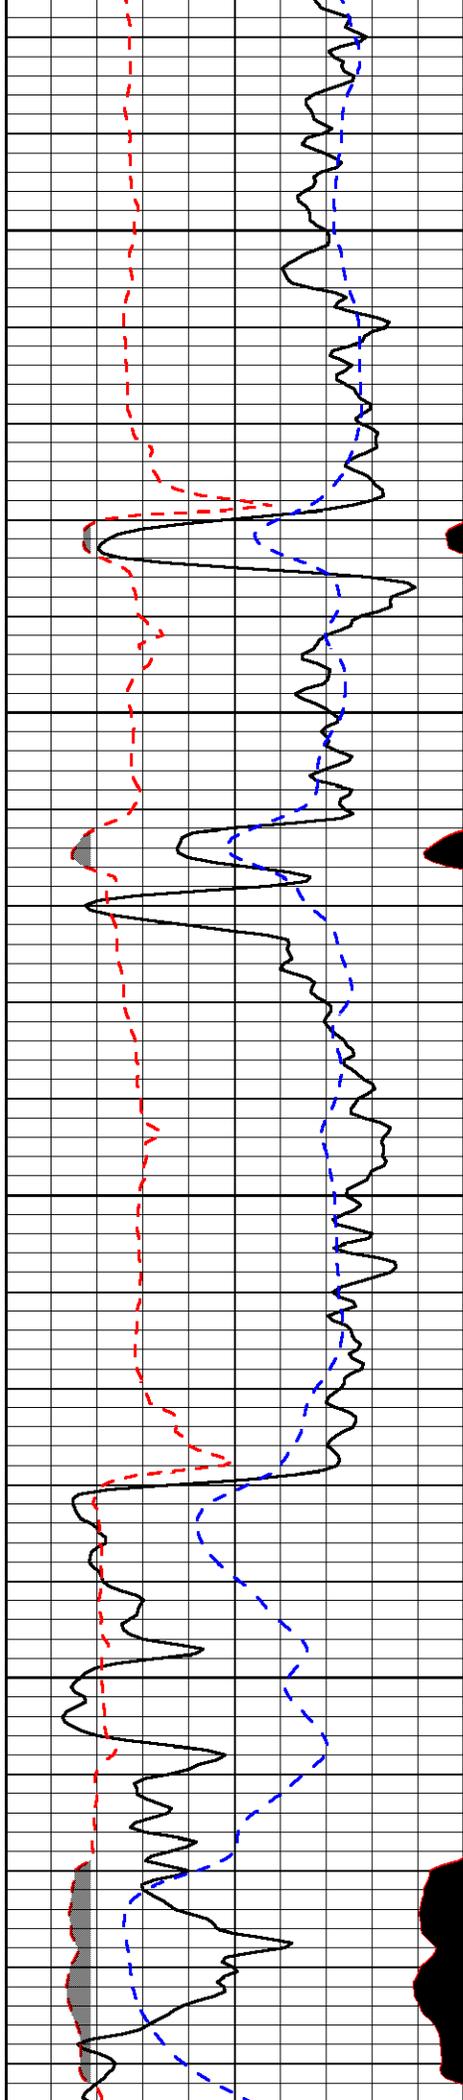


1550

1600

1650

1700

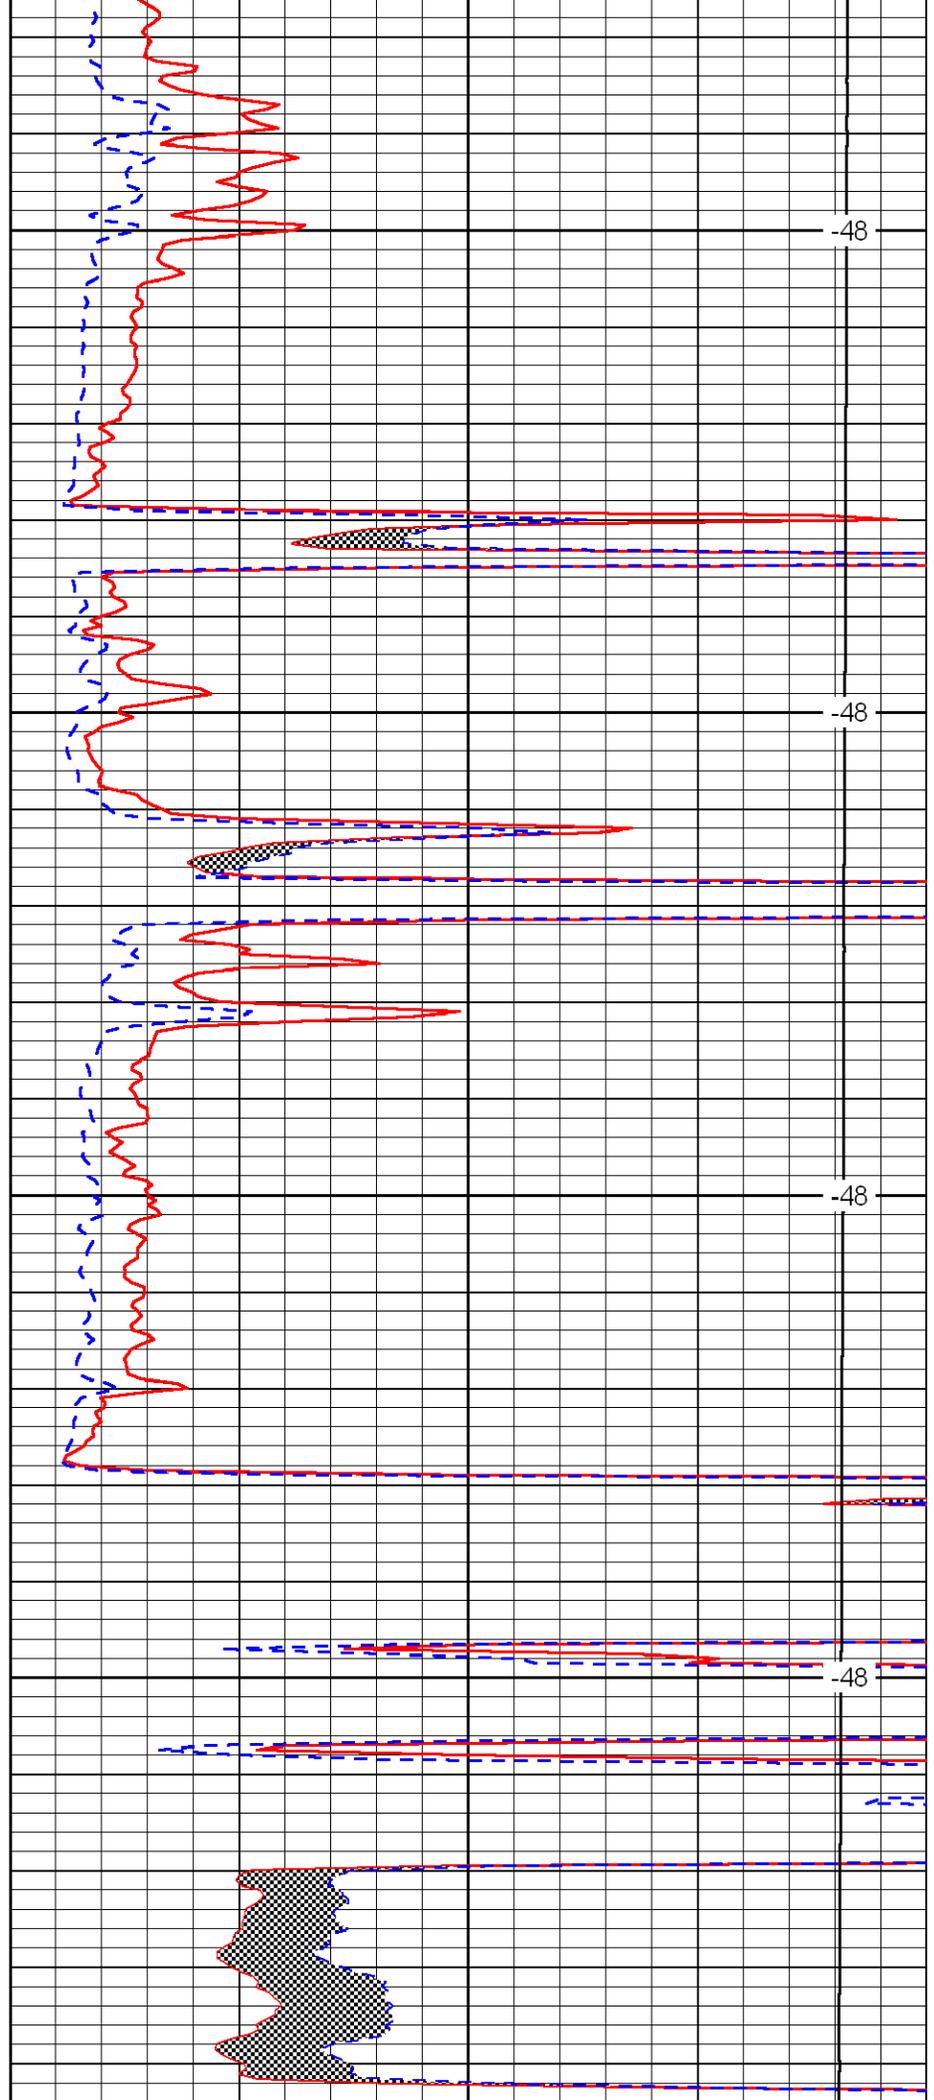


-48

-48

-48

-48

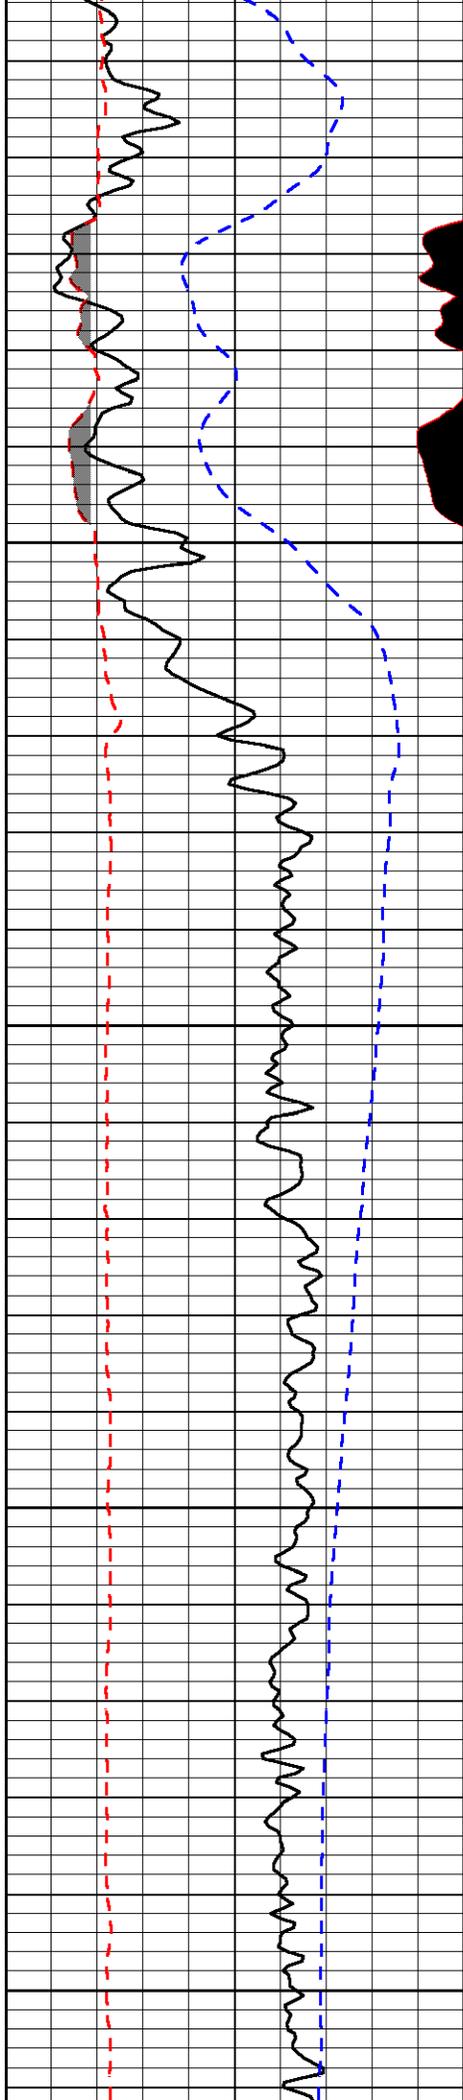


1750

1800

1850

1900

1950

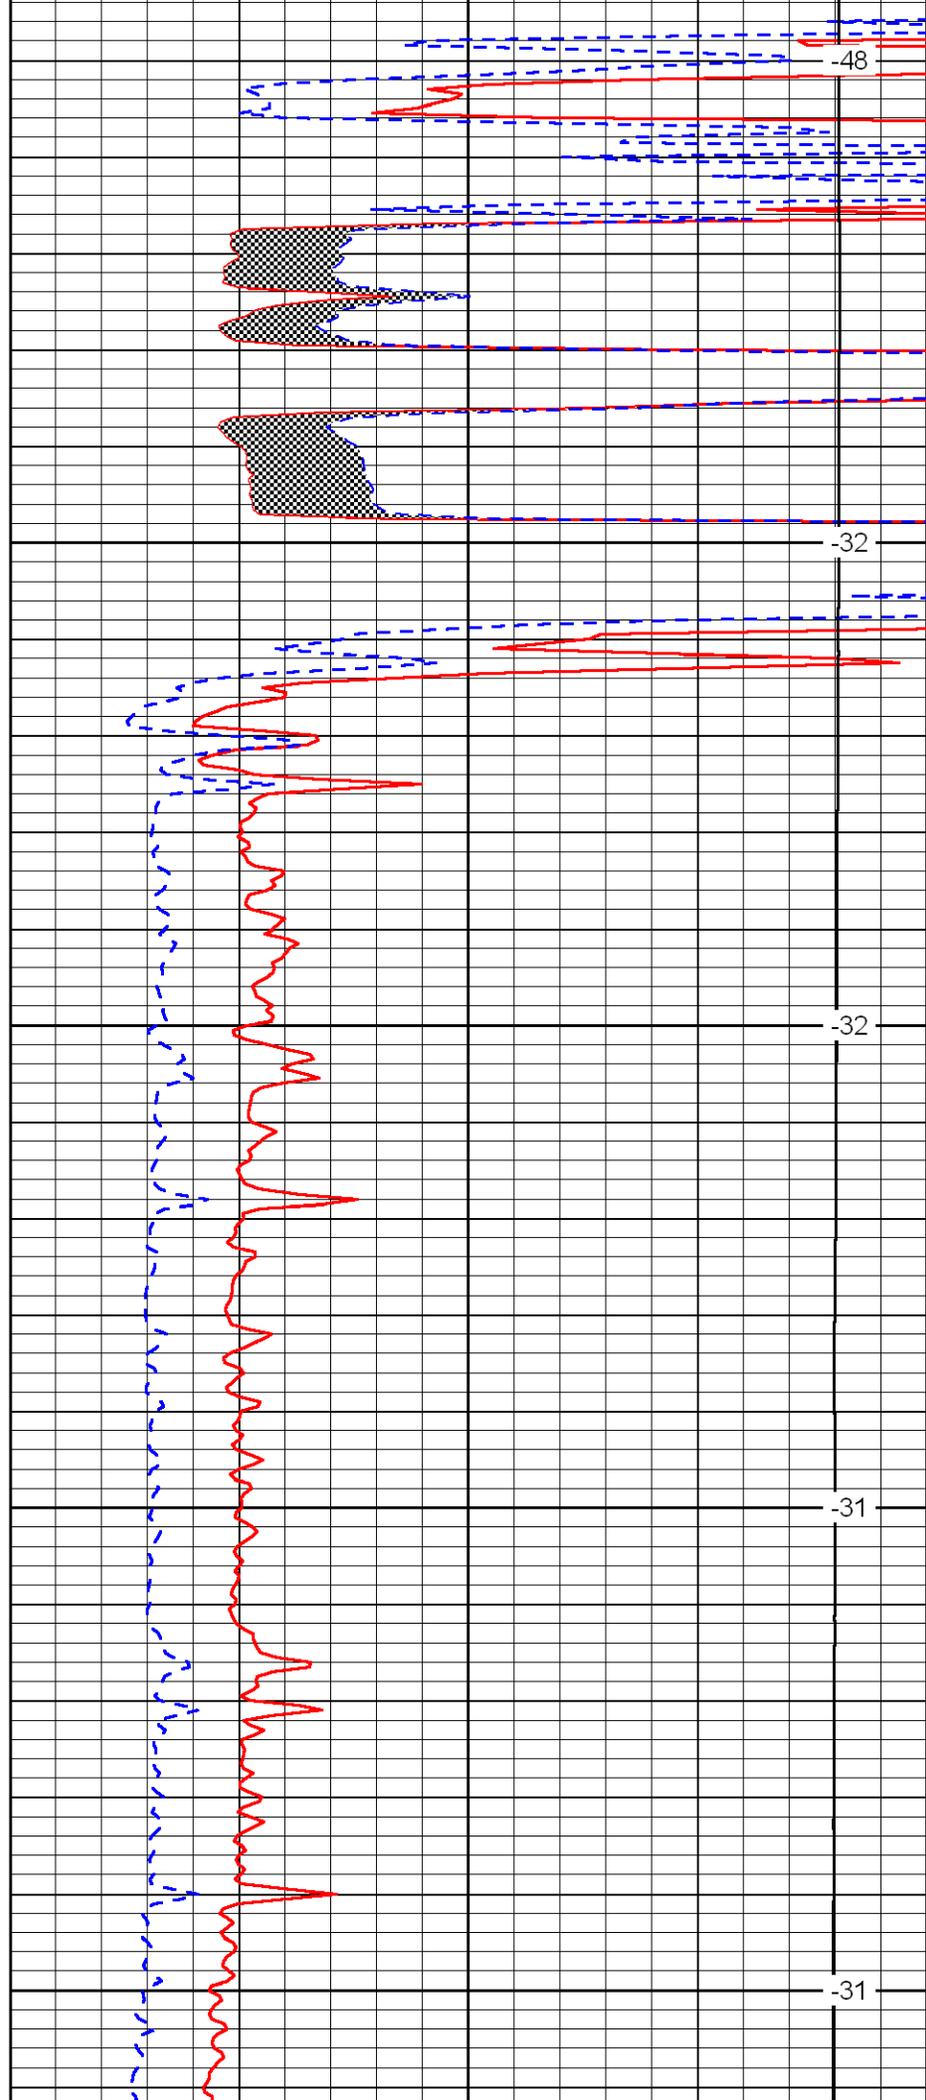


-48

-32

-32

-31

-31

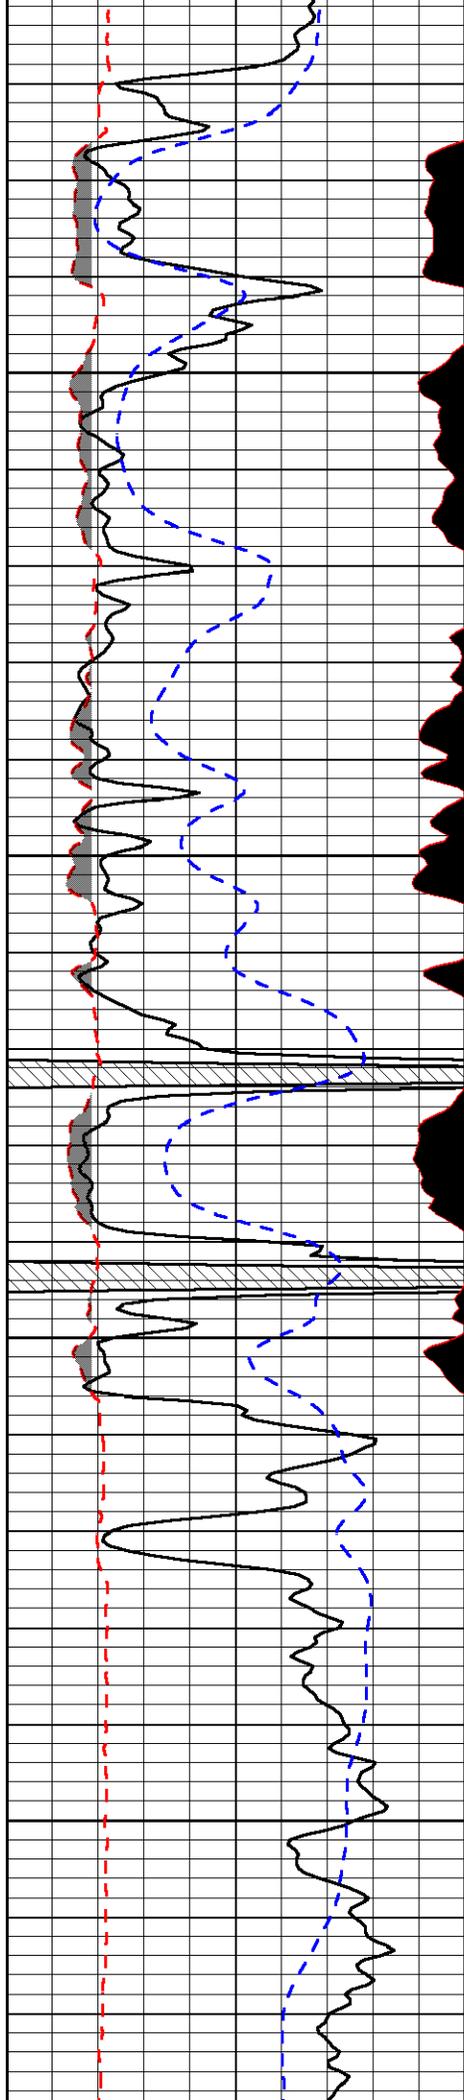


2000

2050

2100

2150

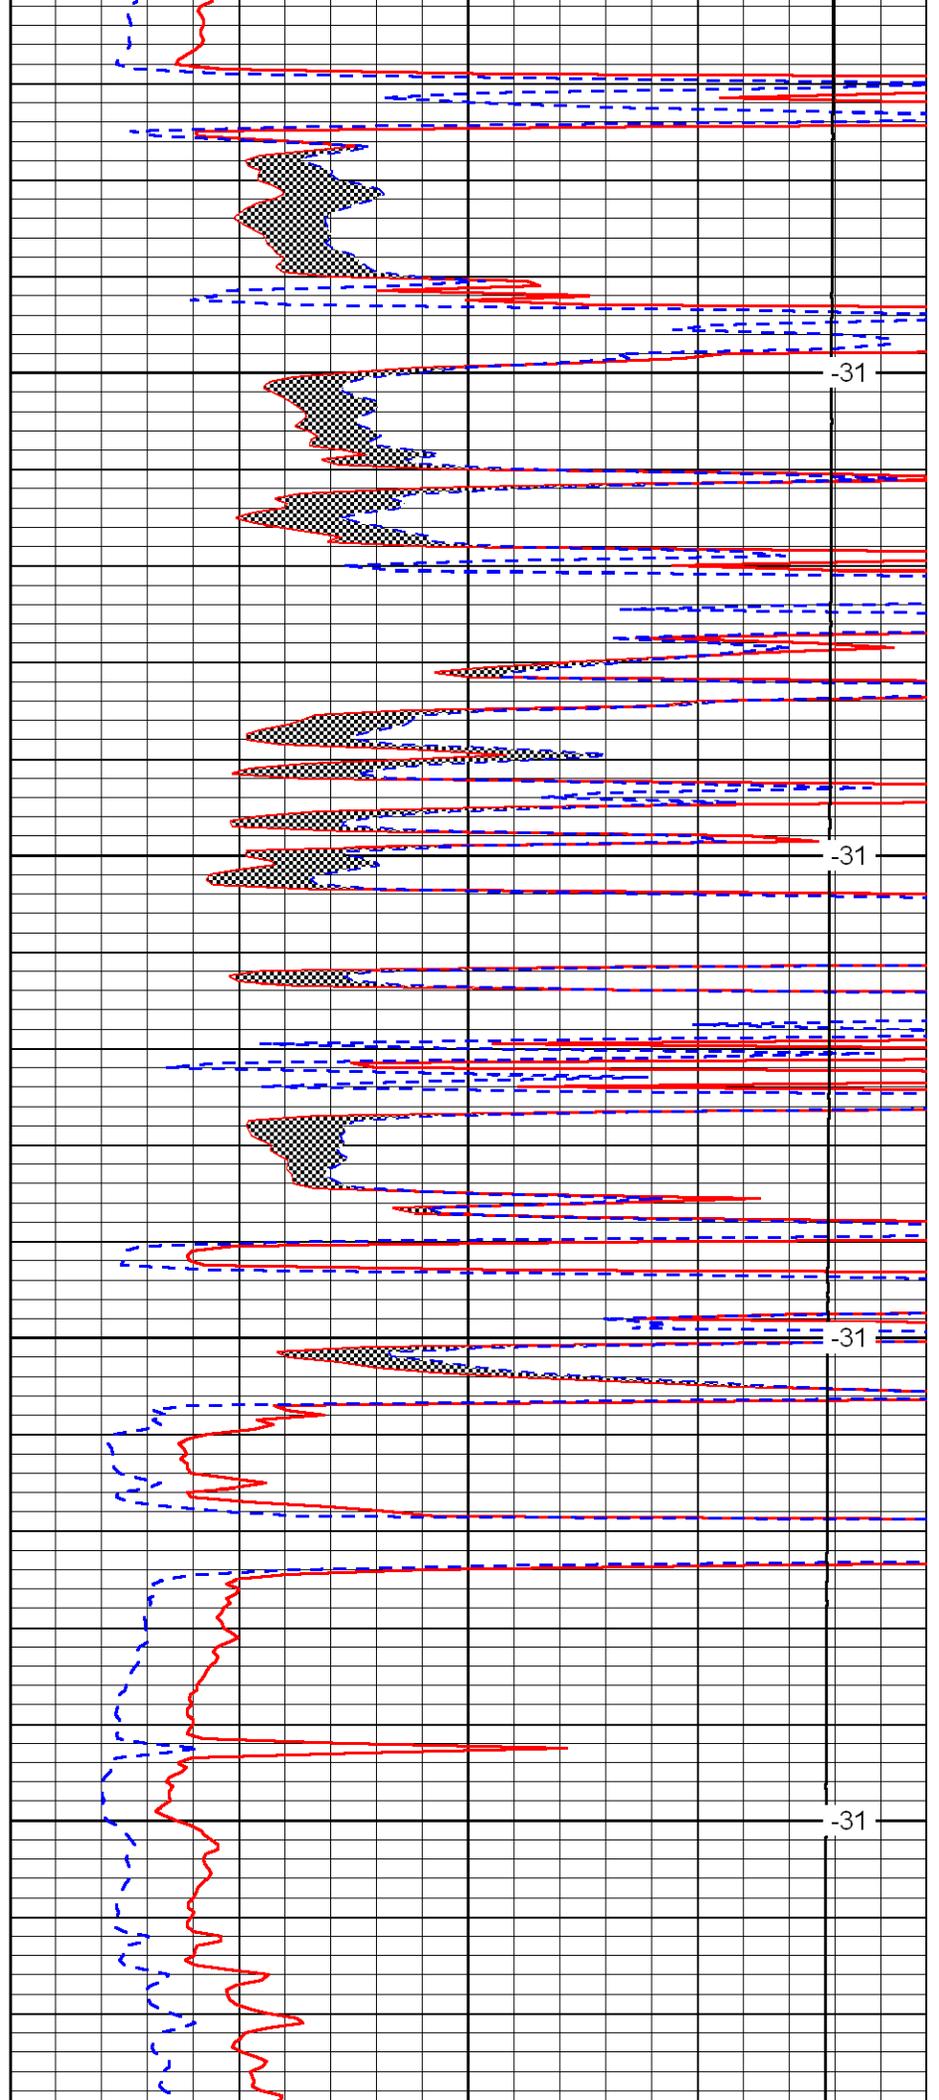


-31

-31

-31

-31

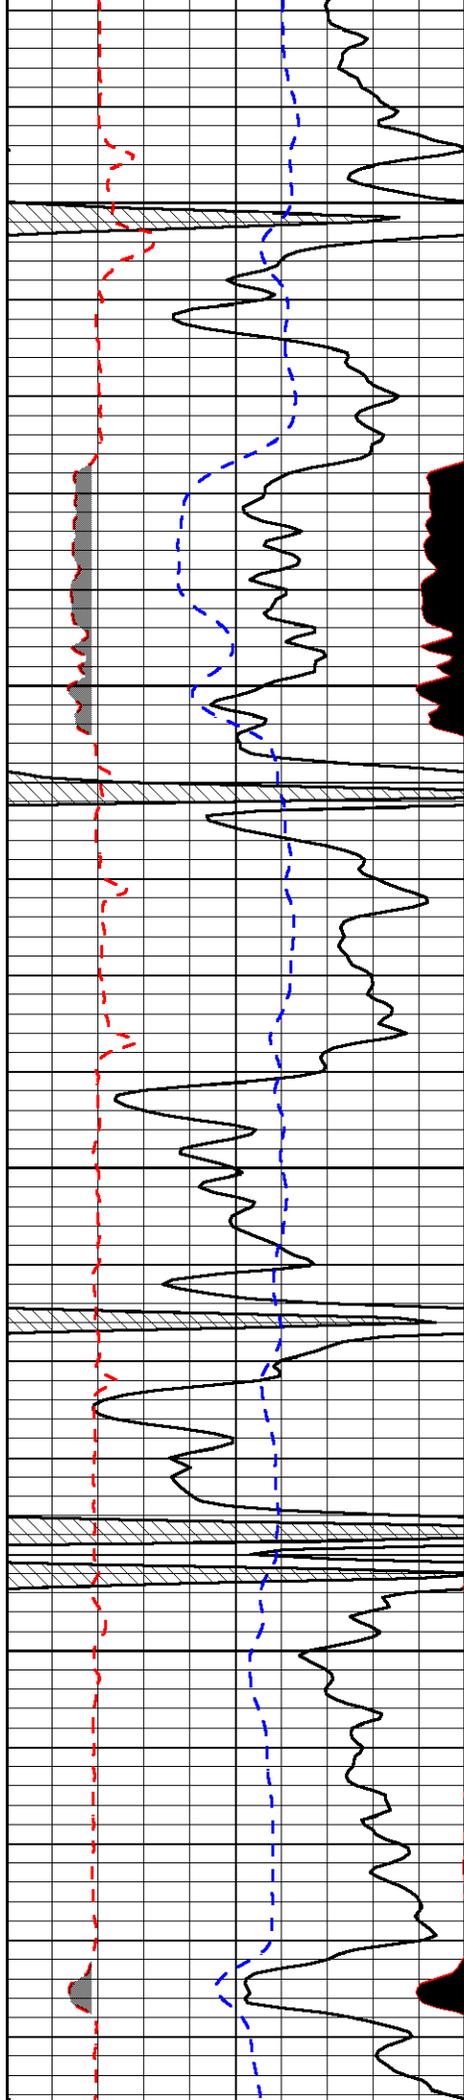


2200

2250

2300

2350

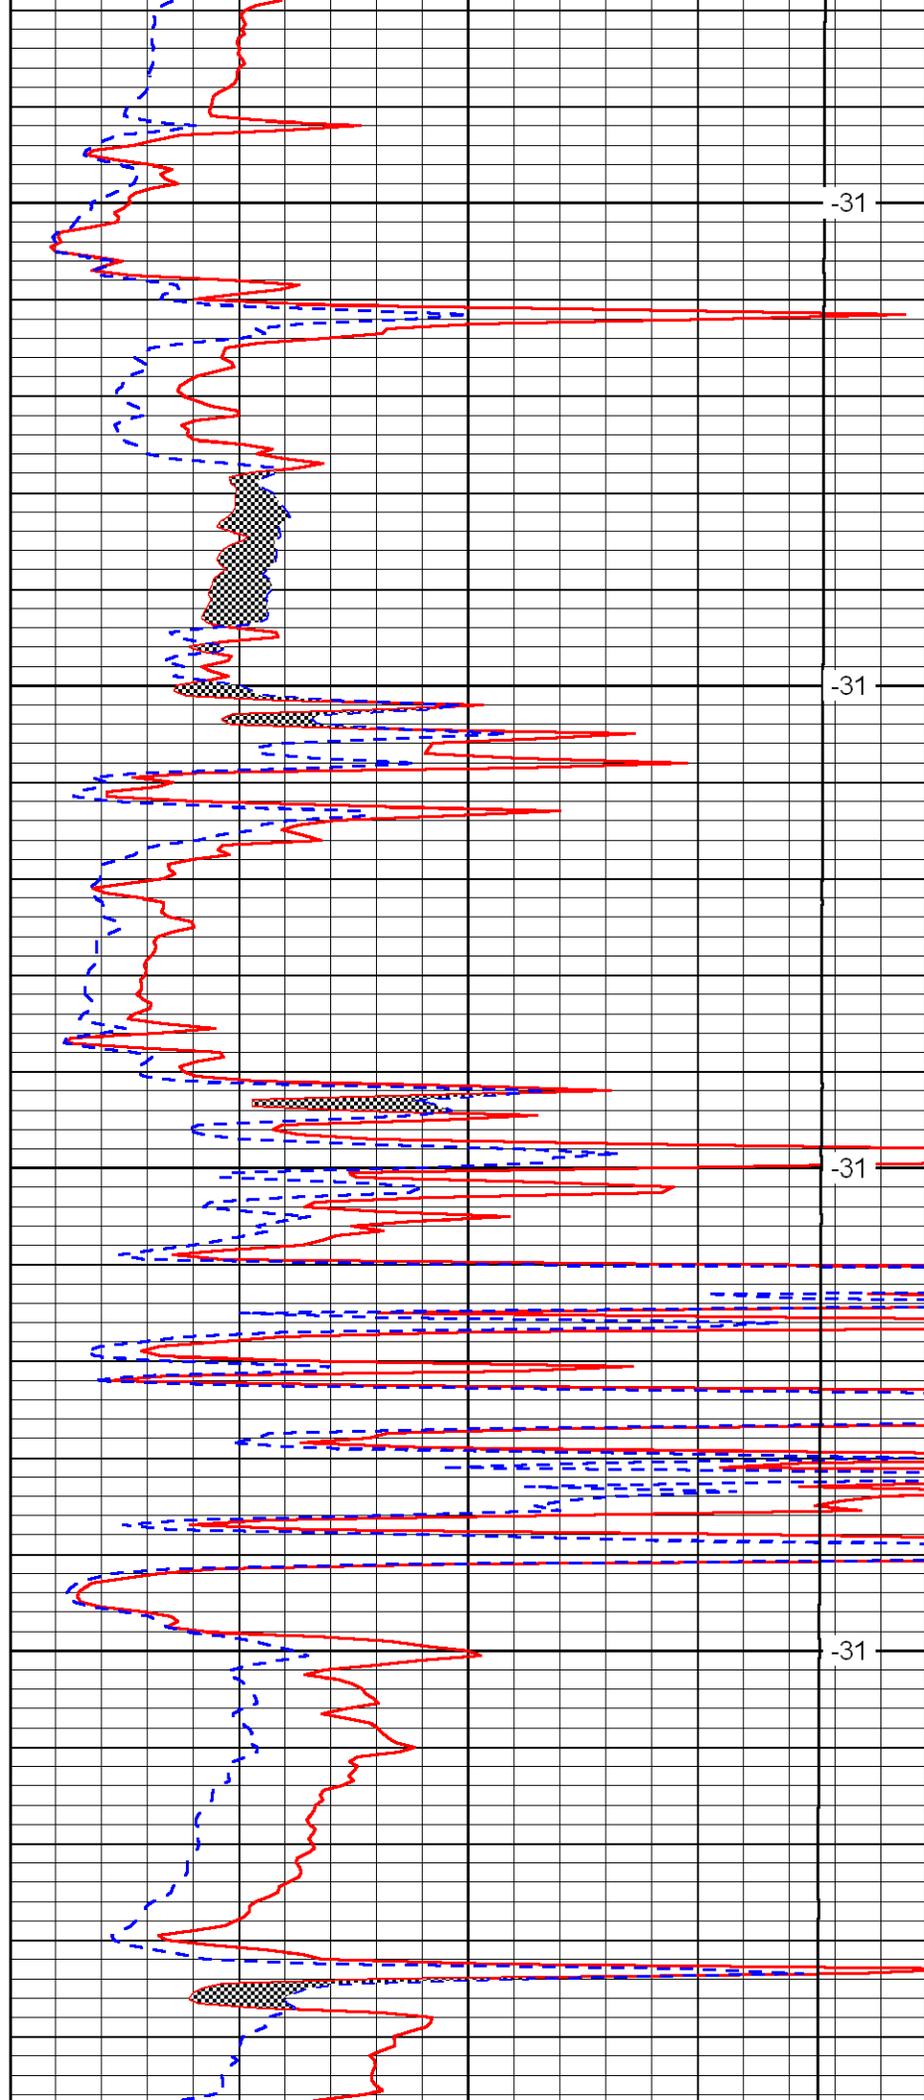


-31


-31

-31

-31

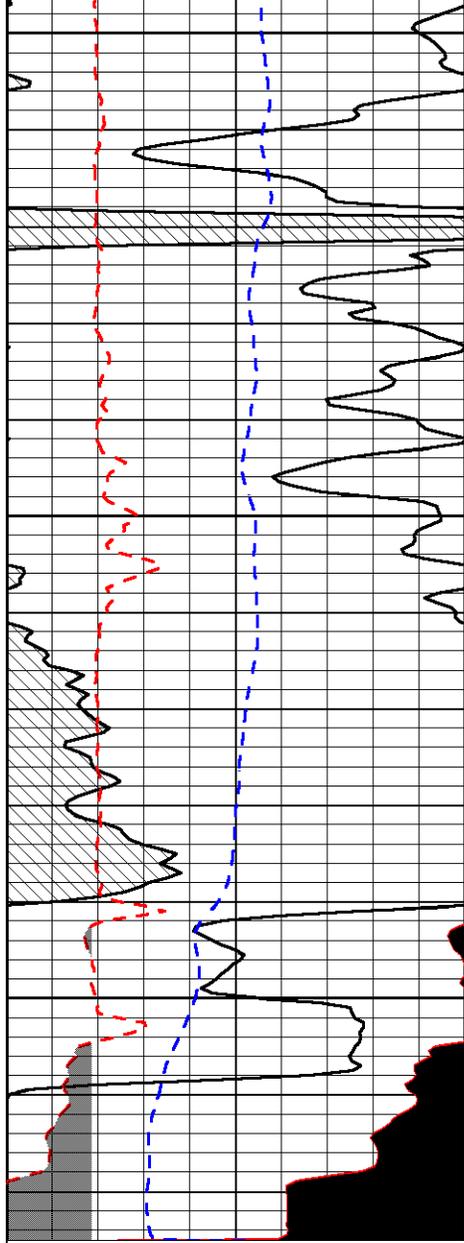

0	Gamma Ray	150
6	MCAL (GAPI)	16
2.875	Mud Cake (GAPI)	7.875
-200	SP	0

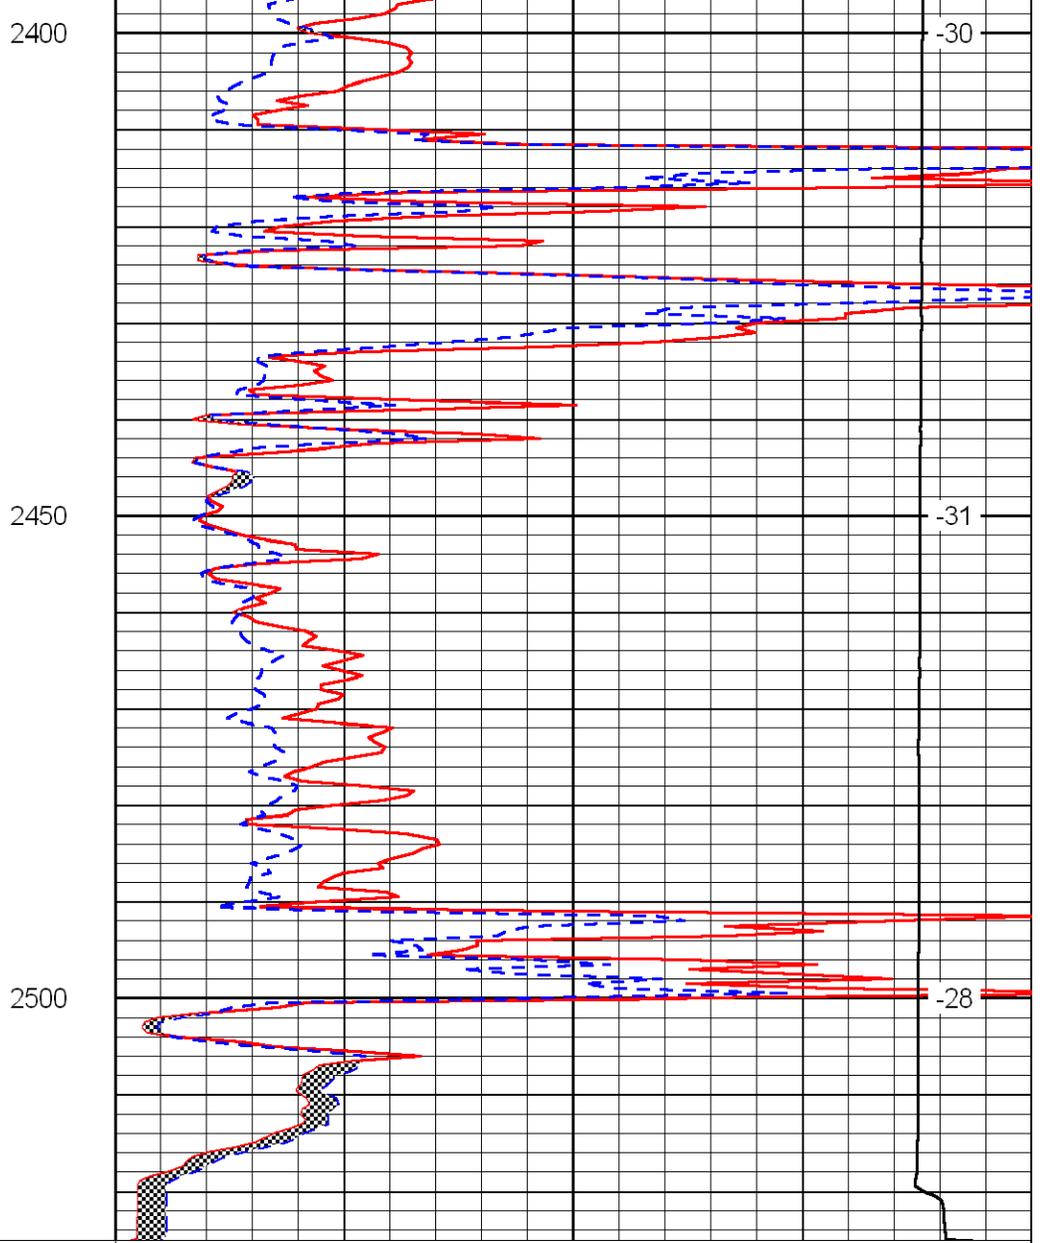

0	Micro Inverse 1 X 1	40
0	Micro Normal 2''	40
10000	Line Weight	0
		LSPD