


15-065-00459-0200

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

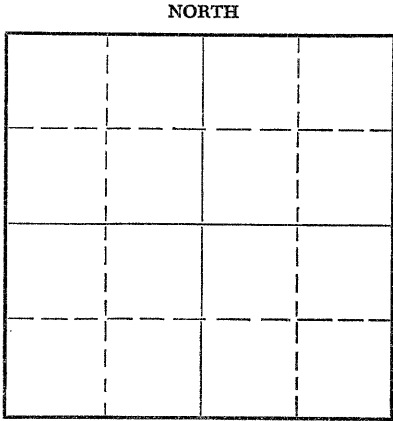

Locate well correctly on above
Section Plat

Graham County. Sec. 33 Twp. 6 Rge. 25 (X) (W)
Location as "NE/CNW/SW" or footage from lines SE SE NW
Lease Owner Petroleum, Inc.
Lease Name CARVER 311 East Third, Wichita Well No. 1
Office Address _____
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed August 15, 19 54
Application for plugging filed August 15, 19 54
Application for plugging approved August 15, 19 54
Plugging commenced August 15, 19 54
Plugging completed August 15, 19 54
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19 ____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4280 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	218'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mudded up to 160' and set first
wooden plug at 160'. Placed 1/2
sack hulls on top of plug. Displaced
15 sacks cement through drill pipe on top
of hulls. Mudded up to 40' and set second
wooden plug and placed 1/2 sack hulls on
top of plug. Filled hole to base of well
cellar with 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Garvey Drilling Company
Address XX R. R. #2, Great Bend, Kansas 827-54

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
KARL E. BECKER (employee of owner) ~~of the above-described~~
well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Karl E. Becker
311 East Third, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 20th day of August, 19 54

My commission expires July 8, 1958
D. M. Kennedy Notary Public.

PLUGGING
FILE SEC 33 T 6 R 25
BOOK PAGE 52 LINE 32