



SUPERIOR
Hays,
Kansas

COMPENSATED
DENSITY/NEUTRON
LOG

Company	SHELBY RESOURCES, LLC.	Company	SHELBY RESOURCES, LLC.
Well	RGW #1-16	Well	RGW #1-16
Field	WILDCAT	Field	WILDCAT
County	PAWNEE	County	PAWNEE
State	KANSAS	State	KANSAS
Location:	API # : 15-145-21659-0000 2035' FNL & 2470' FEL NW - SW - SW - NE	Other Services DIL/MEL SON	
Permanent Datum	GROUND LEVEL	Elevation	1991
Log Measured From	KELLY BUSHING 11' A.G.L.	K.B. 2002 D.F. 2000 G.L. 1991	
Drilling Measured From	KELLY BUSHING		
SEC 16	TWP 21S	RGE 16W	
Date	12/14/11		
Run Number	ONE		
Depth Driller	3900		
Depth Logger	3898		
Bottom Logged Interval	3874		
Top Log Interval	2900		
Casing Driller	8 5/8" @ 1032		
Casing Logger	1008		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 8600 PPM	
Density / Viscosity	9.3/42		
pH / Fluid Loss	10.0/8.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	0.95 @ 74F		
Rmf @ Meas. Temp	0.71 @ 74F		
Rmc @ Meas. Temp	1.14 @ 74F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	0.61 @ 115F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	115F		
Equipment Number	680		
Location	HAYS, KS.		
Recorded By	JEFF GRONEMEG		
Witnessed By	CHARLIE STURDAVANT		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.



Comments


THANK YOU FOR USING SUPERIOR WELL SERVICE (785) 628-6395
DIRECTIONS
LARNED FOUR WAY STOP - NORTH TO RD 0
1 1/2 MILES EAST TO RD 100 - 1 1/2 MILES NORTH - WEST INTO

Database File: 008653ddn.db
Dataset Pathname: pass3.2
Presentation Format: _den_neu
Dataset Creation: Wed Dec 14 19:39:57 2011 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240

Charted by:		Depth in Feet scaled 1:2.15				
0	GAMMA RAY (GAPI)	150	AVTX	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	BVTX	-0.25 CORRECTION (g/cc) 0.25		
			0 (ft3)	10		

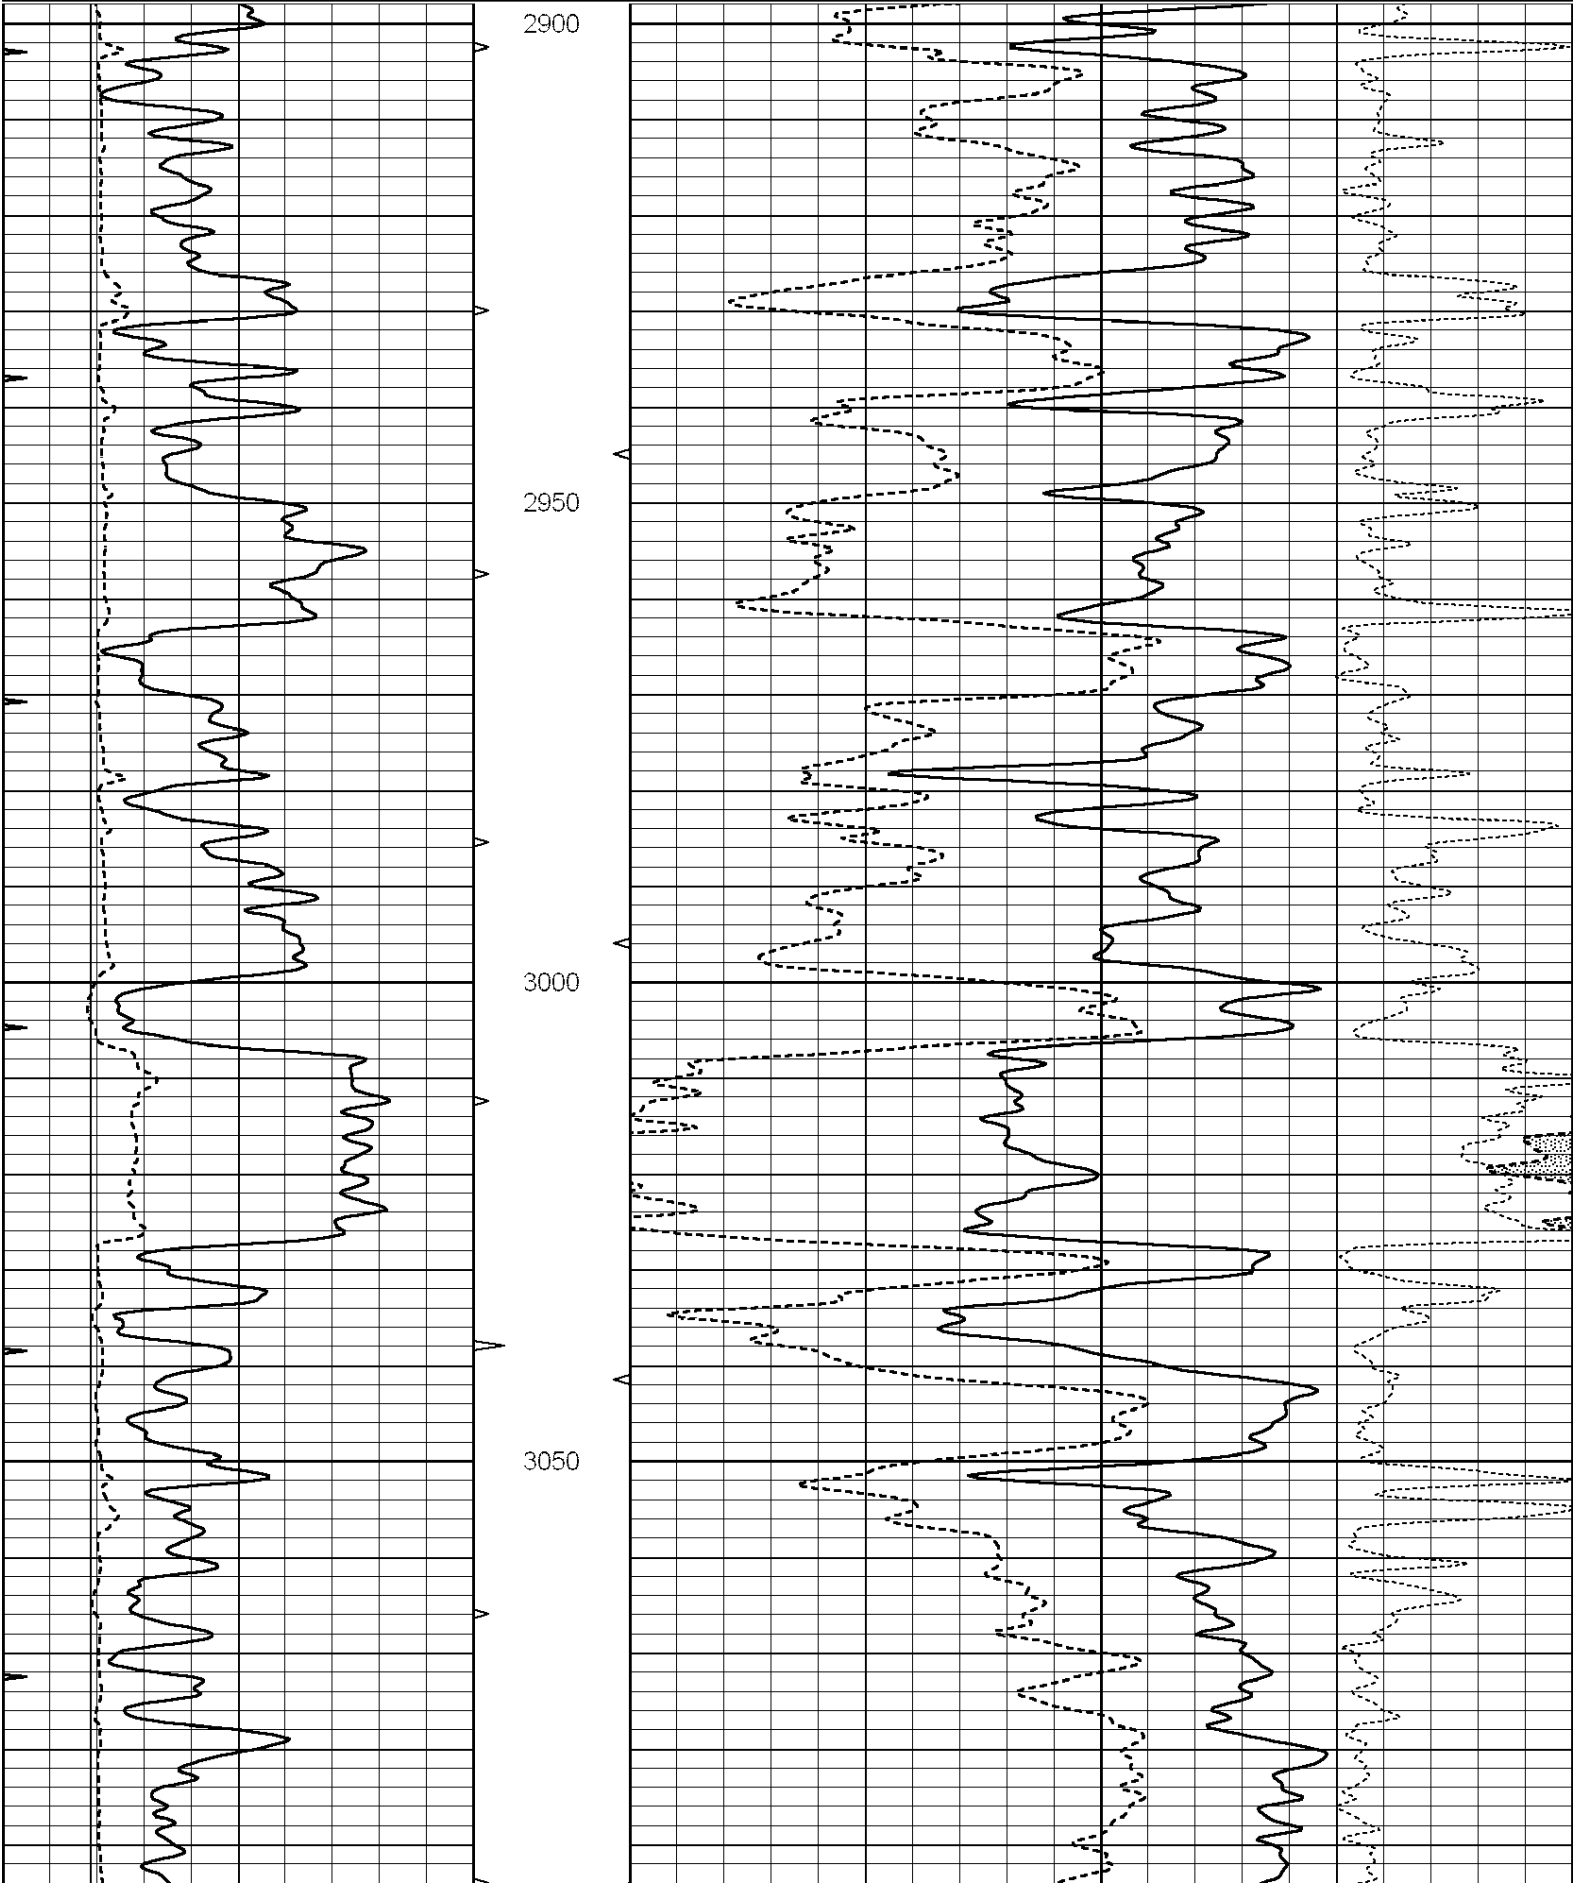

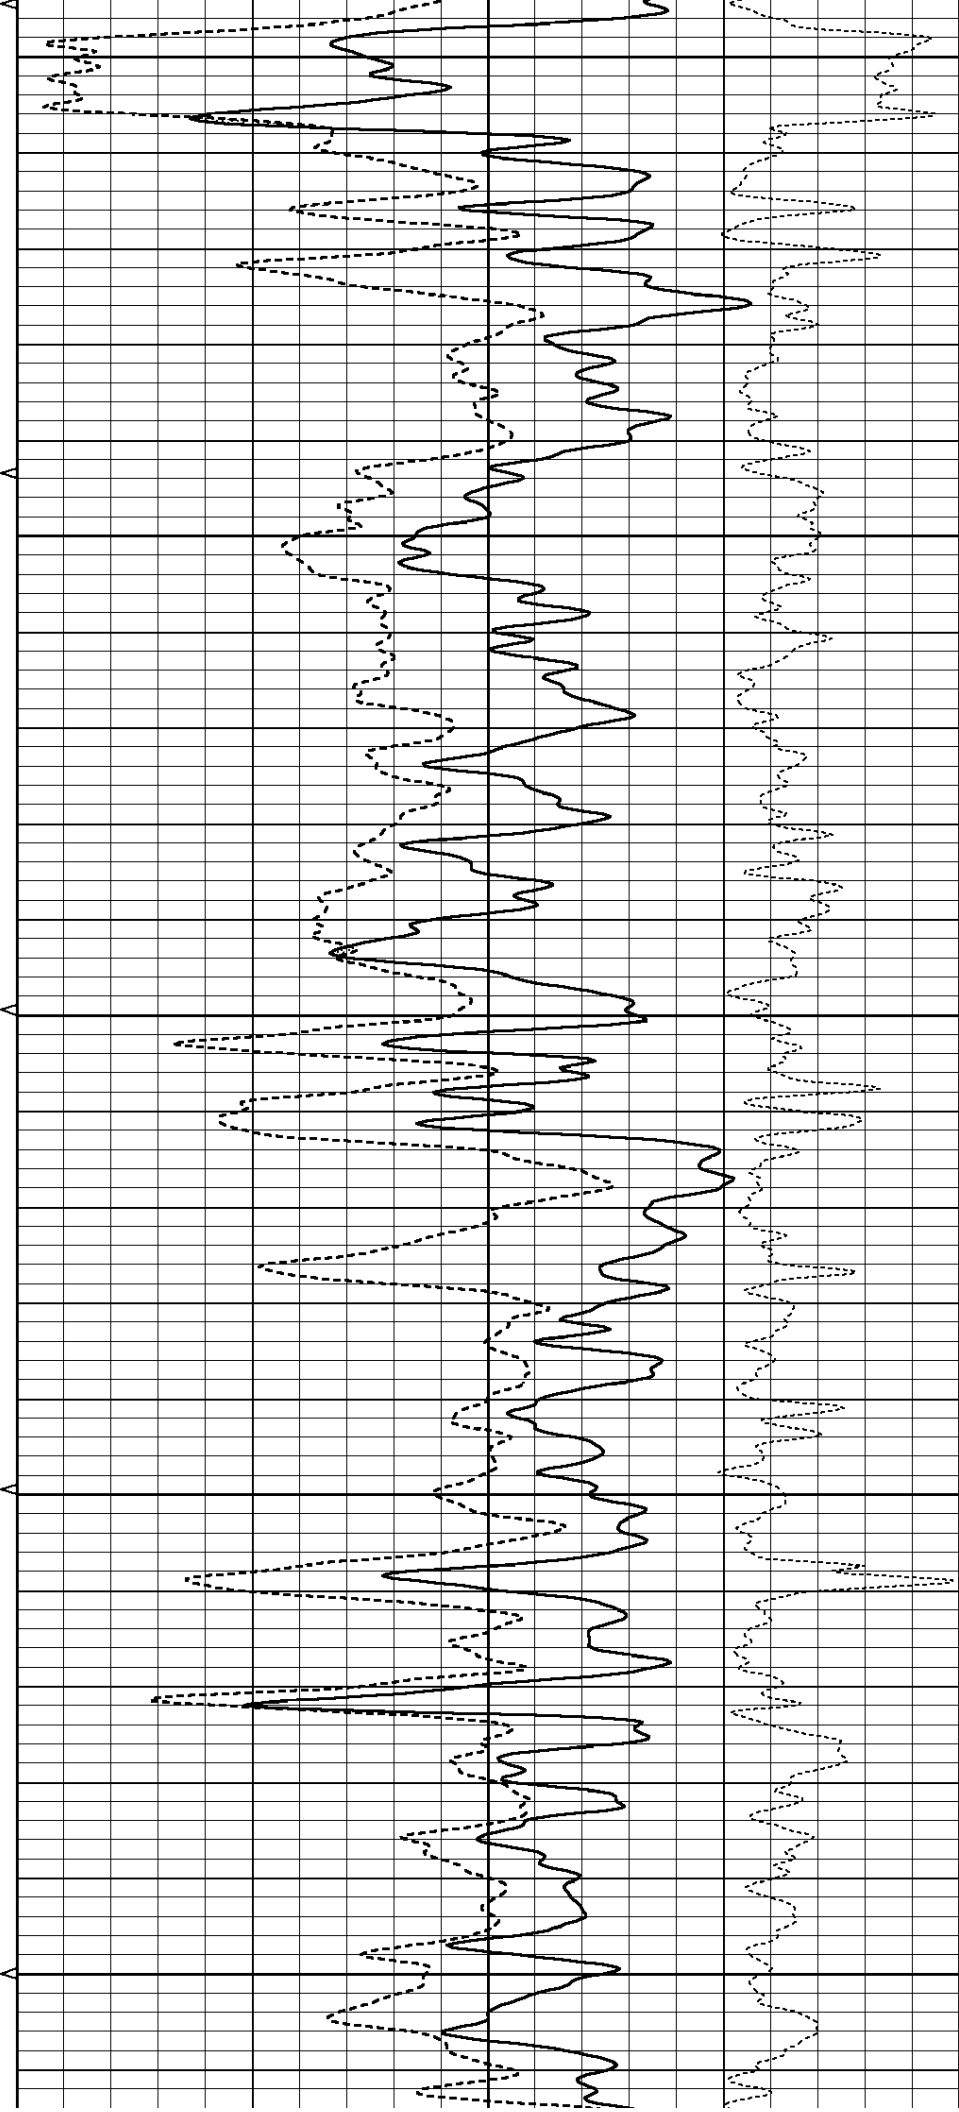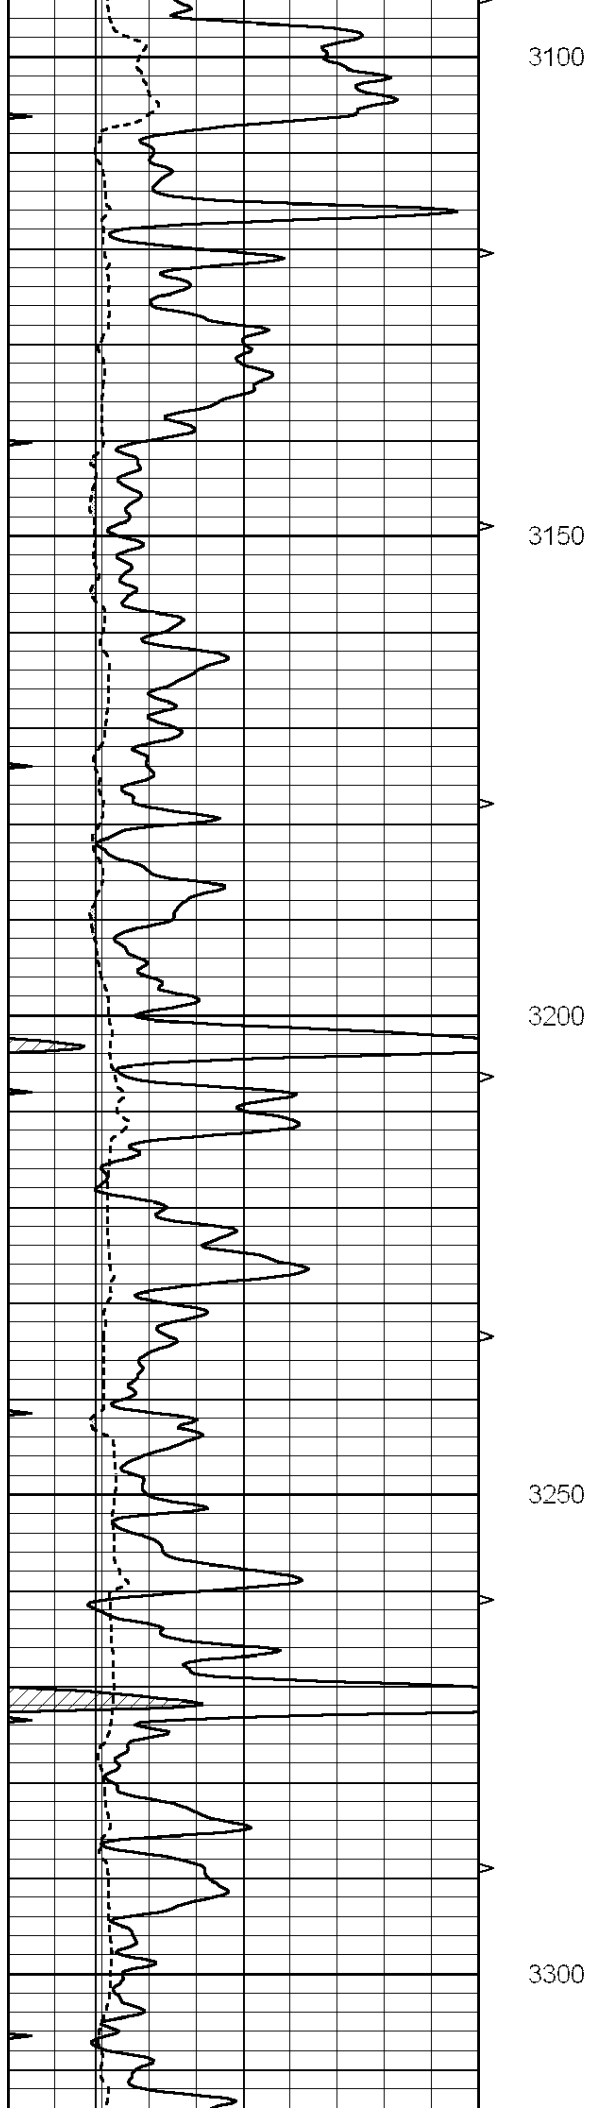

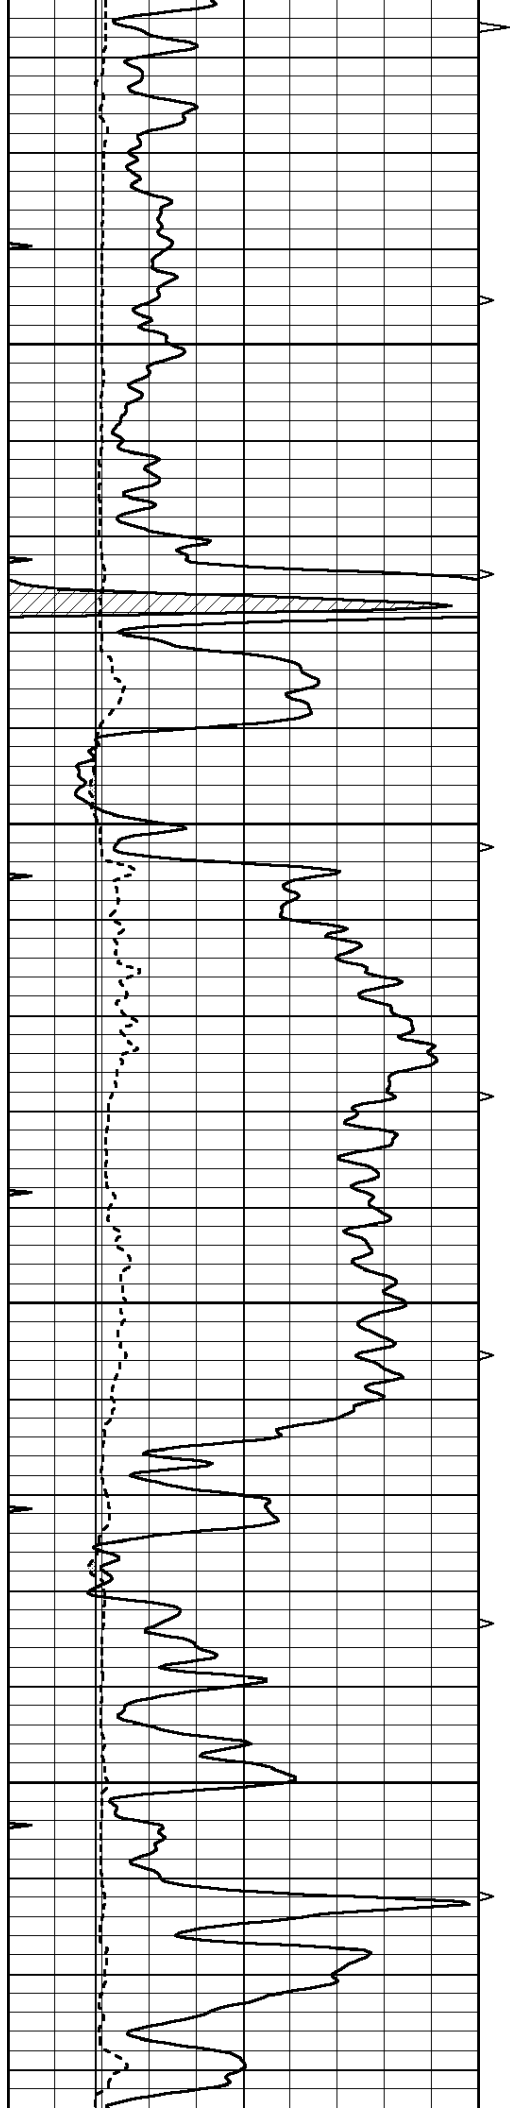



3350


3400

3450

3500

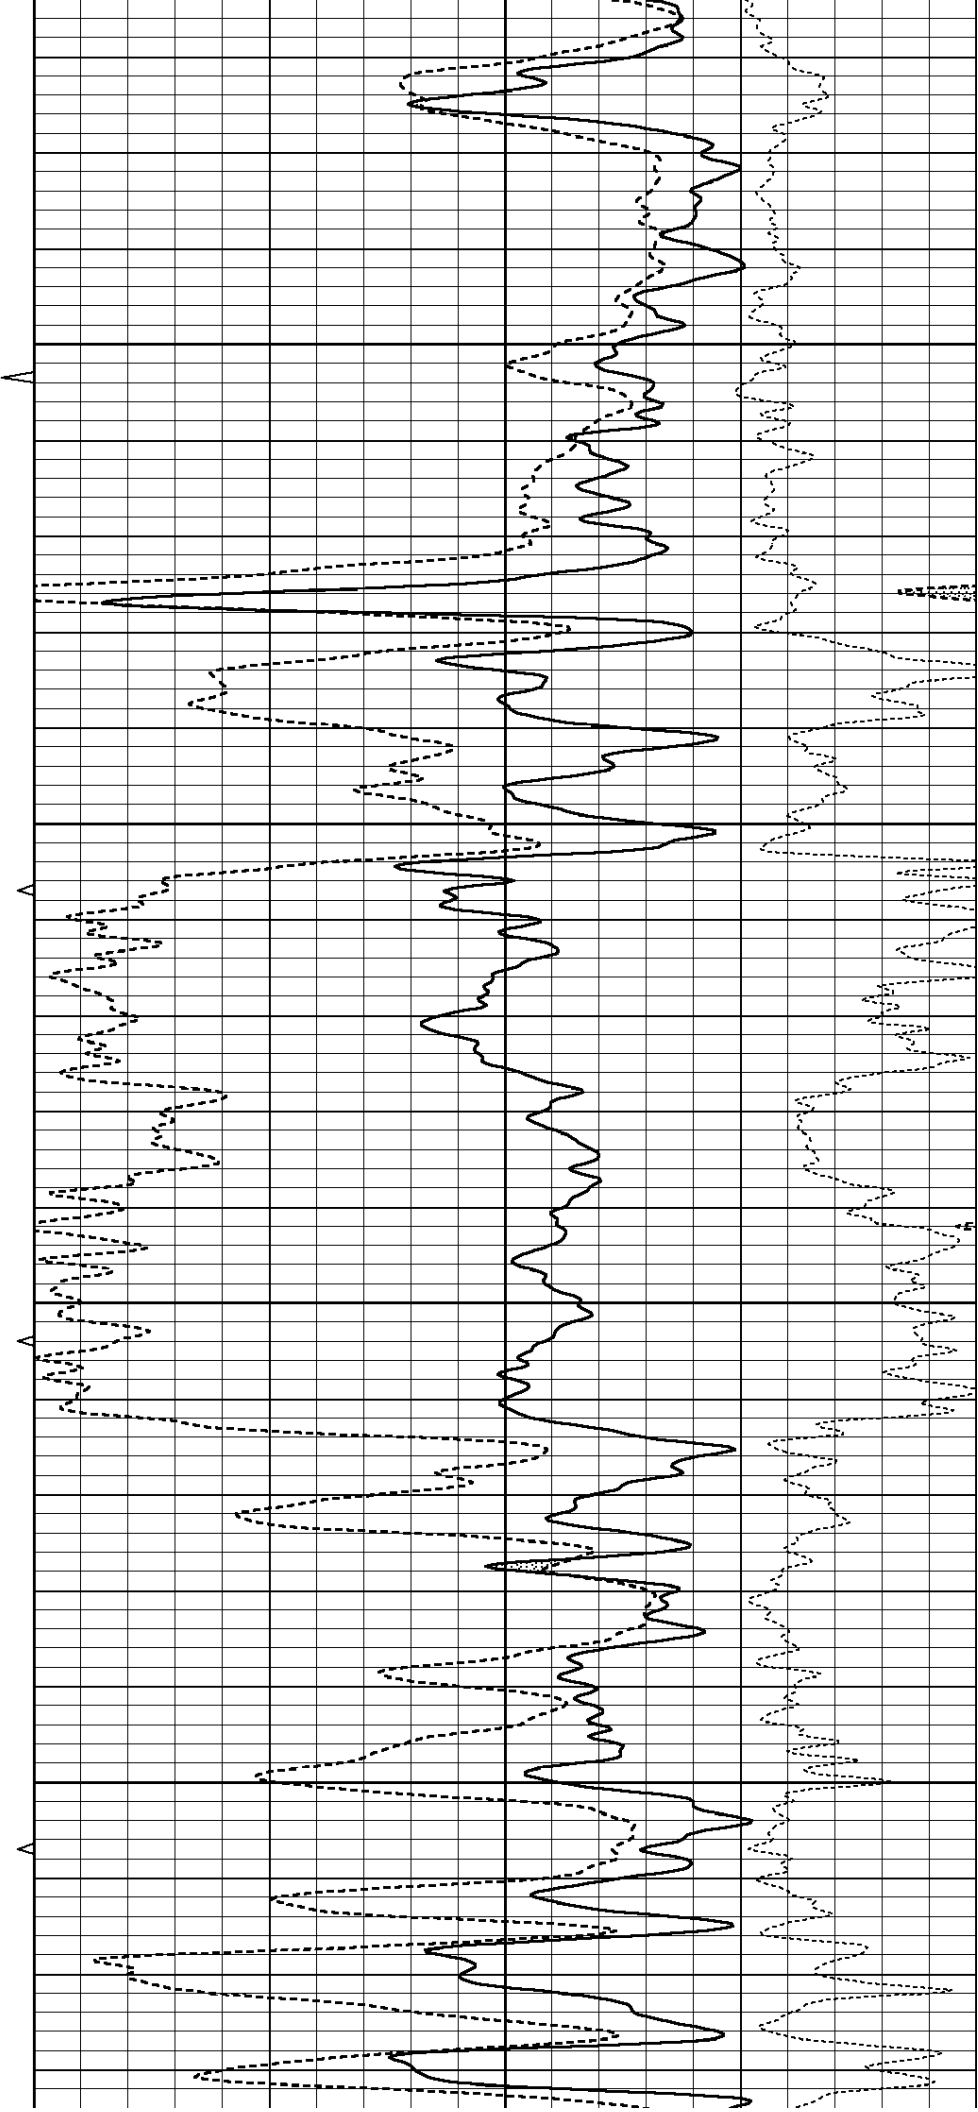

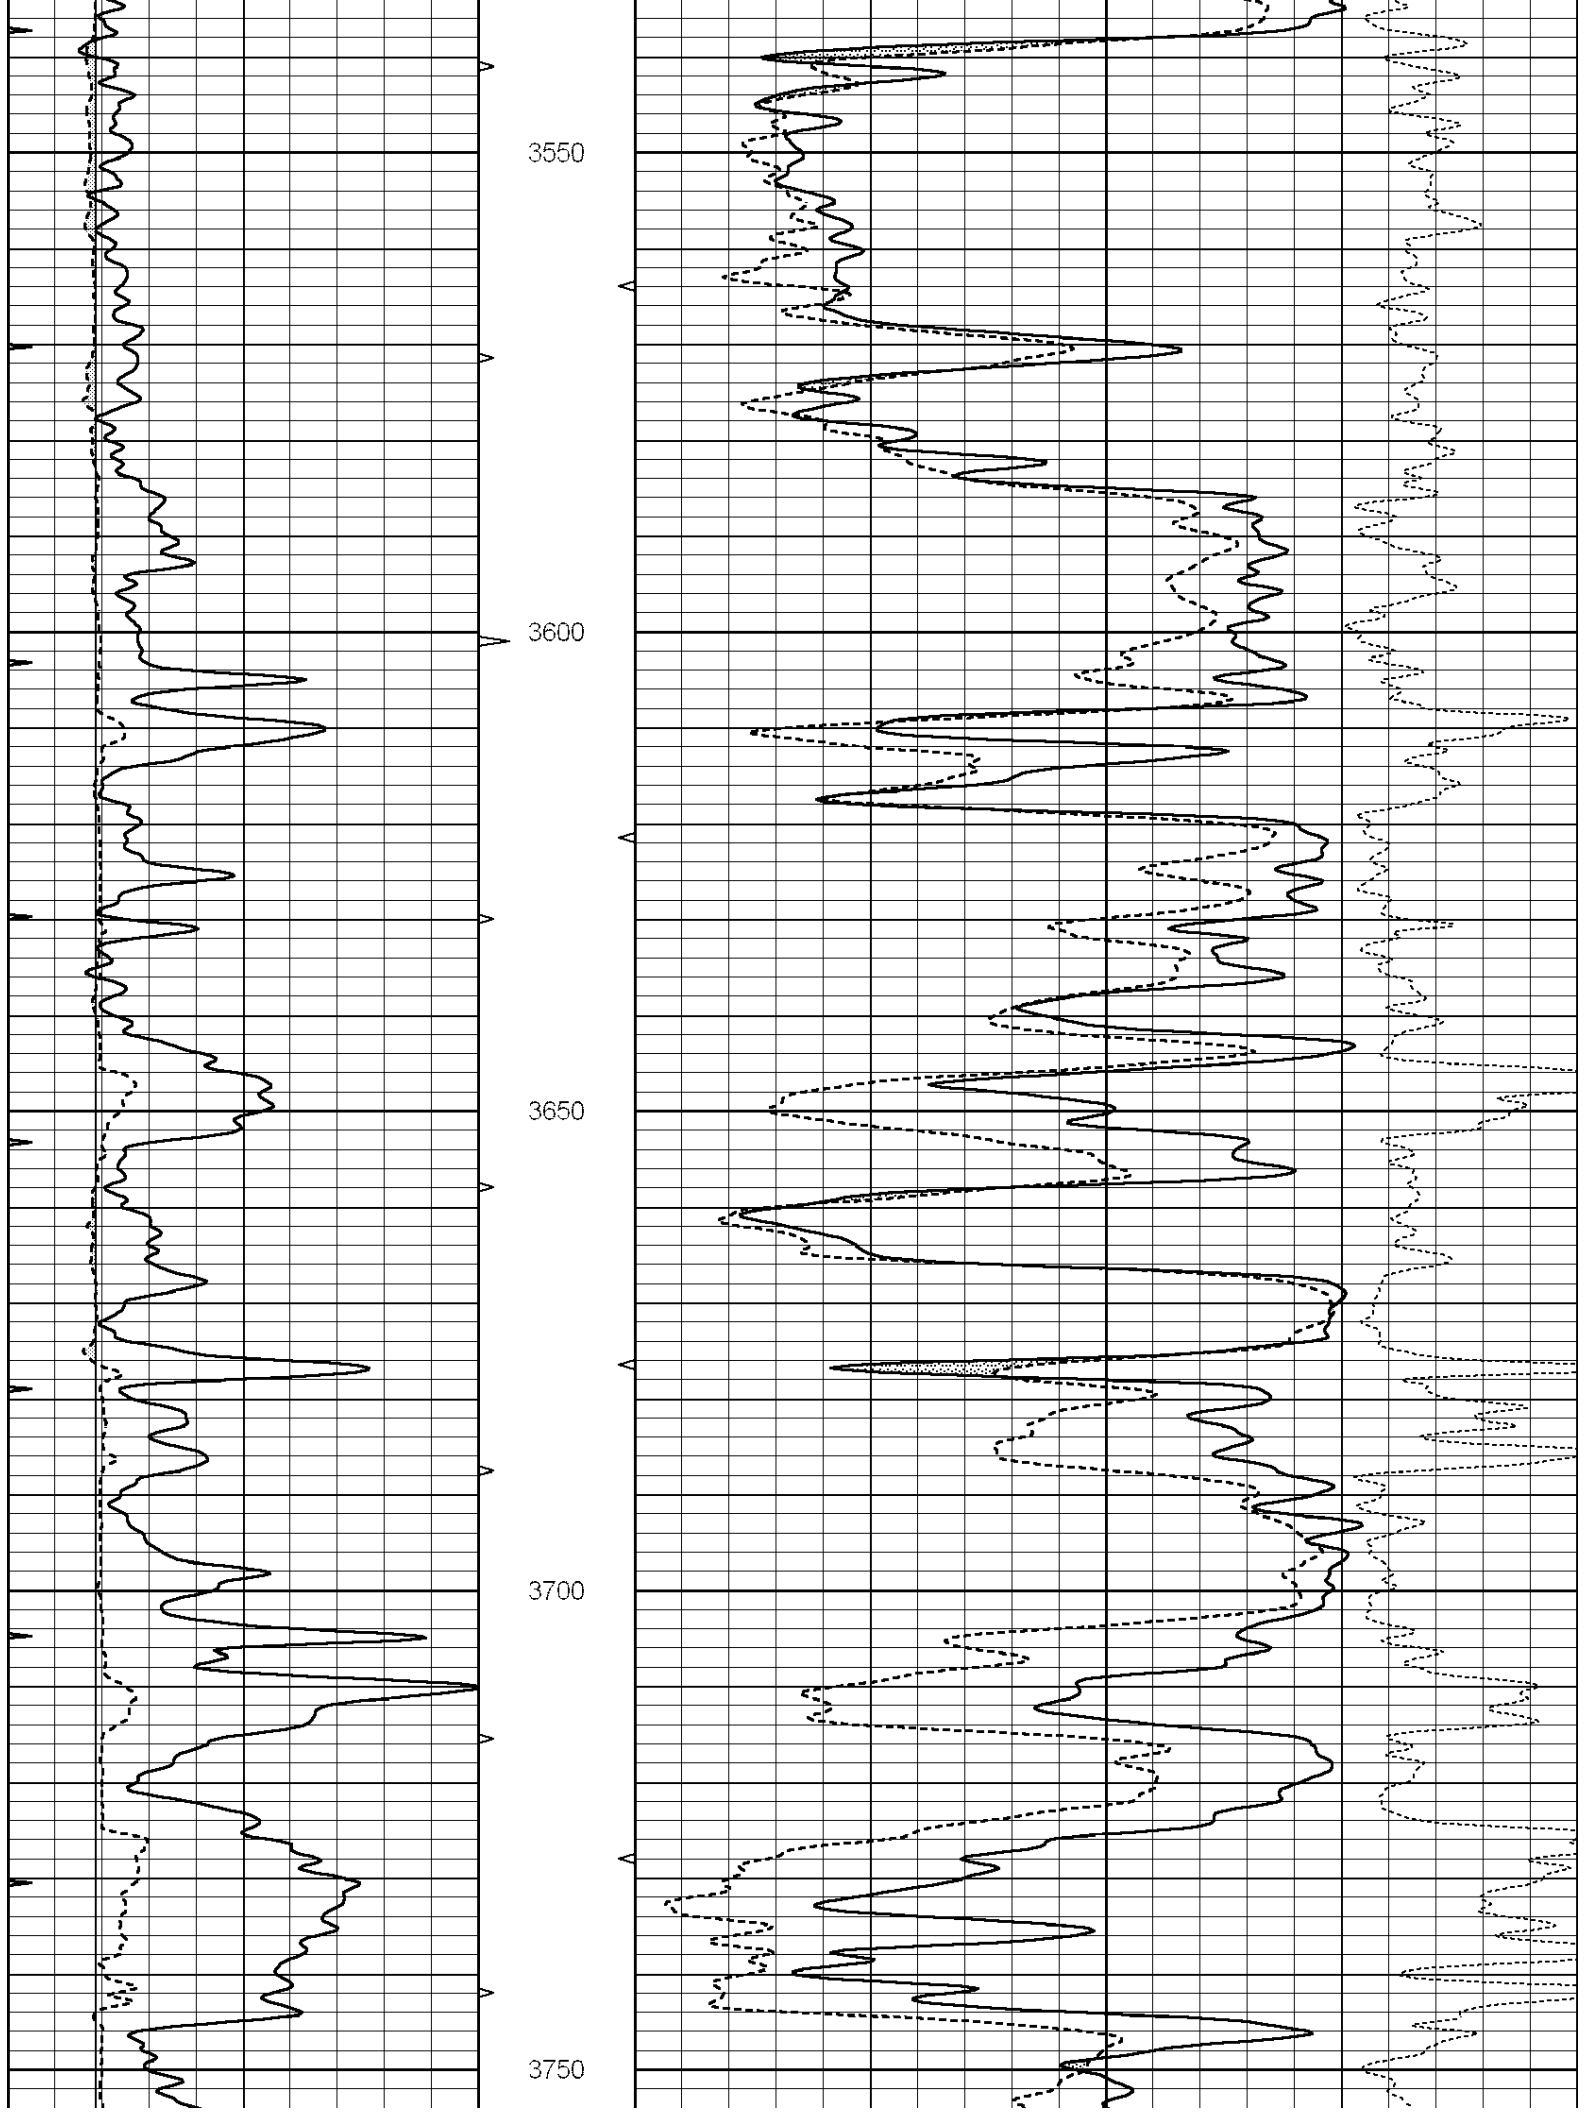

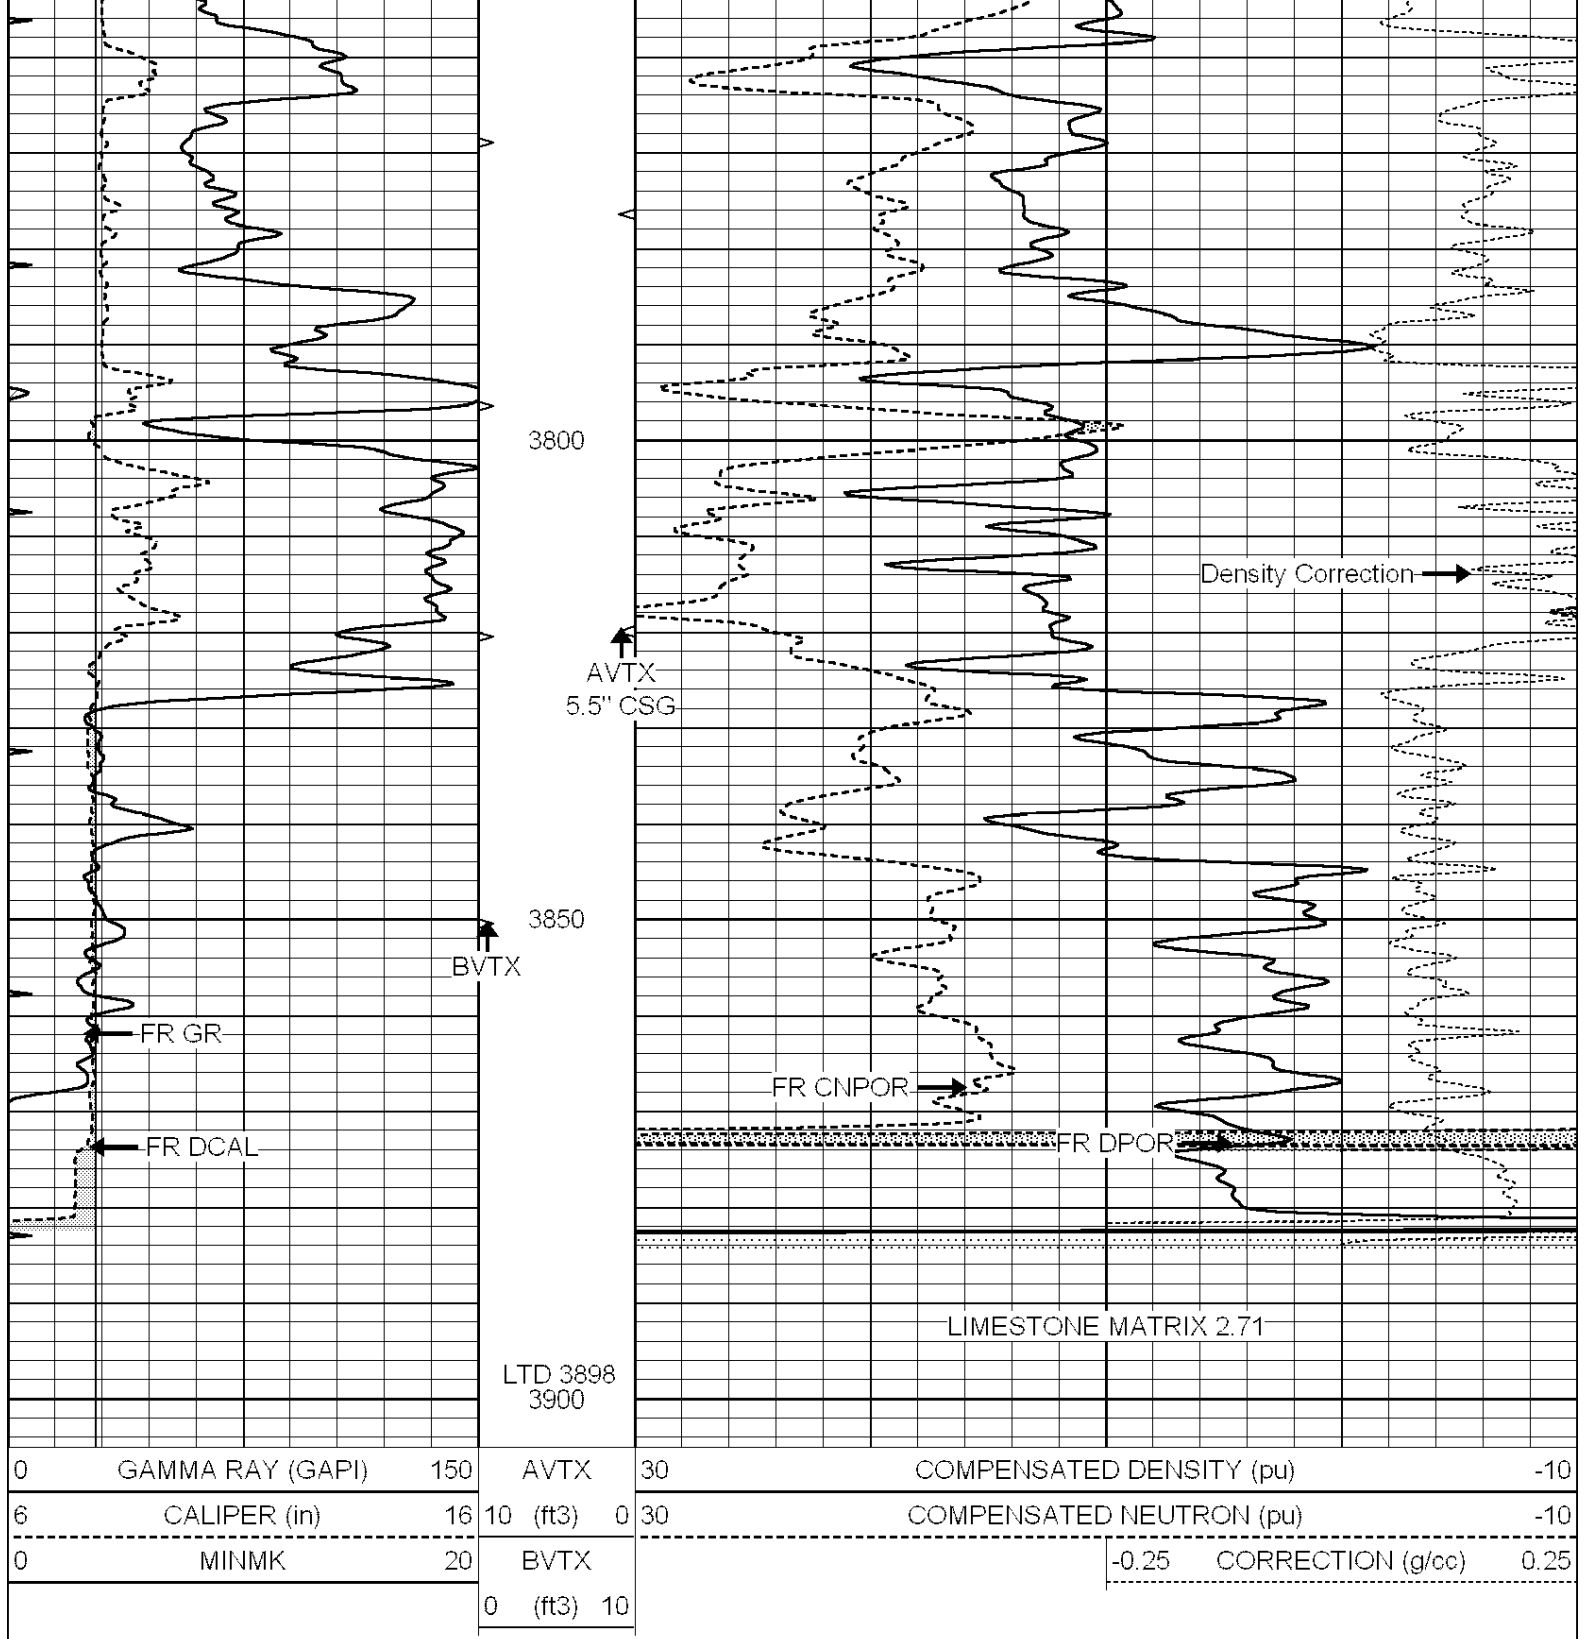


SUPERIOR
Hays,
Kansas

REPEAT SECTION

Database File: 008653ddn.db
 Dataset Pathname: pass2.1
 Presentation Format: _den_neu
 Dataset Creation: Wed Dec 14 19:02:04 2011 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	AVTX	30	COMPENSATED DENSITY (pu)	-10
---	------------------	-----	------	----	--------------------------	-----

6	CALIPER (in)	16	10 (ft3)	0	30	COMPENSATED NEUTRON (pu)		-10
0	MINMK	20	BVTX			-0.25	CORRECTION (g/cc)	0.25
			0 (ft3)	10				

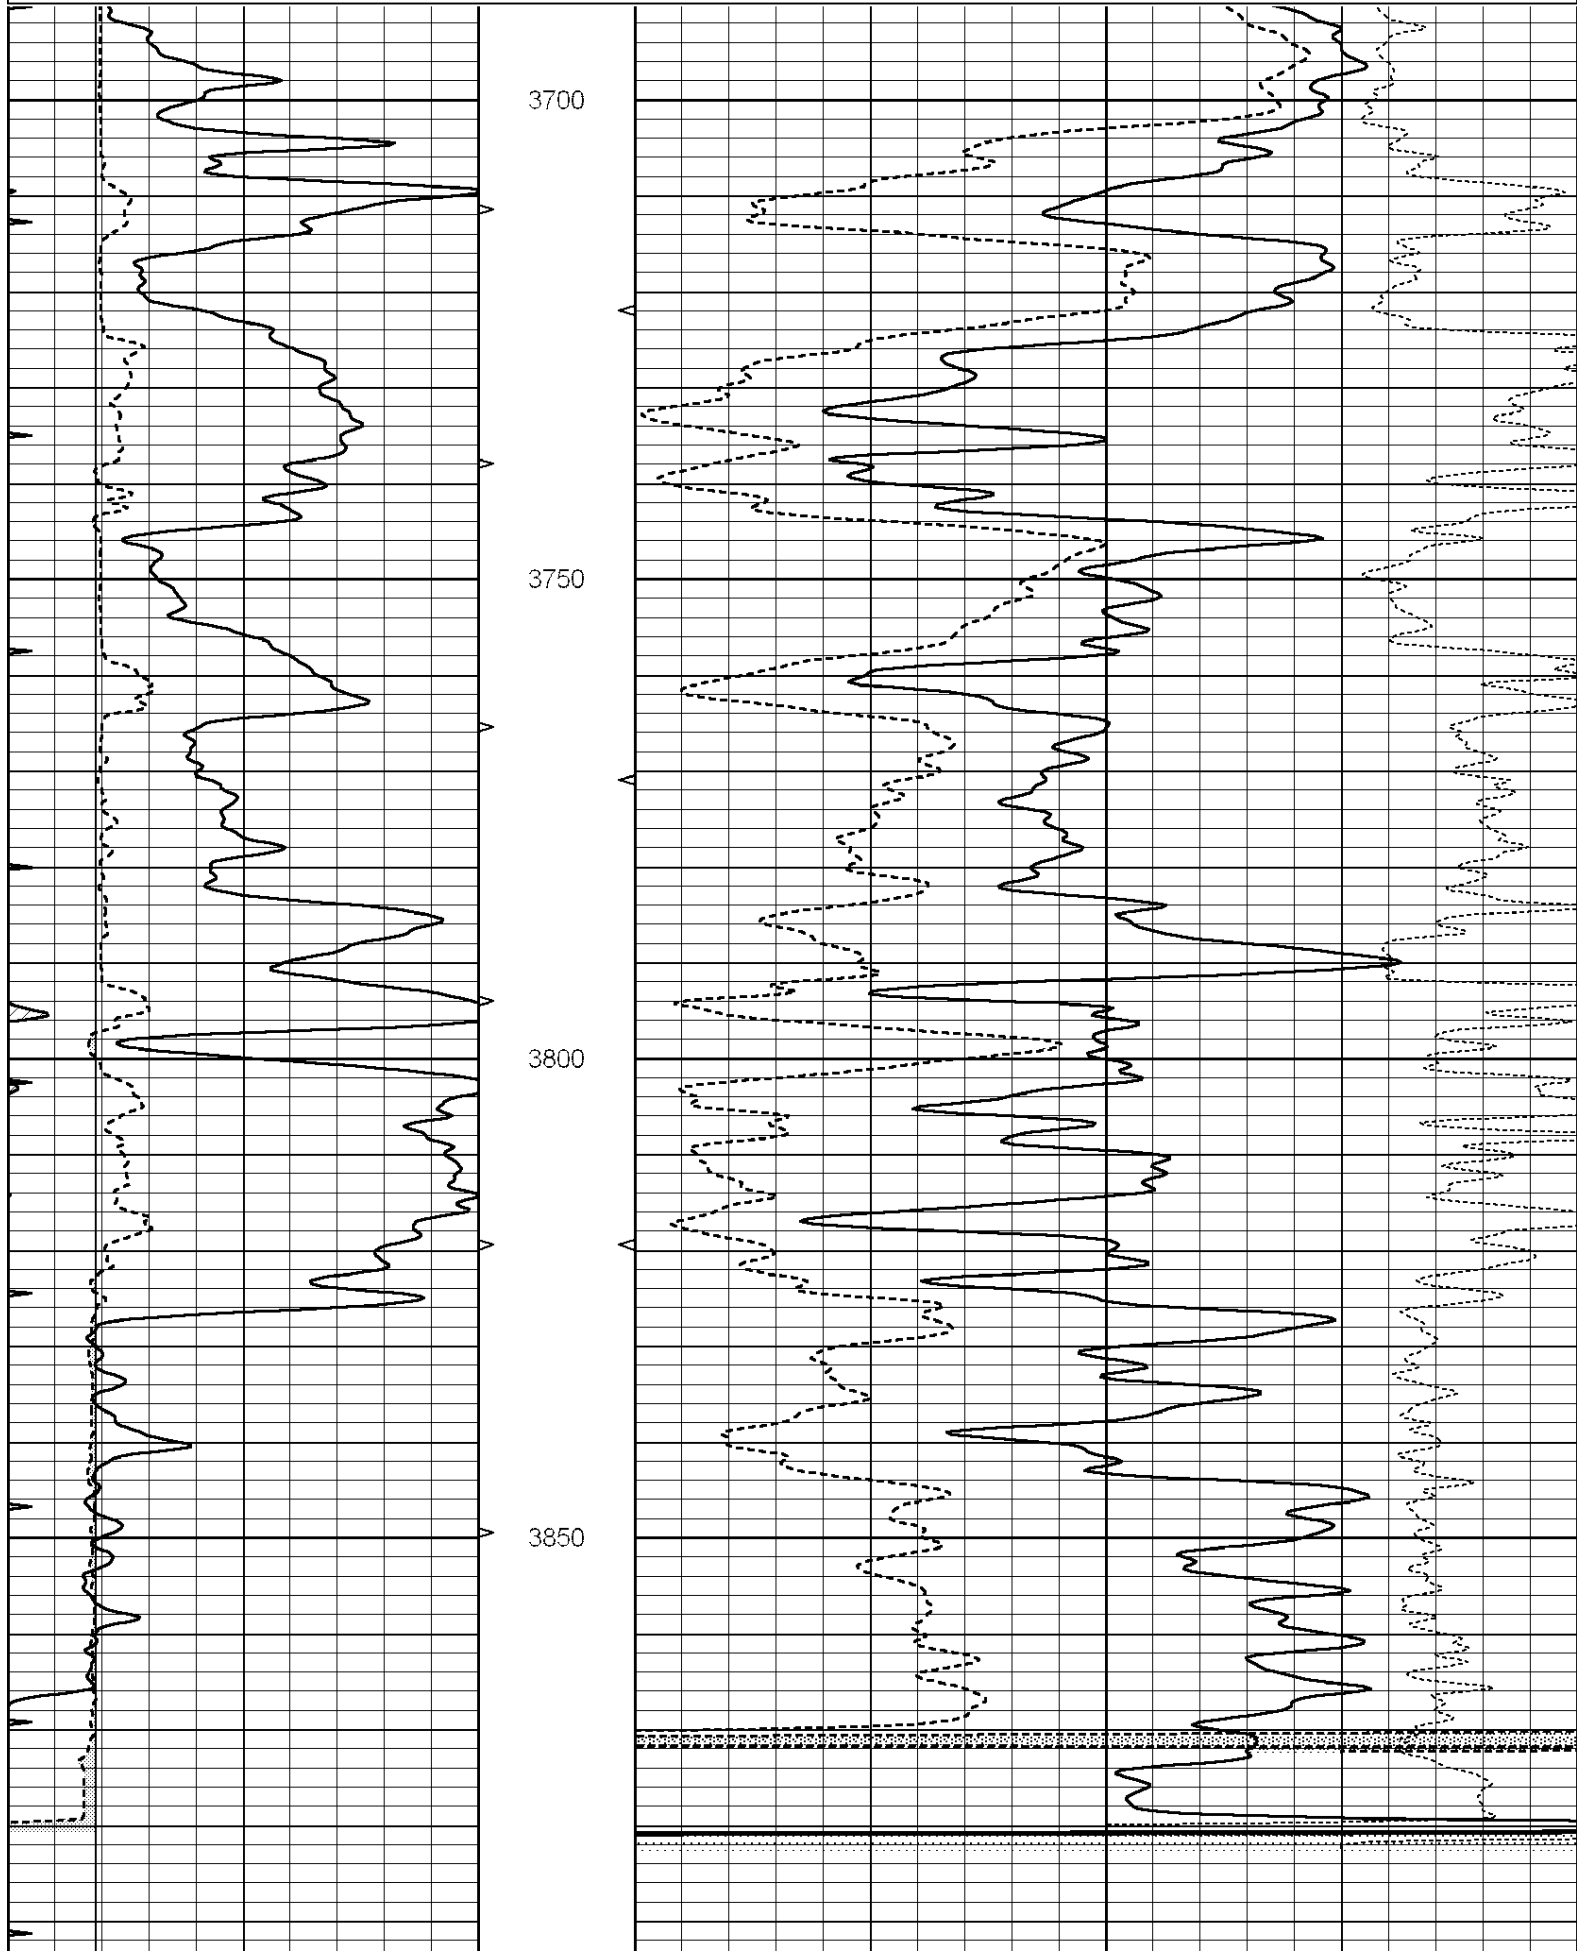

			3900			
0	GAMMA RAY (GAPI)	150	AVTX	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	BVTX	-0.25 CORRECTION (g/cc) 0.25		
			0 (ft3) 10			





SUPERIOR
Hays,
Kansas

DOLOMITE MATRIX 2.81

Database File: 008653ddn.db
Dataset Pathname: pass2.2.d
Presentation Format: _den_neu
Dataset Creation: Wed Dec 14 19:59:47 2011
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	AVTX	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	BVTX	-0.25 CORRECTION (g/cc) 0.25		
			0 (ft3) 10			

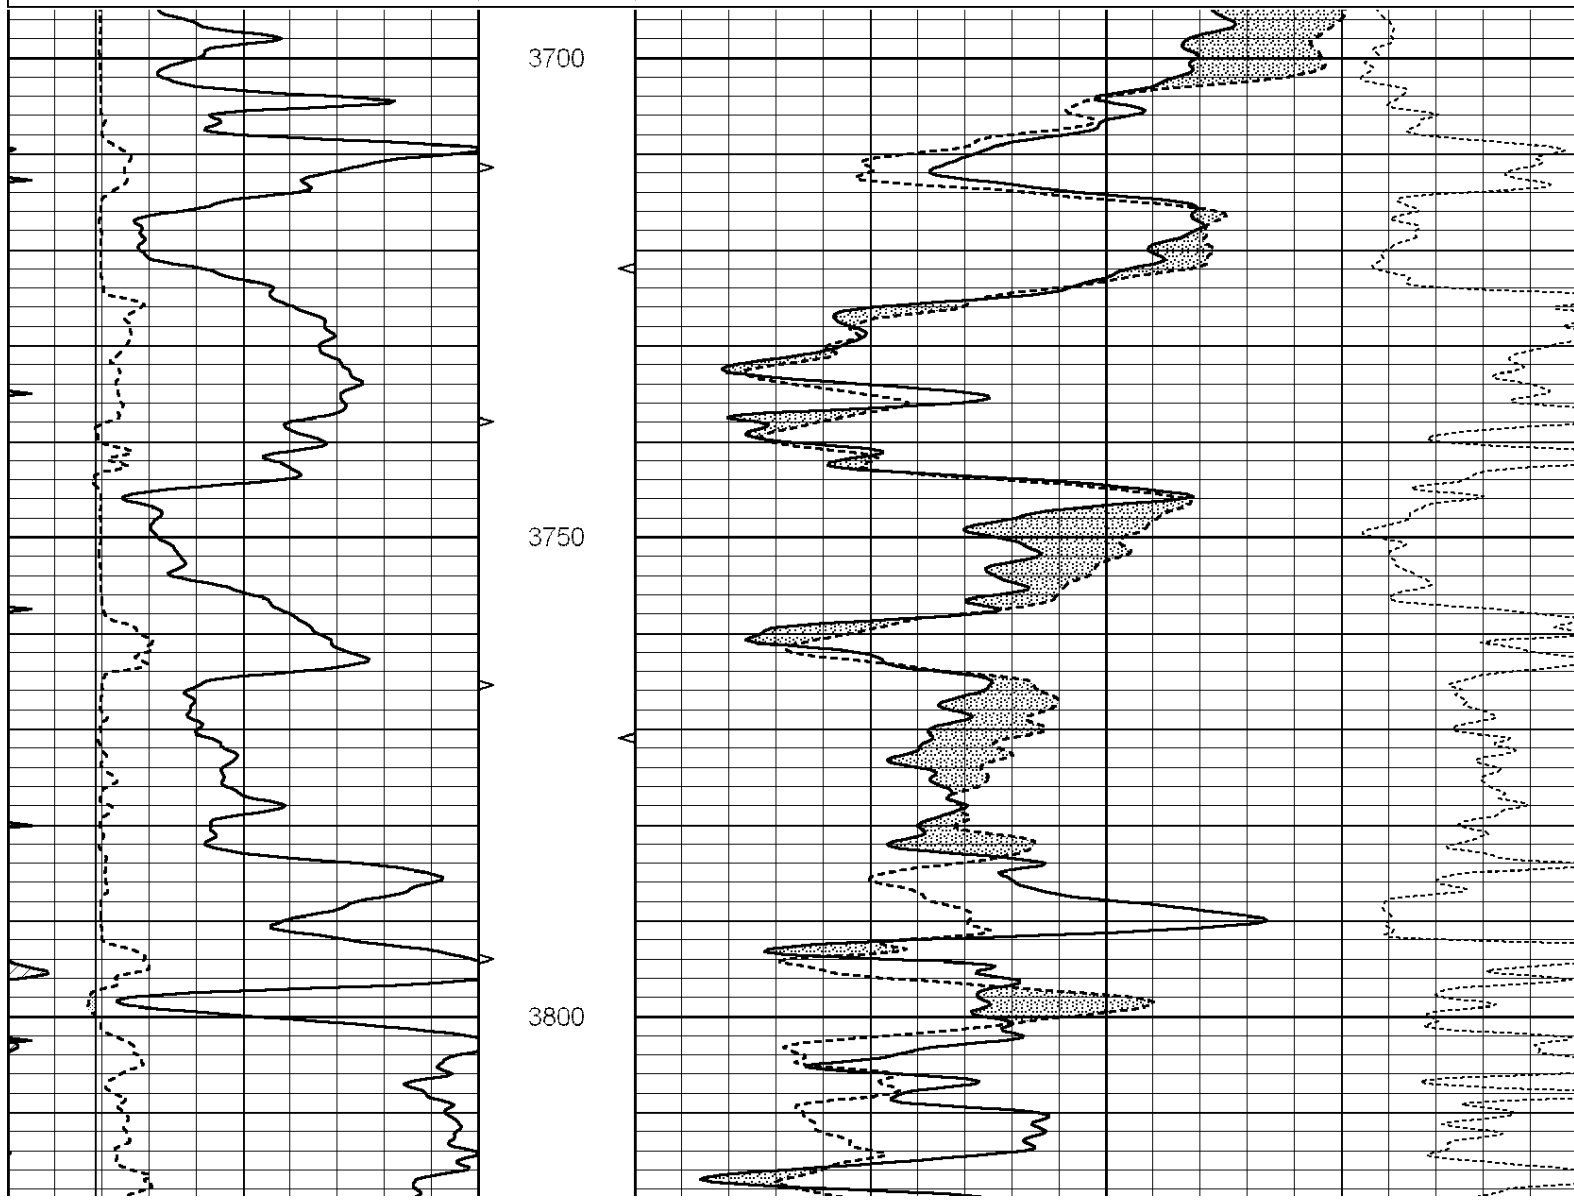

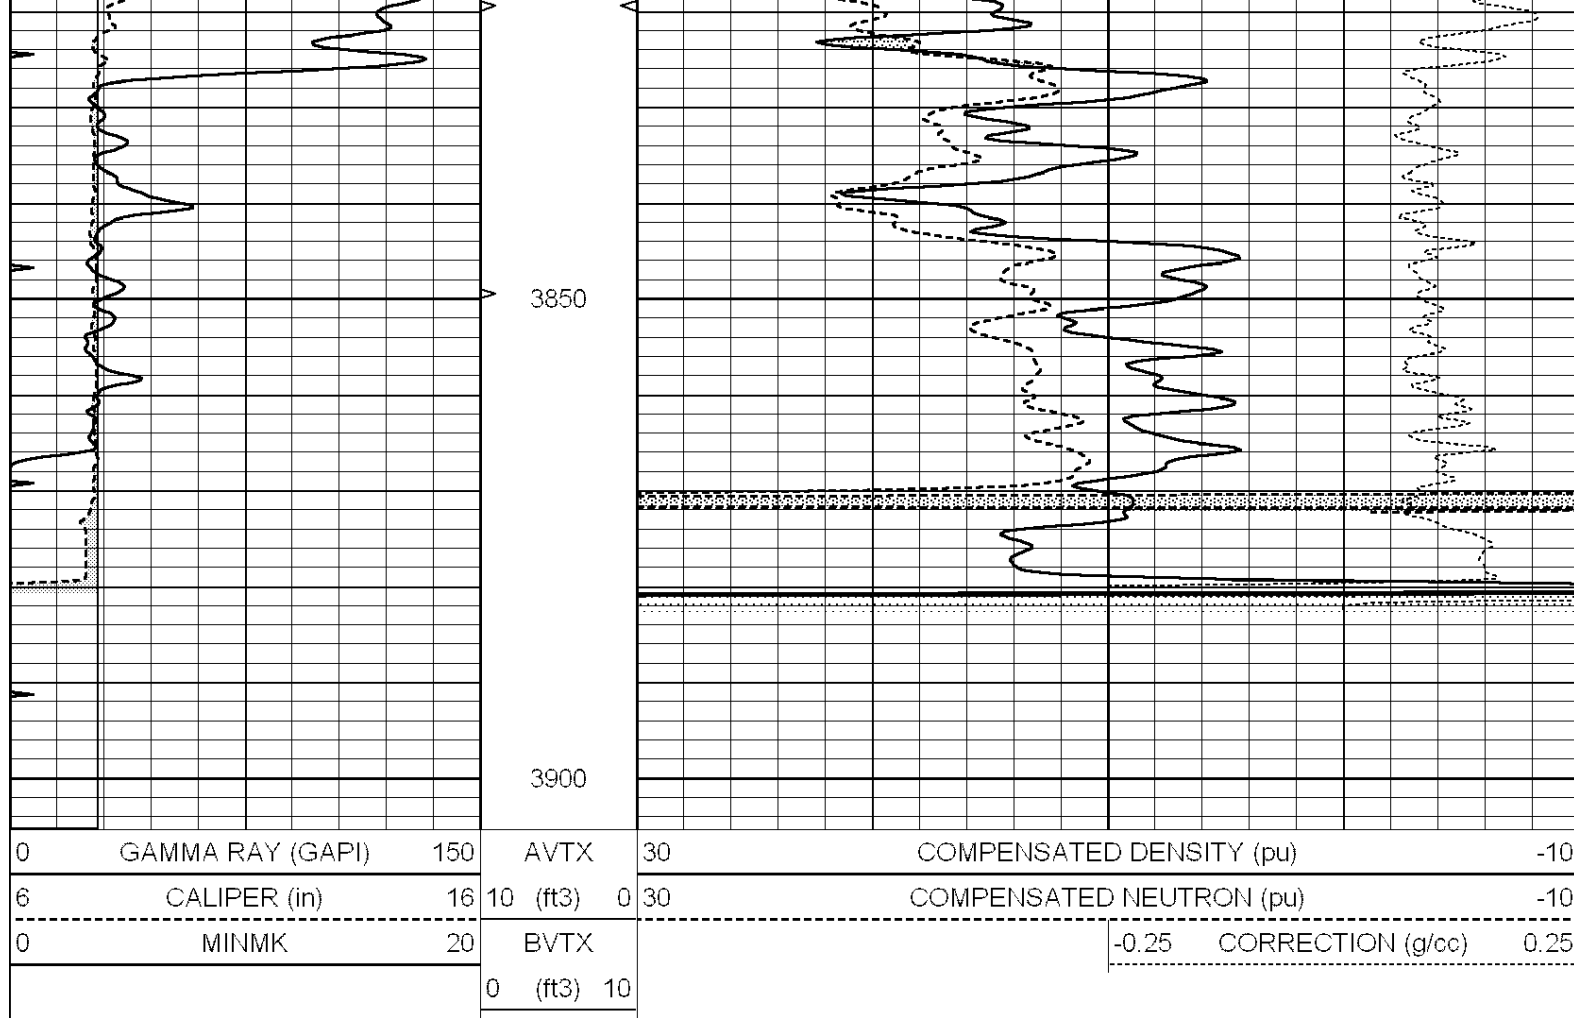

Calibration Report

Database File: 008653ddn.db
Dataset Pathname: pass3.2
Dataset Creation: Wed Dec 14 19:39:57 2011 by Calc Open-Cased 090629

Dual Induction Calibration Report

Serial-Model: PROBE8-DILG
Surface Cal Performed: Fri Aug 01 06:33:19 2008
Downhole Cal Performed: Mon Jul 28 11:08:27 2008
After Survey Verification Performed: Mon Jul 28 11:08:27 2008

Surface Calibration

Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	632.616	-9.730
Medium	0.029	0.796	V	0.000	464.000	mmho/m	605.049	-17.680
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739

Downhole Calibration

Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		

After Survey Verification								
	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		
Compensated Density Calibration Report								
Serial-Model:				GEAR4-GEARHART				
Source / Verifier:				143 / 143				
Master Calibration Performed:				Sat Jul 16 17:35:04 2011				
Master Calibration								
	Density			Far Detector		Near Detector		
Magnesium	1.710	g/cc		1015.91		497.51	cps	
Aluminum	2.600	g/cc		227.67		350.20	cps	
Spine Angle = 76.79				Density/Spine Ratio = 0.579				
	Size			Reading				
Small Ring	8.00	in		2.24	V			
Large Ring	14.00	in		4.38	V			
Compensated Neutron Calibration Report								
Serial Number:				6I				
Tool Model:				G				
CALIBRATION								
Detector		Readings		Target		Normalization		
Short Space		1.00	cps	1.00	cps	1.0000		
Long Space		1.00	cps	1.00	cps	1.0000		
Gamma Ray Calibration Report								
Serial Number:			#8					
Tool Model:			OPEN					
Performed:			Mon Jun 13 16:56:43 2011					
Calibrator Value:			150.0	GAPI				
Background Reading:			0.0	cps				
Calibrator Reading:			175.0	cps				
Sensitivity:			0.8371	GAPI/cps				