



Green Country Wireline

GAMMA RAY
CEMENT BOND LOG
CCLVDL

Company		JONES & BUCK DEVELOPMENT	
Well		BALES # JBD 19-2	
Field		PERU-SEDAN	
County		CHAUTAUQUA	
State		KANSAS	
Company		JONES & BUCK DEVELOPMENT	
Well		BALES # JBD 19-2	
Field		PERU-SEDAN	
County		CHAUTAUQUA	
State		KANSAS	
Location:		API #:	
Permanent Datum		SE SW NW NW	
Log Measured From		4125 FSL & 4785 FEL	
Drilling Measured From		SEC 19 TWP 34S RGE 12E	
Elevation		934'	
Other Services		K.B. D.F. G.L. 934'	
Date		1-24-12	
Run Number		1	
Depth Driller		1213'	
Depth Logger		1178'	
Bottom Logged Interval		1177'	
Top Log Interval		SURFACE	
Open Hole Size		WATER	
Type Fluid		---	
Density / Viscosity		---	
Max. Recorded Temp.		33'	
Estimated Cement Top		---	
Time Well Ready		---	
Time Logger on Bottom		---	
Equipment Number		3	
Location		DEWEY	
Recorded By		HERREN	
Witnessed By		MR JONES	
Borehole Record		Tubing Record	
Run Number		Bit	
From		To	
Size		Weight	
From		To	
Casing Record		Size	
Surface String		8.625"	
Prot String		---	
Production String		4.5"	
Liner		---	
Top		Bottom	
SURFACE		40'	
SURFACE		ID	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments




Green Country Wireline

GAMMA RAY CEMENT BOND

Database File: bales192.dlb
Dataset Pathname: bales192/run1/pass1
Presentation Format: cbl_dr
Dataset Creation: Tue Jan 24 11:56:03 2012 by Log Std Casedhole 09061
Charted by: Depth in Feet scaled 1:240




9	Collar Locator	-1	-1	Amplitude (mV)	90	200	Variable Density	120
0	Gamma Ray (GAPI) (GAPI)	60	1000	Travel Time (usec)	250			




Collar Locator	-1
Gamma Ray (GAPI) (GAPI)	60

-1	Amplitude (mV)	90	200
1000	Travel Time (usec)	250	

Variable Density	1200
------------------	------

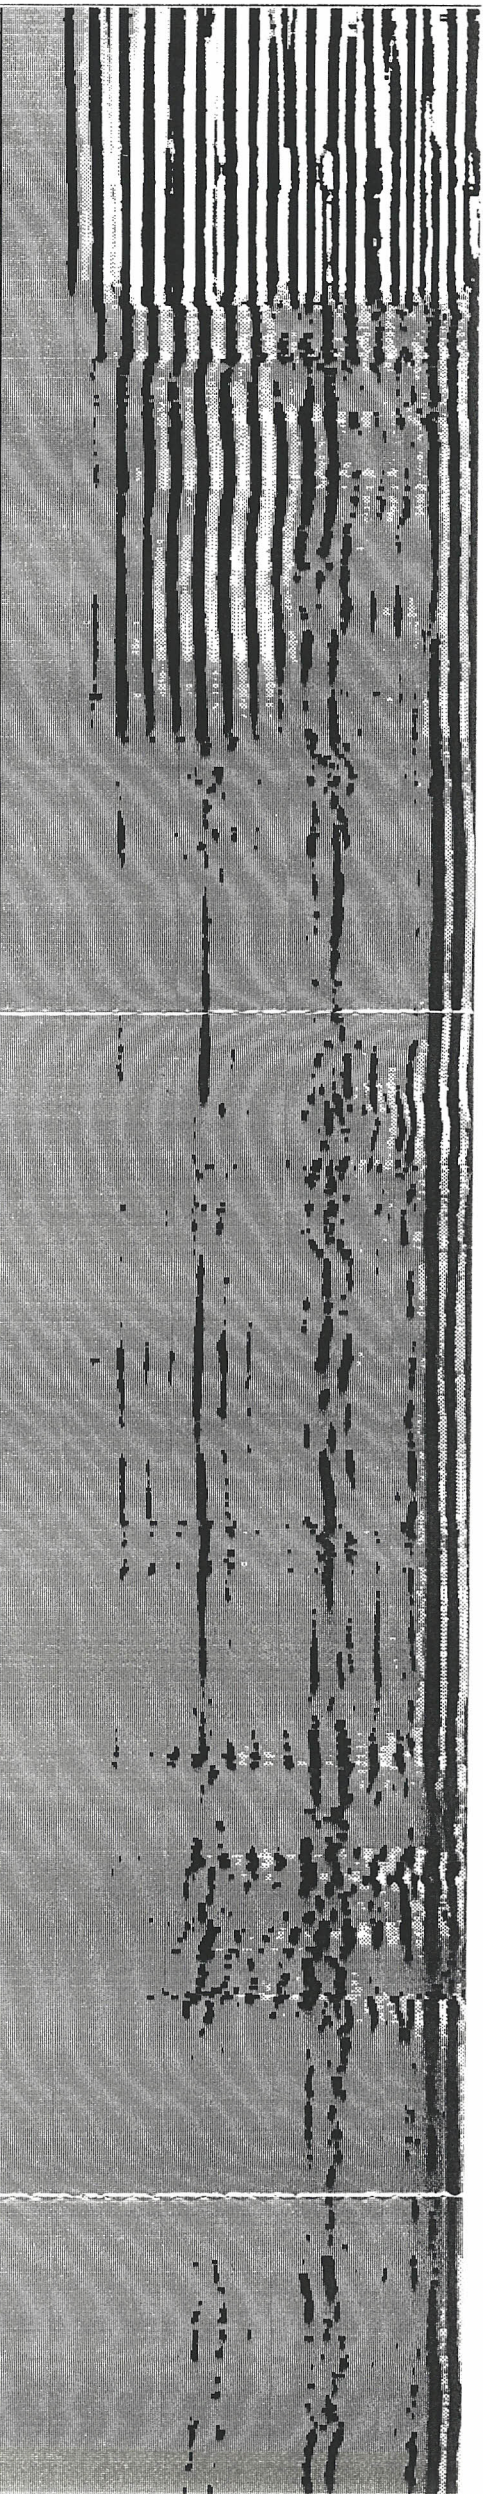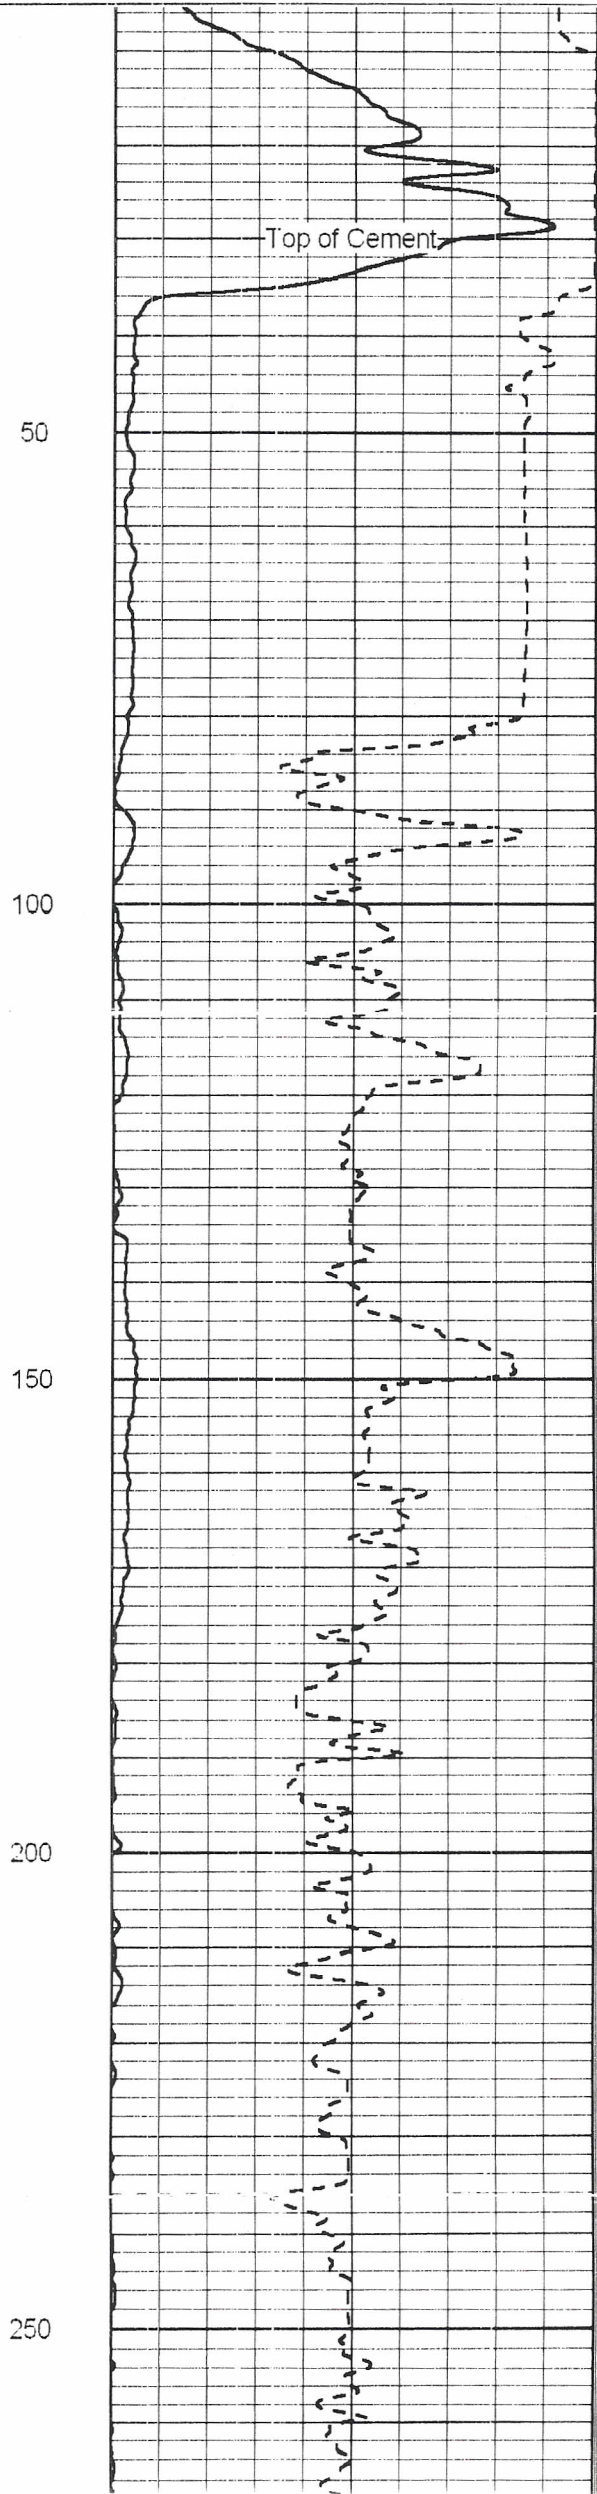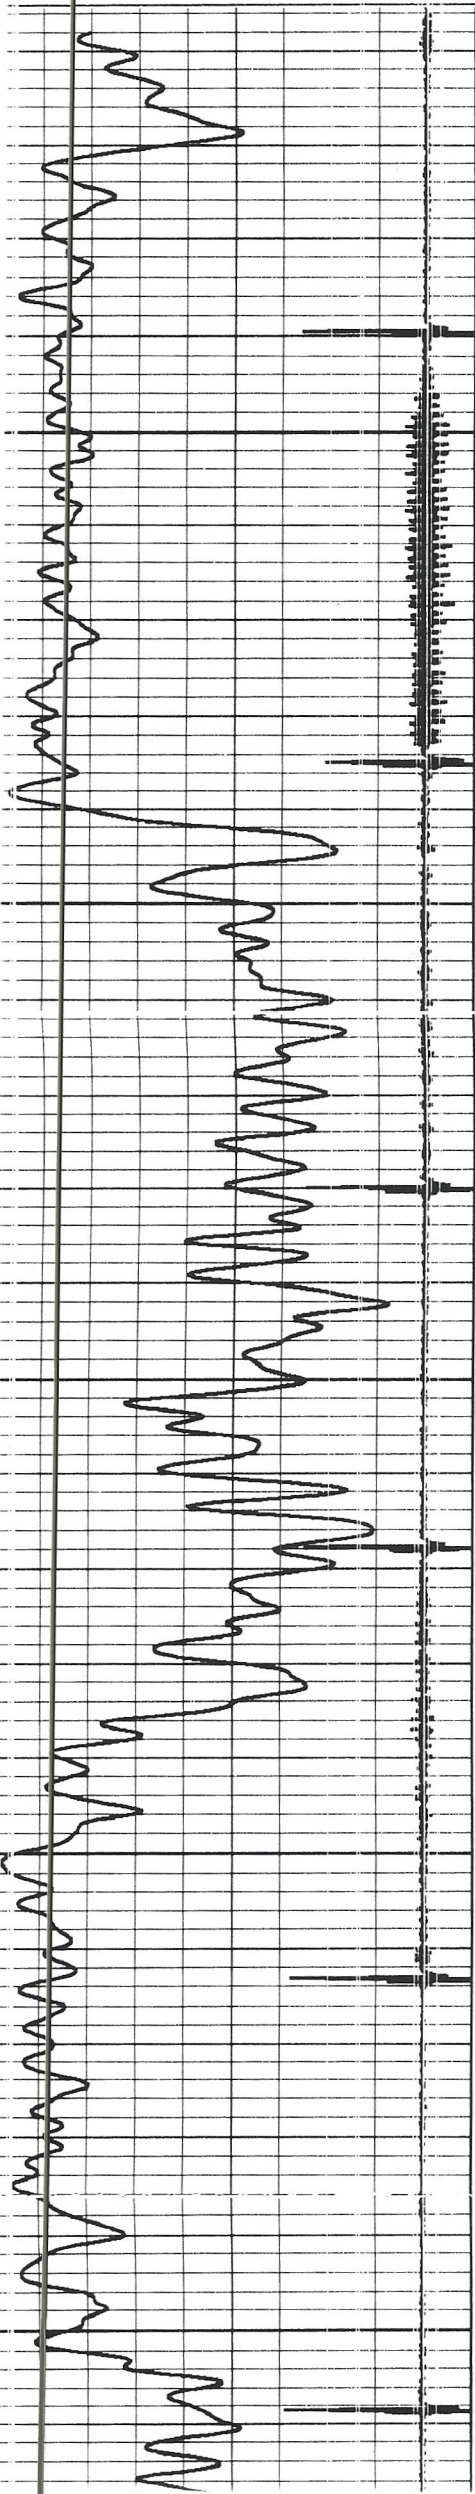

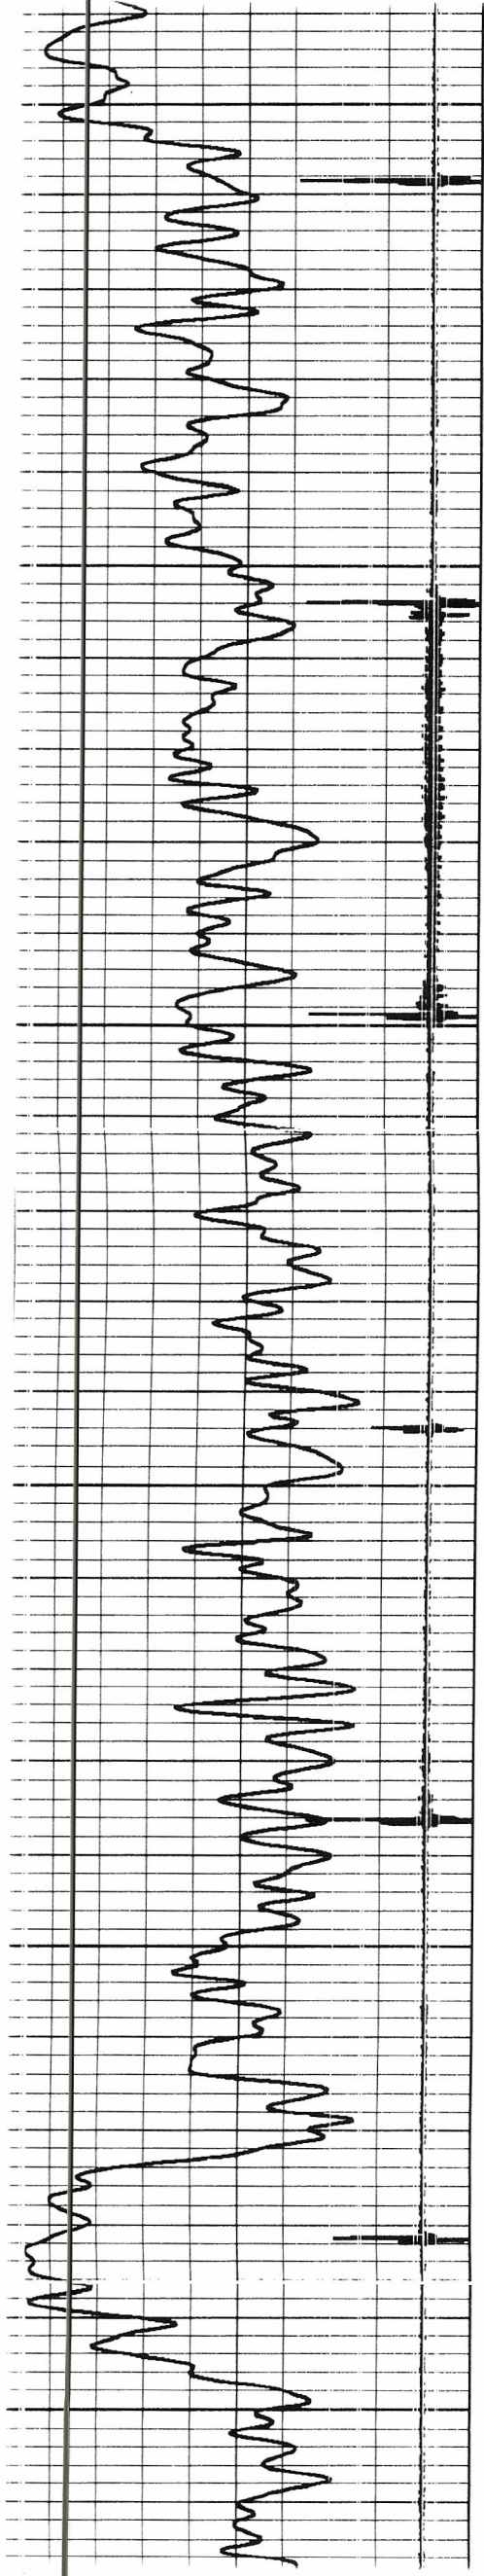

250



300


350

400



450


500

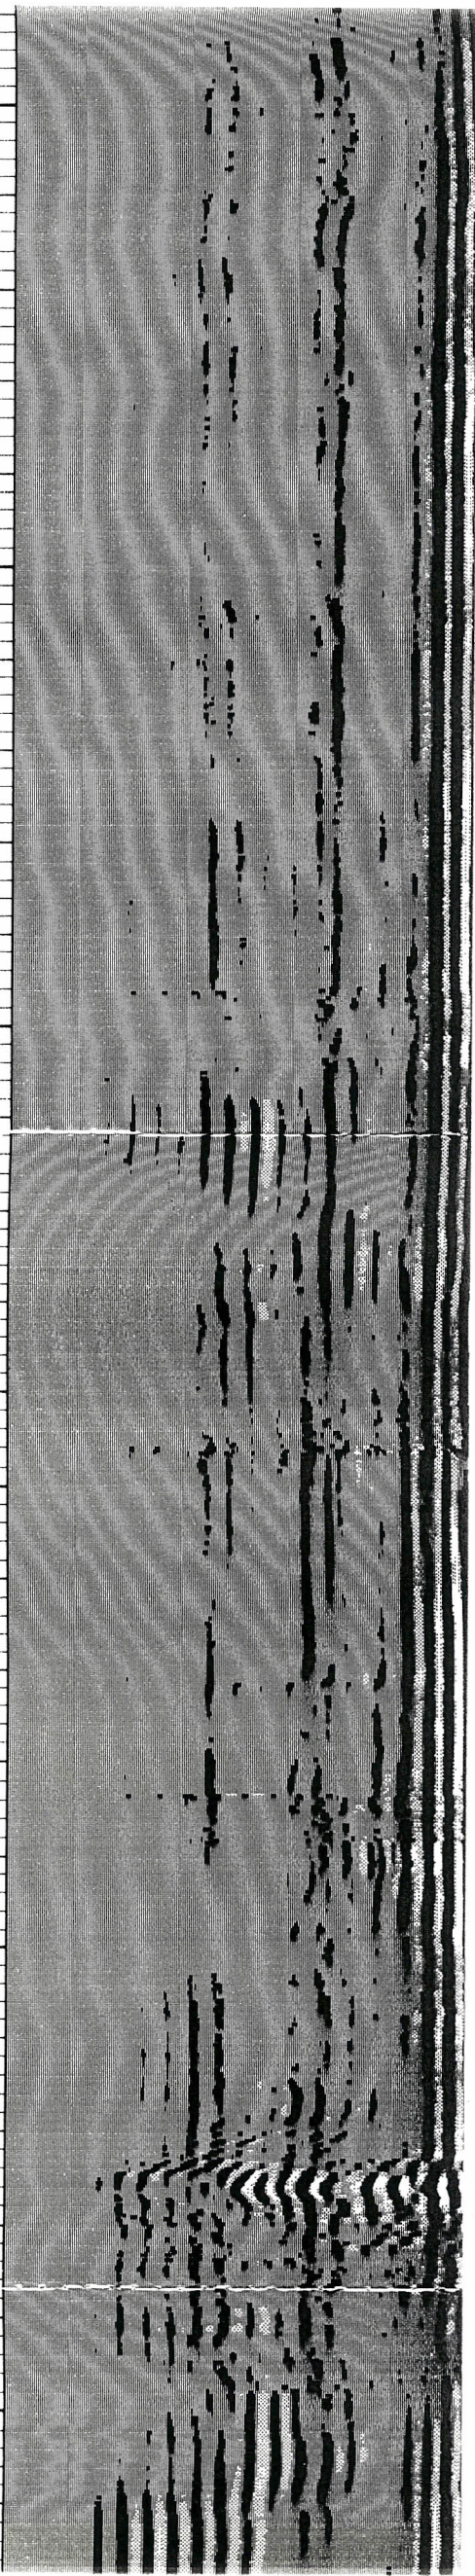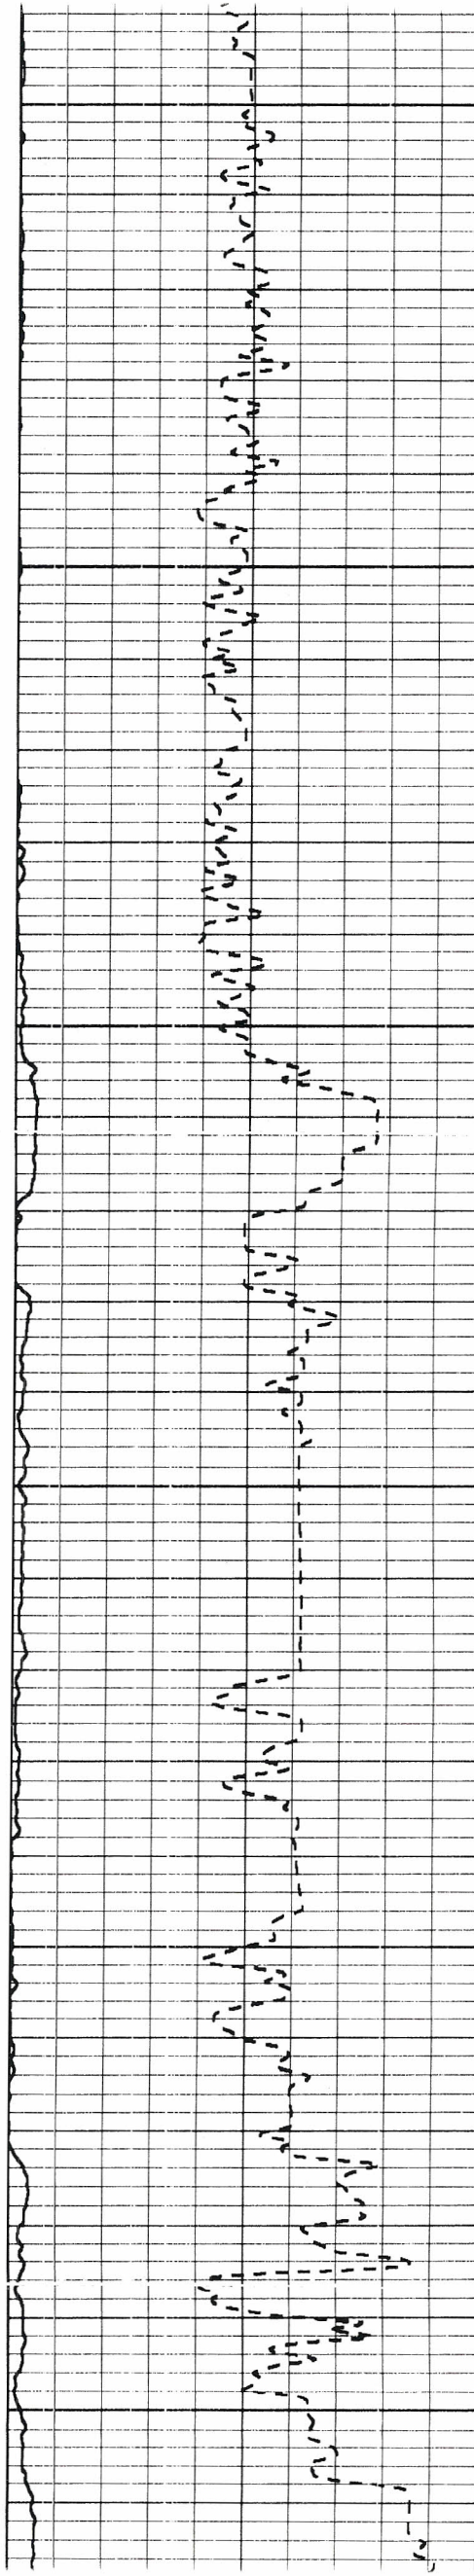

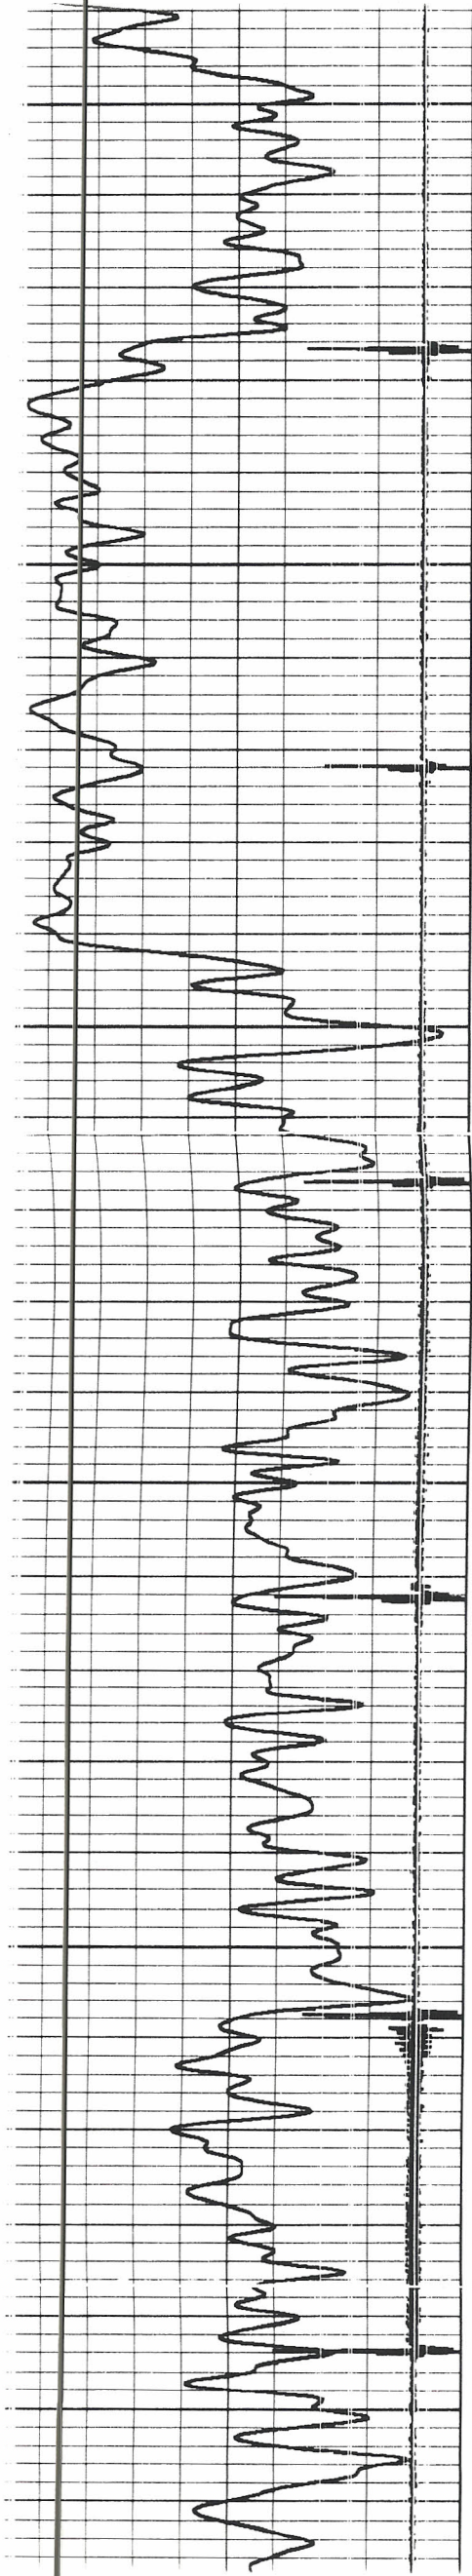

500
550
600
650
700
750

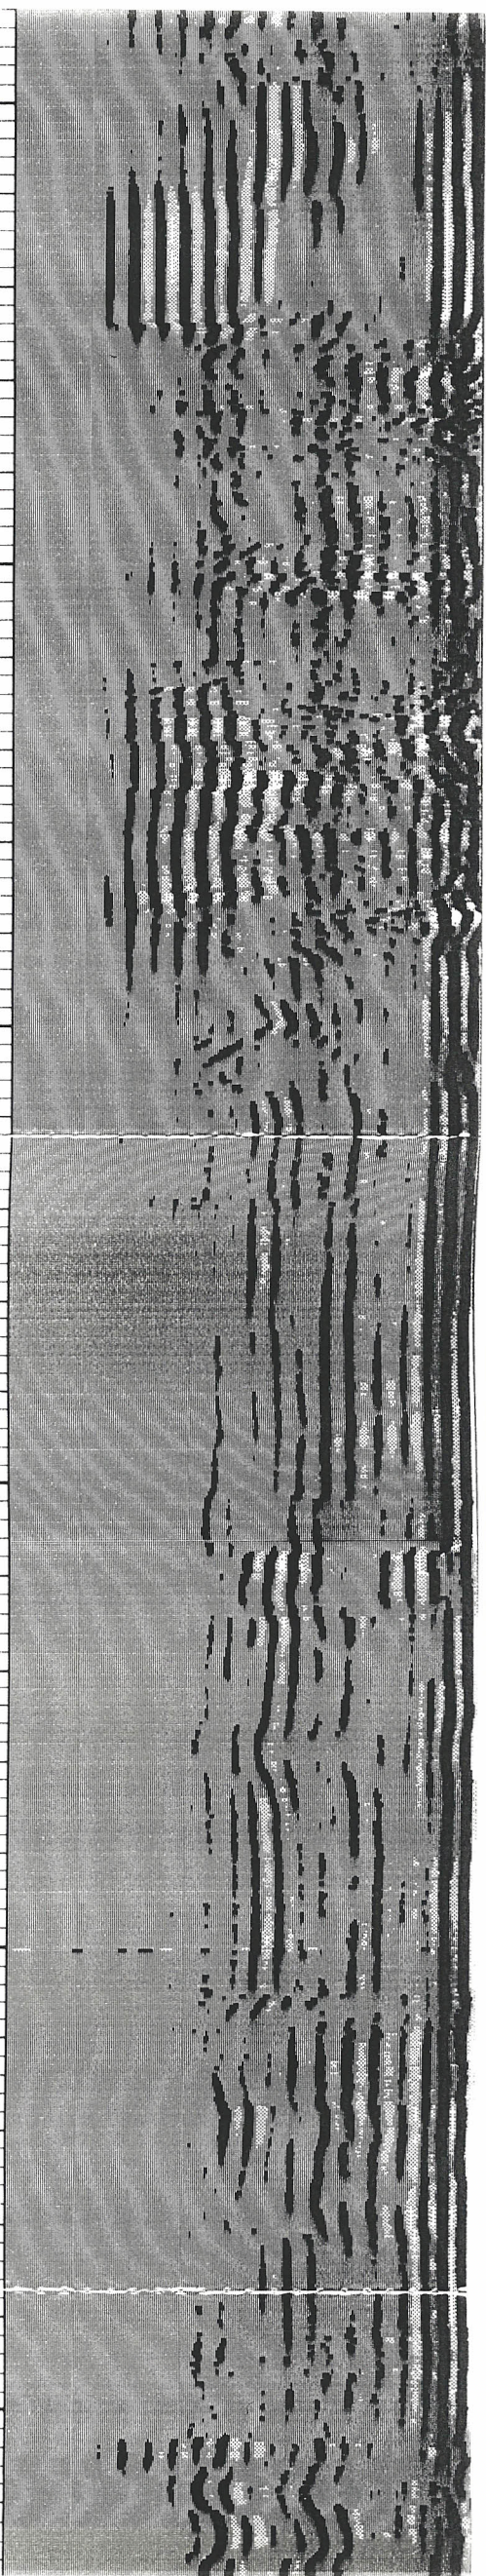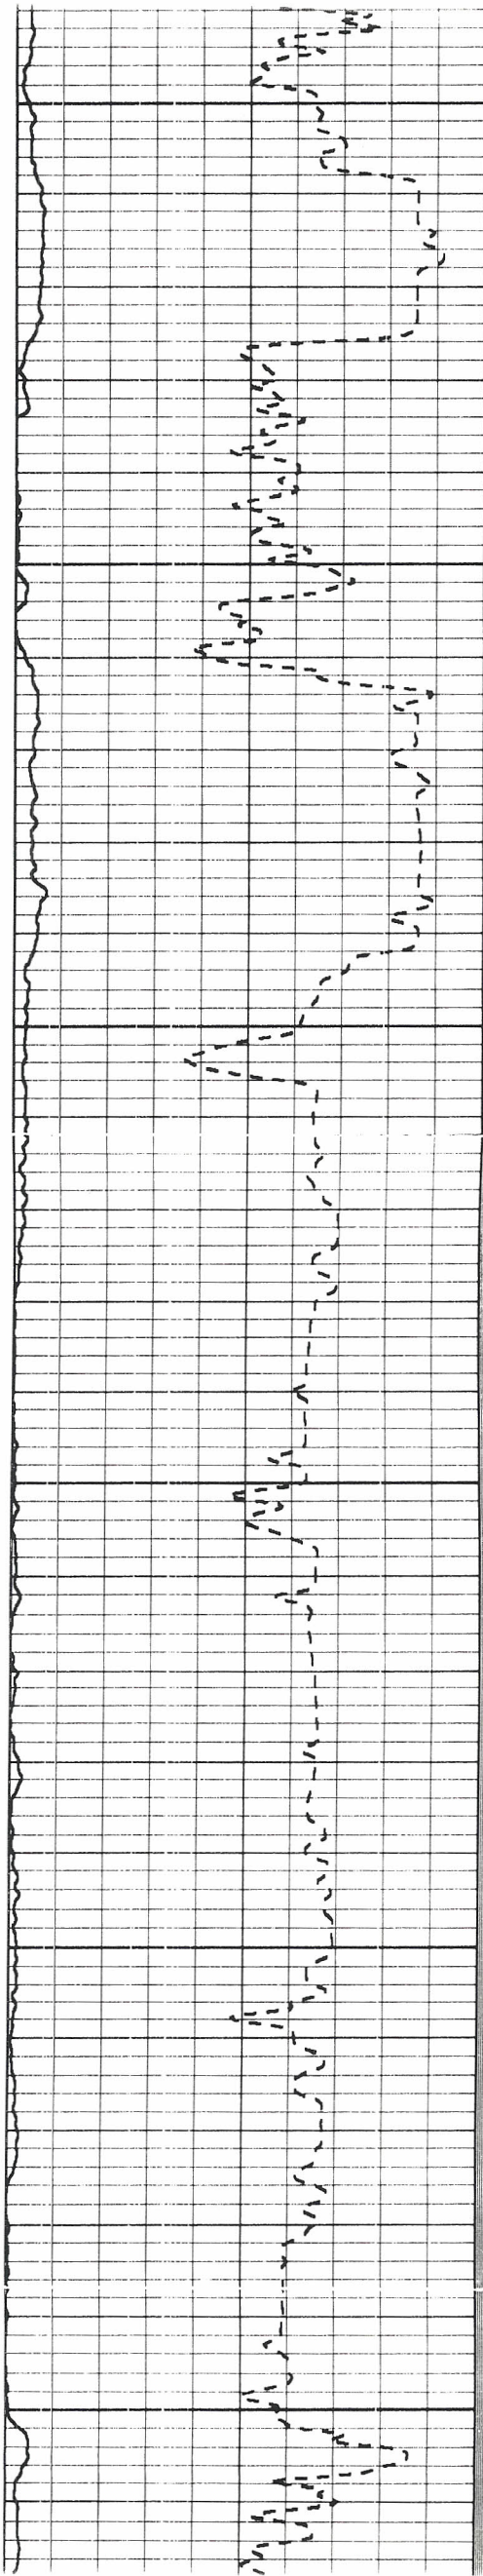

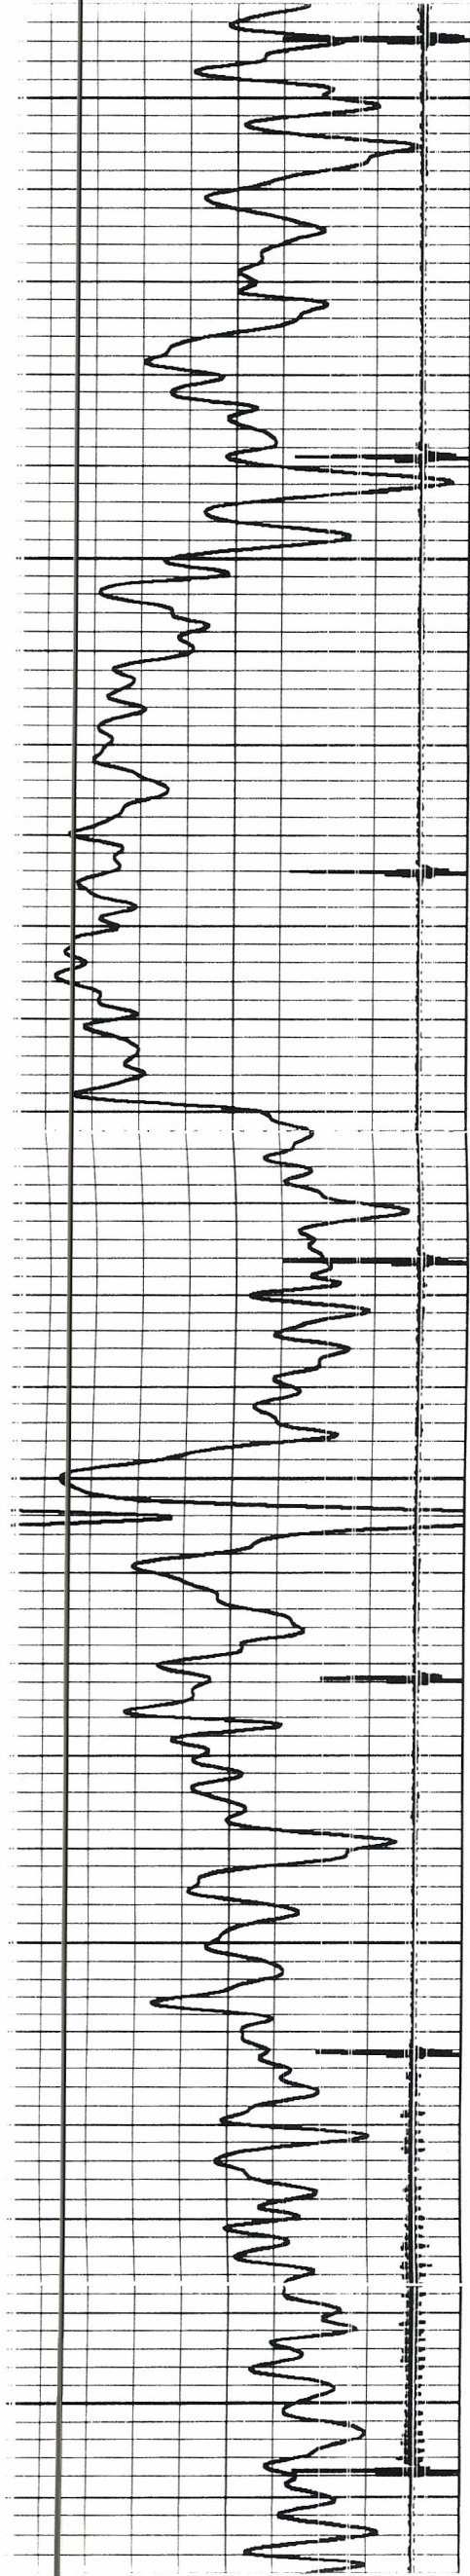

750

800

850

900

950

1000

