



Green Country Wireline

GAMMA RAY CEMENT BOND LOG CCLVLDL

Company JONES & BUCK DEVELOPMENT
Well BP # KEC 6-4
Field PERU-SEDAN
County CHAUTAUQUA
State KANSAS

Company JONES & BUCK DEVELOPMENT
Well BP # KEC 6-4
Field PERU-SEDAN
County CHAUTAUQUA State KANSAS

Location: API #: 15-019-27122
SE SE SE SE
165' FSL & 165' FEL
SEC 6 TWP 34S RGE 12E
Permanent Datum Elevation 900'
Log Measured From
Drilling Measured From
Other Services
Elevation
K.B.
D.F.
G.L. 900'

Date	1-30-12						
Run Number	1						
Depth Driller	1138'						
Depth Logger	1098'						
Bottom Logged Interval	1097'						
Top Log Interval	SURFACE						
Open Hole Size	---						
Type Fluid	WATER						
Density / Viscosity	---						
Max Recorded Temp.	---						
Estimated Cement Top	SURFACE						
Time Well Ready	---						
Time Logger on Bottom	---						
Equipment Number	3						
Location	DEWEY						
Recorded By	HERREN						
Witnessed By	MR JONES						
Run Number	Bit	From	To	Size	Weight	From	To
Borehole Record							
Casing Record	Size	Wgt/Ft	Top	Bottom			
Surface String	8.625"		SURFACE	40'			
Prot String							
Production String	4.5"		SURFACE	TD			
Liner							
Tubing Record							

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments




Green Country Wireline

GAMMA RAY CEMENT BOND

Database File: bpkec64.db
Dataset Pathname: bpkec64/run1/pass1
Presentation Format: cbl_dr
Dataset Creation: Mon Jan 30 09:12:25 2012 by Log Std Casedhole 09061
Charted by: Depth in Feet scaled 1:240




9	Collar Locator	-1	-1	Amplitude (mV)	120	200	Variable Density	1200
0	Gamma Ray (GAPI) (GAPI)	60	1000	Travel Time (usec)	250			

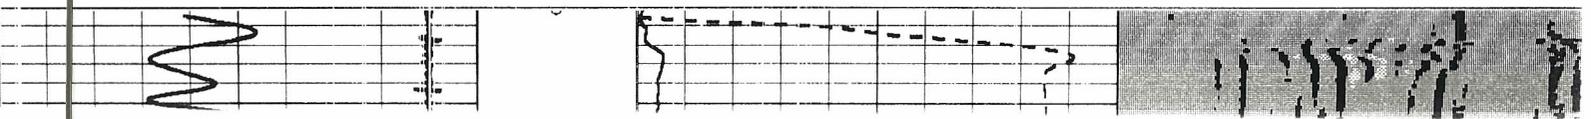


9	Collar Locator	-1
0	Gamma Ray (GAPI) (GAPI)	60

-1	Amplitude (mV)	120
1000	Travel Time (usec)	250

200 Variable Density 120

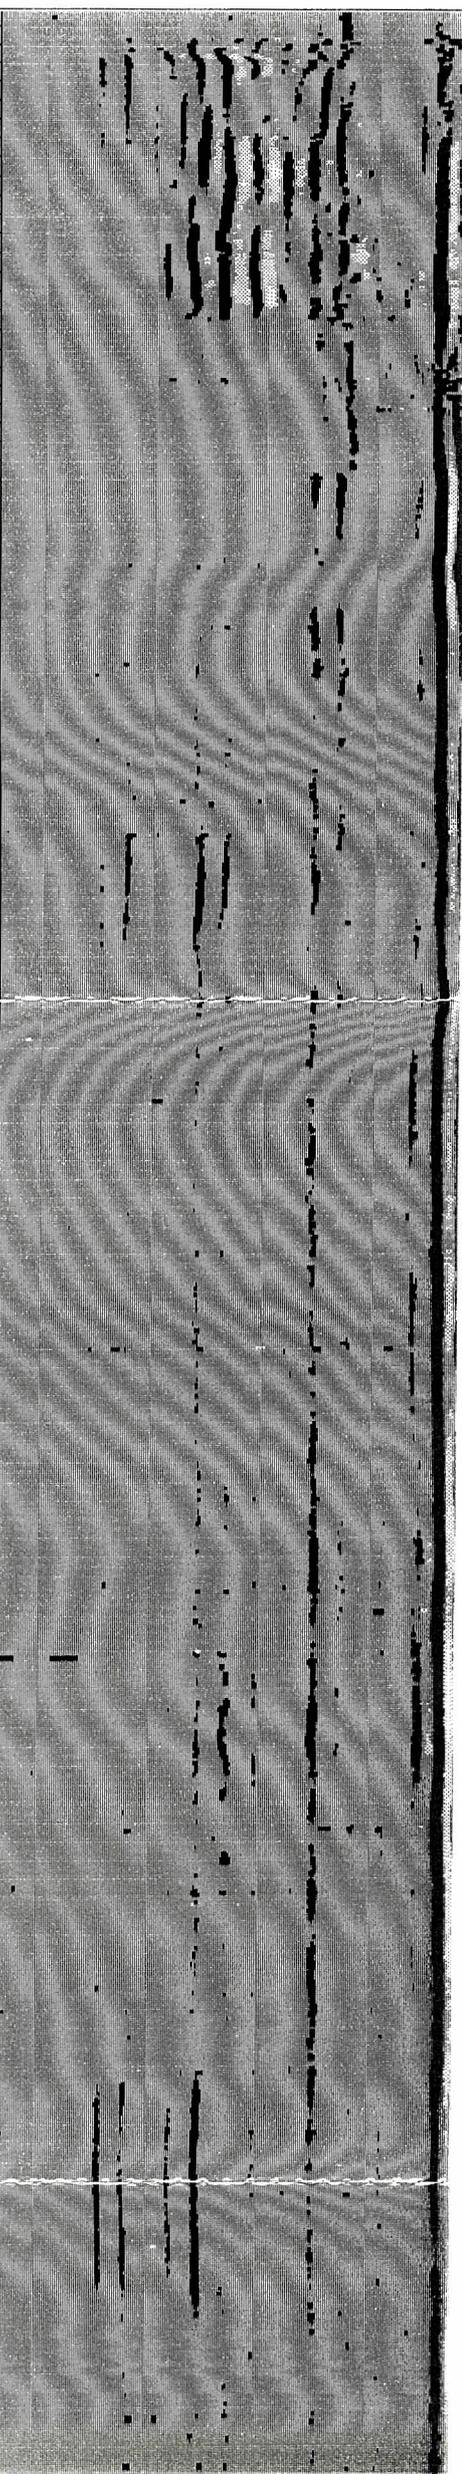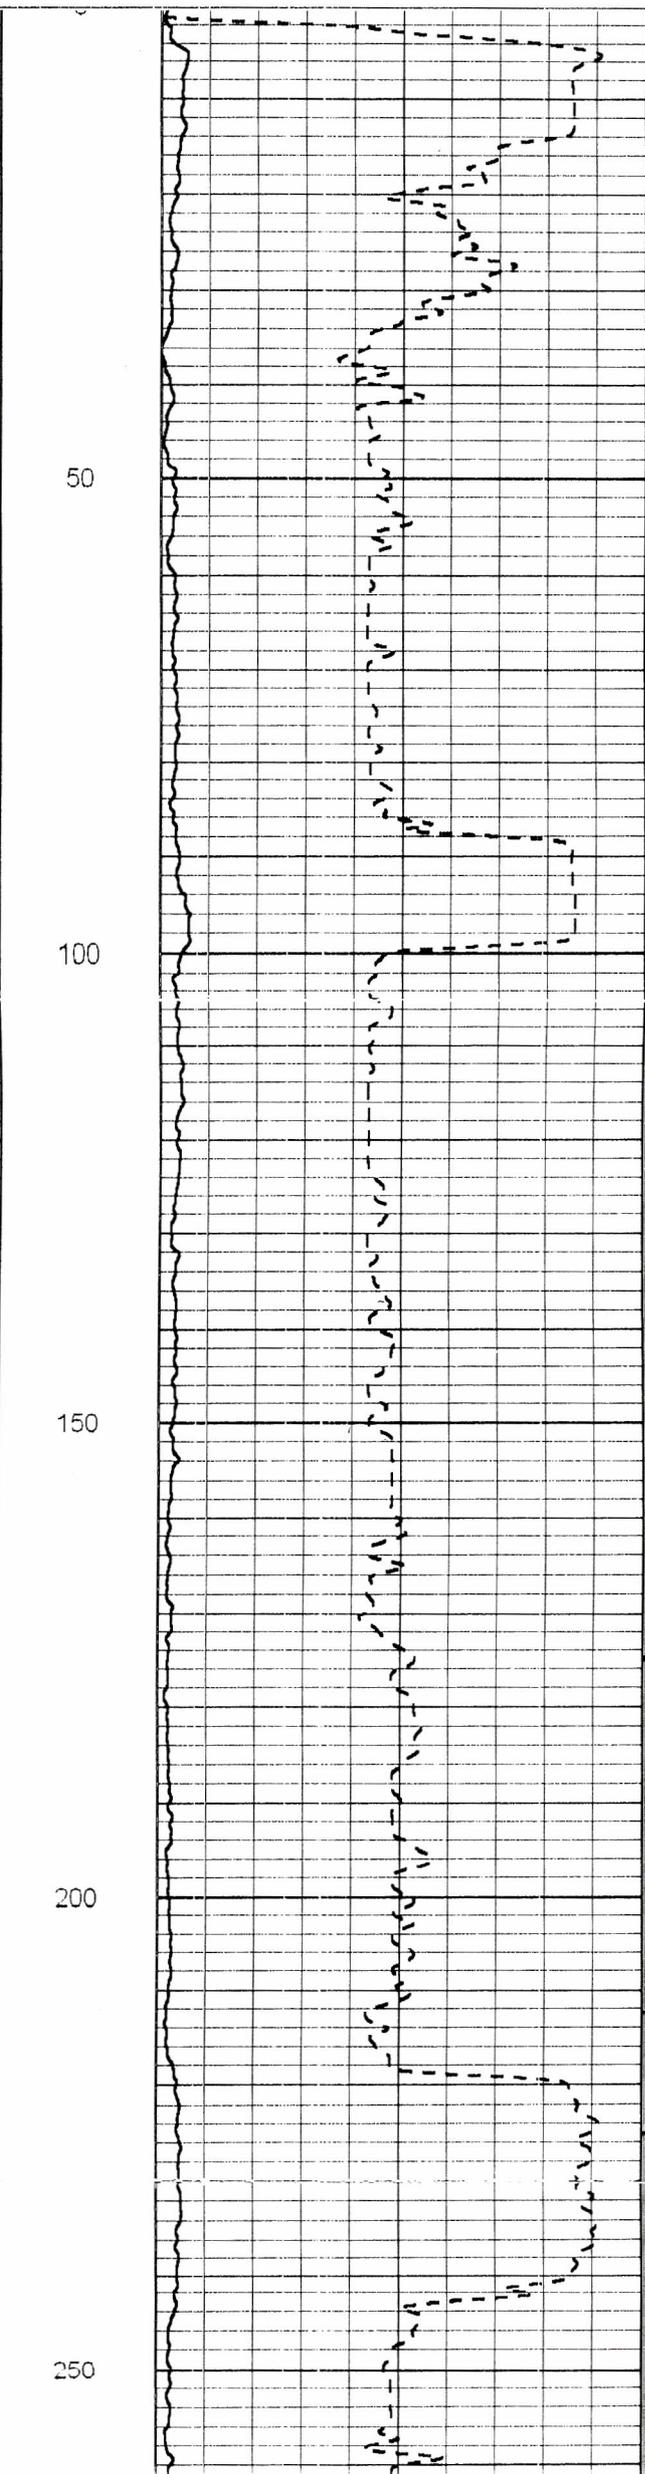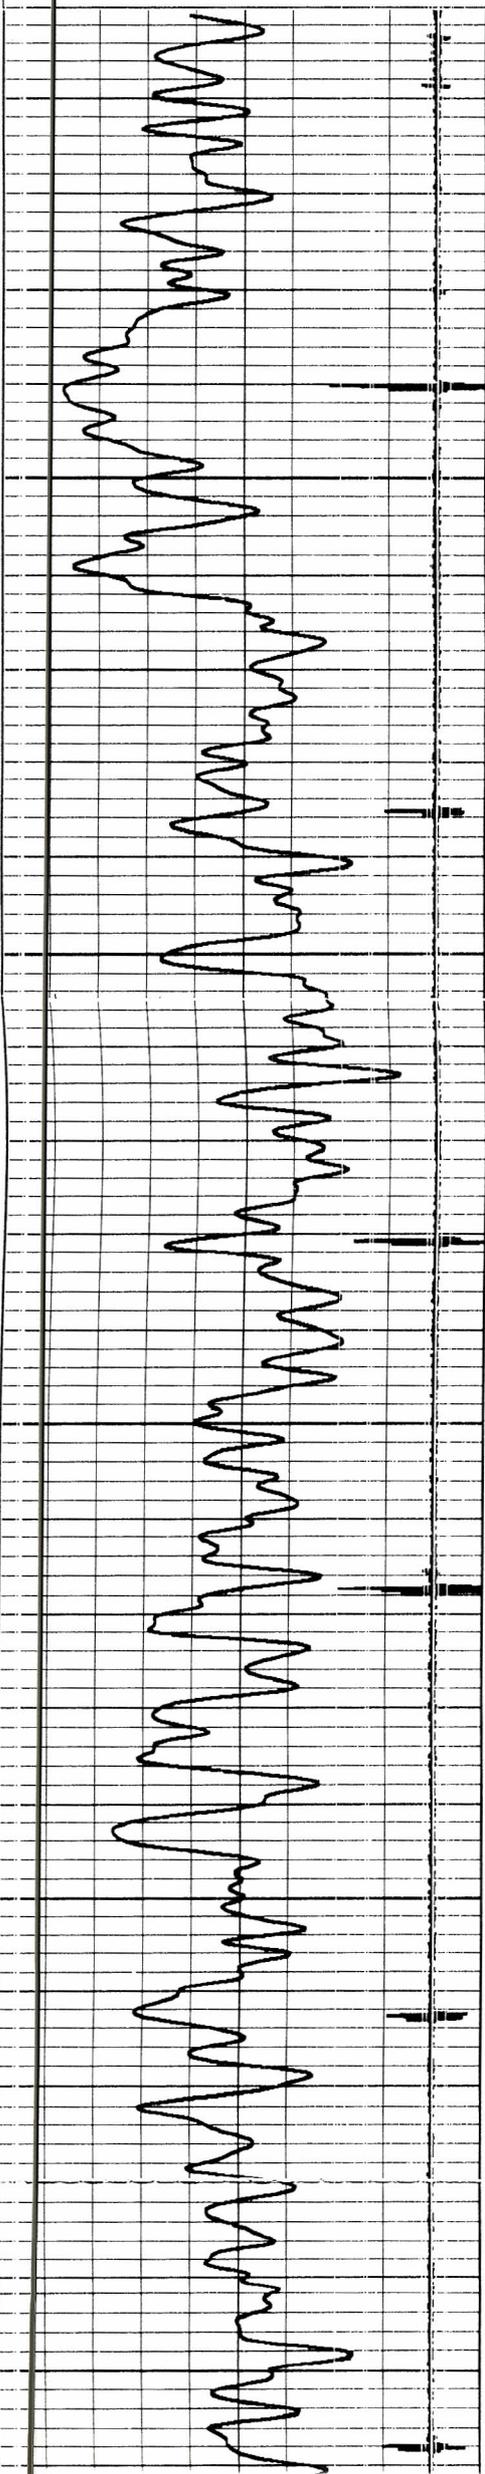

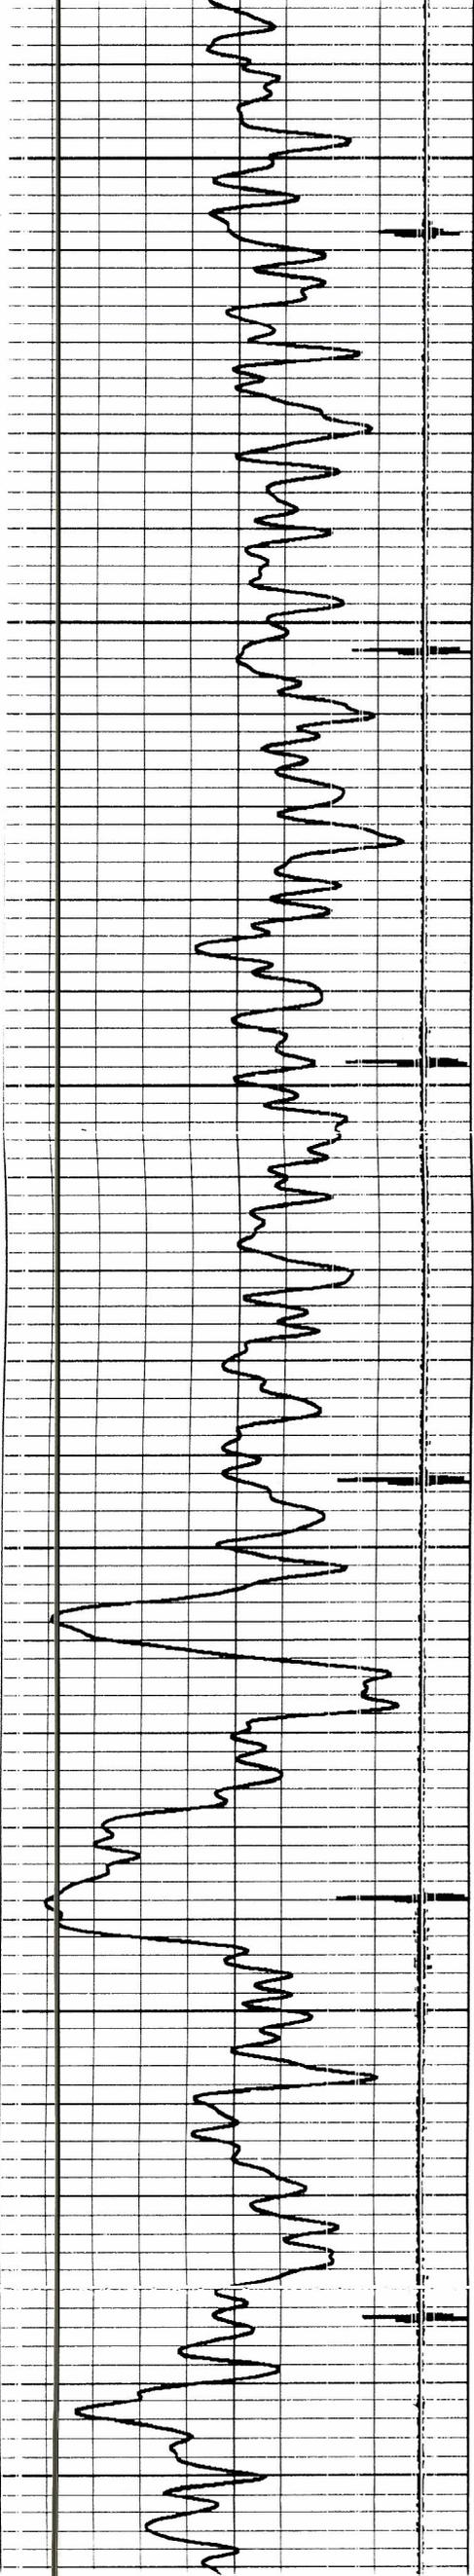

250



300


350

400

450

500

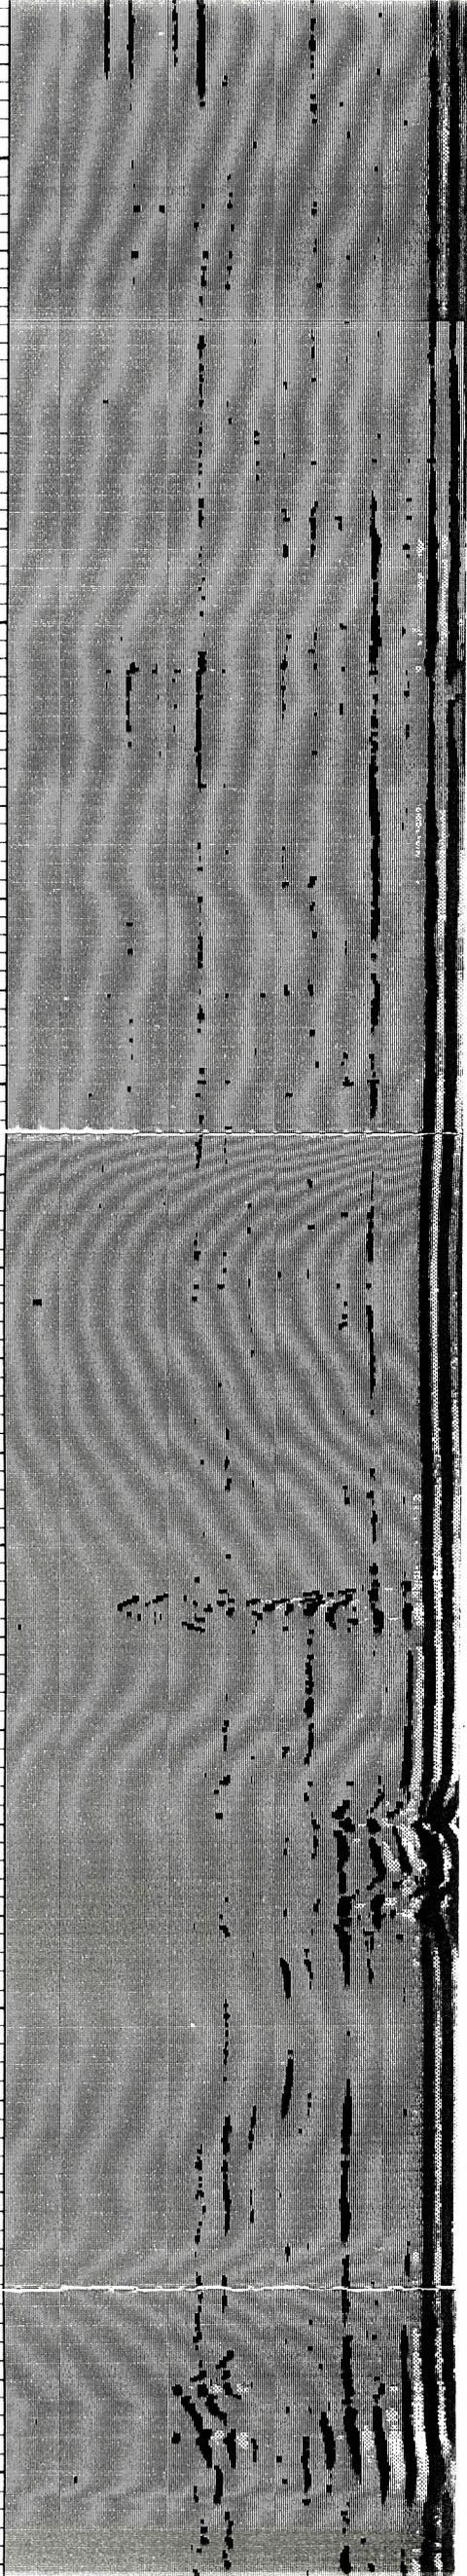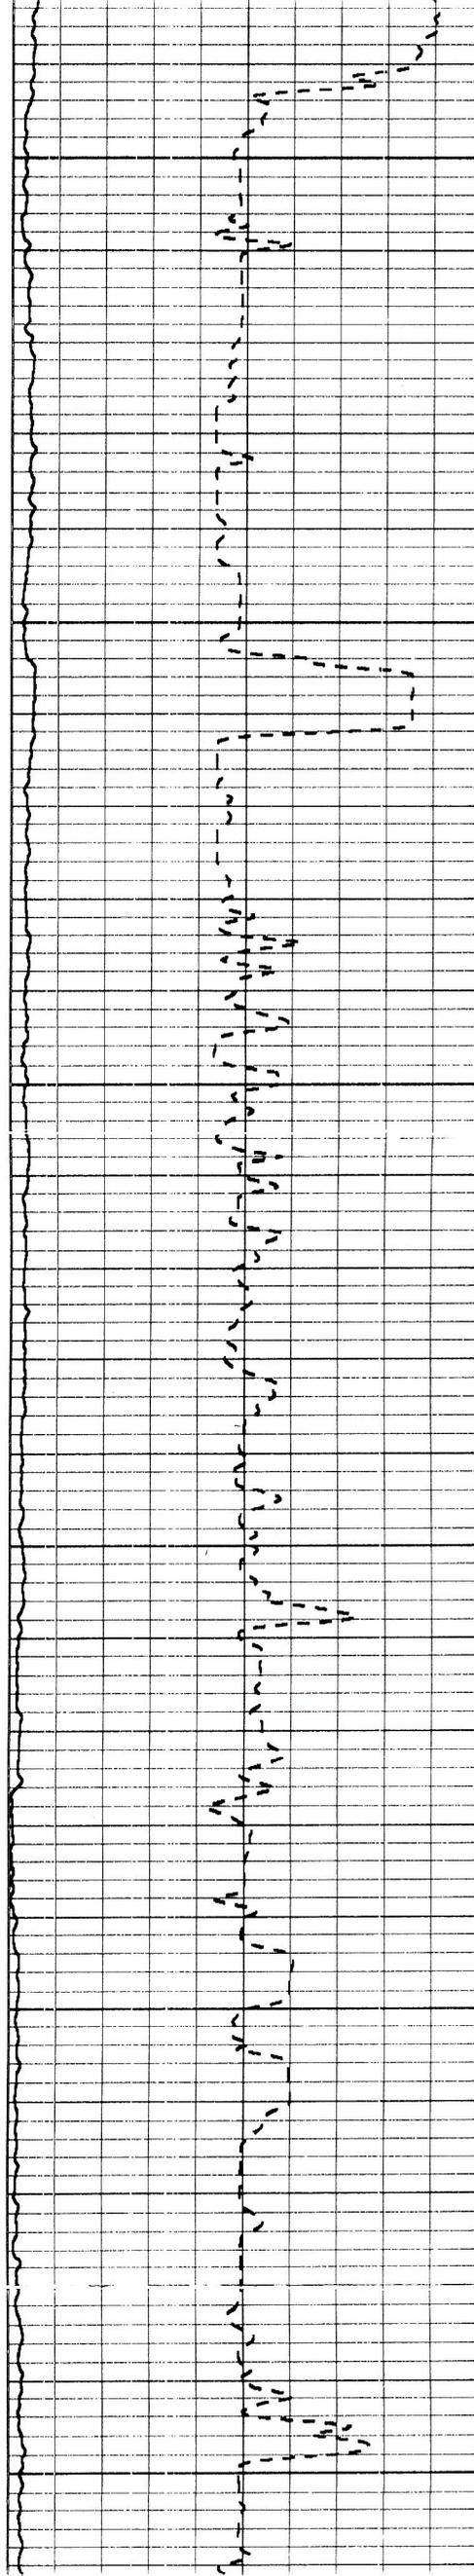

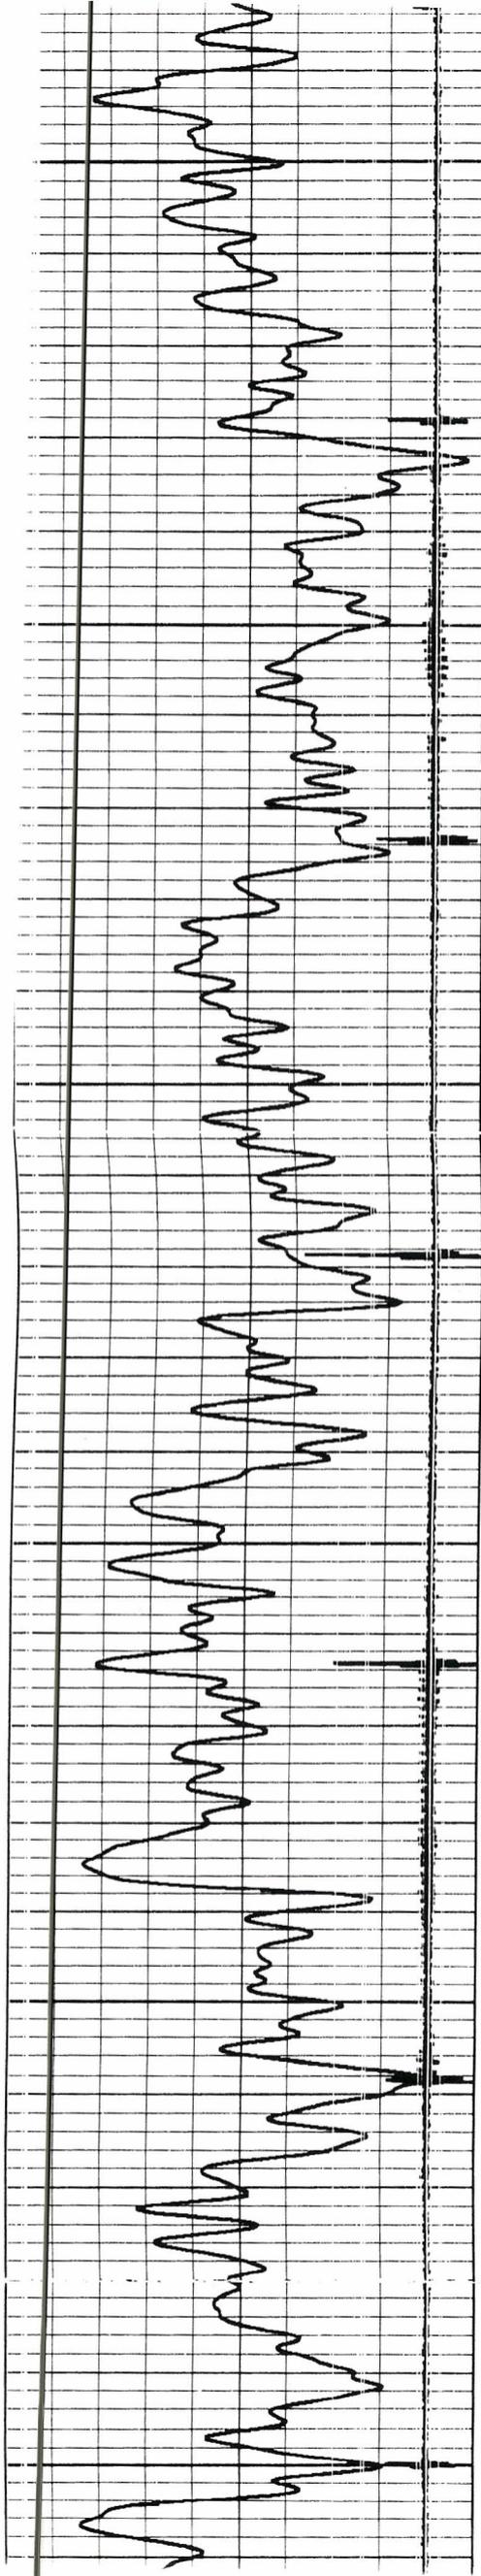

500



550


600

650



700



750

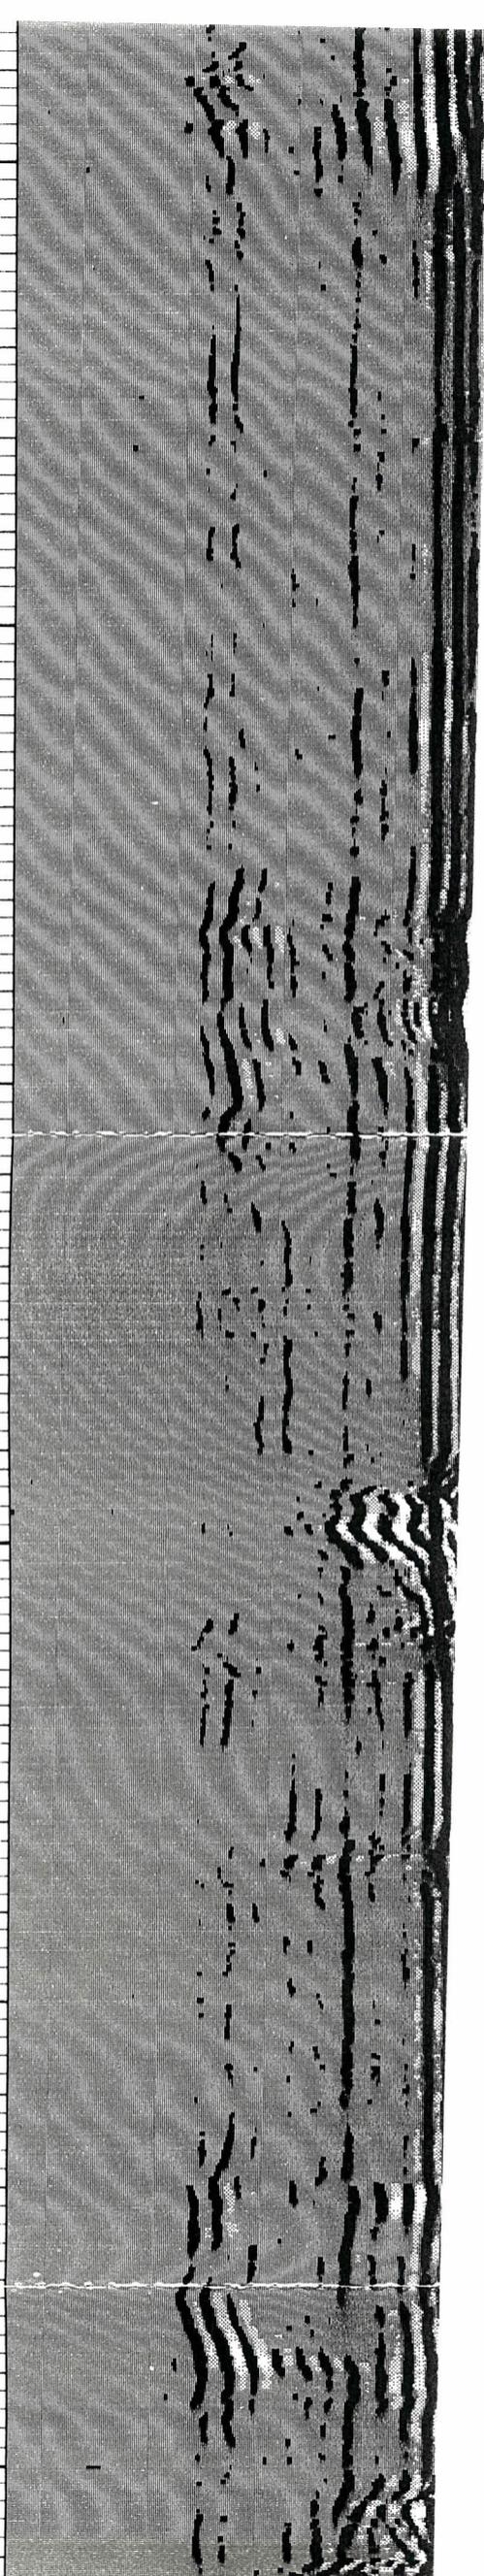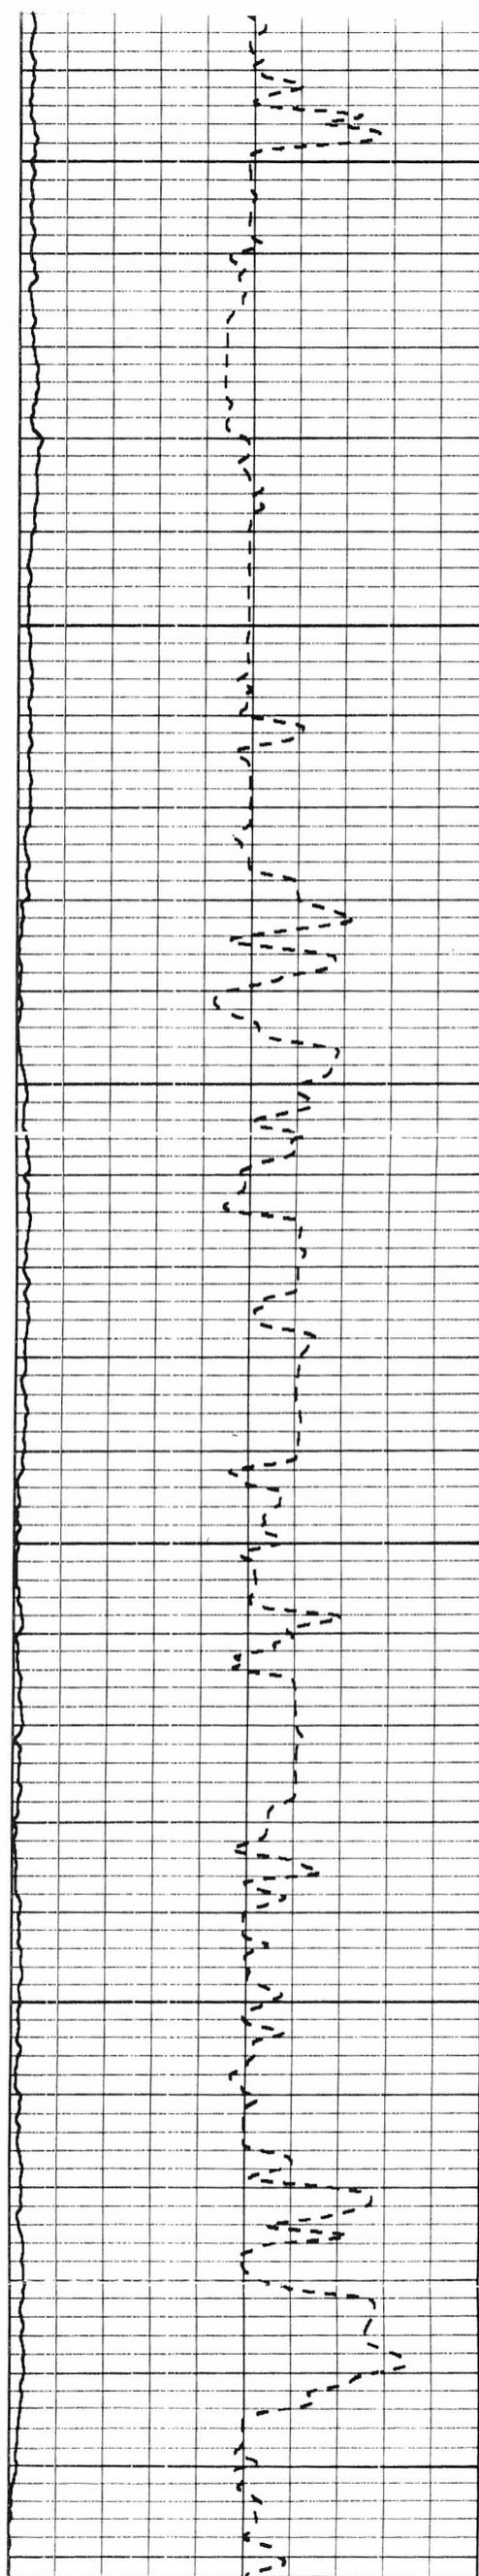

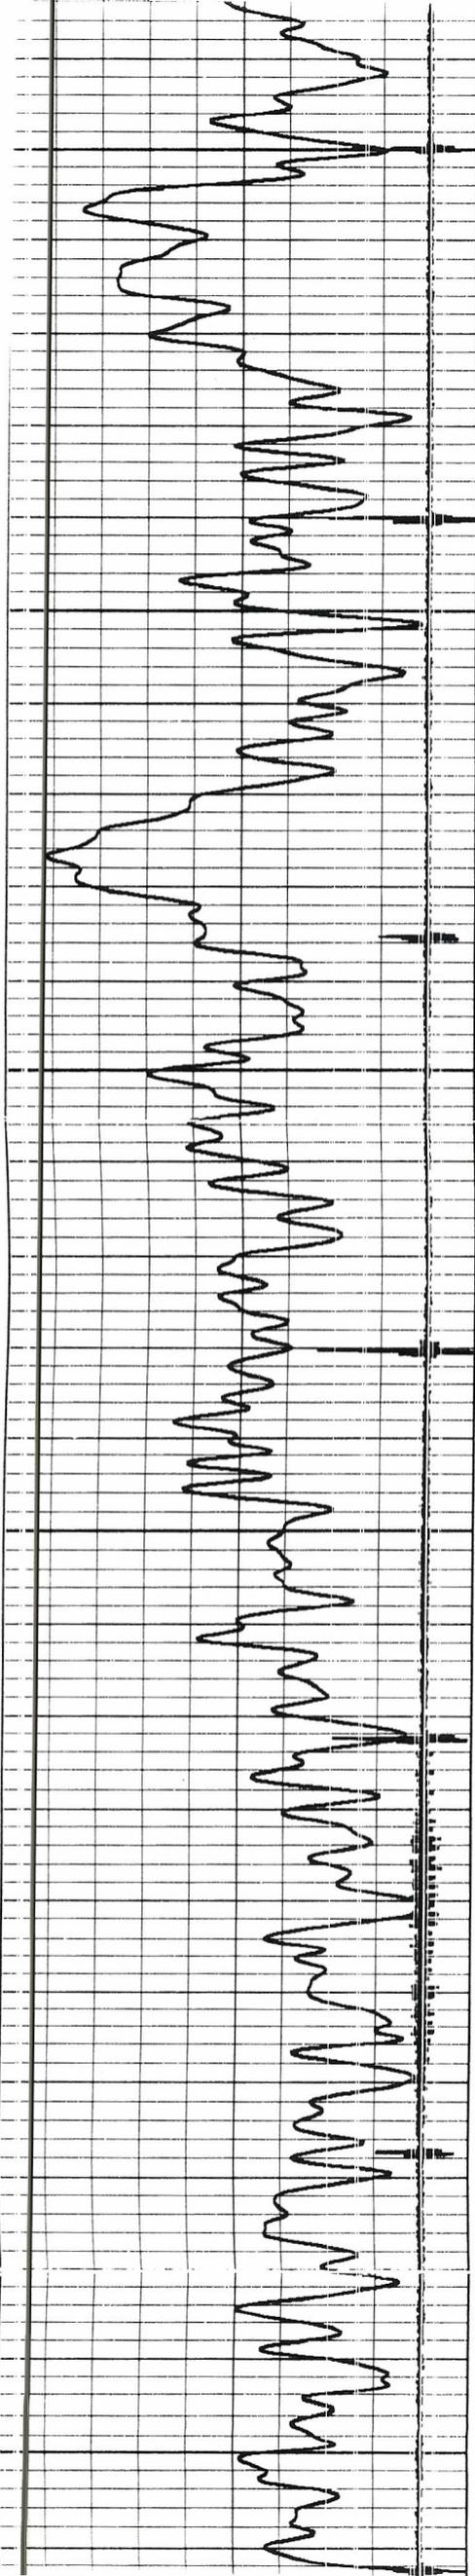

750
800
850
900
950
1000

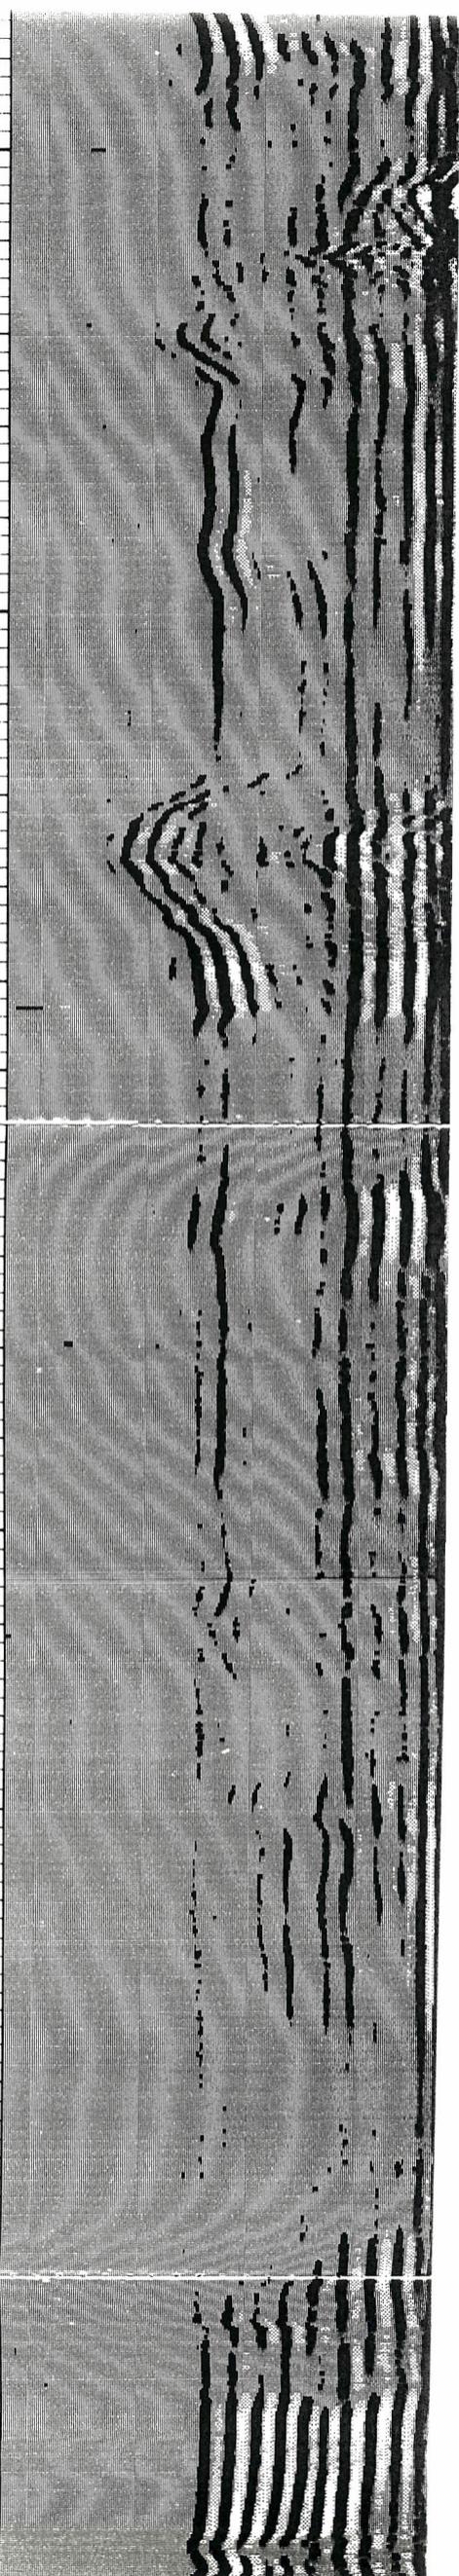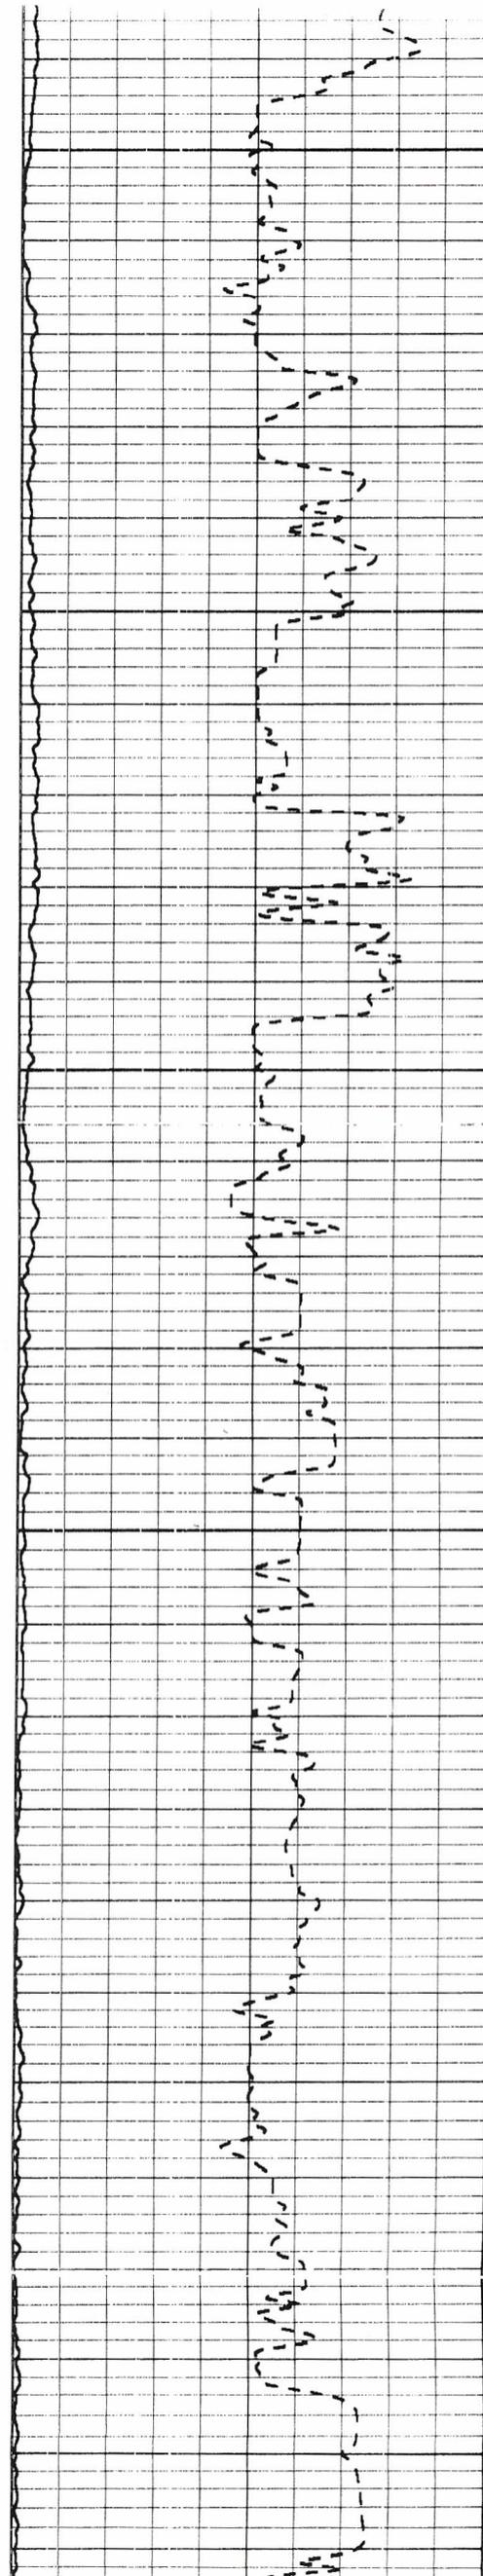

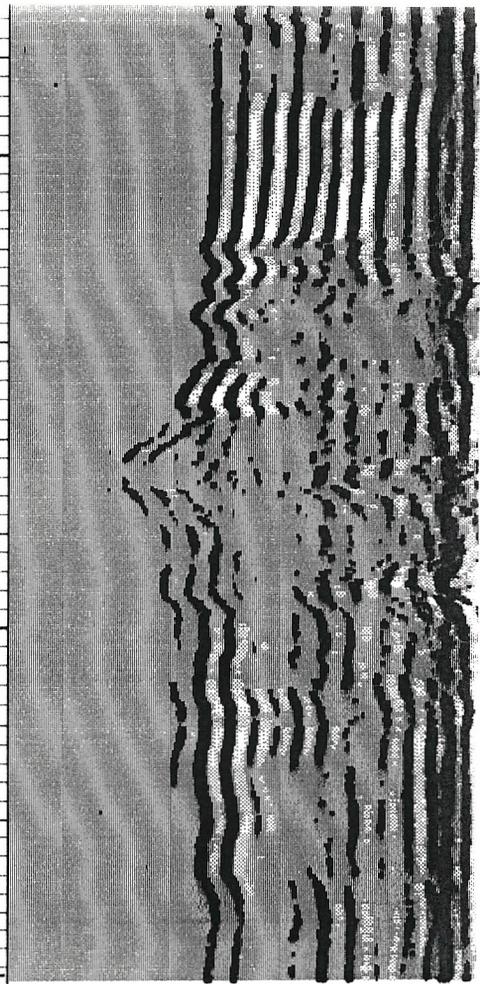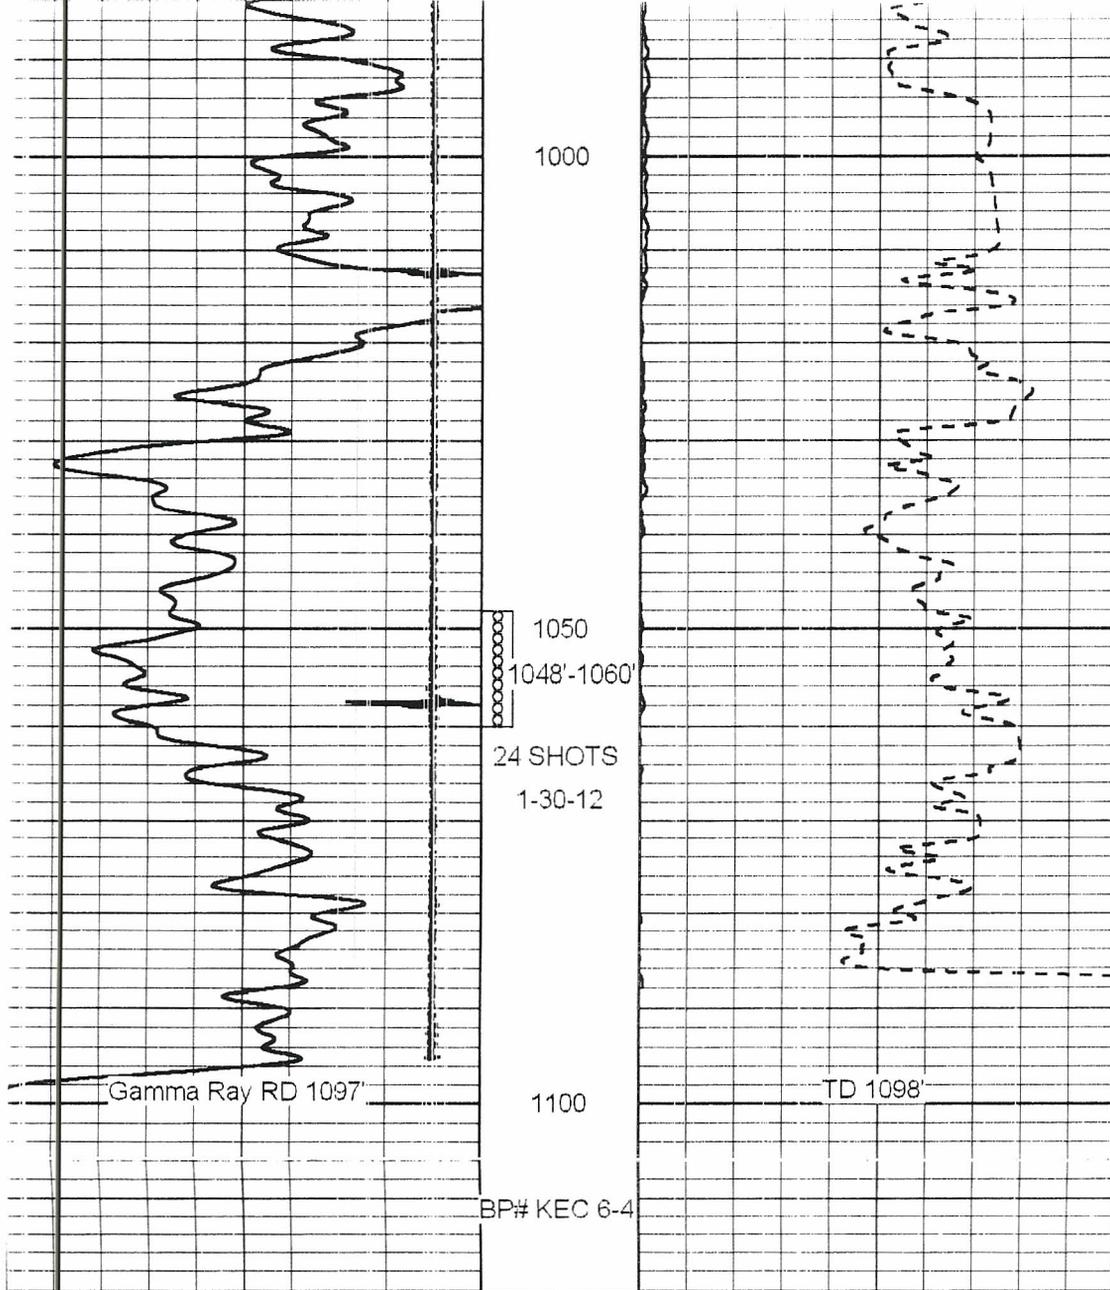

CBL RD 1086'

9	Collar Locator	-1
0	Gamma Ray (GAPI) (GAPI)	60

-1	Amplitude (mV)	120	200
1000	Travel Time (usec)	250	

