



DIGITAL LOG (785) 625-3858

Microresistivity Log

15-015-23.934-00-00

API No.

Company Vess Oil Corporation

Well Wilson "A" No.444

Field El Dorado

County Butler State Kansas

Location 2176' FNL & 2310' FWL

Sec: 9 Twp: 25S Rge: 5E

Permanent Datum Ground Level Elevation 1357

Log Measured From Kelly Bushing 6 Ft. Above Perm. Datum

Drilling Measured From Kelly Bushing

Elevation

K.B. 1363

D.F. 1357

Other Services  
CNL/CDL  
DIL

Date 4/4/2012

Run Number Three

Depth Driller 2488

Depth Logger 2488

Bottom Logged Interval 2487

Top Log Interval 250

Casing Driller 8.625 @ 257

Casing Logger 259

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity,ppm CL 1,300

Density / Viscosity 9.3 47

pH / Fluid Loss 9.5 8.8

Source of Sample Flowline

Rm @ Meas. Temp 1.95 @ 64

Rmf @ Meas. Temp 1.46 @ 64

Rmc @ Meas. Temp 2.63 @ 64

Source of Rmf / Rmc Charts

Rm @ BHT 1.24 @ 101

Operating Rig Time 4 1/2 Hours

Max Rec. Temp. F 101

Equipment Number 17

Location Hays

Recorded By C. Desaire

Witnessed By Roger Martin

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.  
(785) 625-3858



East of Potwin KS to 40 Rd,  
2 E, 1/4 N, E Into on first right



Database File: c:\warrior\data\vess\_wilson a no.444\vesshd3.db  
Dataset Pathname: dil/vessstk  
Presentation Format: micro  
Dataset Creation: Wed Apr 04 06:57:32 2012  
Charted by: Depth in Feet scaled 1:240


0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

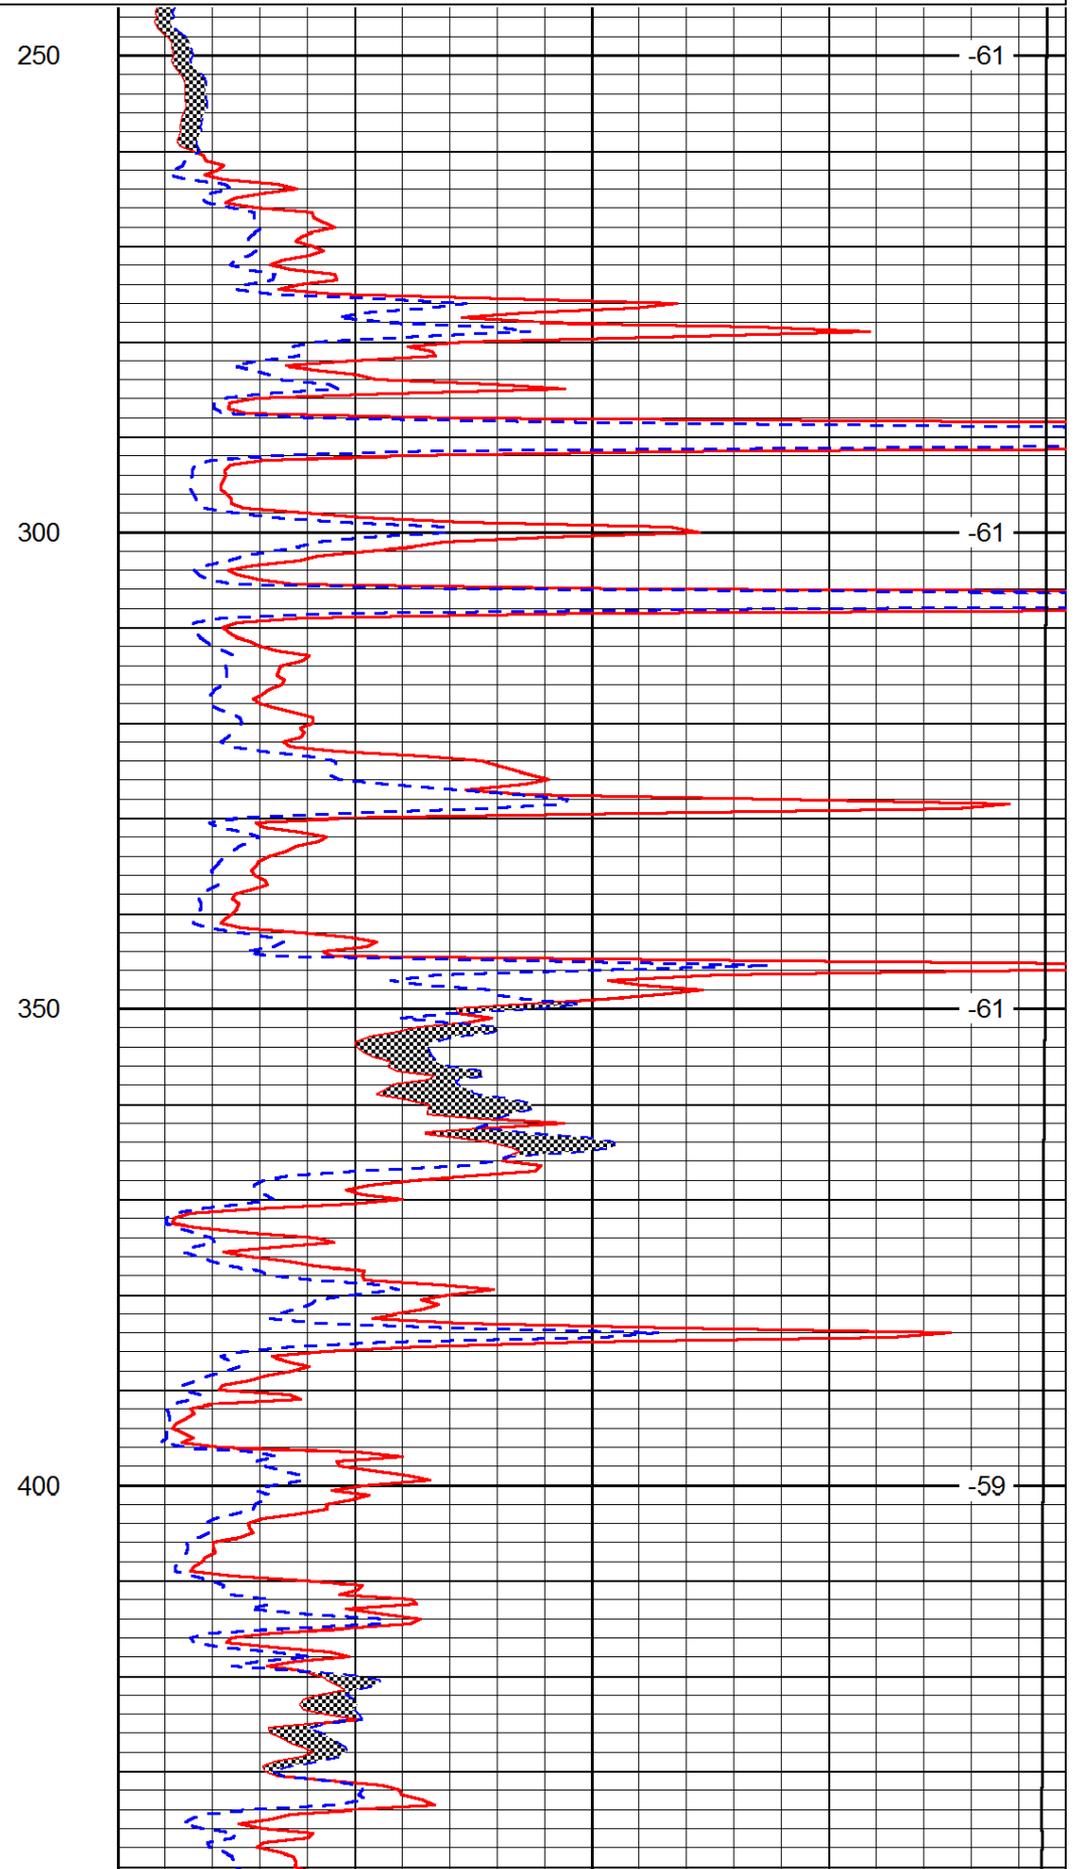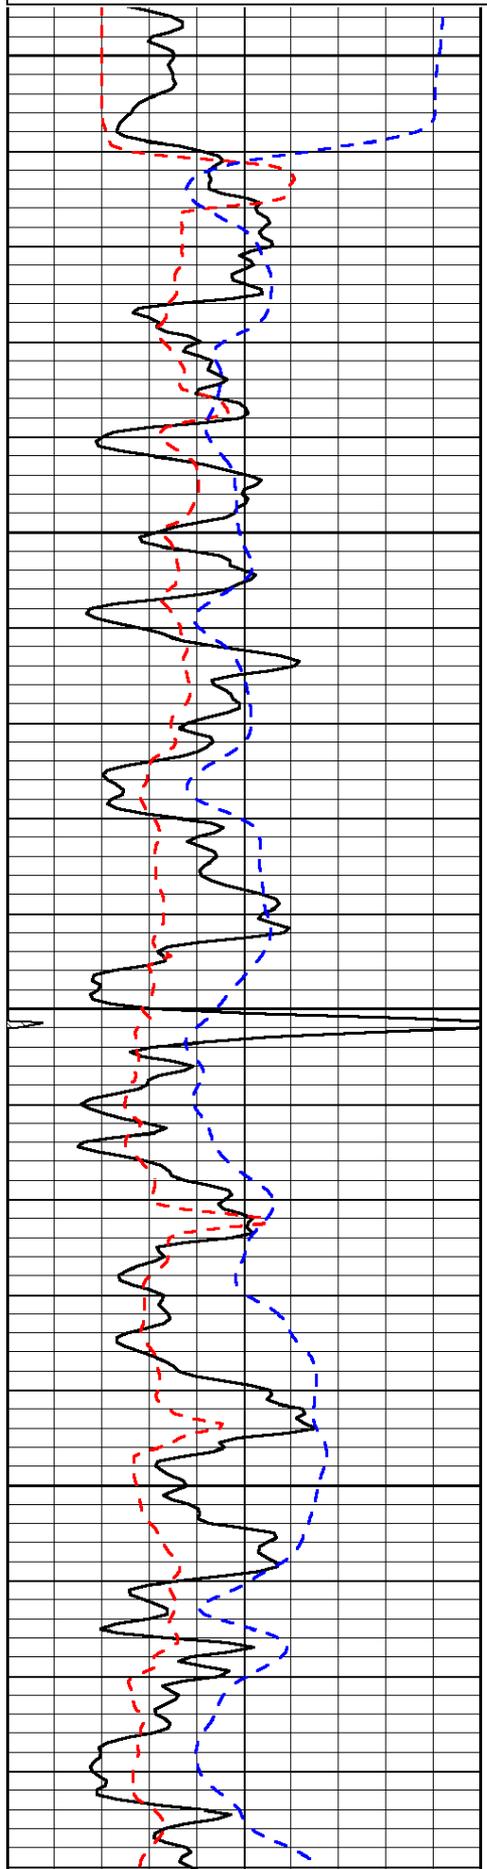

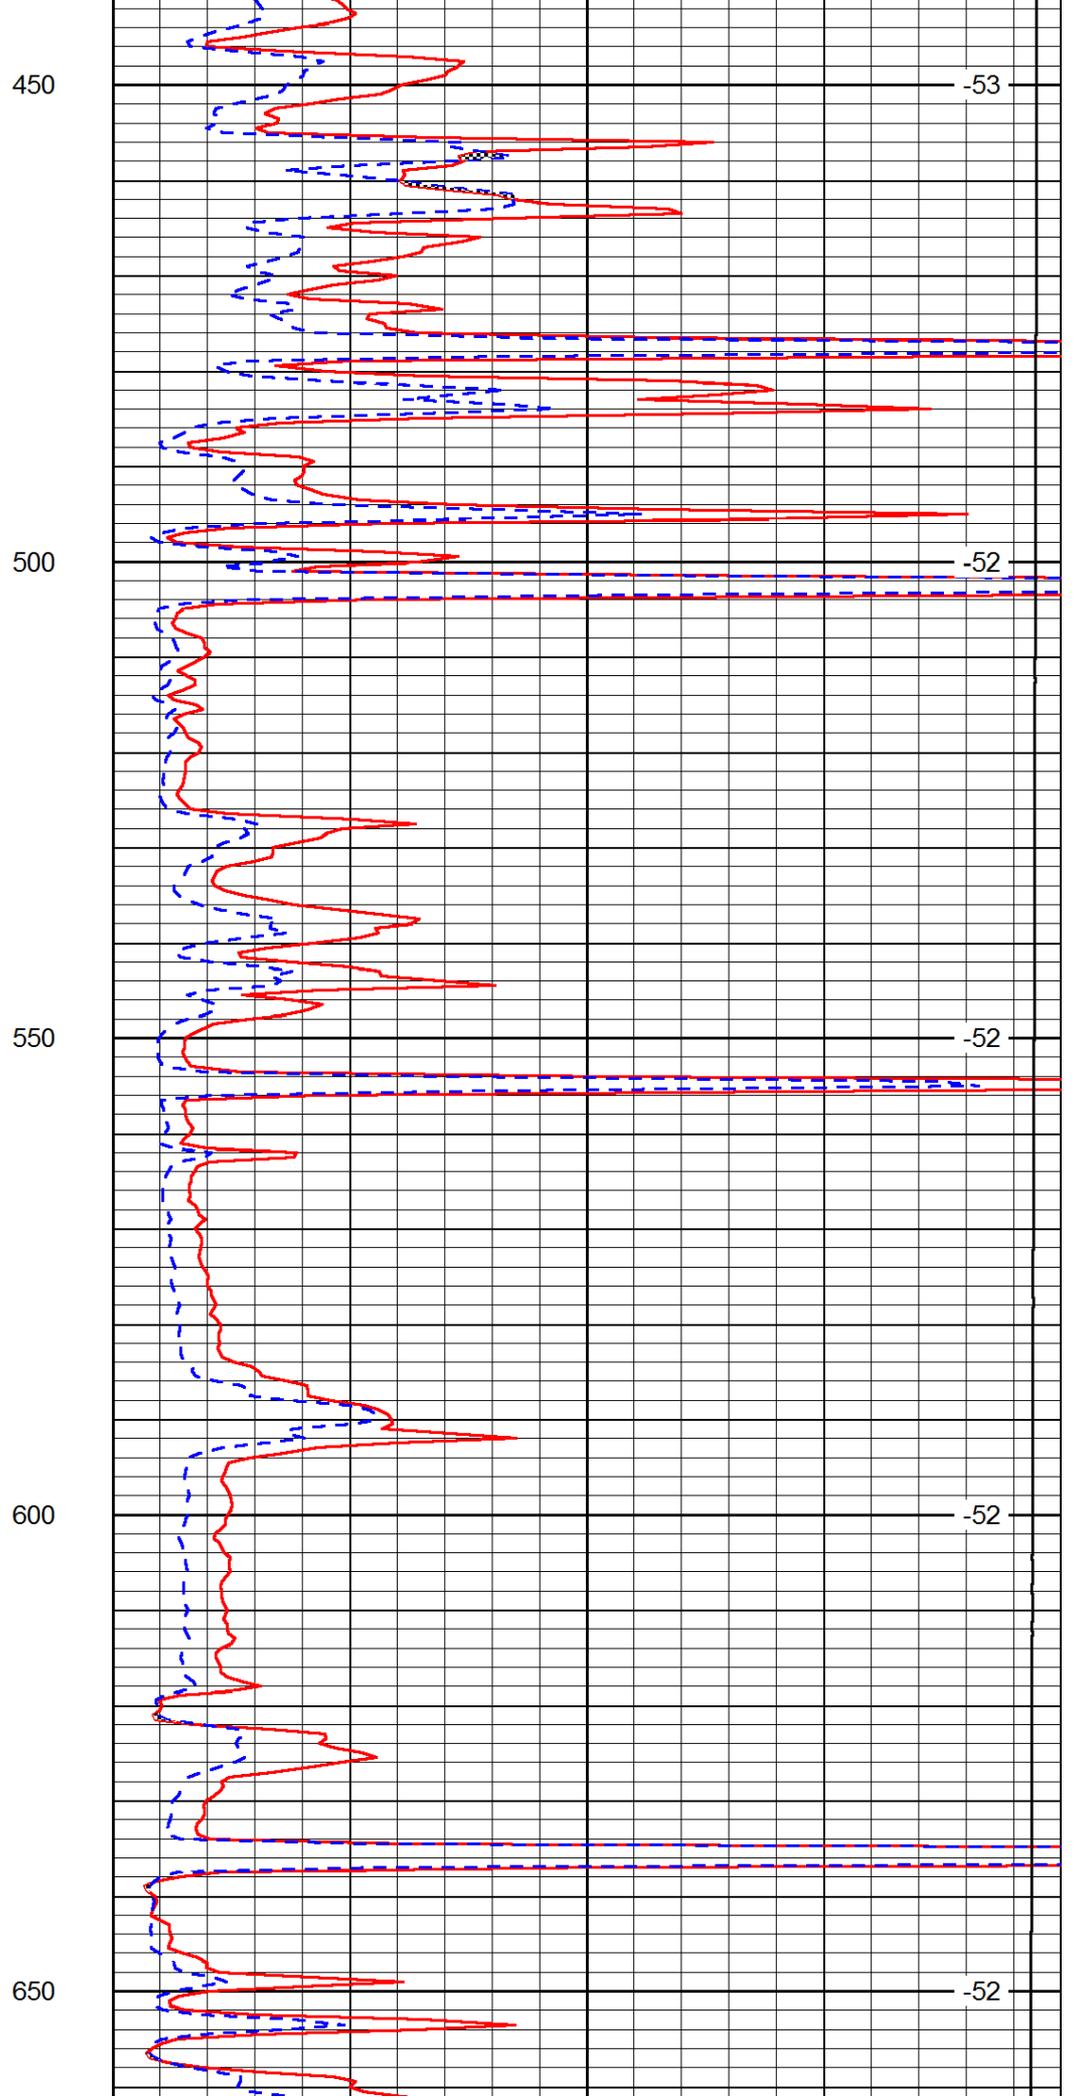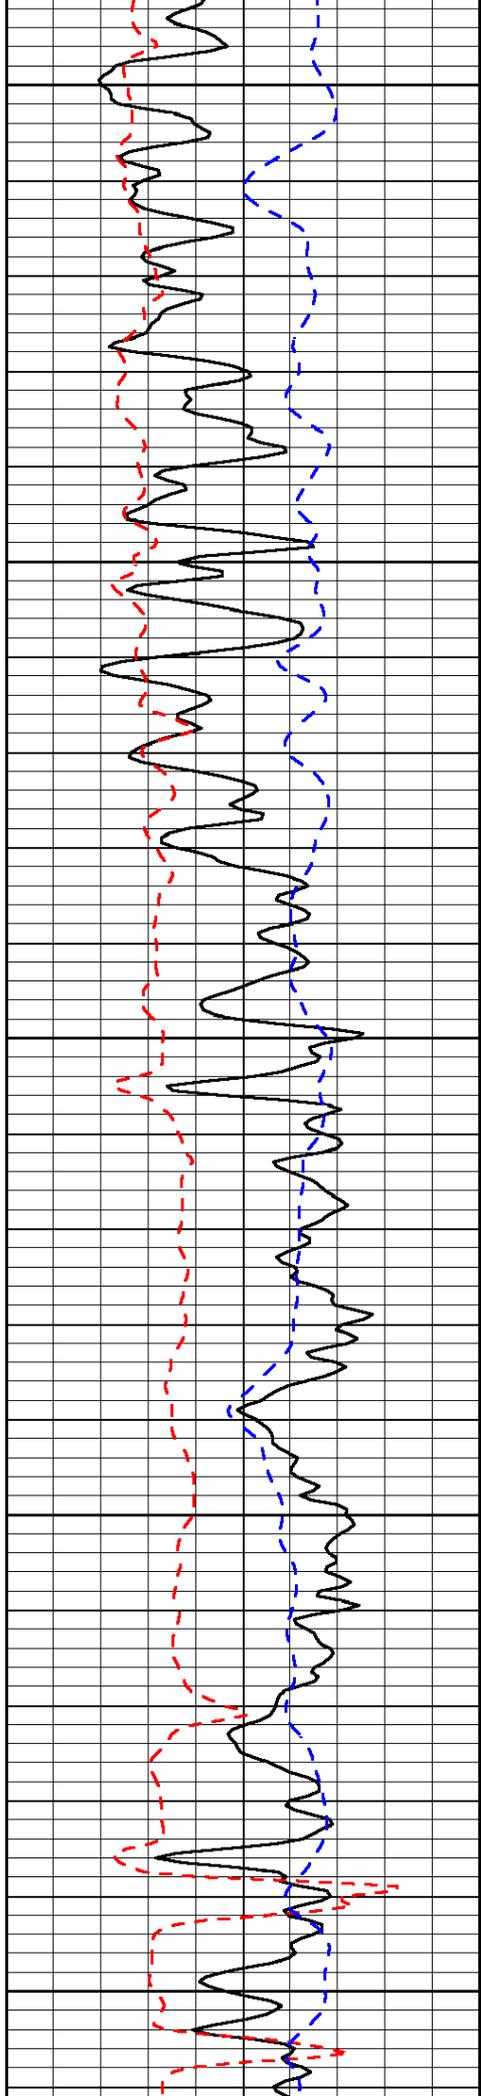

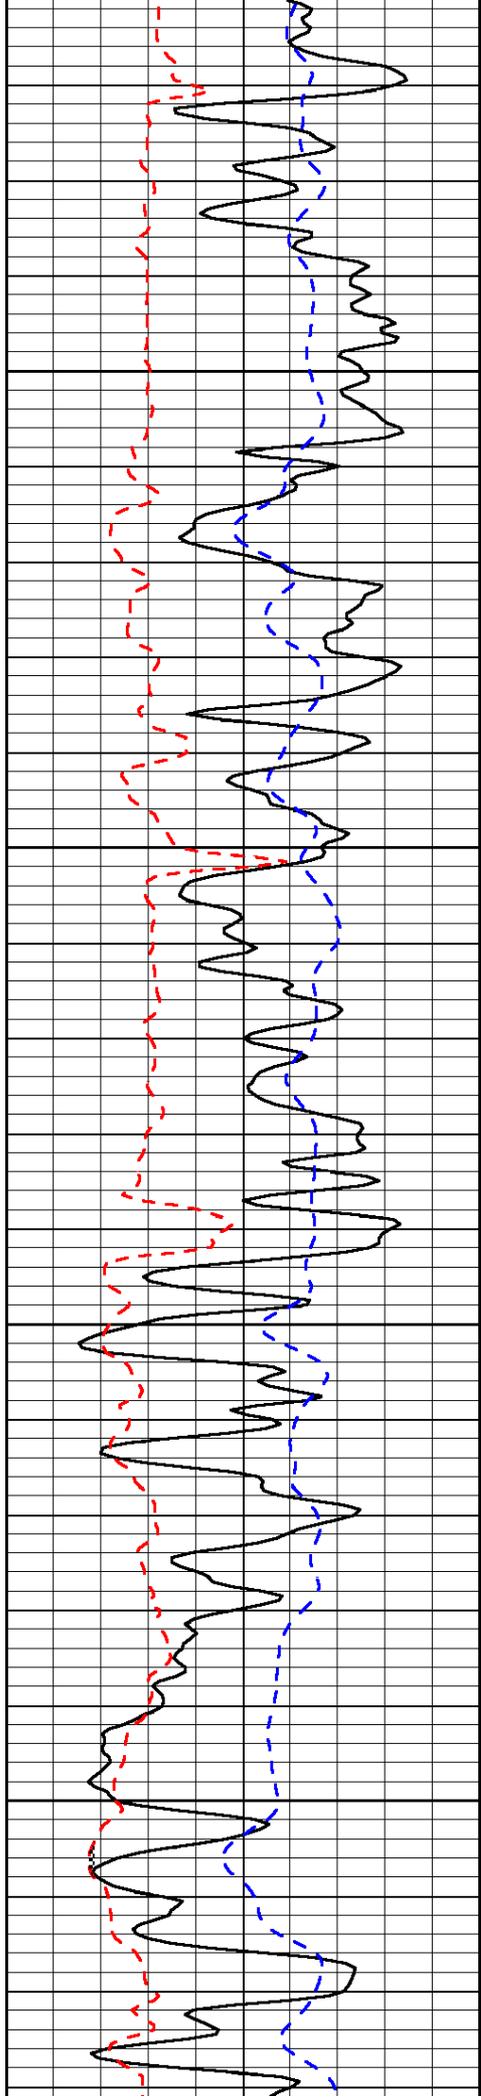


700

750

800

850


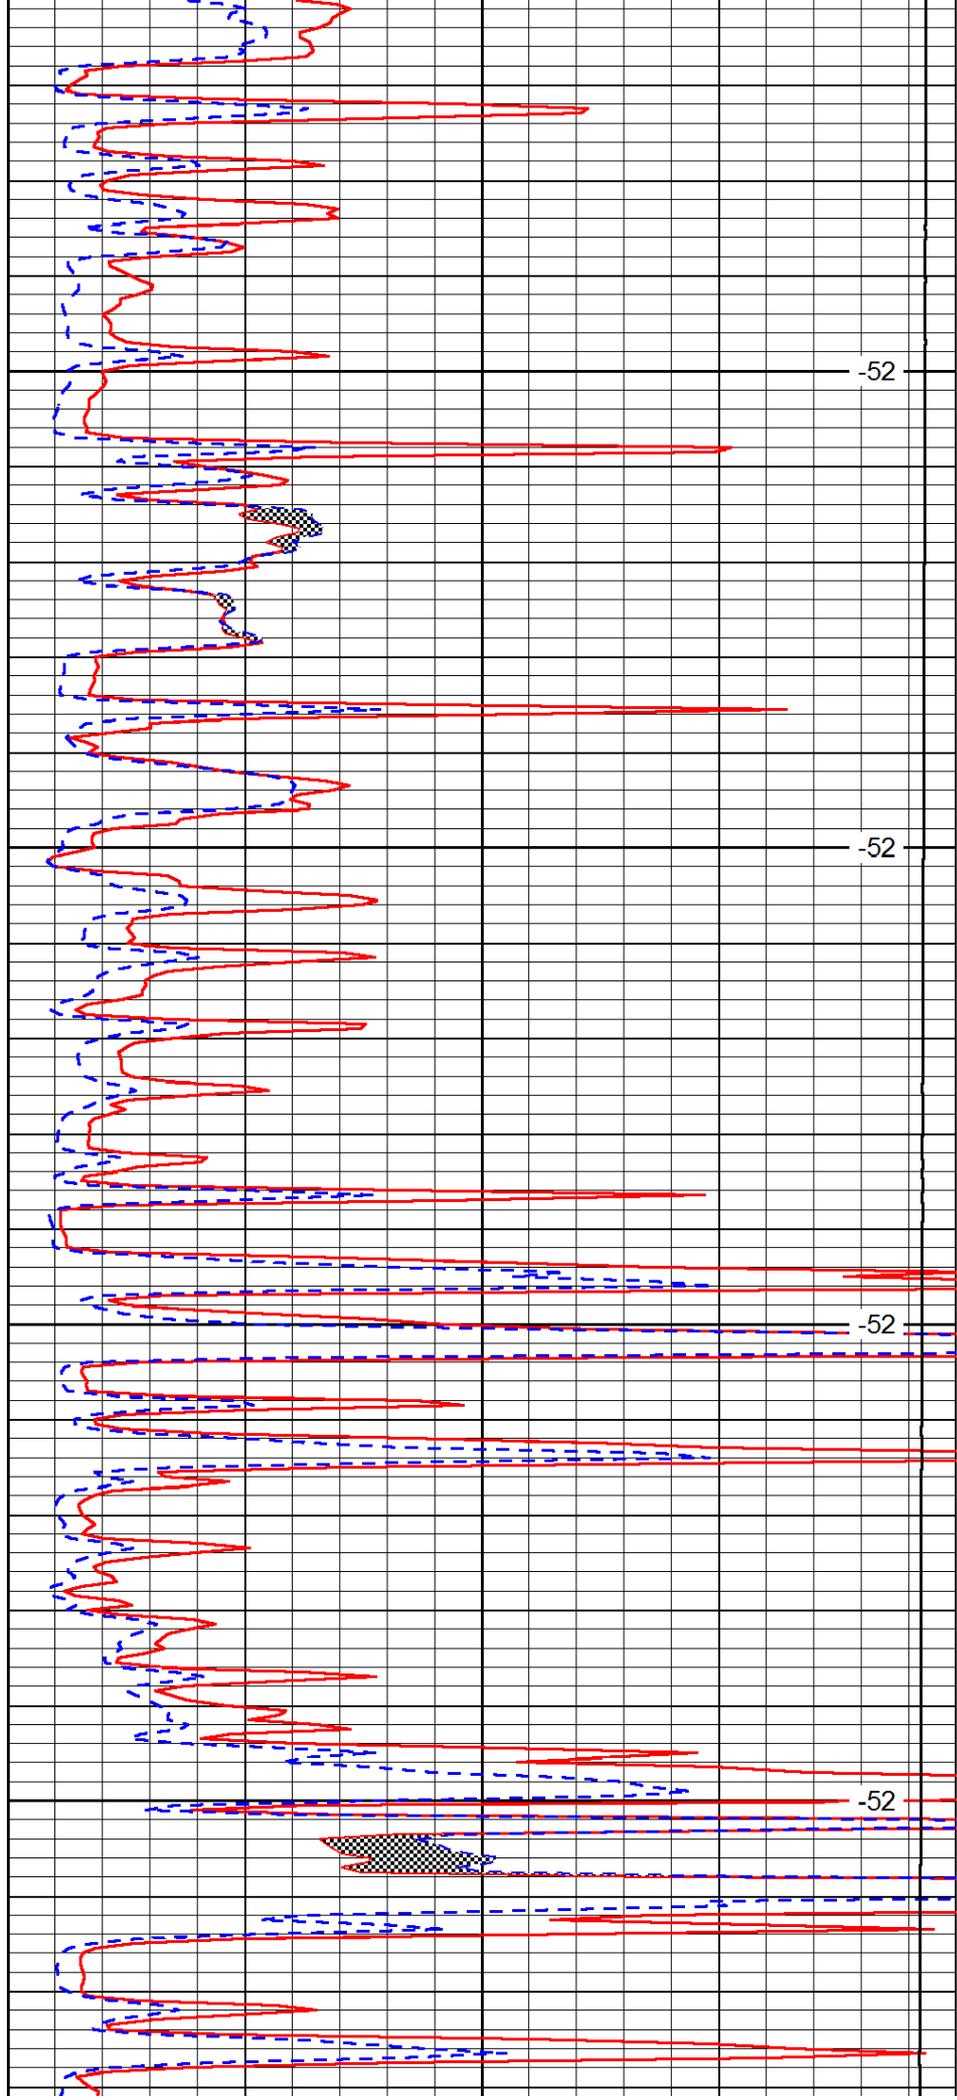




-52


-52

-52

-52

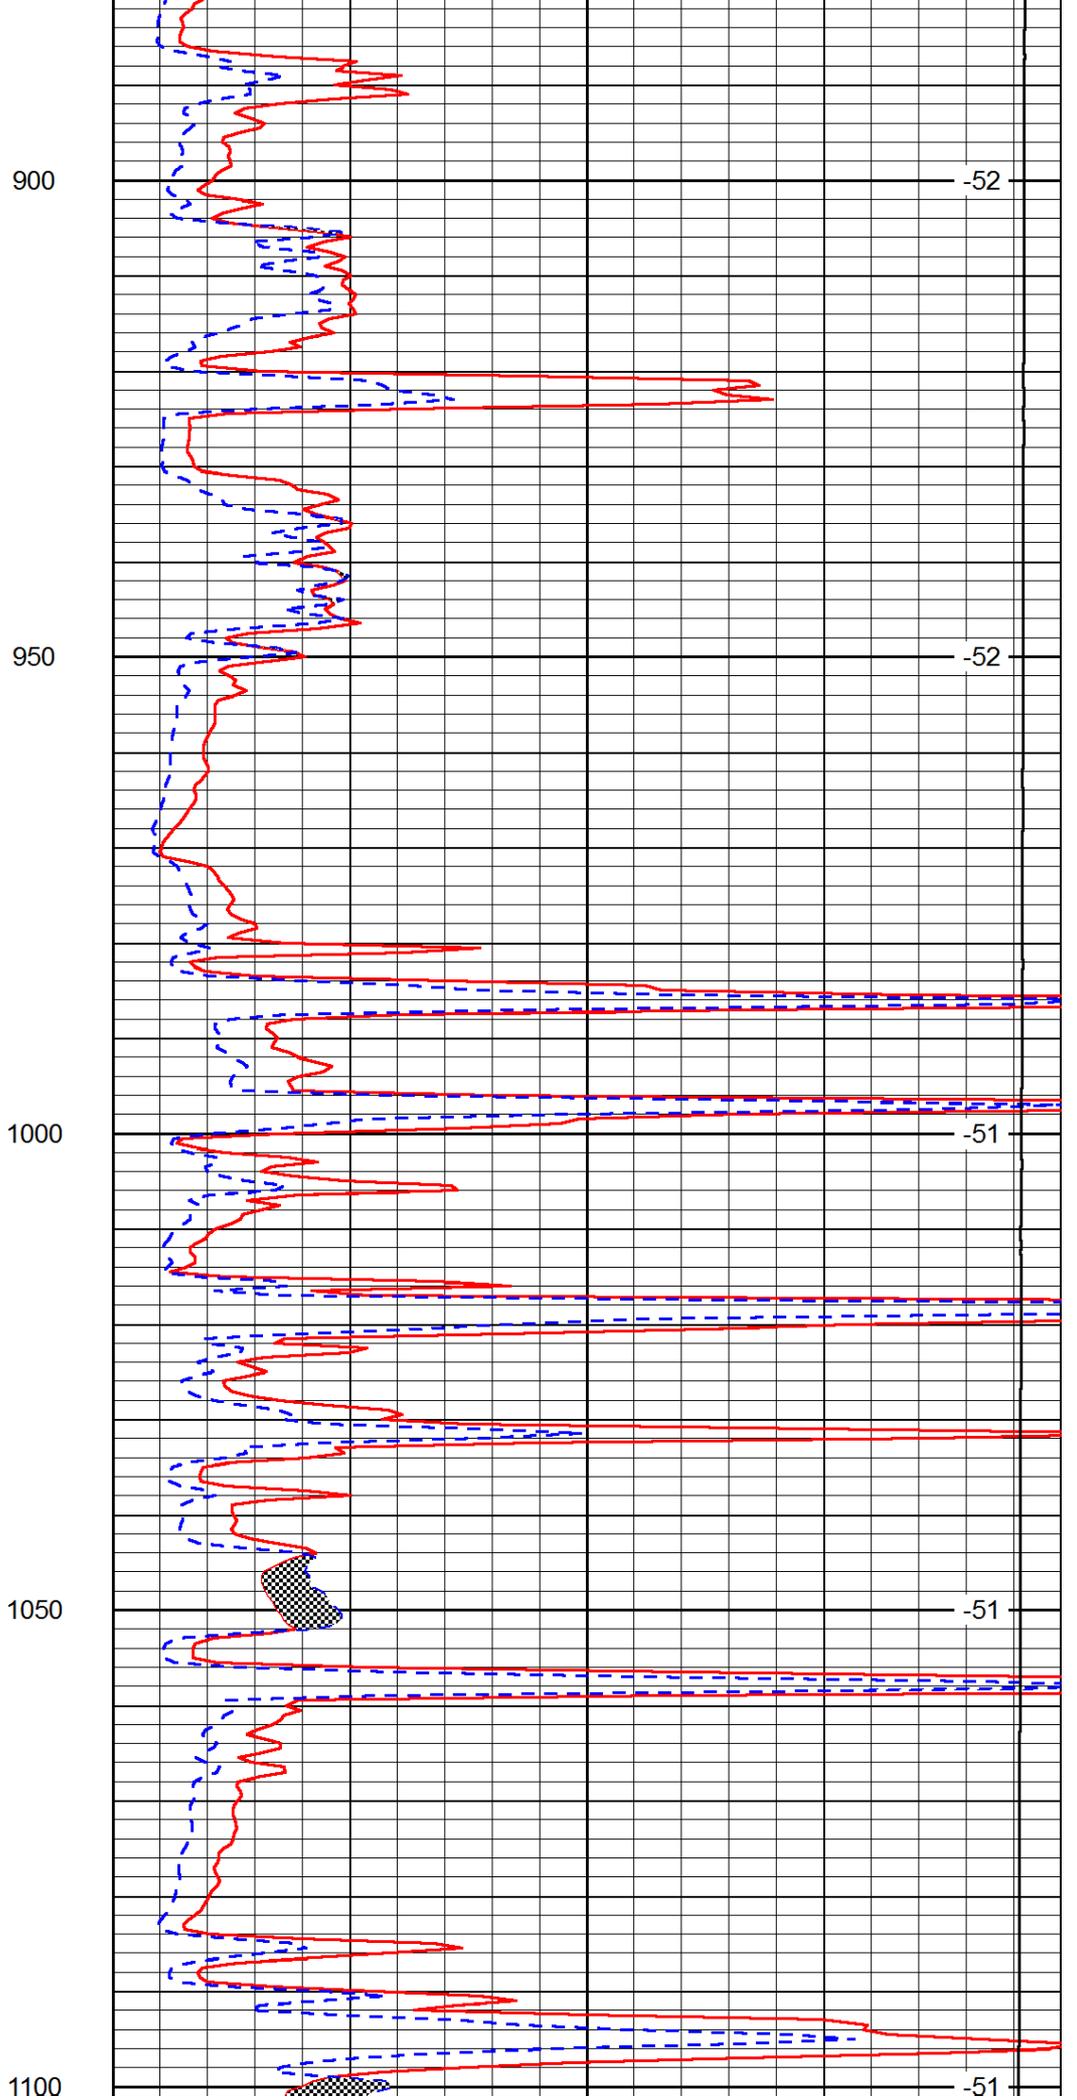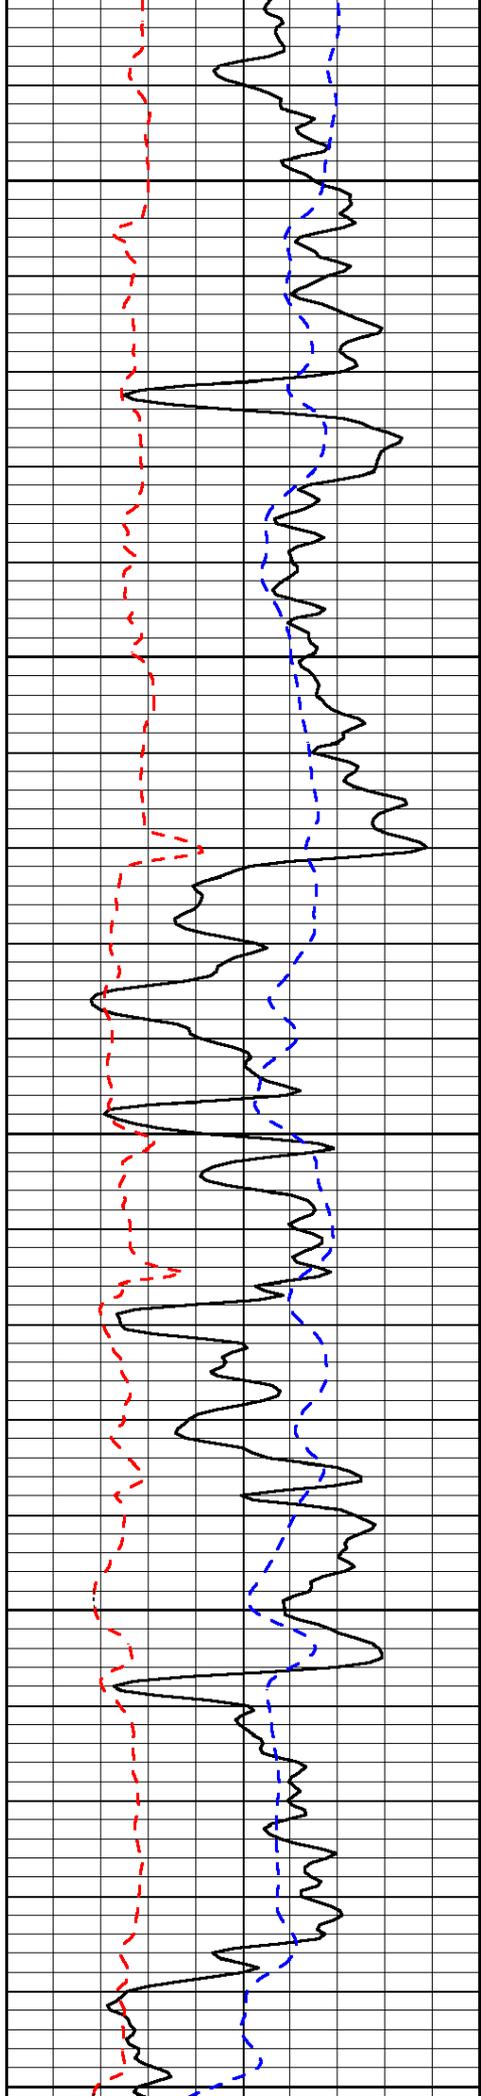

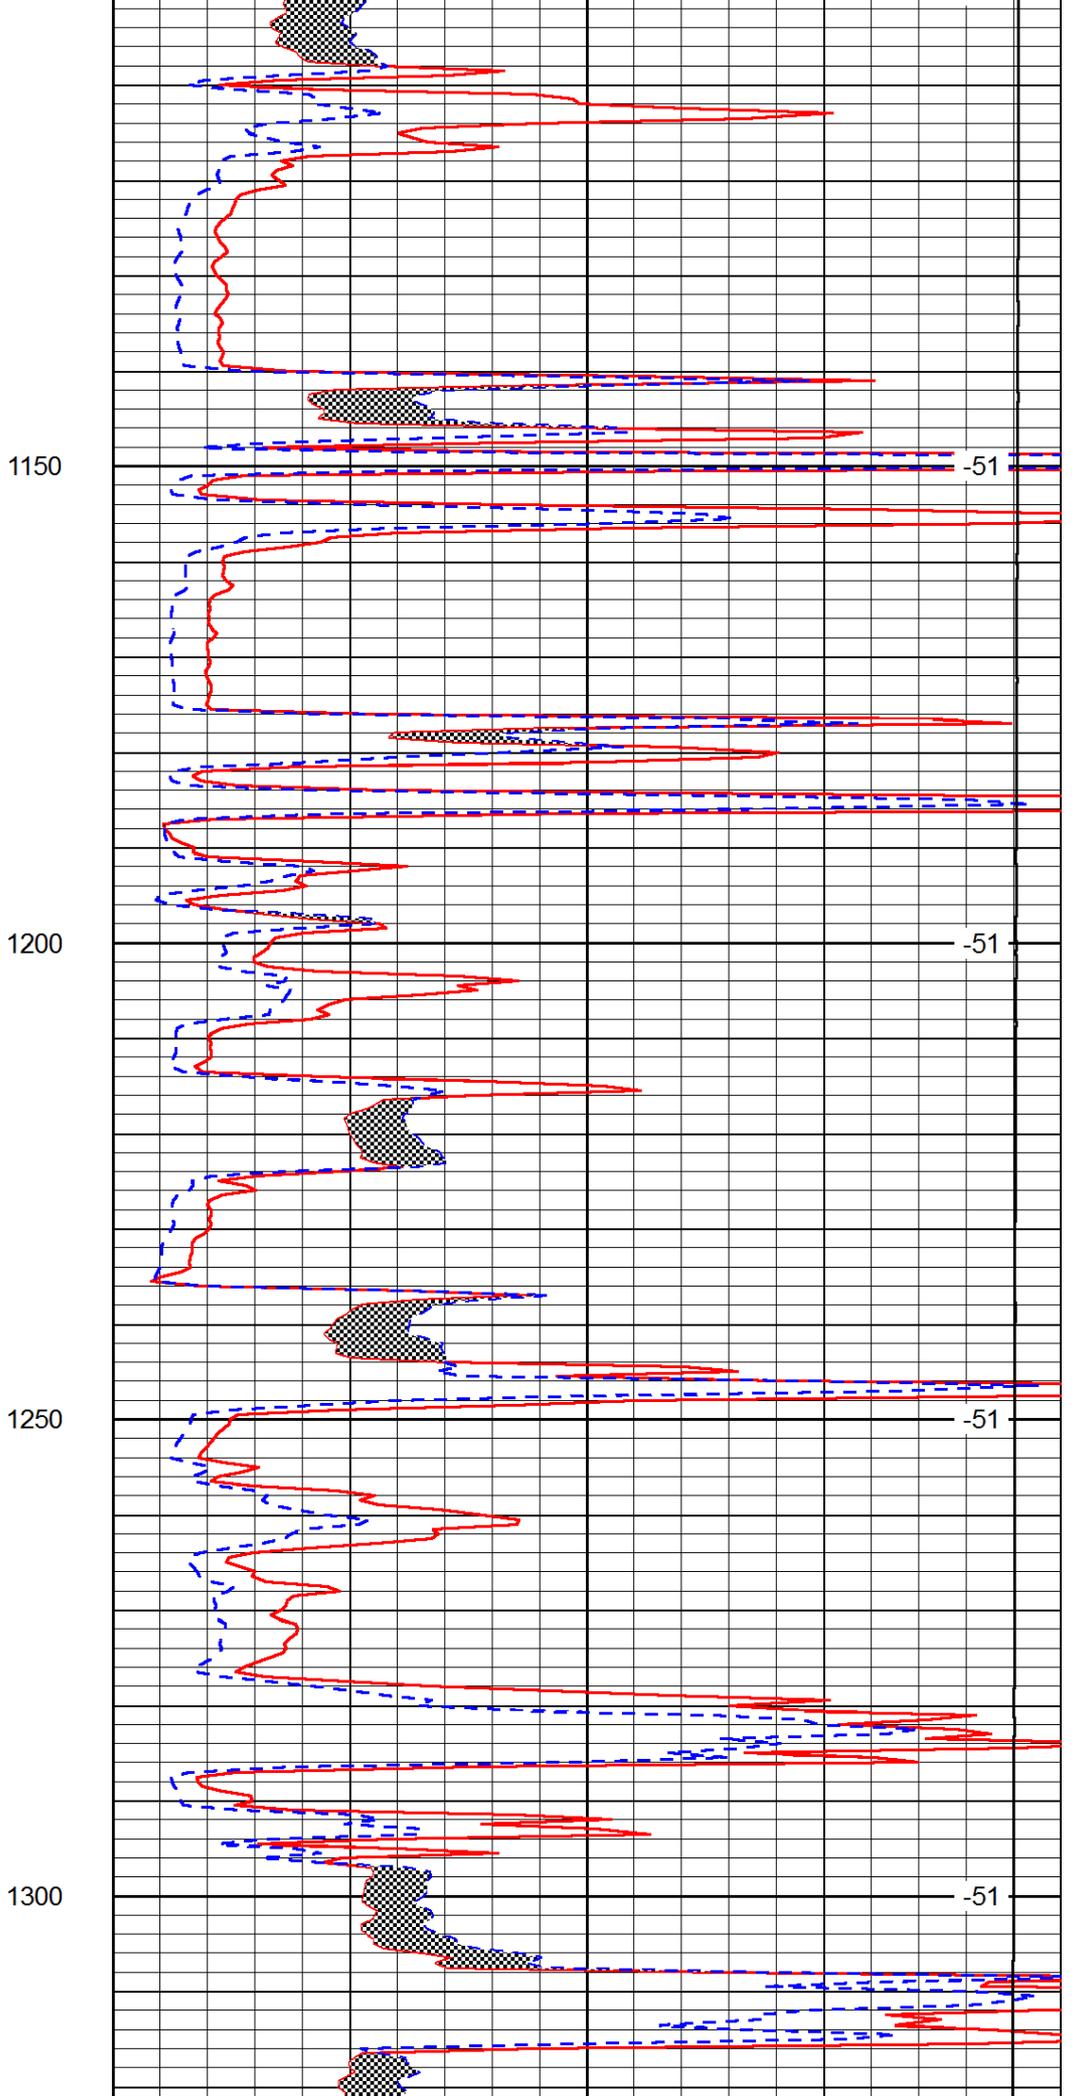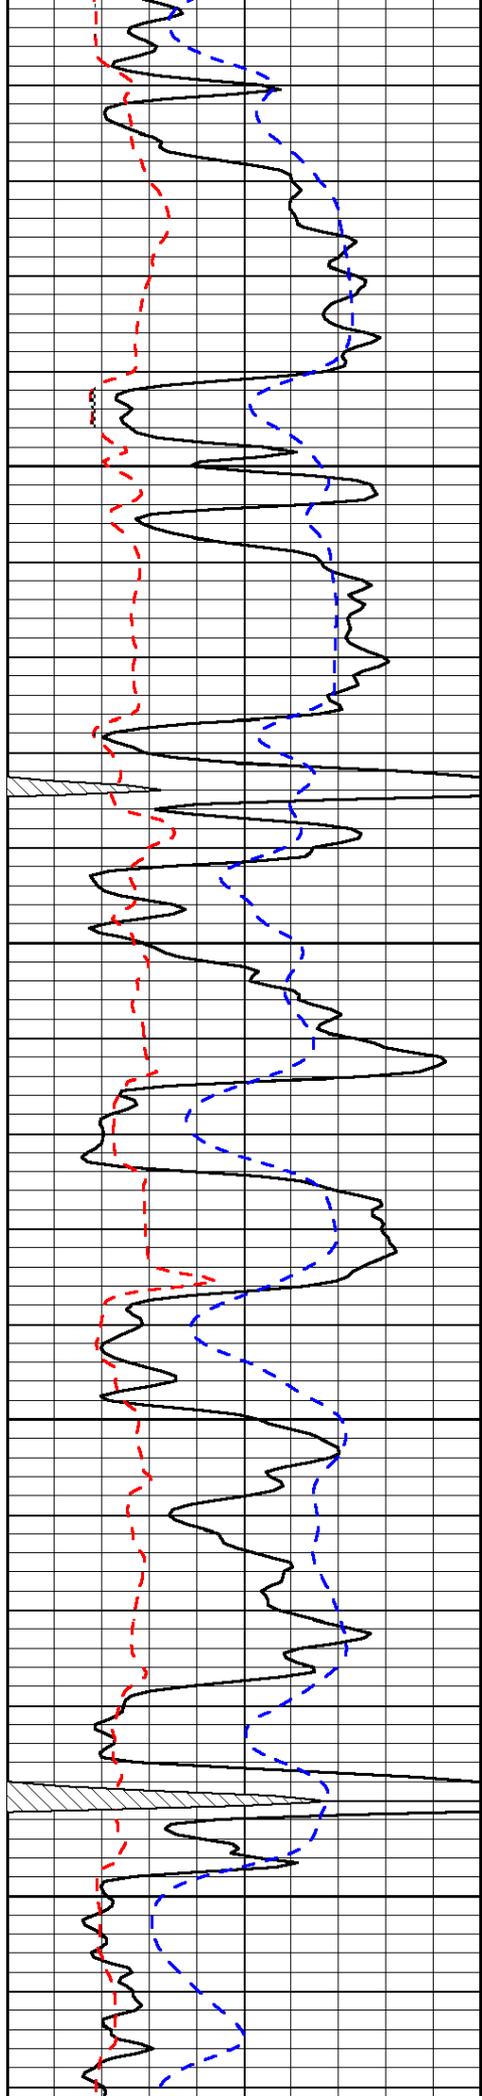

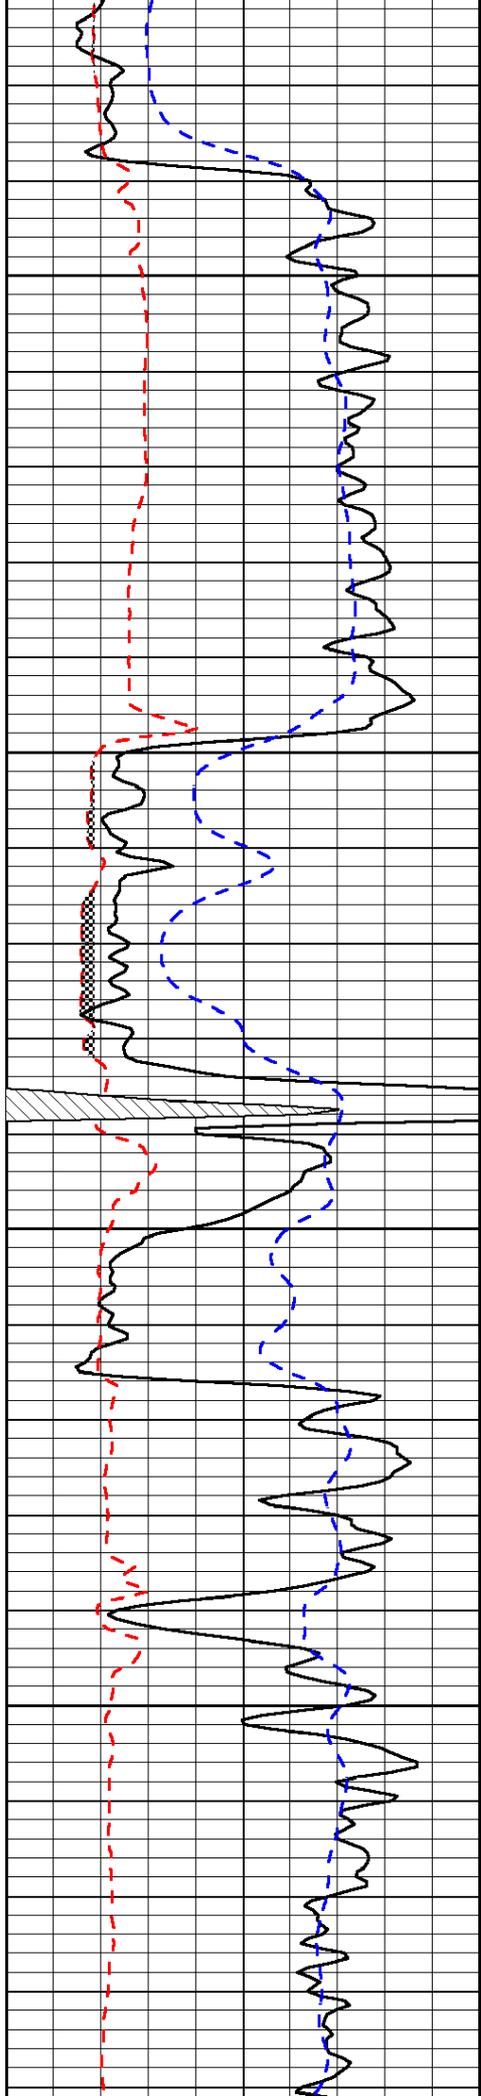


1350

1400

1450

1500

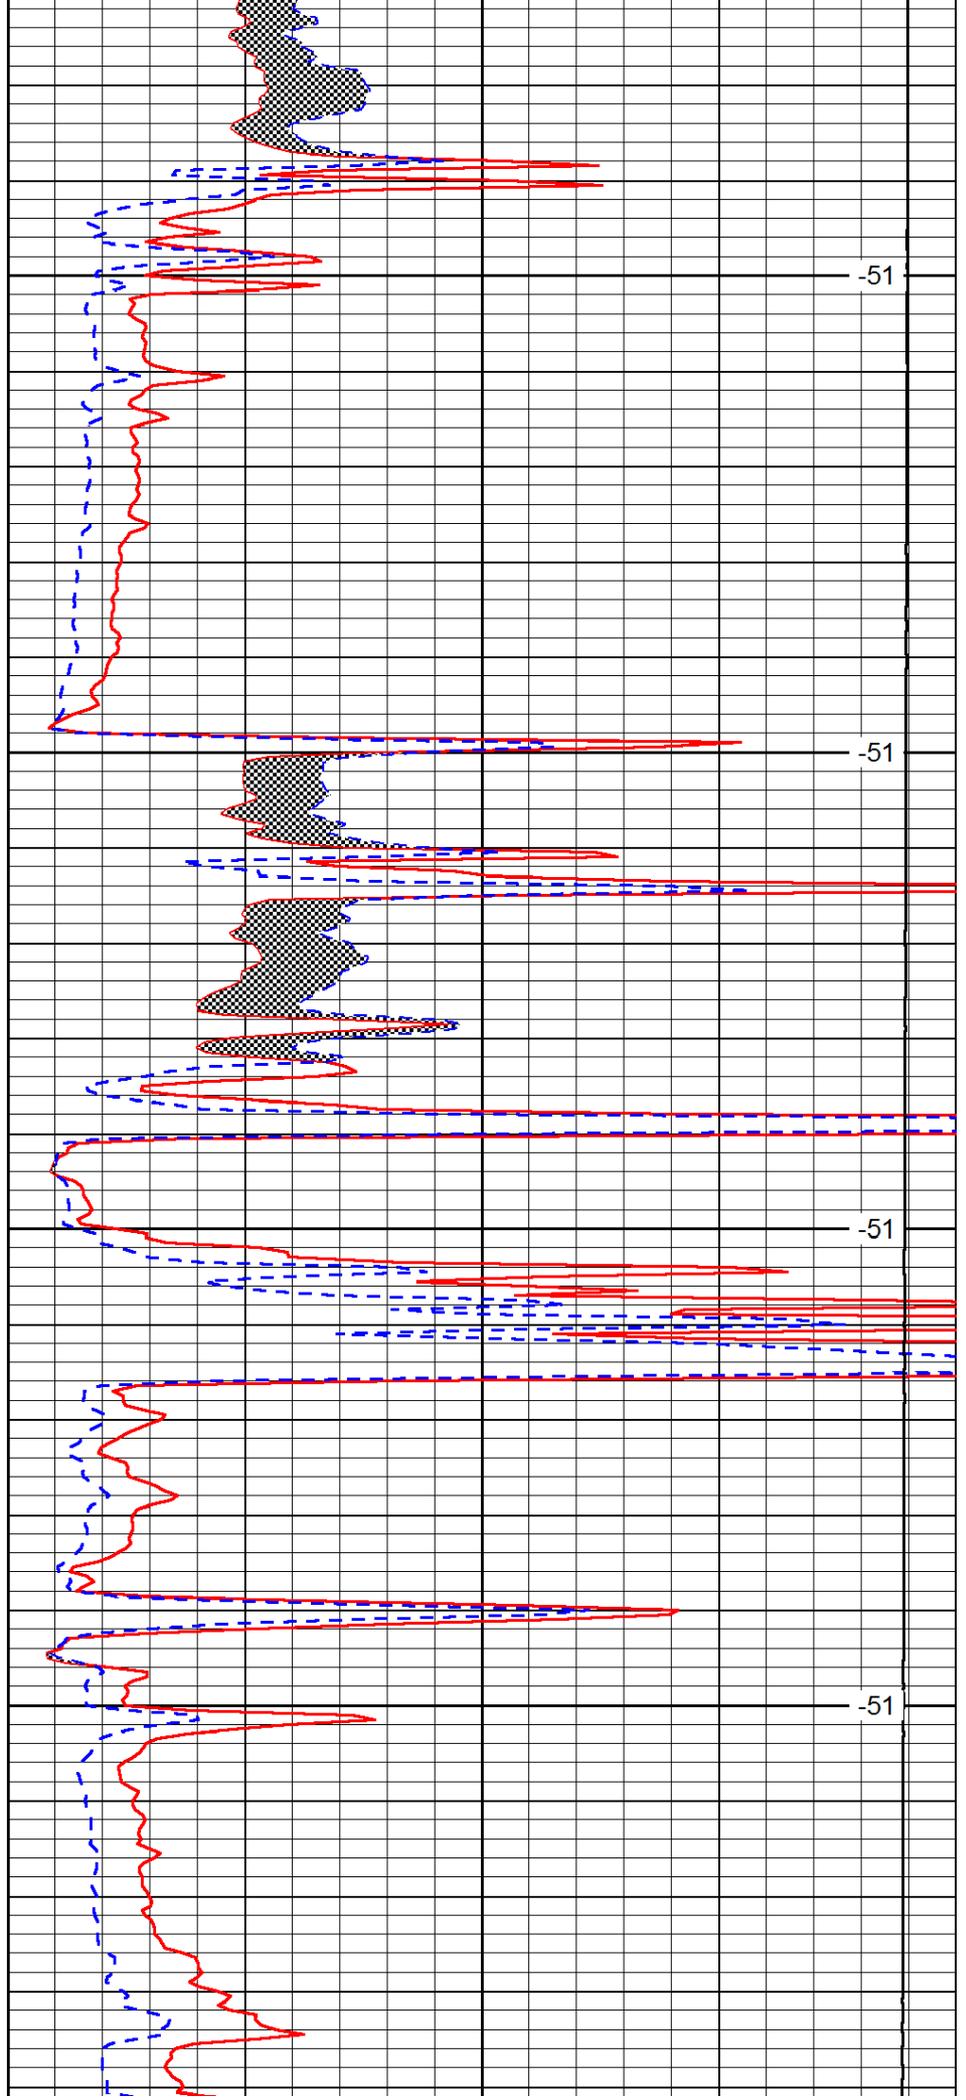


-51

-51

-51

-51

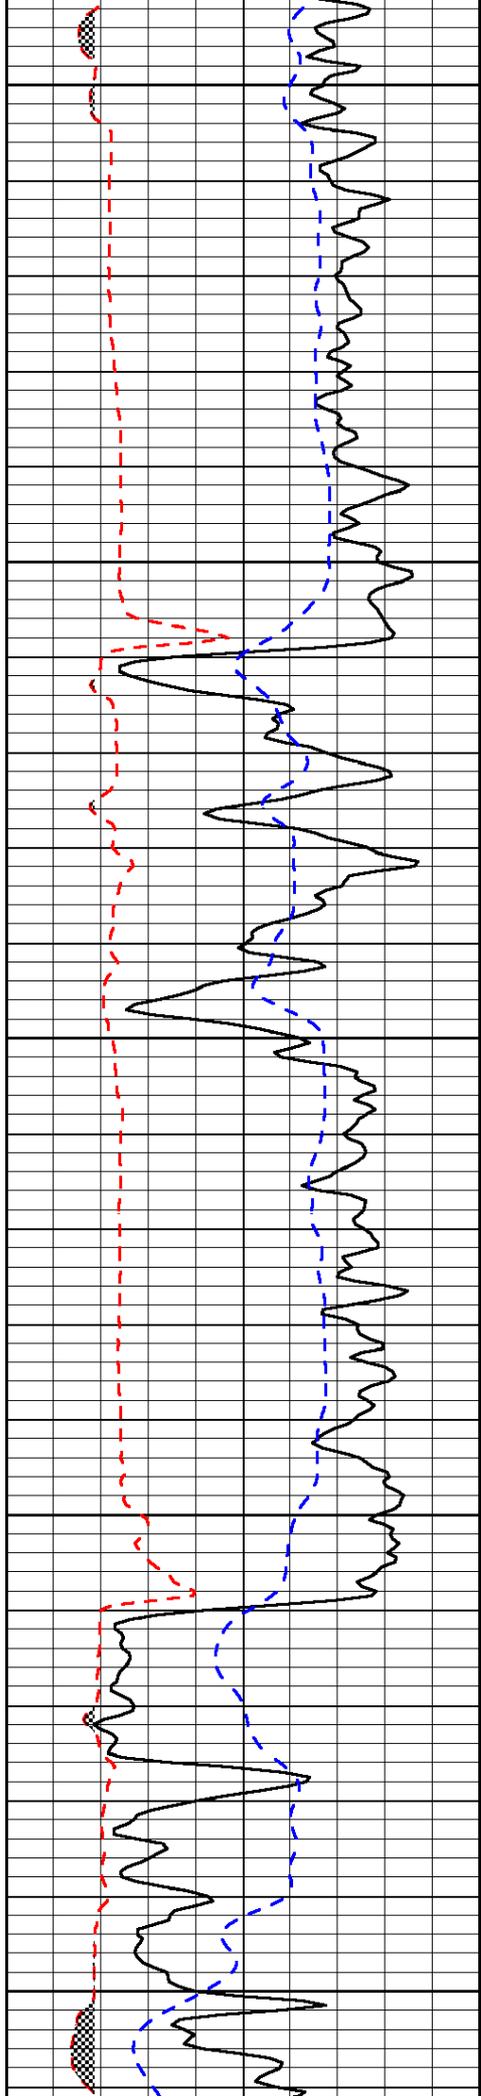


1550

1600

1650

1700

1750

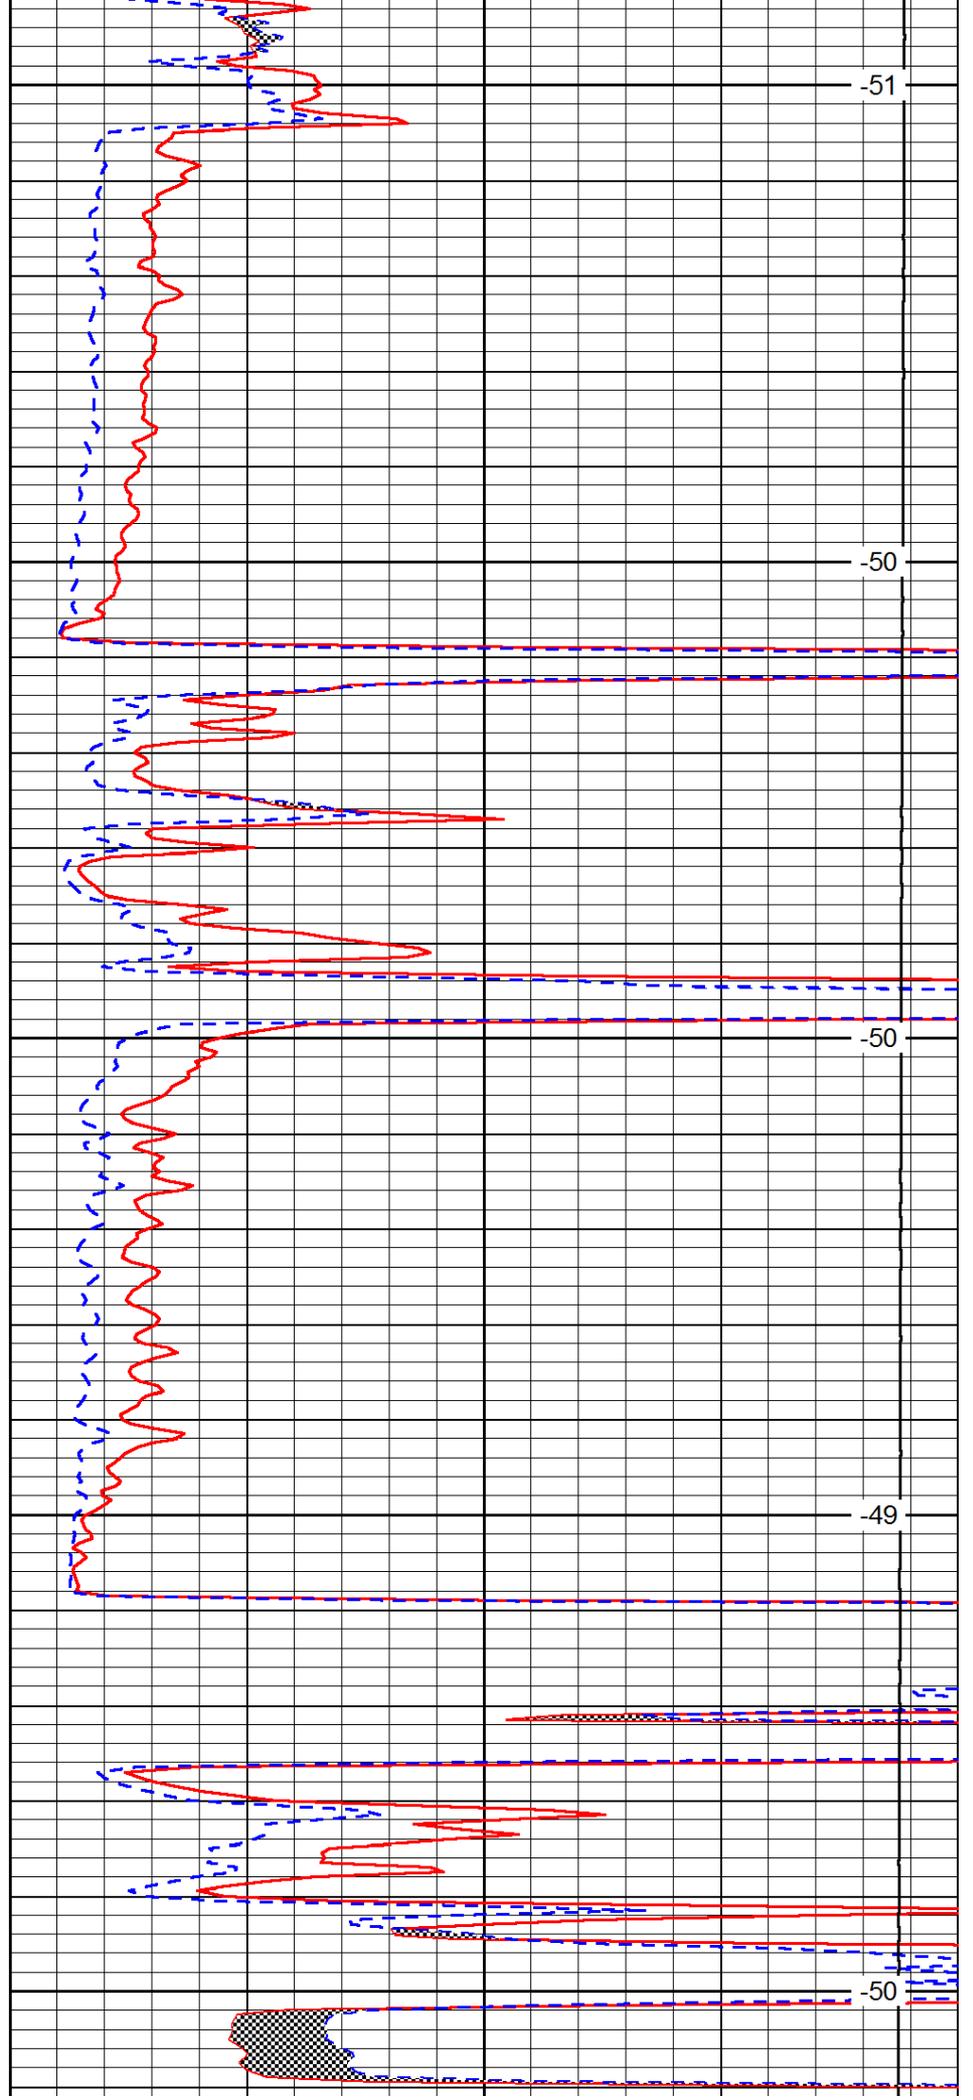


-51

-50

-50

-49

-50

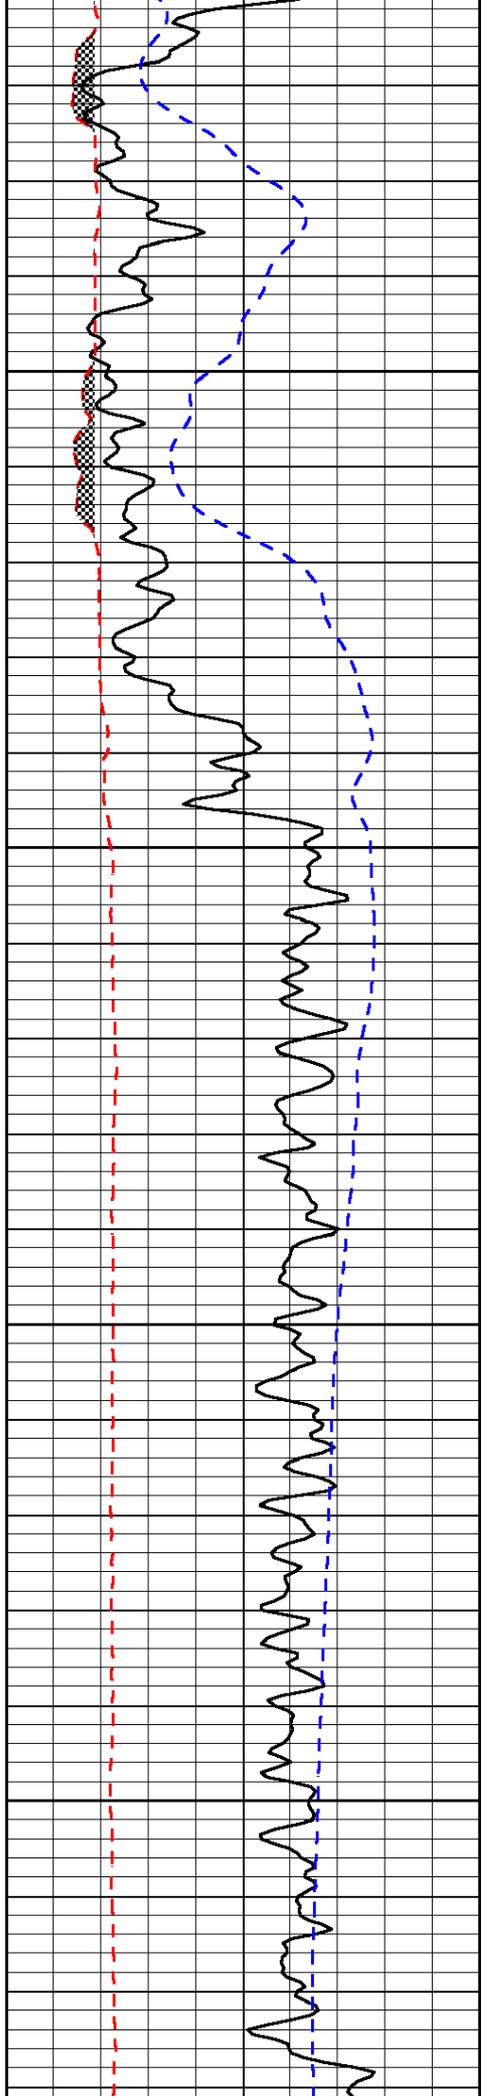


1800

1850

1900

1950

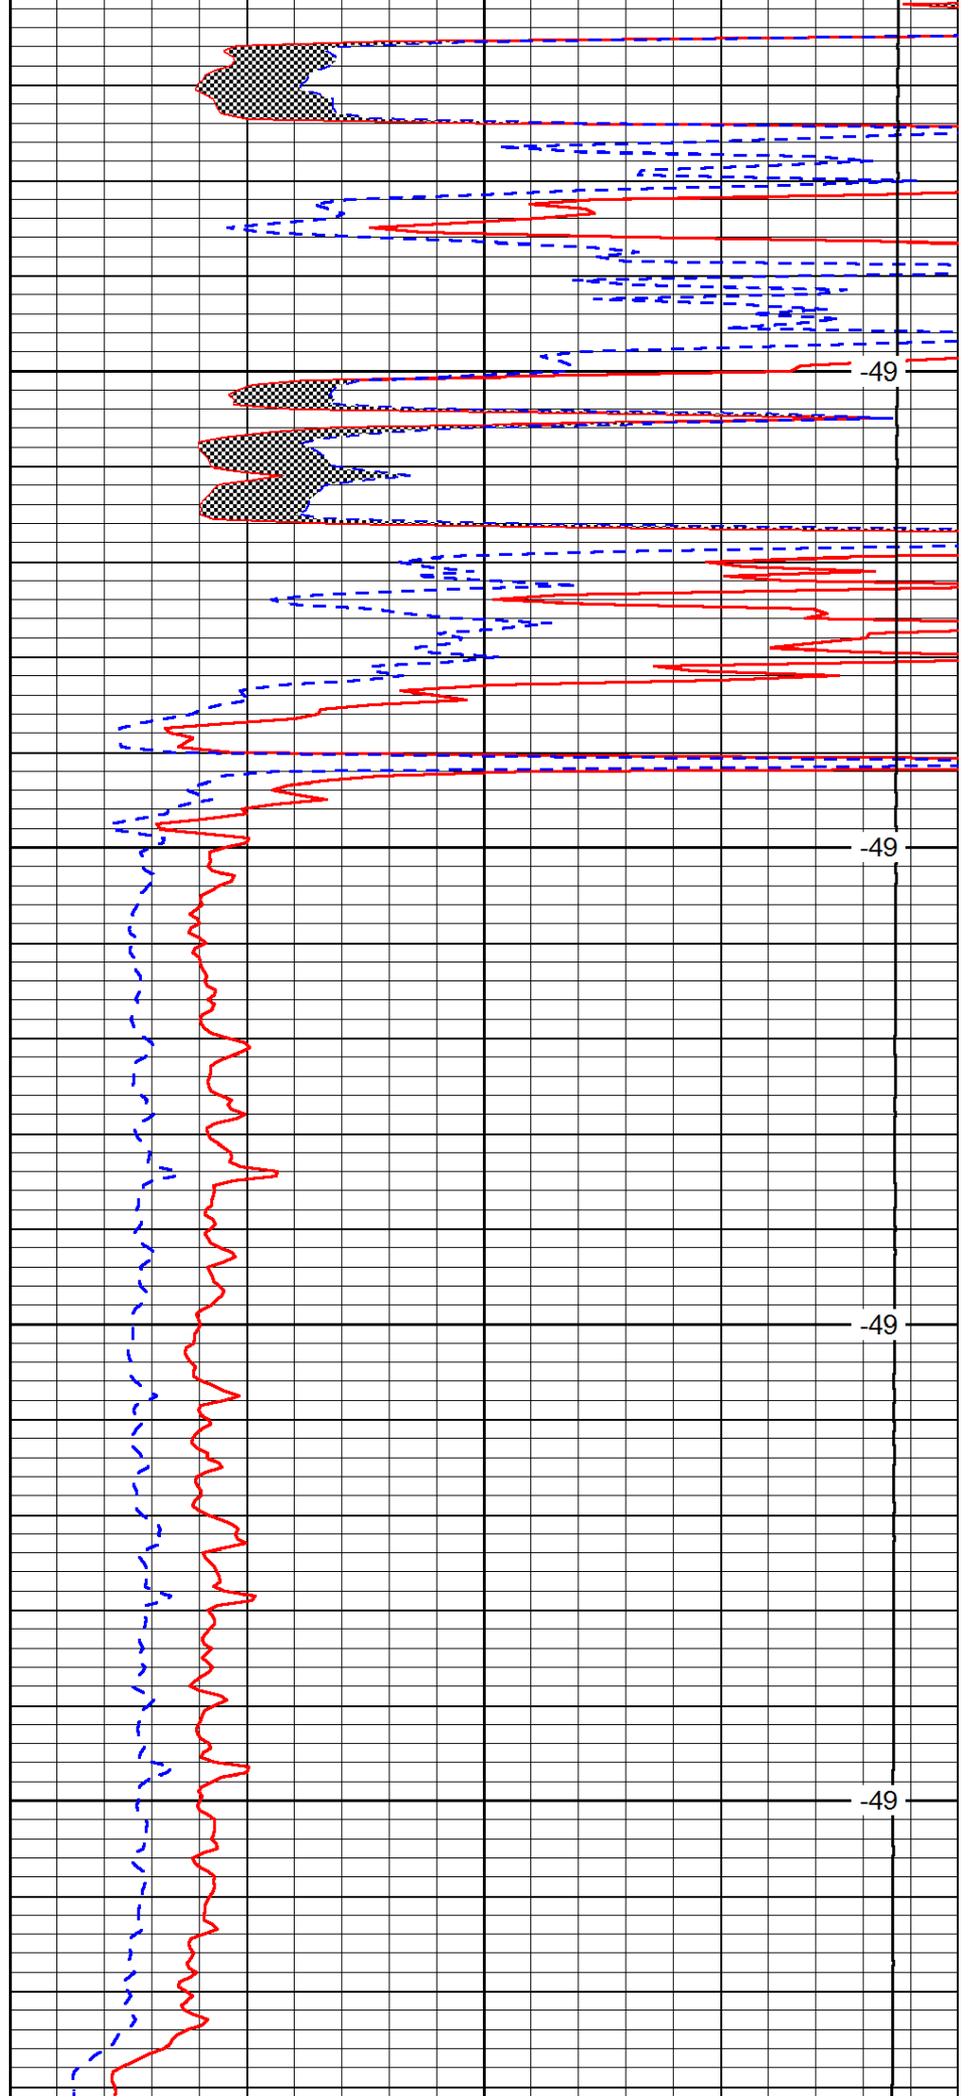


-49

-49

-49

-49

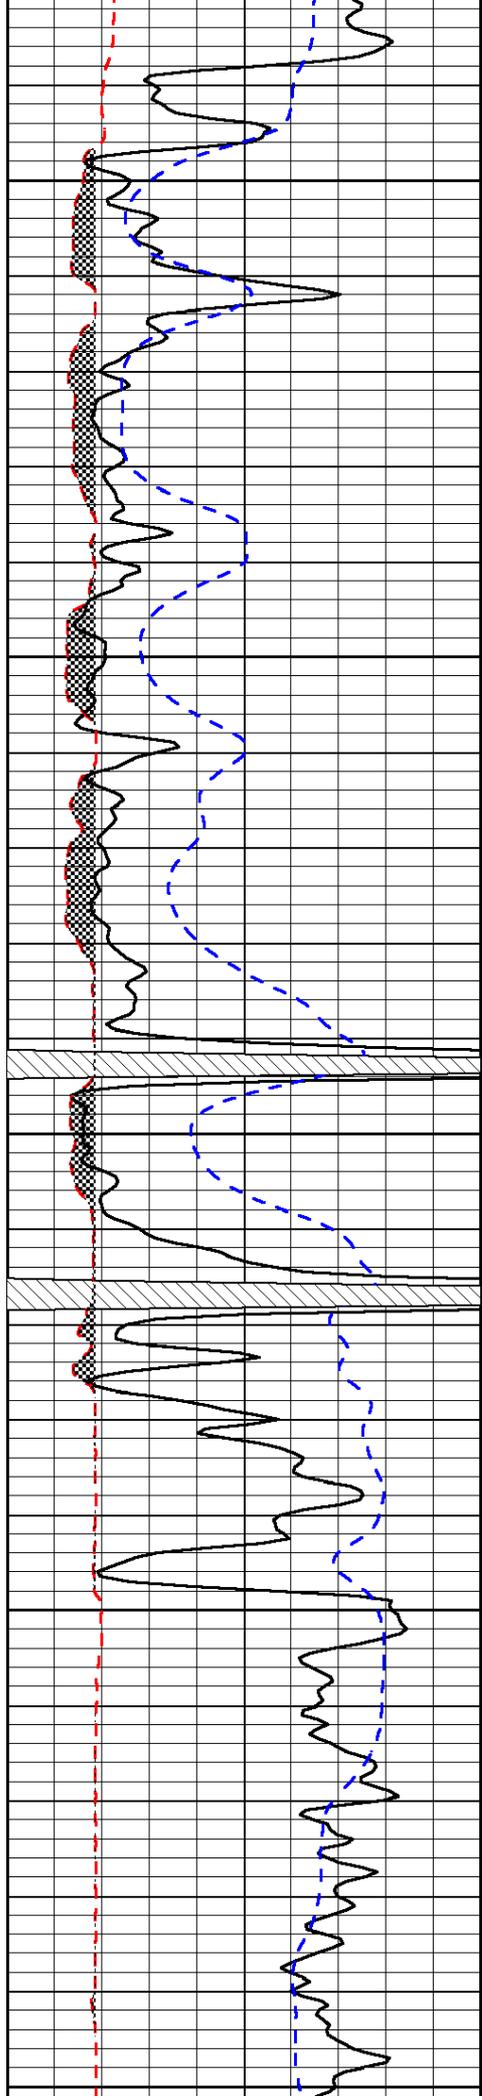


2000

2050

2100

2150

2200

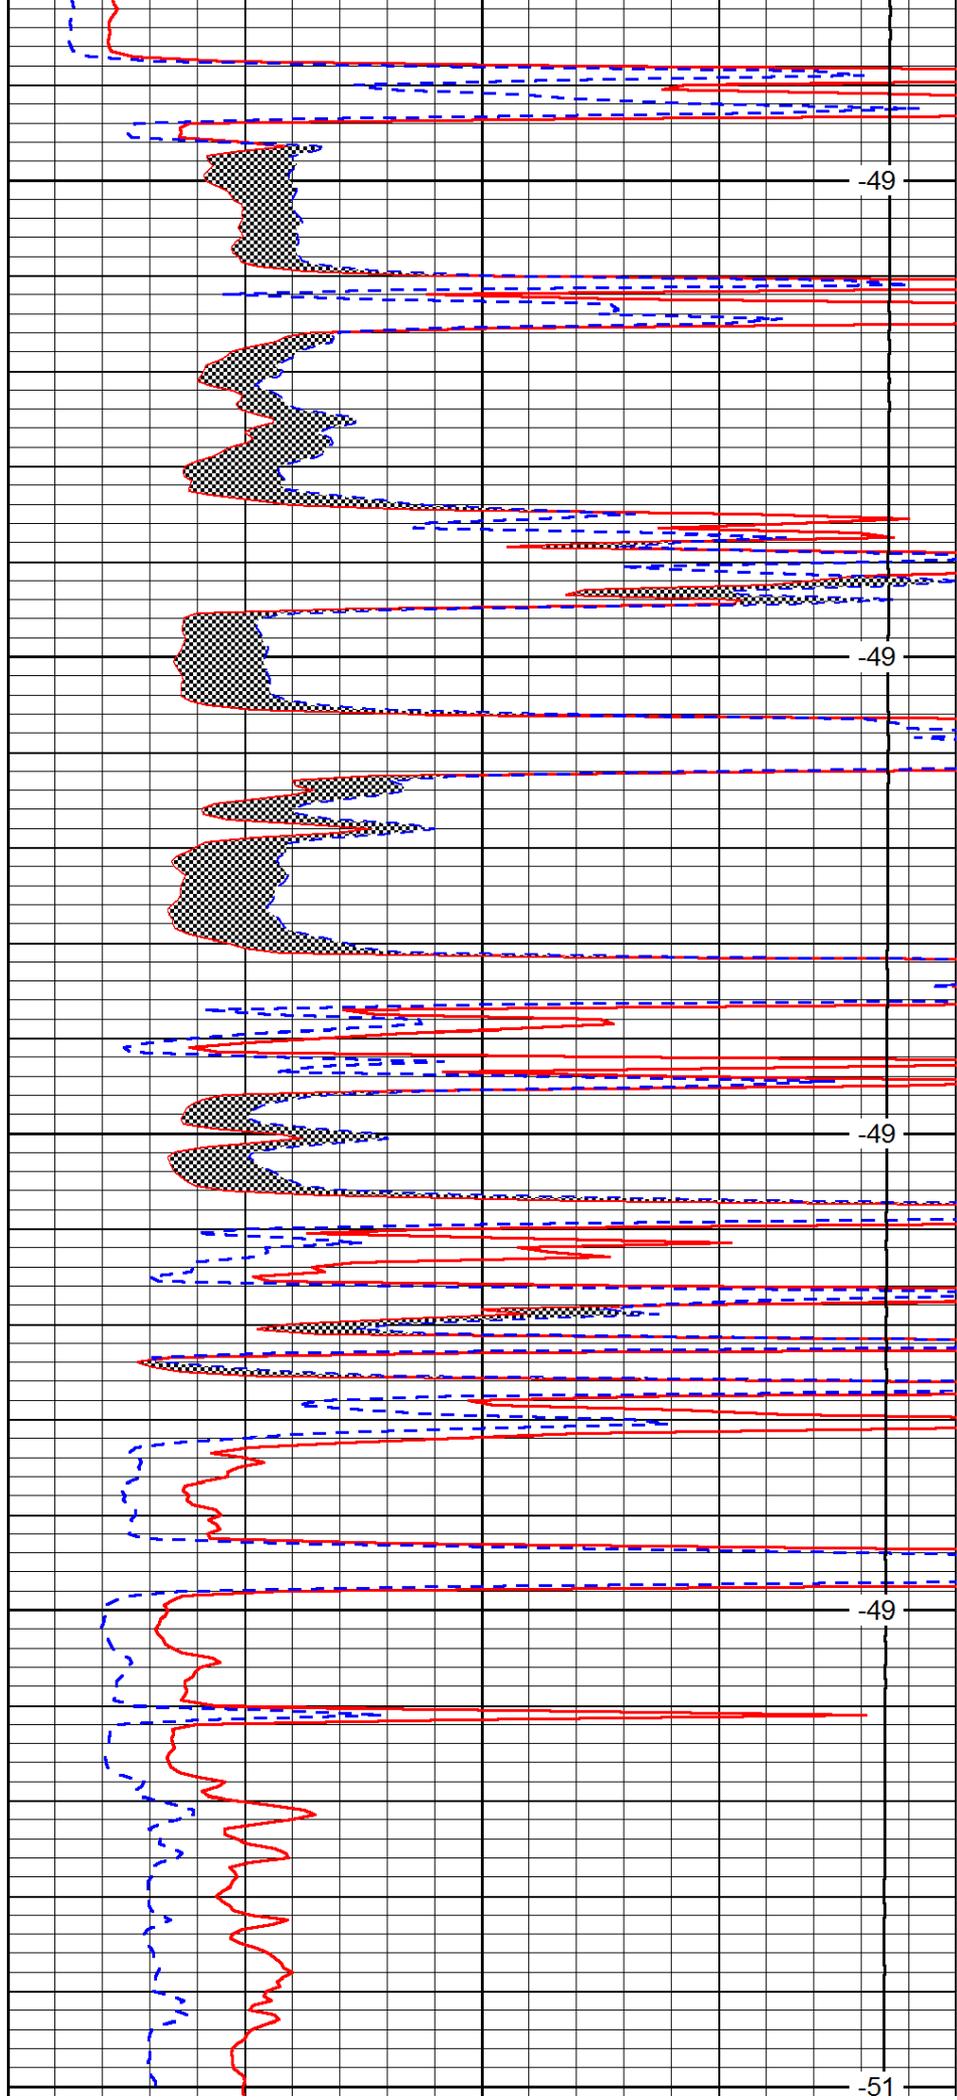


-49

-49

-49

-49

-51

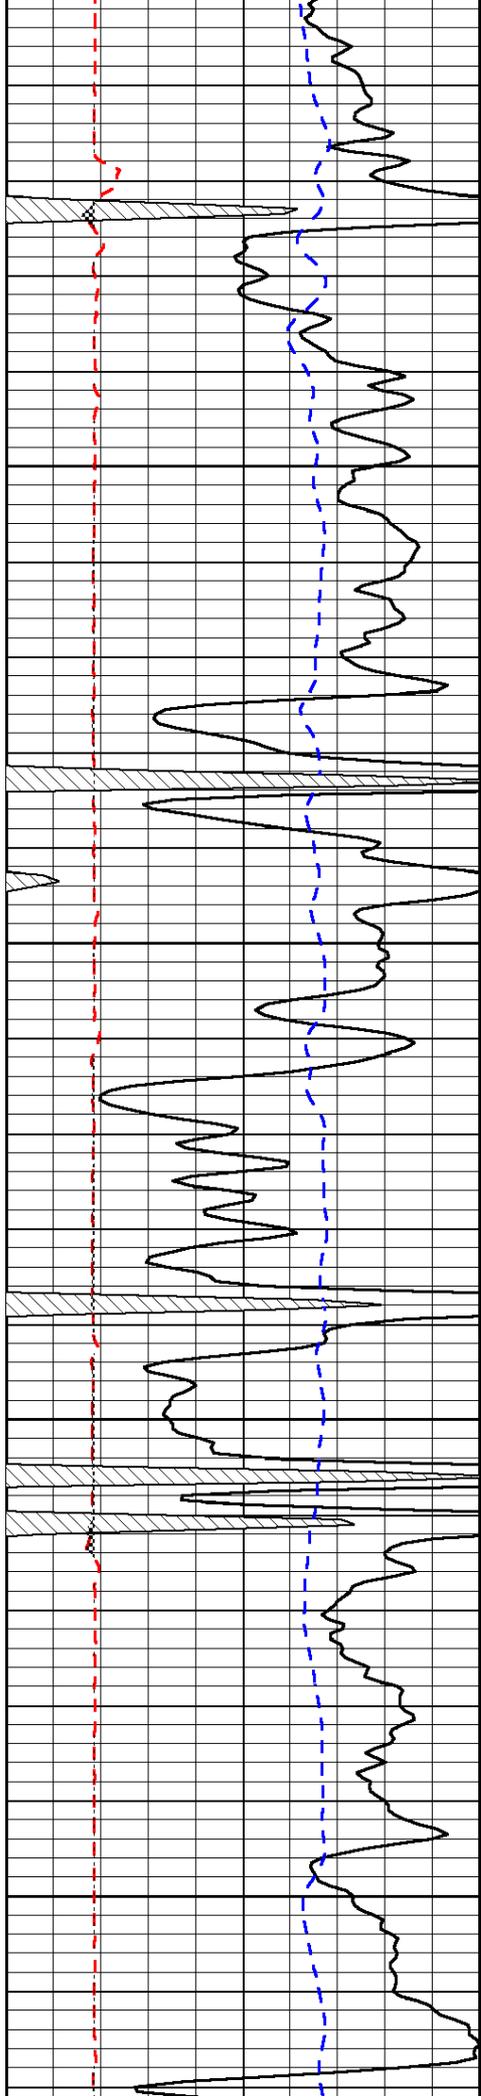


2250

2300

2350

2400

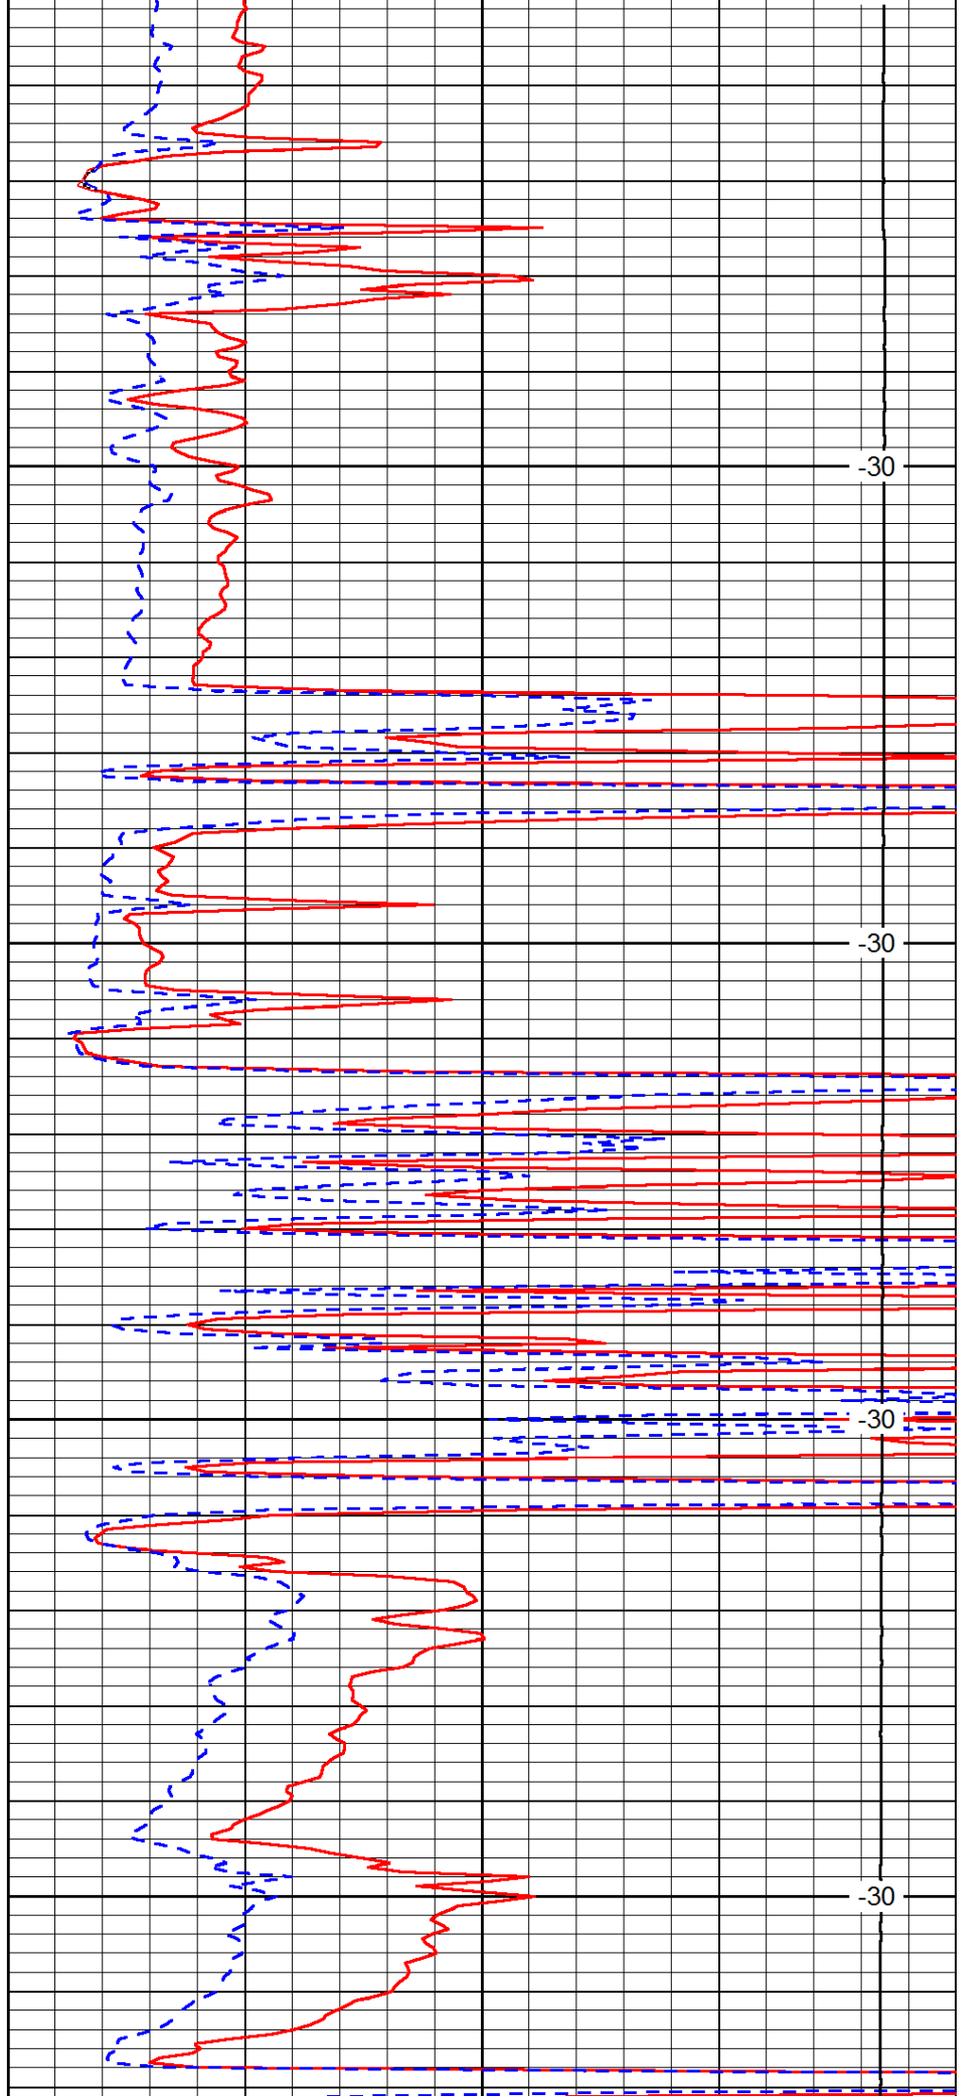


-30

-30


-30

-30

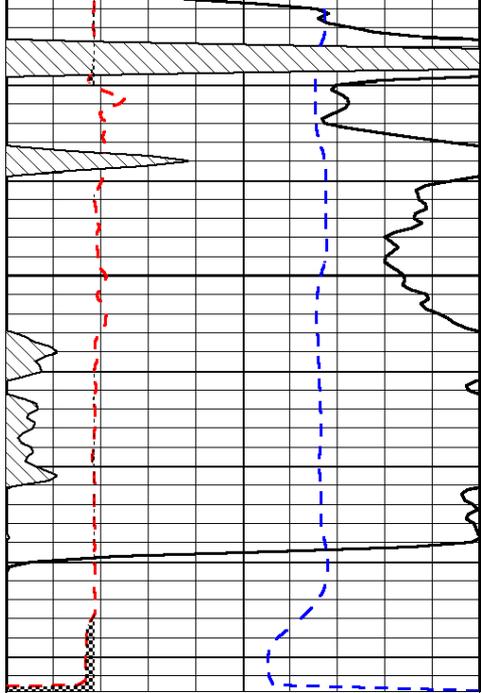

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

2450

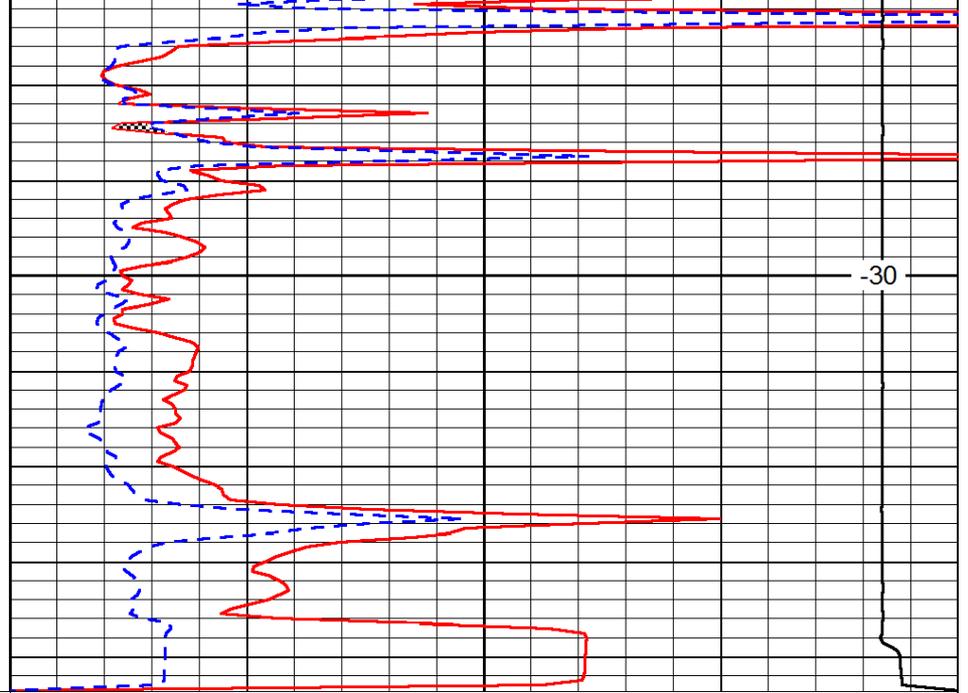

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

-30

LSPD