

Company JONES & BUCK DEVELOPMENT  
Well BP # KEC 6-2  
Field PERU-SEDAN  
County CHAUTAUQUA  
State KANSAS

Company JONES & BUCK DEVELOPMENT  
Well BP # KEC 6-2  
Field PERU-SEDAN  
County CHAUTAUQUA State KANSAS

Location: API #: 15-019-27120  
SE NE SE SE  
825' FSL & 165' FEL  
SEC 6 TWP 34S RGE 12E

Permanent Datum	SEC 6 TWP 34S RGE 12E	Elevation	916'	Other Services
Log Measured From				
Drilling Measured From				

Date	2-6-12
Run Number	1
Depth Driller	1163'
Depth Logger	1108'
Bottom Logged Interval	1107'
Top Log Interval	SURFACE
Open Hole Size	WATER
Type Fluid	---
Density / Viscosity	---
Max. Recorded Temp.	---
Estimated Cement Top	SURFACE
Time Well Ready	---
Time Logger on Bottom	---
Equipment Number	3
Location	DEWEY
Recorded By	HERREN
Witnessed By	MR JONES

Borehole Record		Tubing Record	
Run Number	Bit	From	To
		Size	Weight
		From	To

Casing Record	Size	Wgt/Ft	Top	Bottom
Surface String	8.625"		SURFACE	40'
Prot. String				
Production String	4.5"		SURFACE	TD
Liner				

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments




Green Country Wireline


**GAMMA RAY CEMENT BOND LOG**

Database File: bp62.db  
Dataset Pathname: bp62/run1/pass1  
Presentation Format: cbl\_dr  
Dataset Creation: Mon Feb 06 11:19:06 2012 by Log Std Casedhole 09061  
Charted by: Depth in Feet scaled 1:240


9	Collar Locator	-1	-1	Amplitude (mV)	120	200	Variable Density	1
0	Gamma Ray (GAPI) (GAPI)	60	1000	Travel Time (usec)	250			

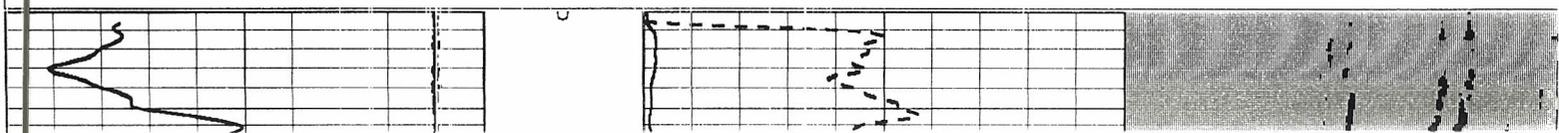


Collar Locator  
Gamma Ray (GAPI) (GAPI) 60

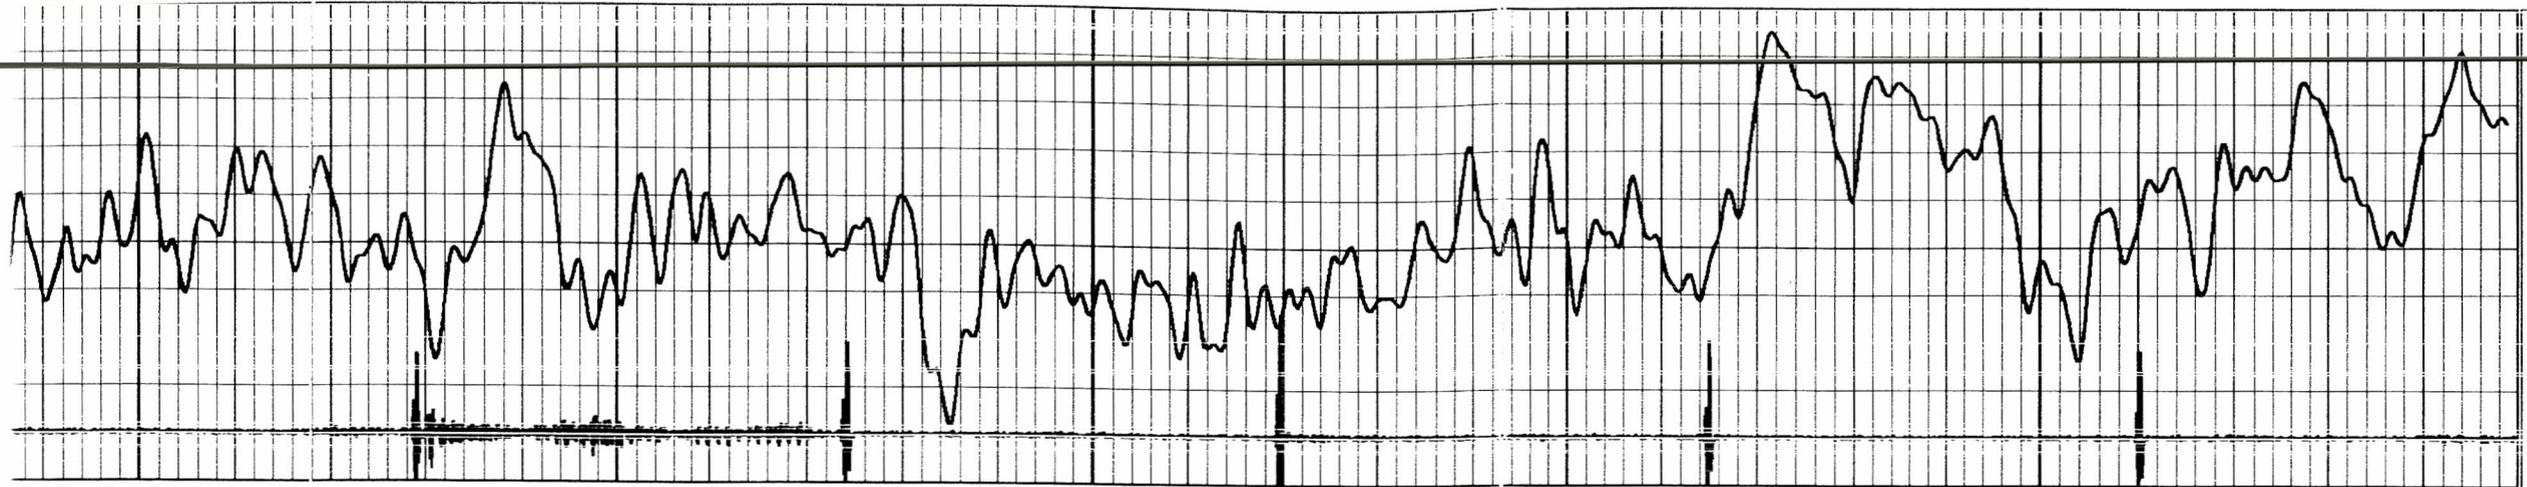


Amplitude (mV)  
Travel Time (usec) 1000 250


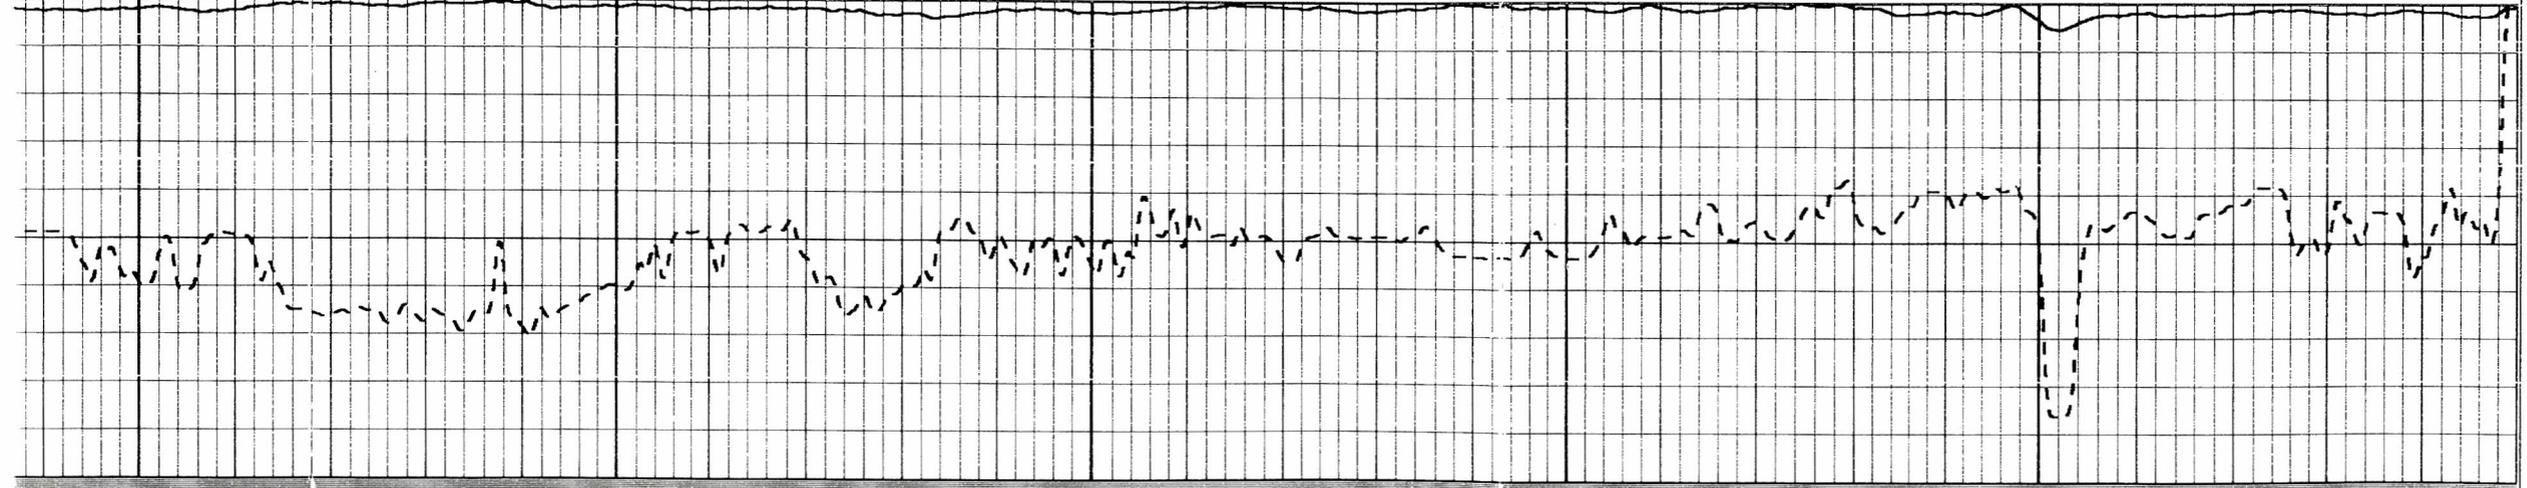



Variable Density  
120

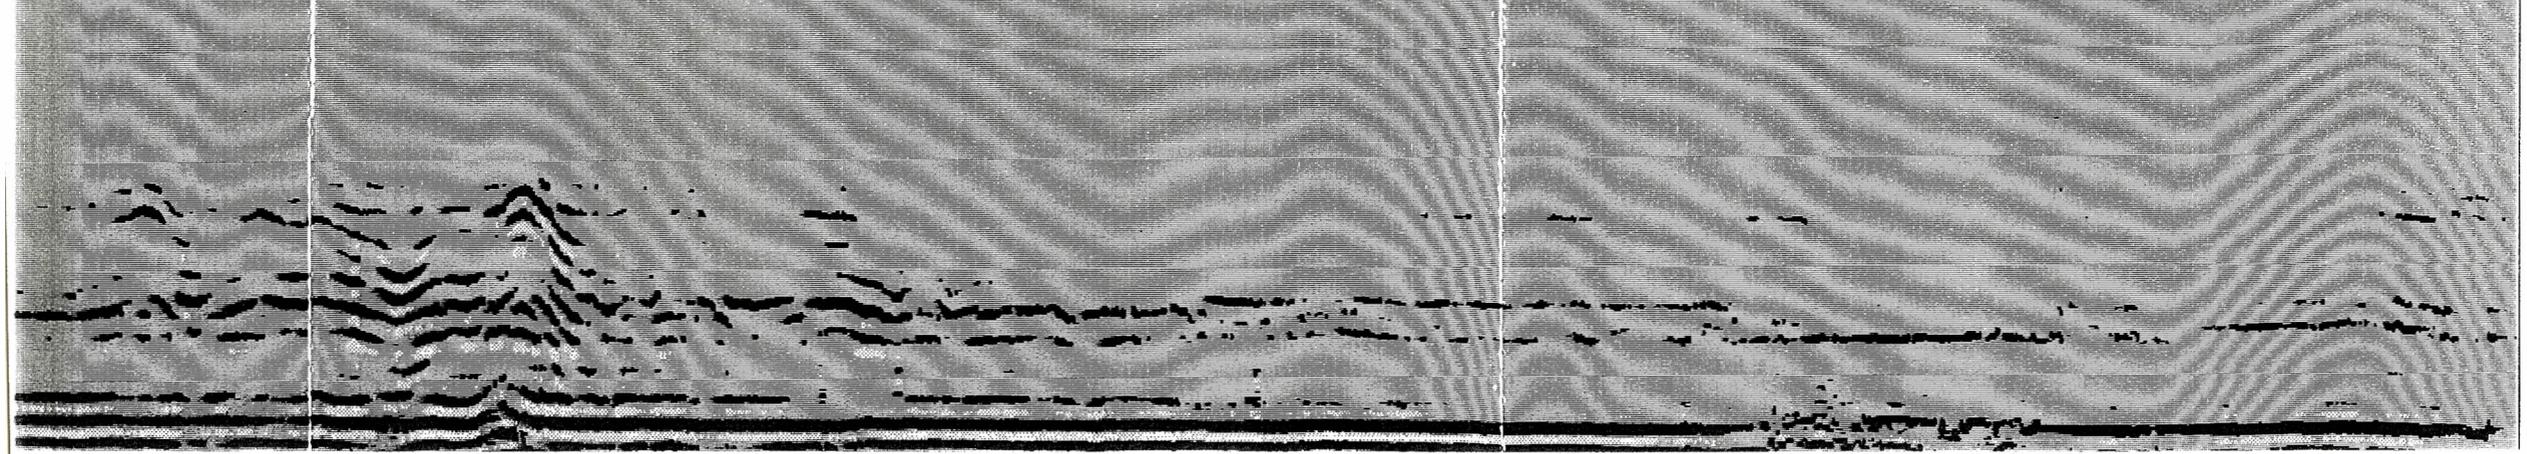

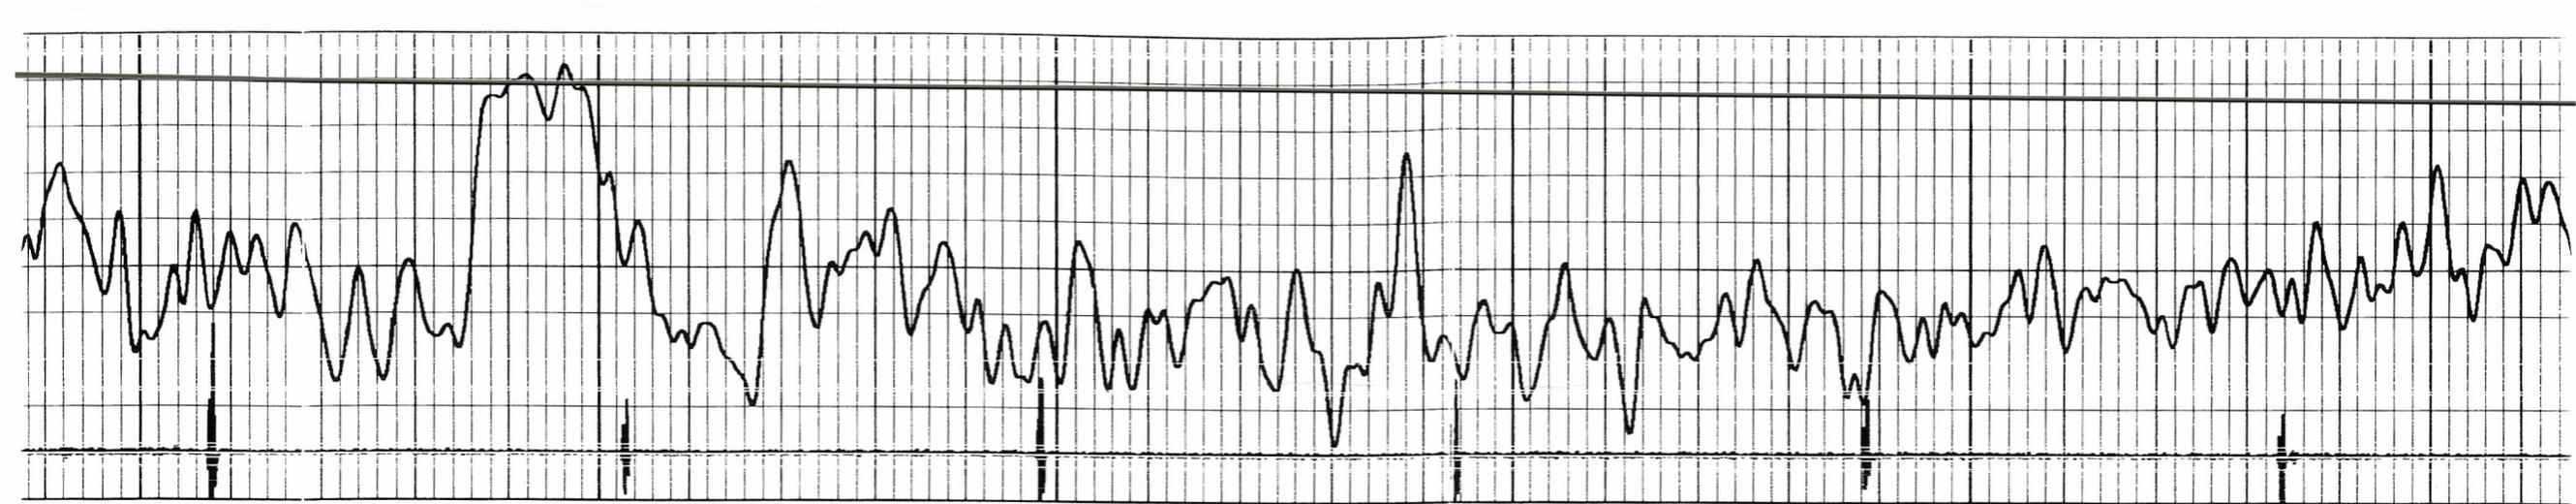

500 450 400 350 300 250

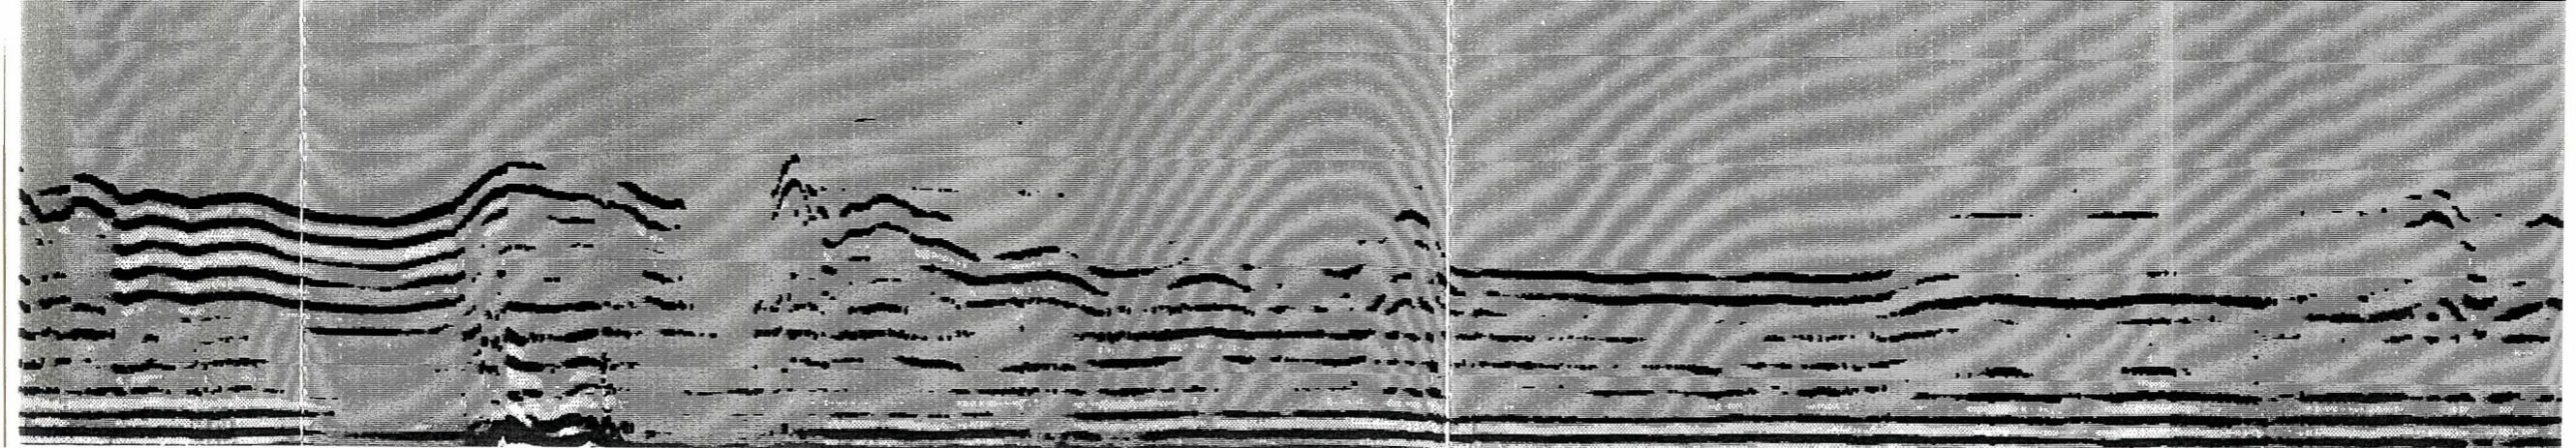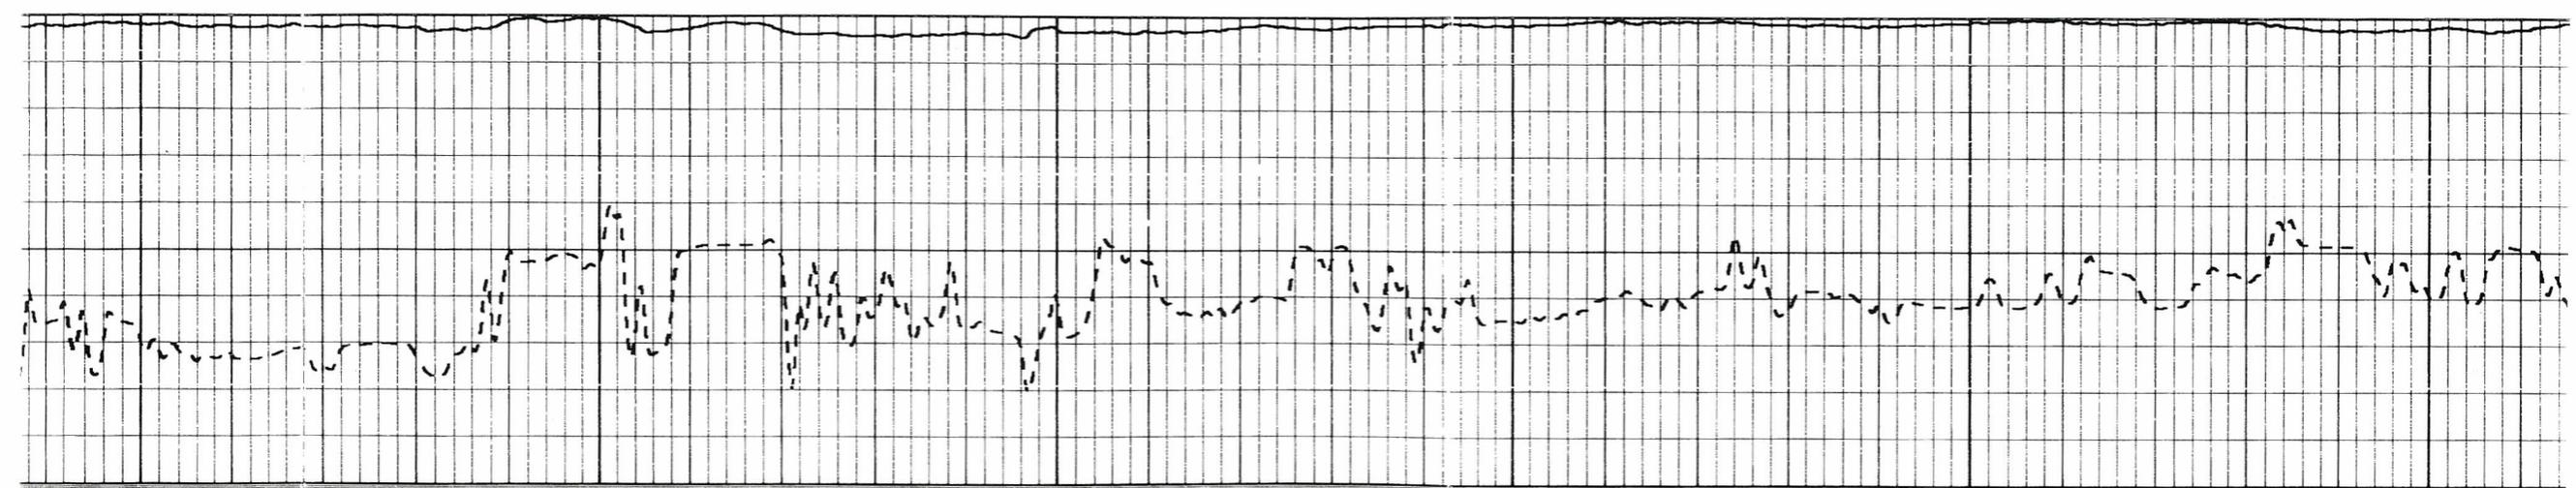

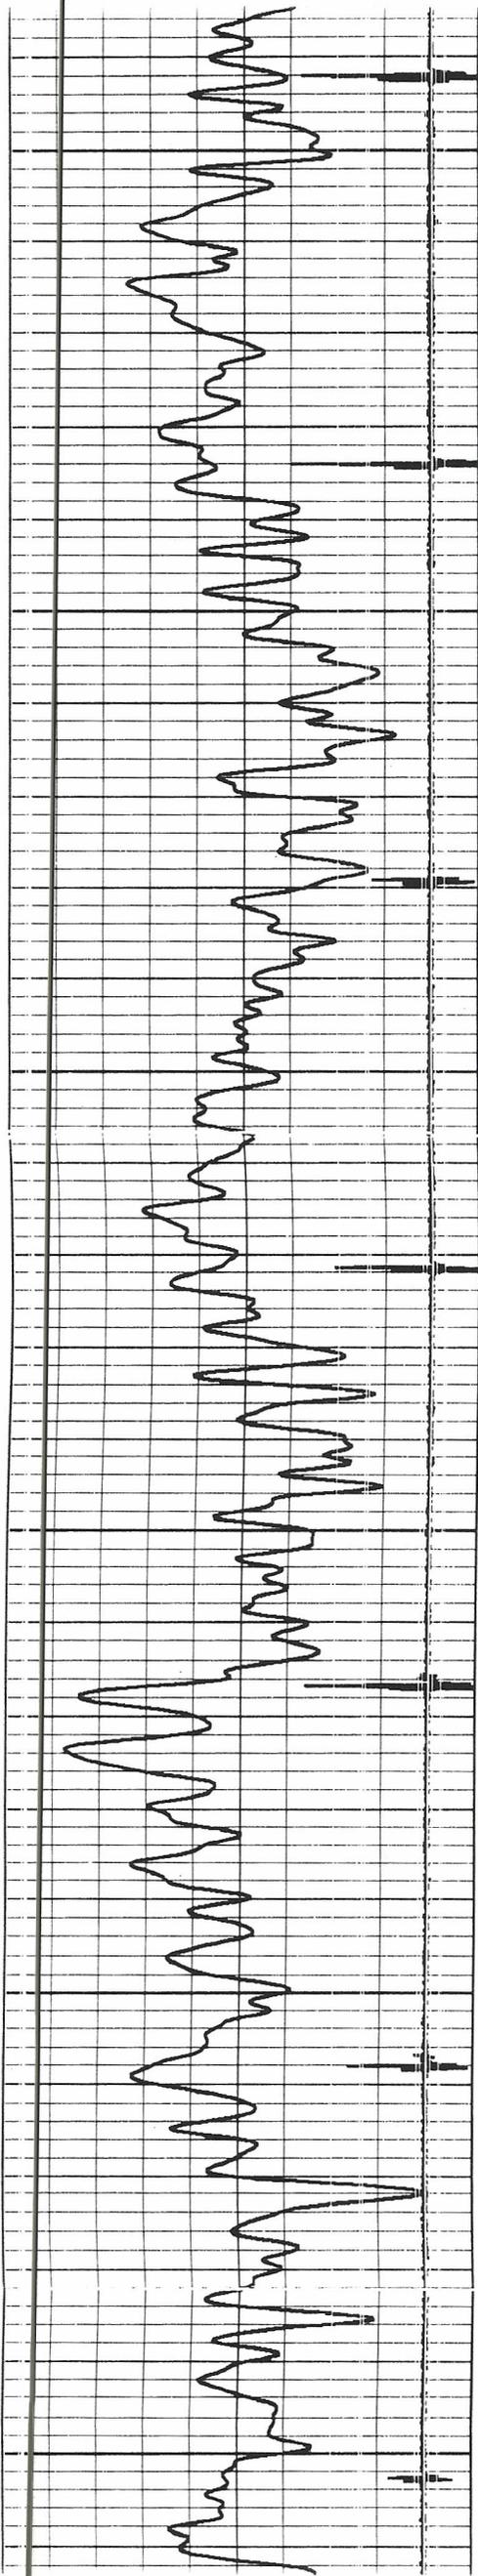

500



550


600

650



700




750

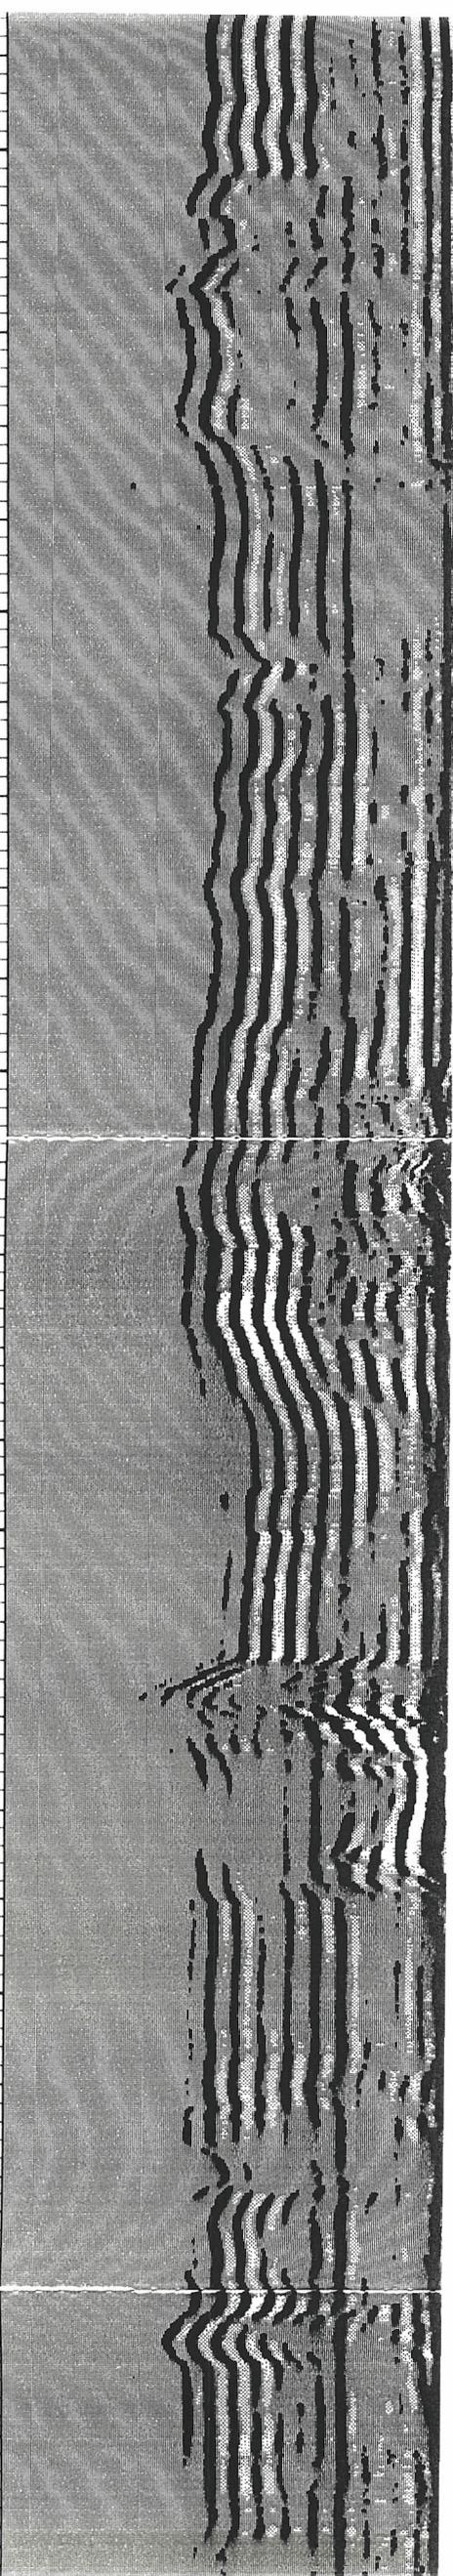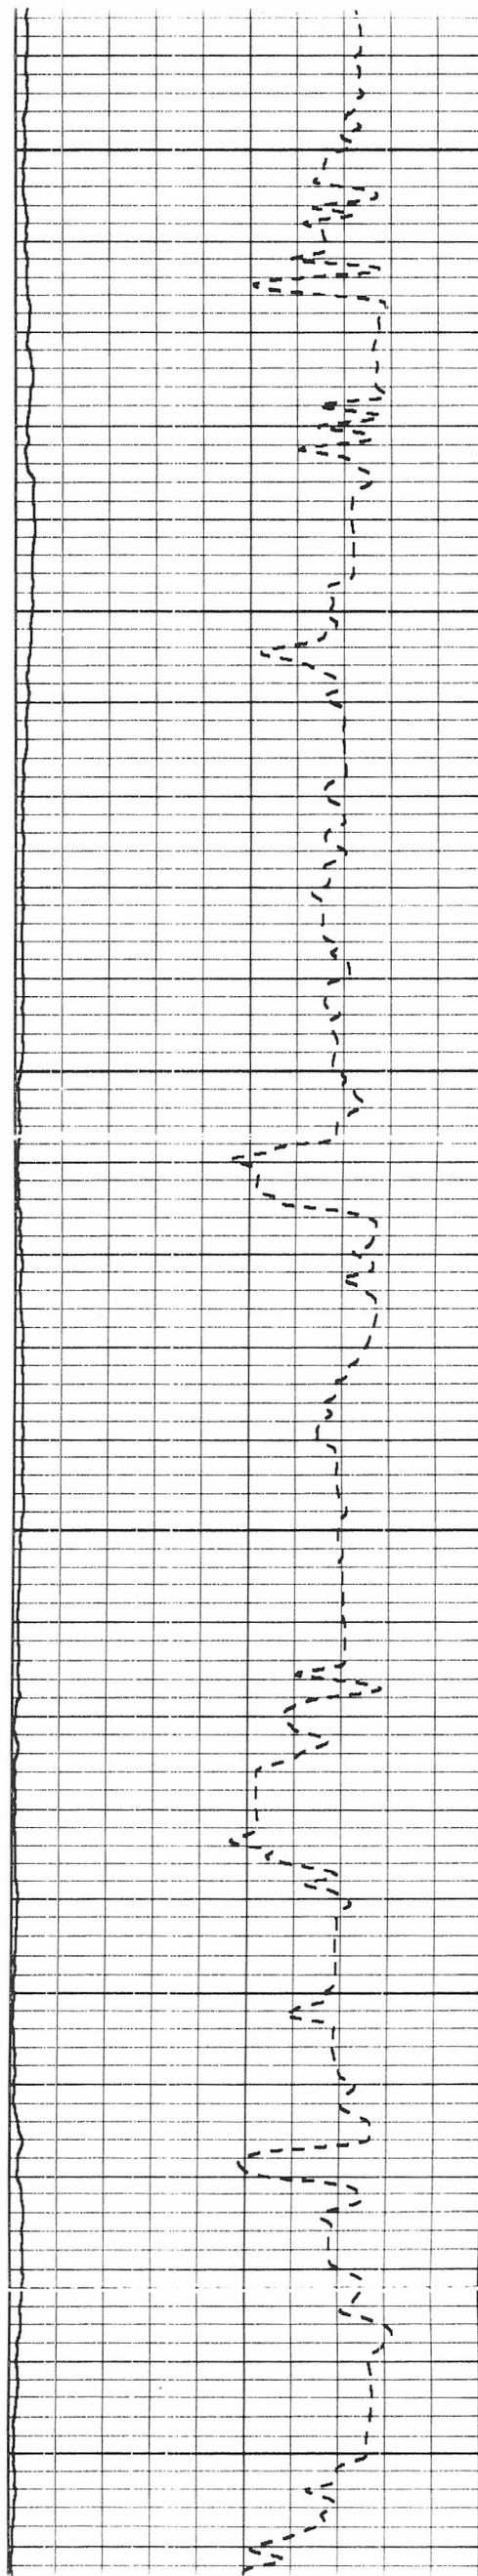

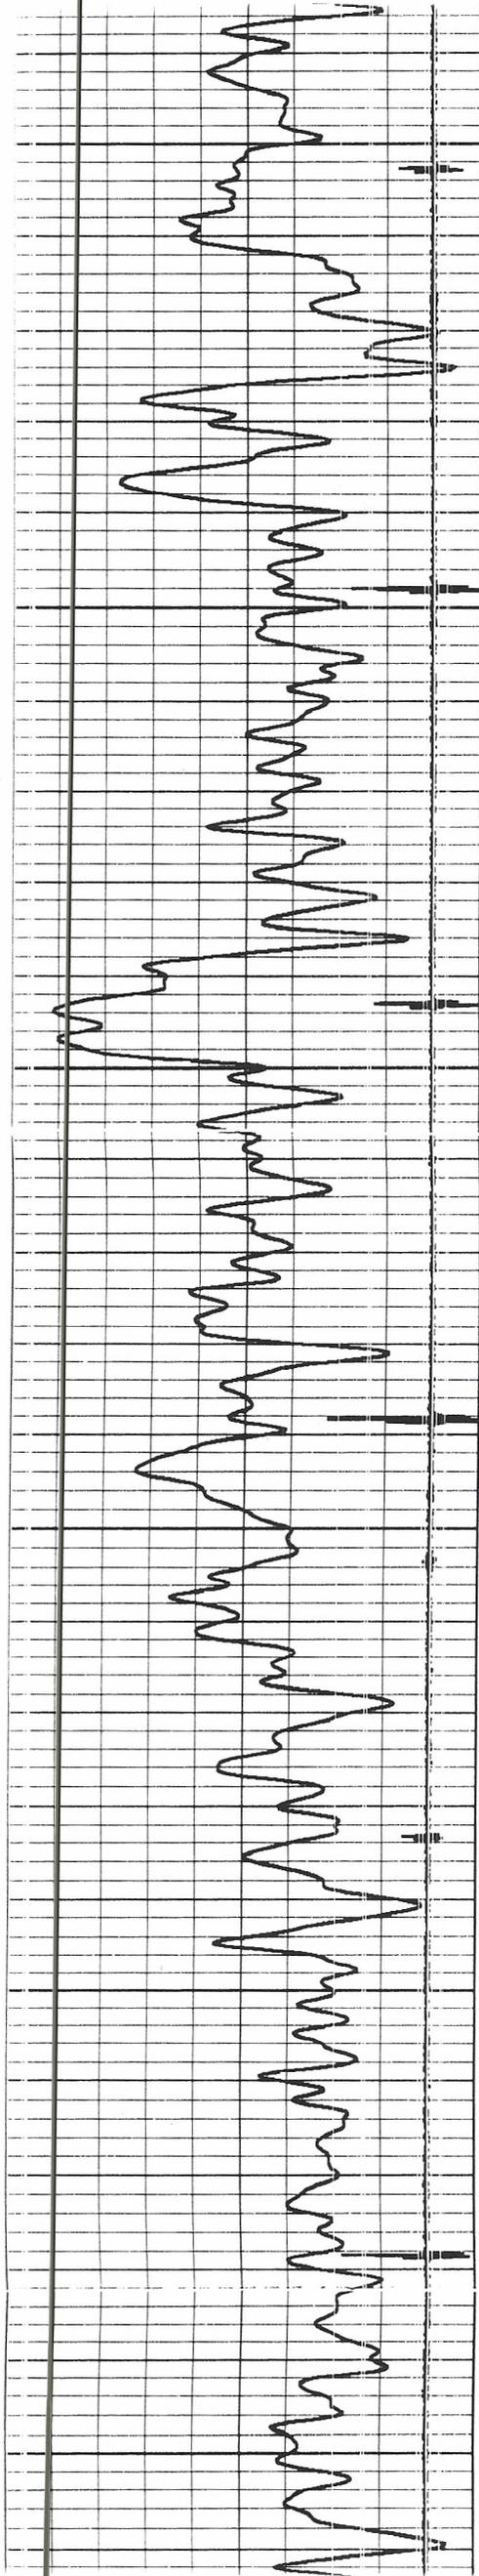

750  
800  
850  
900  
950  
1000

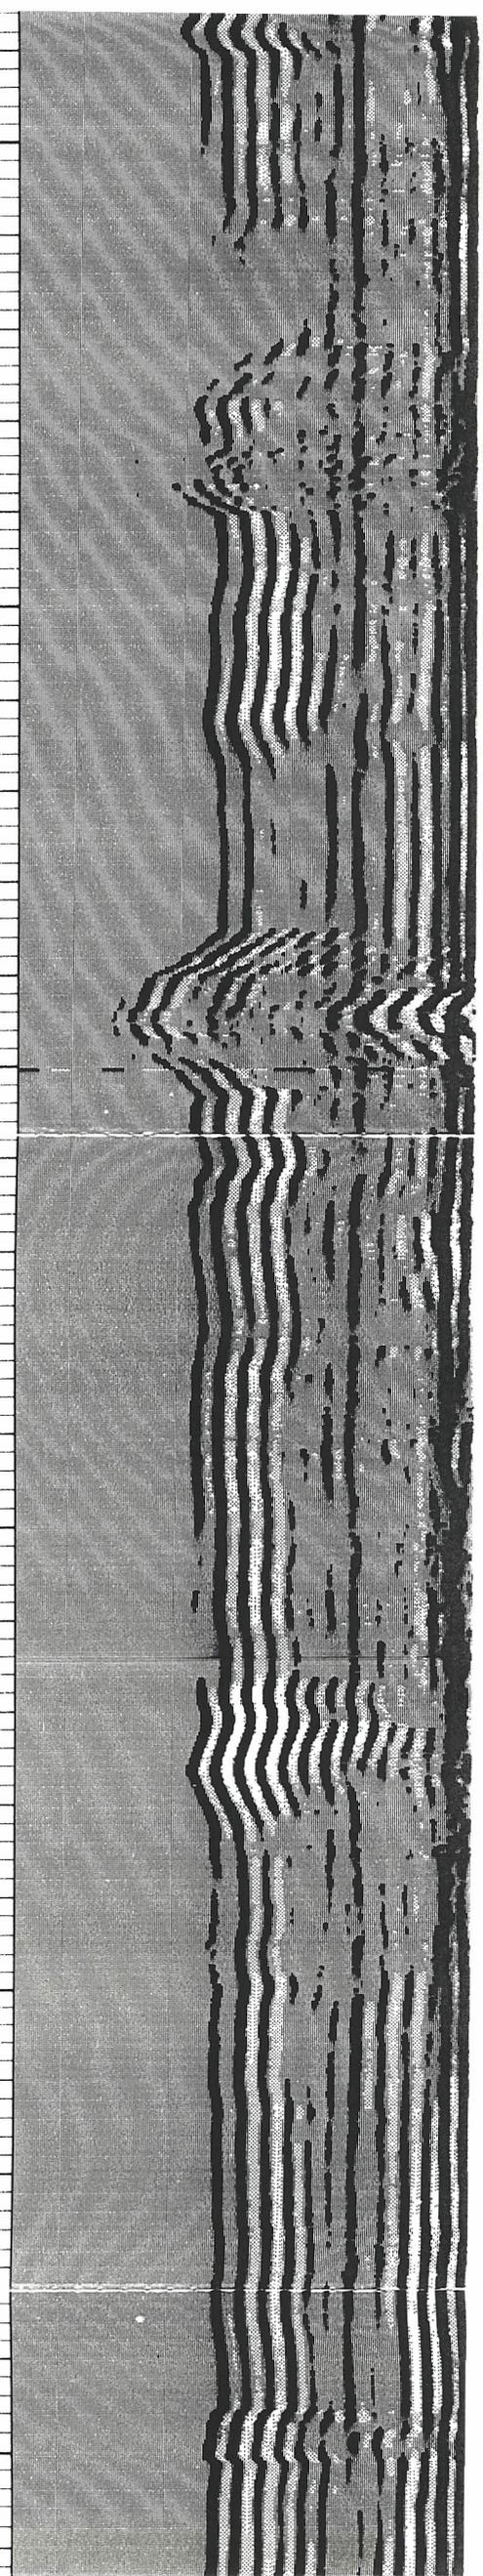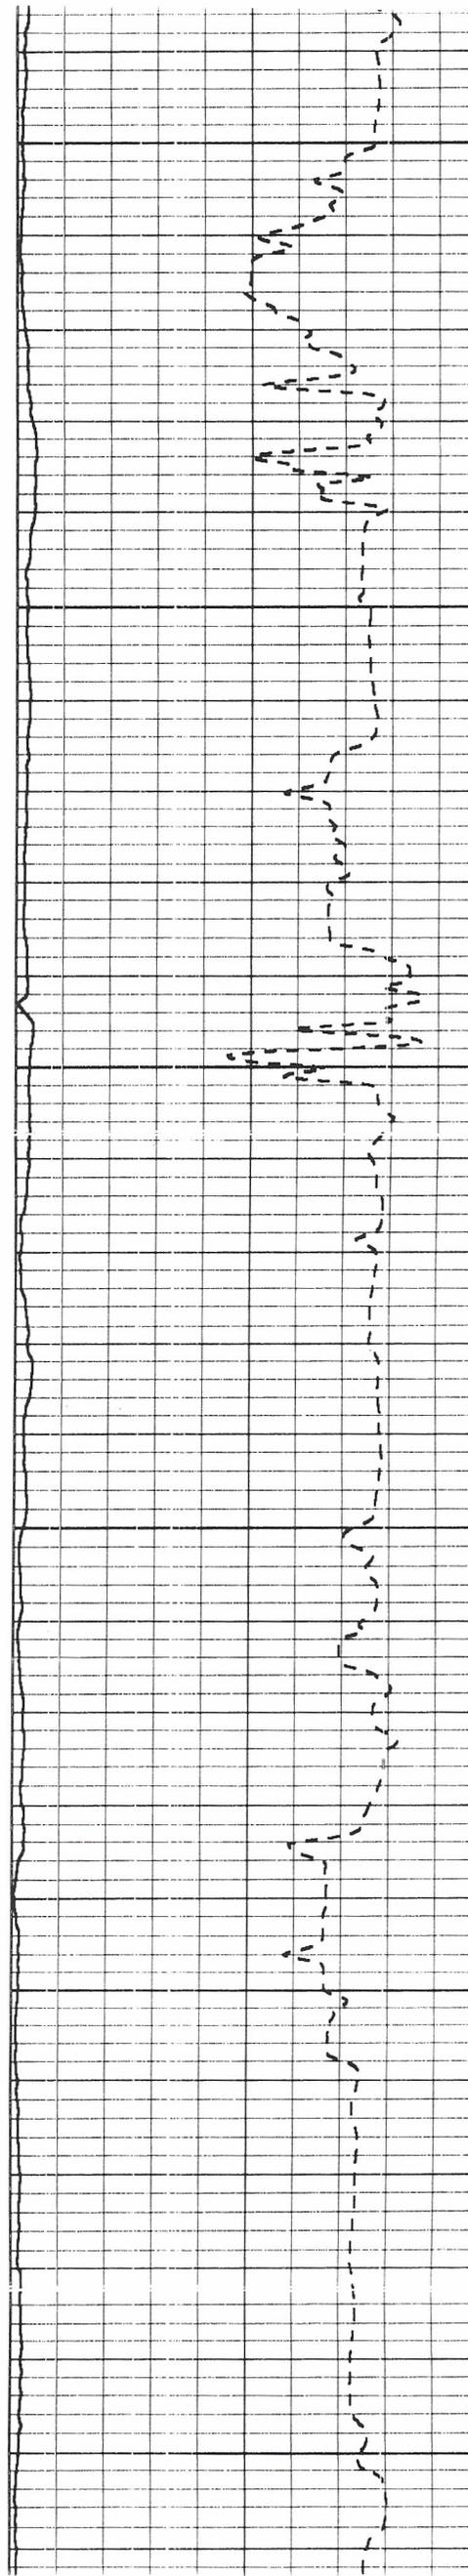

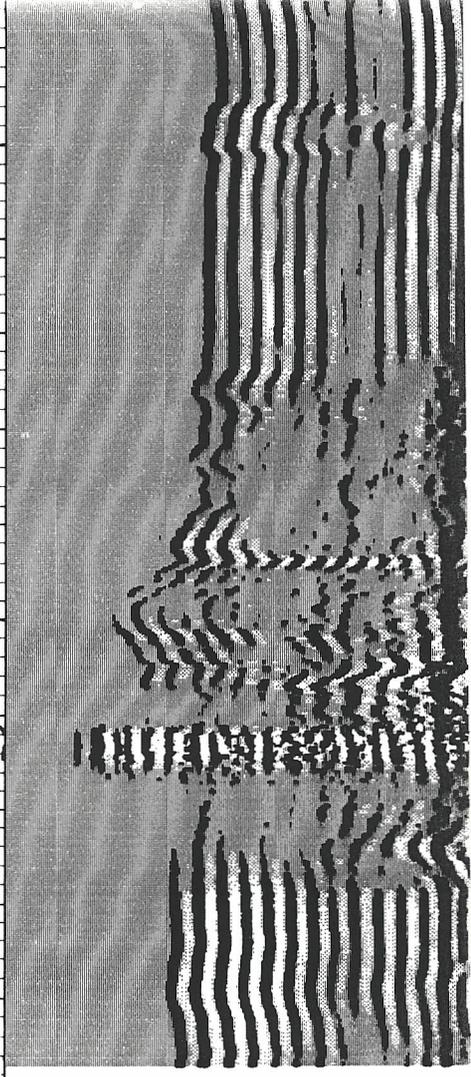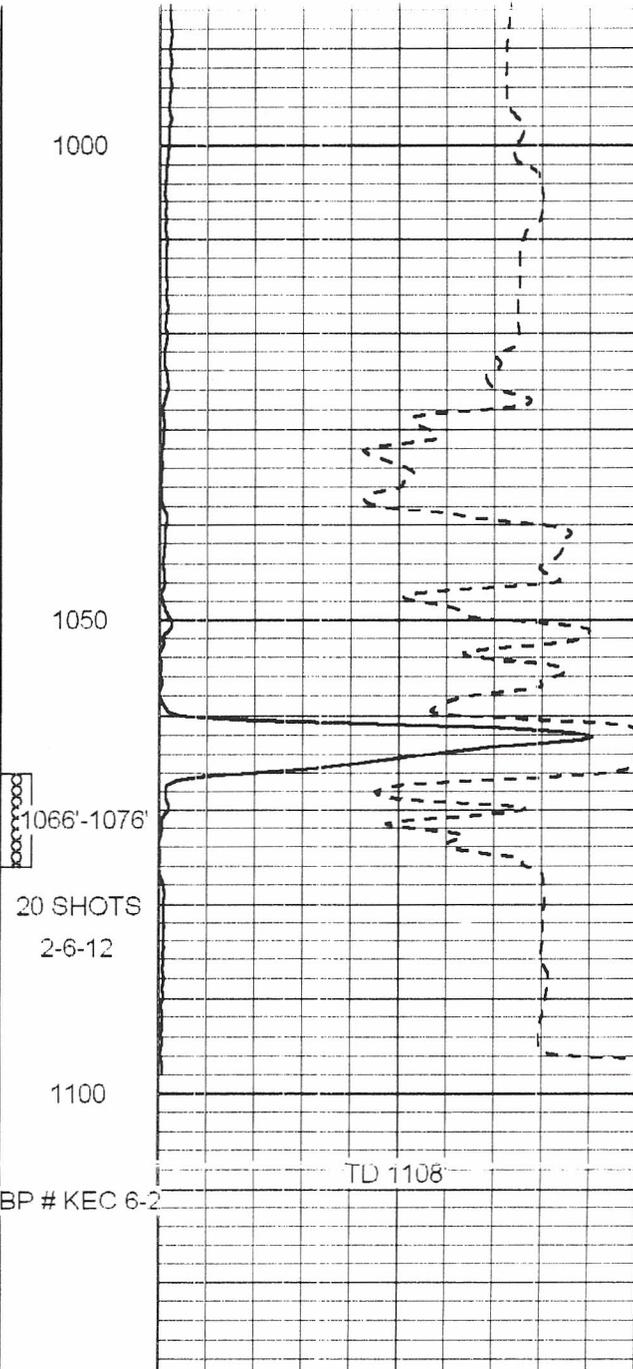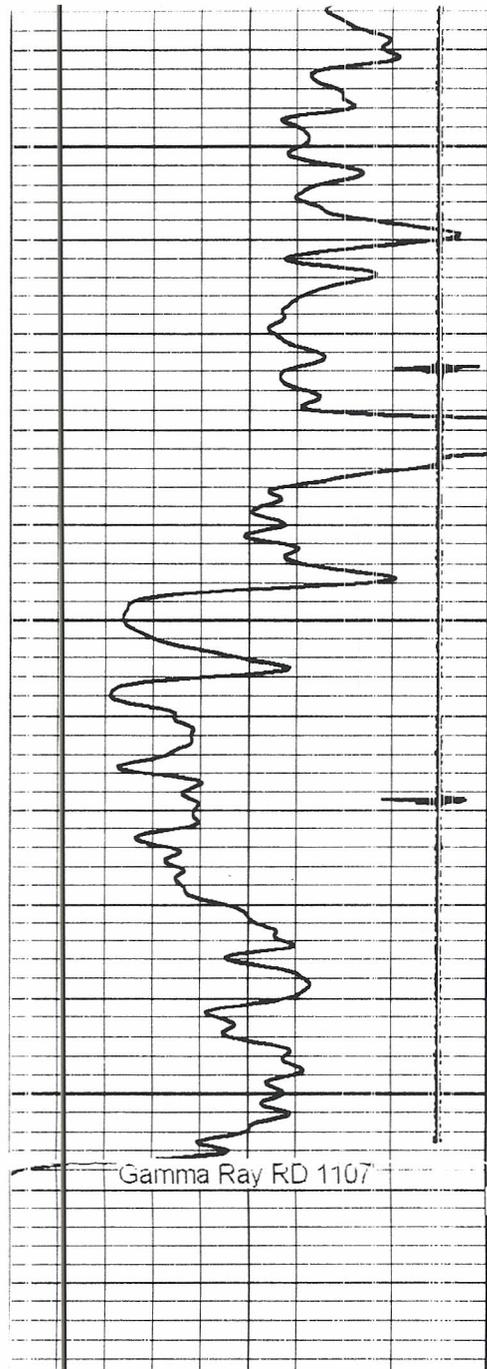

9	Collar Locator	-1
0	Gamma Ray (GAPI) (GAPI)	60

-1	Amplitude (mV)	120
1000	Travel Time (usec)	250

200	Variable Density	1200
-----	------------------	------