



**MIDWEST SURVEYS**  
 LOGGING - PERFORATING - CONSULTING SERVICES  
 P.O. Box 68, Osawatomie, KS 66064  
 913 / 755 - 2128

**GAMMA RAY / NEUTRON / CCL**

File No. \_\_\_\_\_

Company: **Altavista Energy, Inc.**

Well: **McCann "B" No. A-6**

Field: **Gardner**

County: **Johnson**

State: **Kansas**

Location: **1875' FSL & 1395' FEL**

**NE-SE-NW-SE**

Other Services: **Perforate**

Sec. **15** Twp. **14S** Rge. **22E**

Permanent Datum: **GL** Elevation: **NA**

Log Measured From: **GL** K.B. NA

Drilling Measured From: **GL** D.F. NA

Date: **03-05-2012** Elevation: **GL NA**

Run Number: **One**

Depth Driller: **990.0**

Depth Logger: **838.0**

Bottom Logged Interval: **837.0**

Top Log Interval: **200.0**

Fluid Level: **Full**

Type Fluid: **Water**

Density / Viscosity: **NA**

Salinity - PPM Cl: **NA**

Max. Recorded Temp: **NA**

Estimated Cement Top: **0.0**

Equipment No.: **107** Location: **Osawatomie**

Recorded By: **Steve Winklesch**

Witnessed By: **Doug Evans**

BORE-HOLE RECORD				CASINGS RECORD			
Run No.	BIT	FROM	TO	SIZE	WGT.	FROM	TO
One	9.875"	0.0	21.0	7.00"	0.0	0.0	21.0
Two	5.625"	21.0	900.0	2.875"	0.0	0.0	879.85
				Baffle	Set	At	849.15


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Drilling Contractor :  
 Town Oilfield Services, Inc.

Database File: mcann6ab.db  
 Dataset Pathname: pass1  
 Presentation Format: gr-n-ccl  
 Dataset Creation: Mon Mar 05 15:38:44 2012 by Log SCH 111116  
 Charted by: Depth in Feet scaled 1:240

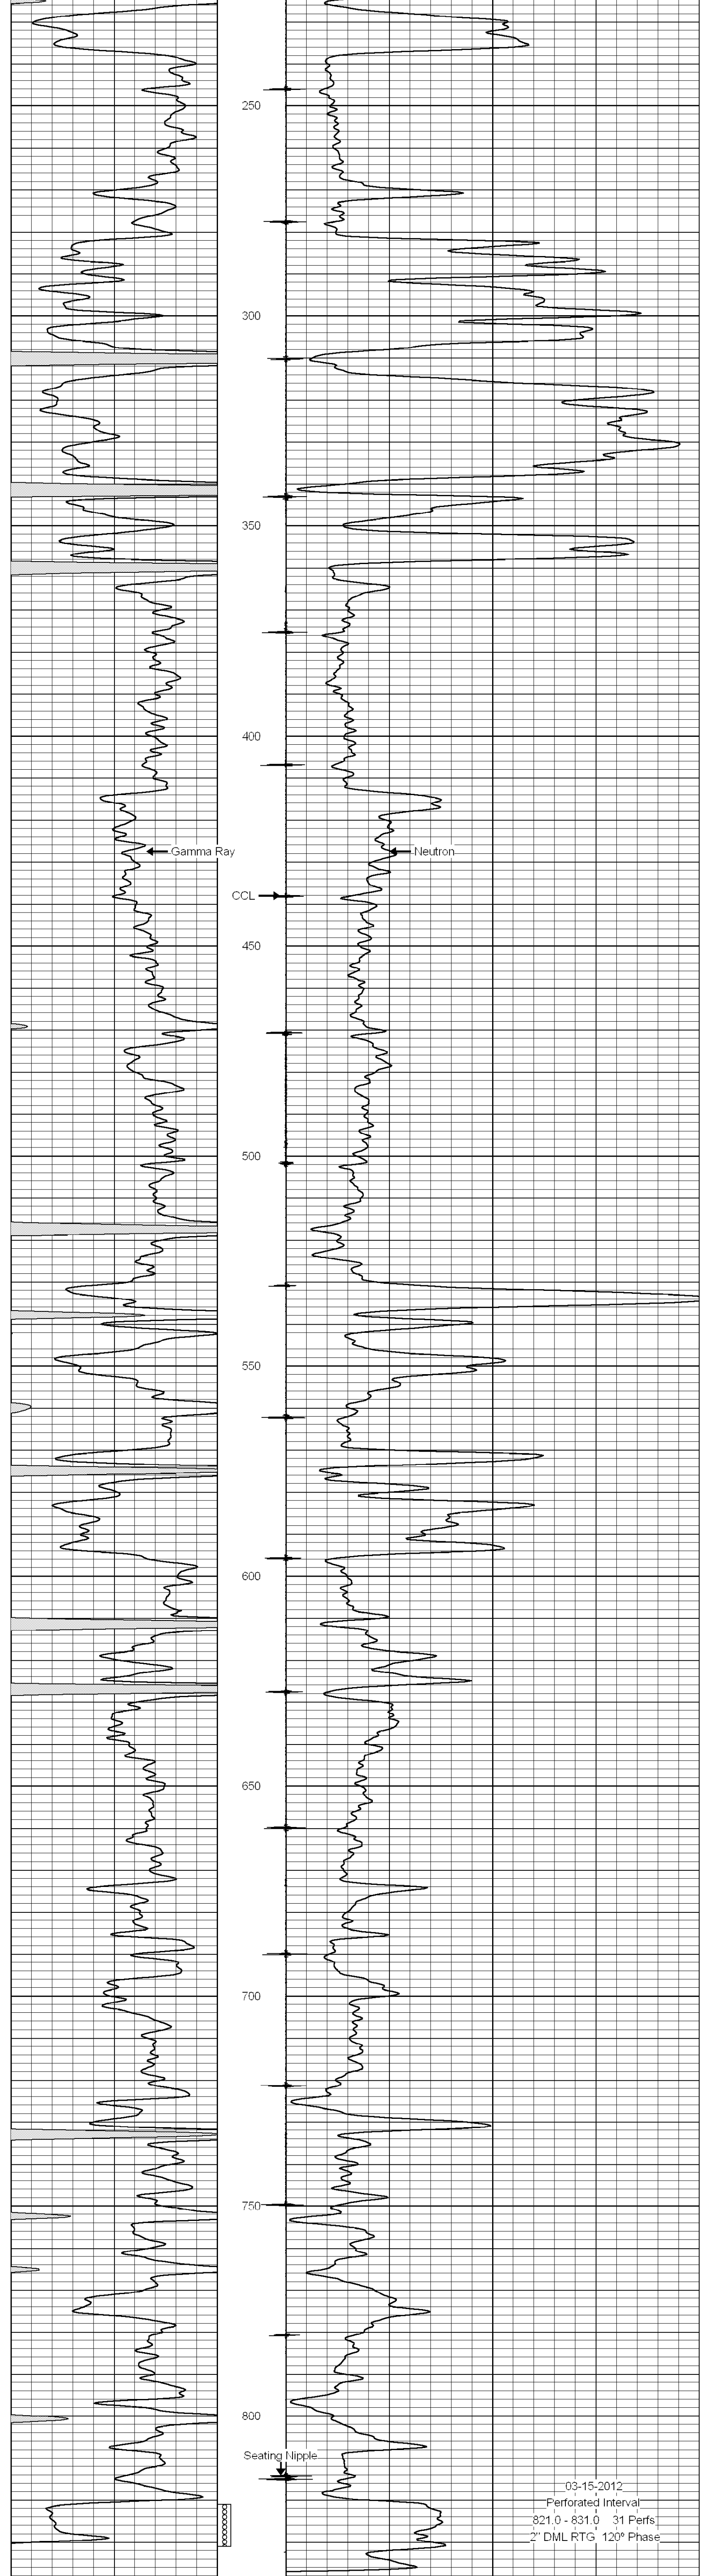

03-15-2012  
 Perforated Interval  
 821.0 - 831.0 31 Perfs.  
 2" DML RTG 120° Phase