LOG-TECH

DIGITAL LOG (785) 625-3858

Dual Induction Log

API No. 15-183-24015-00-00

Company Bowman Oil Company

Well Jelinek #8

Field Jelinek

County Rooks State Kansas

Location NW SE NE SE
1750' FSL / 350' FEL
Sec: 23 Twp: 9S Rge: 19W

Other Services
CNL / CDL
MEL

Elevation
K.B. 2138.6
D.F.
G.L. 2130

Permanent Datum	Ground Level	Elevation 2130	
Log Measured From	Kelly Bushing	8.6	Ft. Above Perm. Datum
Drilling Measured From	Kelly Bushing		

Date	3/19/2012		
Run Number	One		
Depth Driller	3579		
Depth Logger	3582		
Bottom Logged Interval	3581		
Top Log Interval	200		
Casing Driller	8.625 @ 238		
Casing Logger	232		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity,ppm CL	2100		
Density / Viscosity	9.4 / 59		
pH / Fluid Loss	10.5 / 7.2		
Source of Sample	Flowline		
Rm @ Meas. Temp	1.30 @ 65		
Rmf @ Meas. Temp	0.98 @ 65		
Rmc @ Meas. Temp	1.76 @ 65		
Source of Rmf / Rmc	Charts		
Rm @ BHT	0.76 @ 112		
Operating Rig Time	4 Hours		
Max Rec. Temp. F	112		
Equipment Number	15		
Location	Hays		
Recorded By	R. Barnhart		
Witnessed By	Roger Moses		

<<< Fold Here >>>

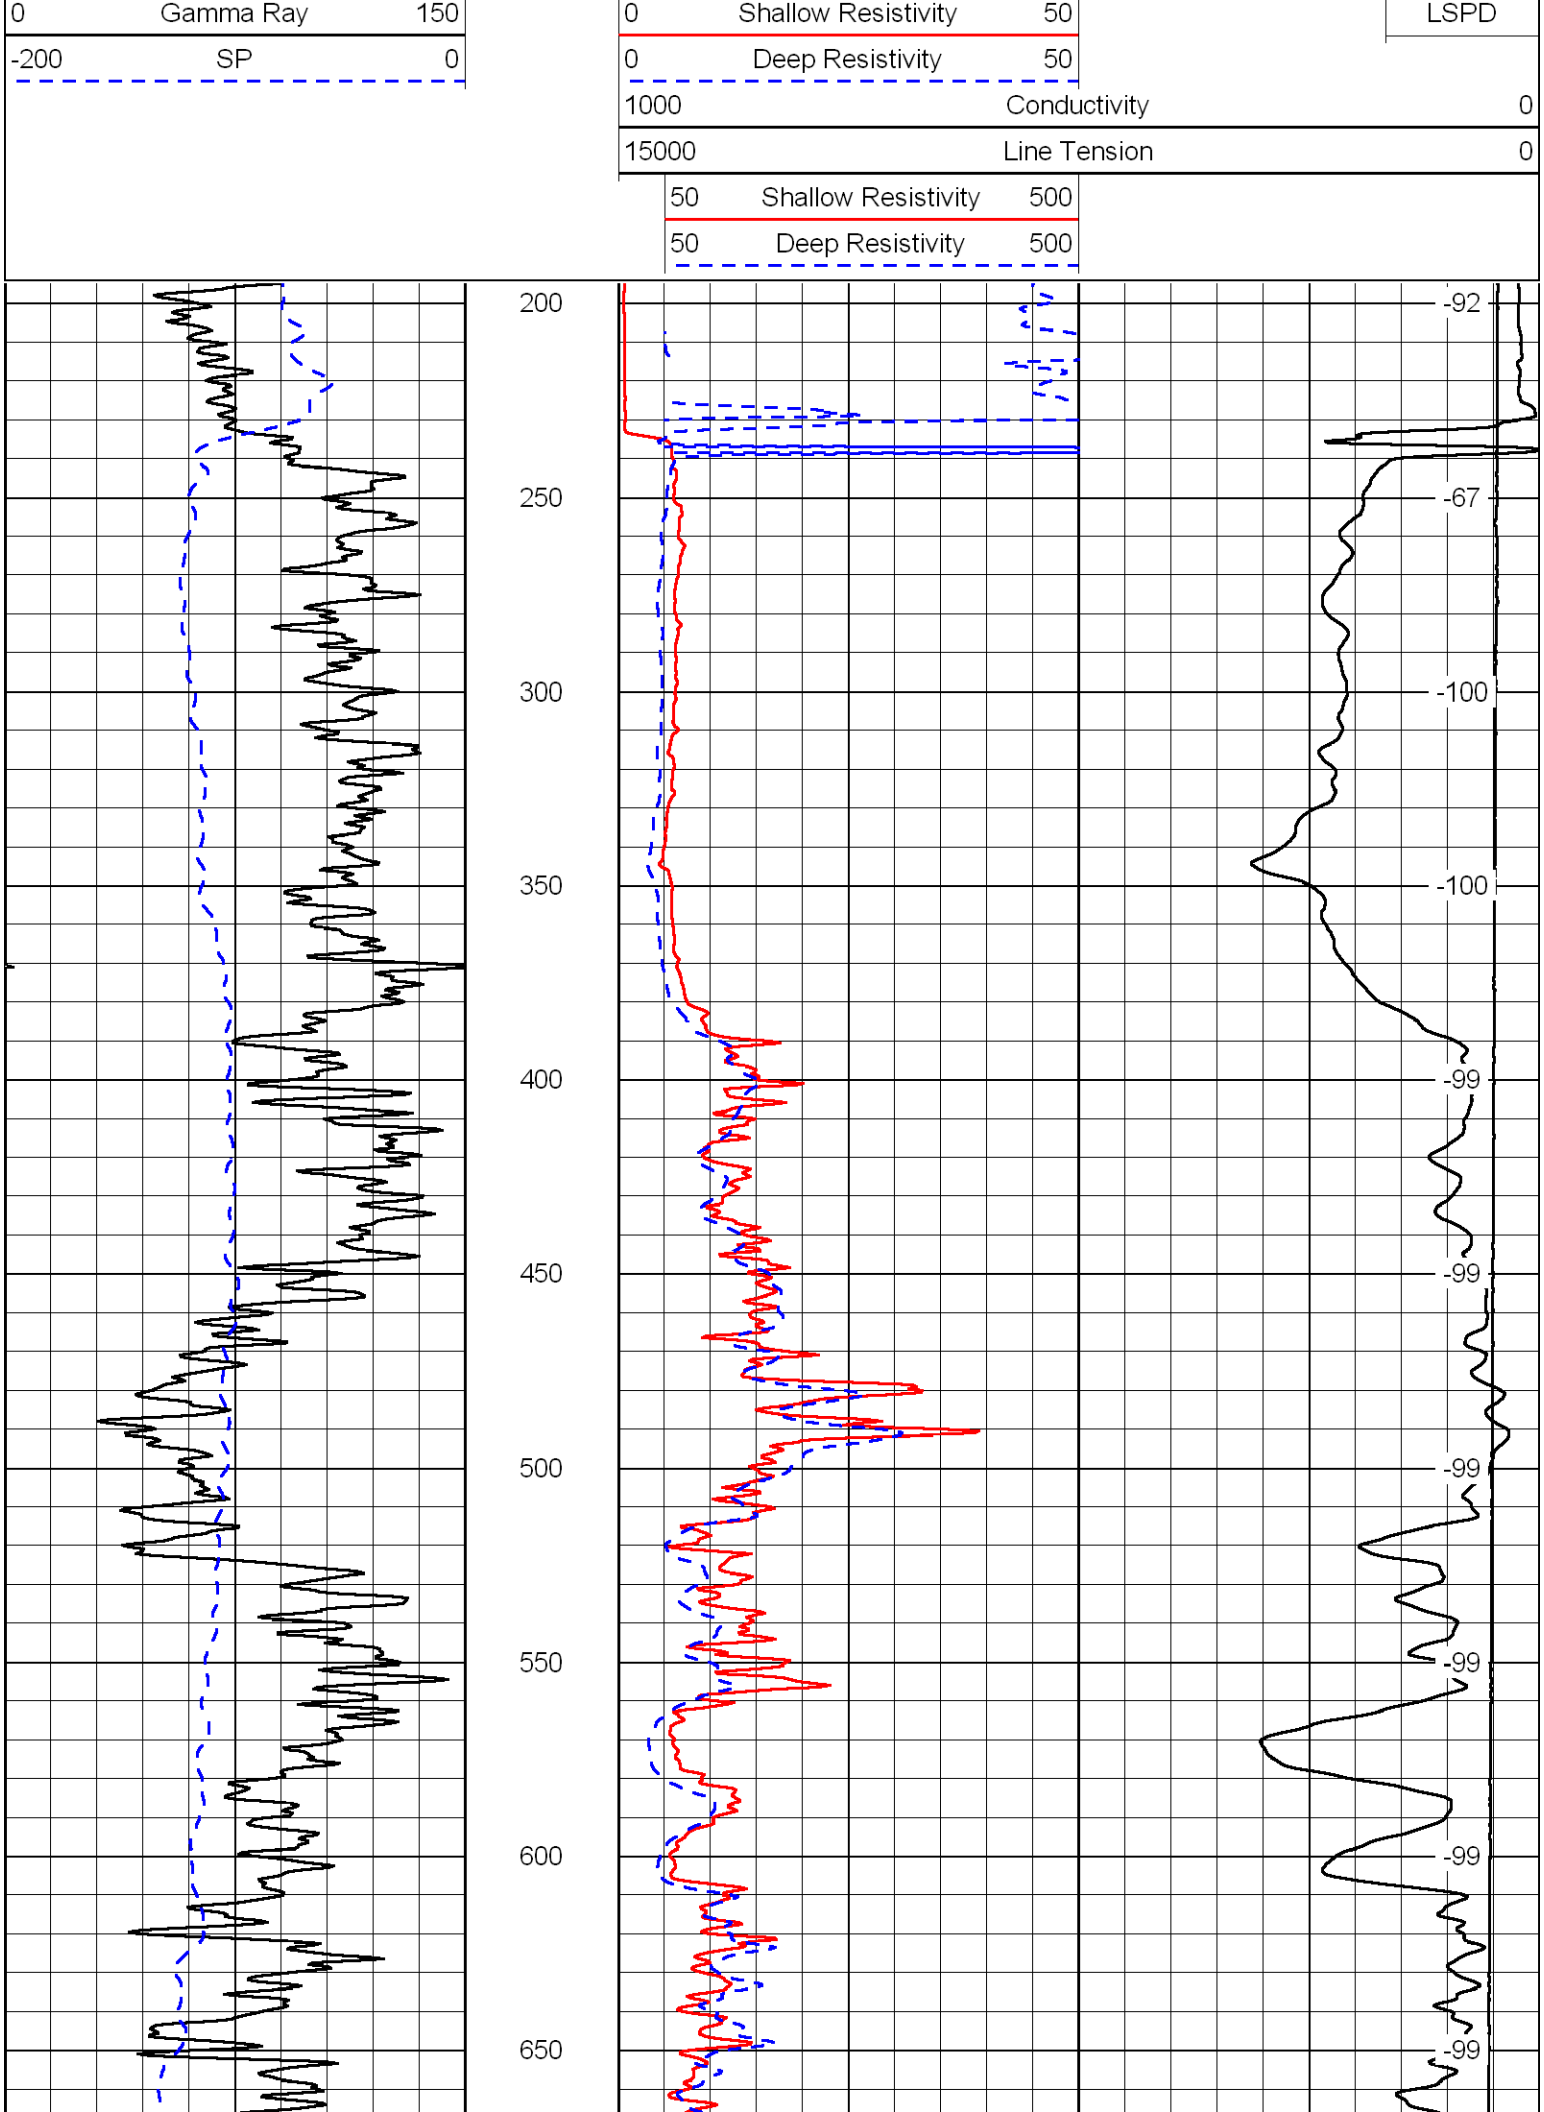
All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

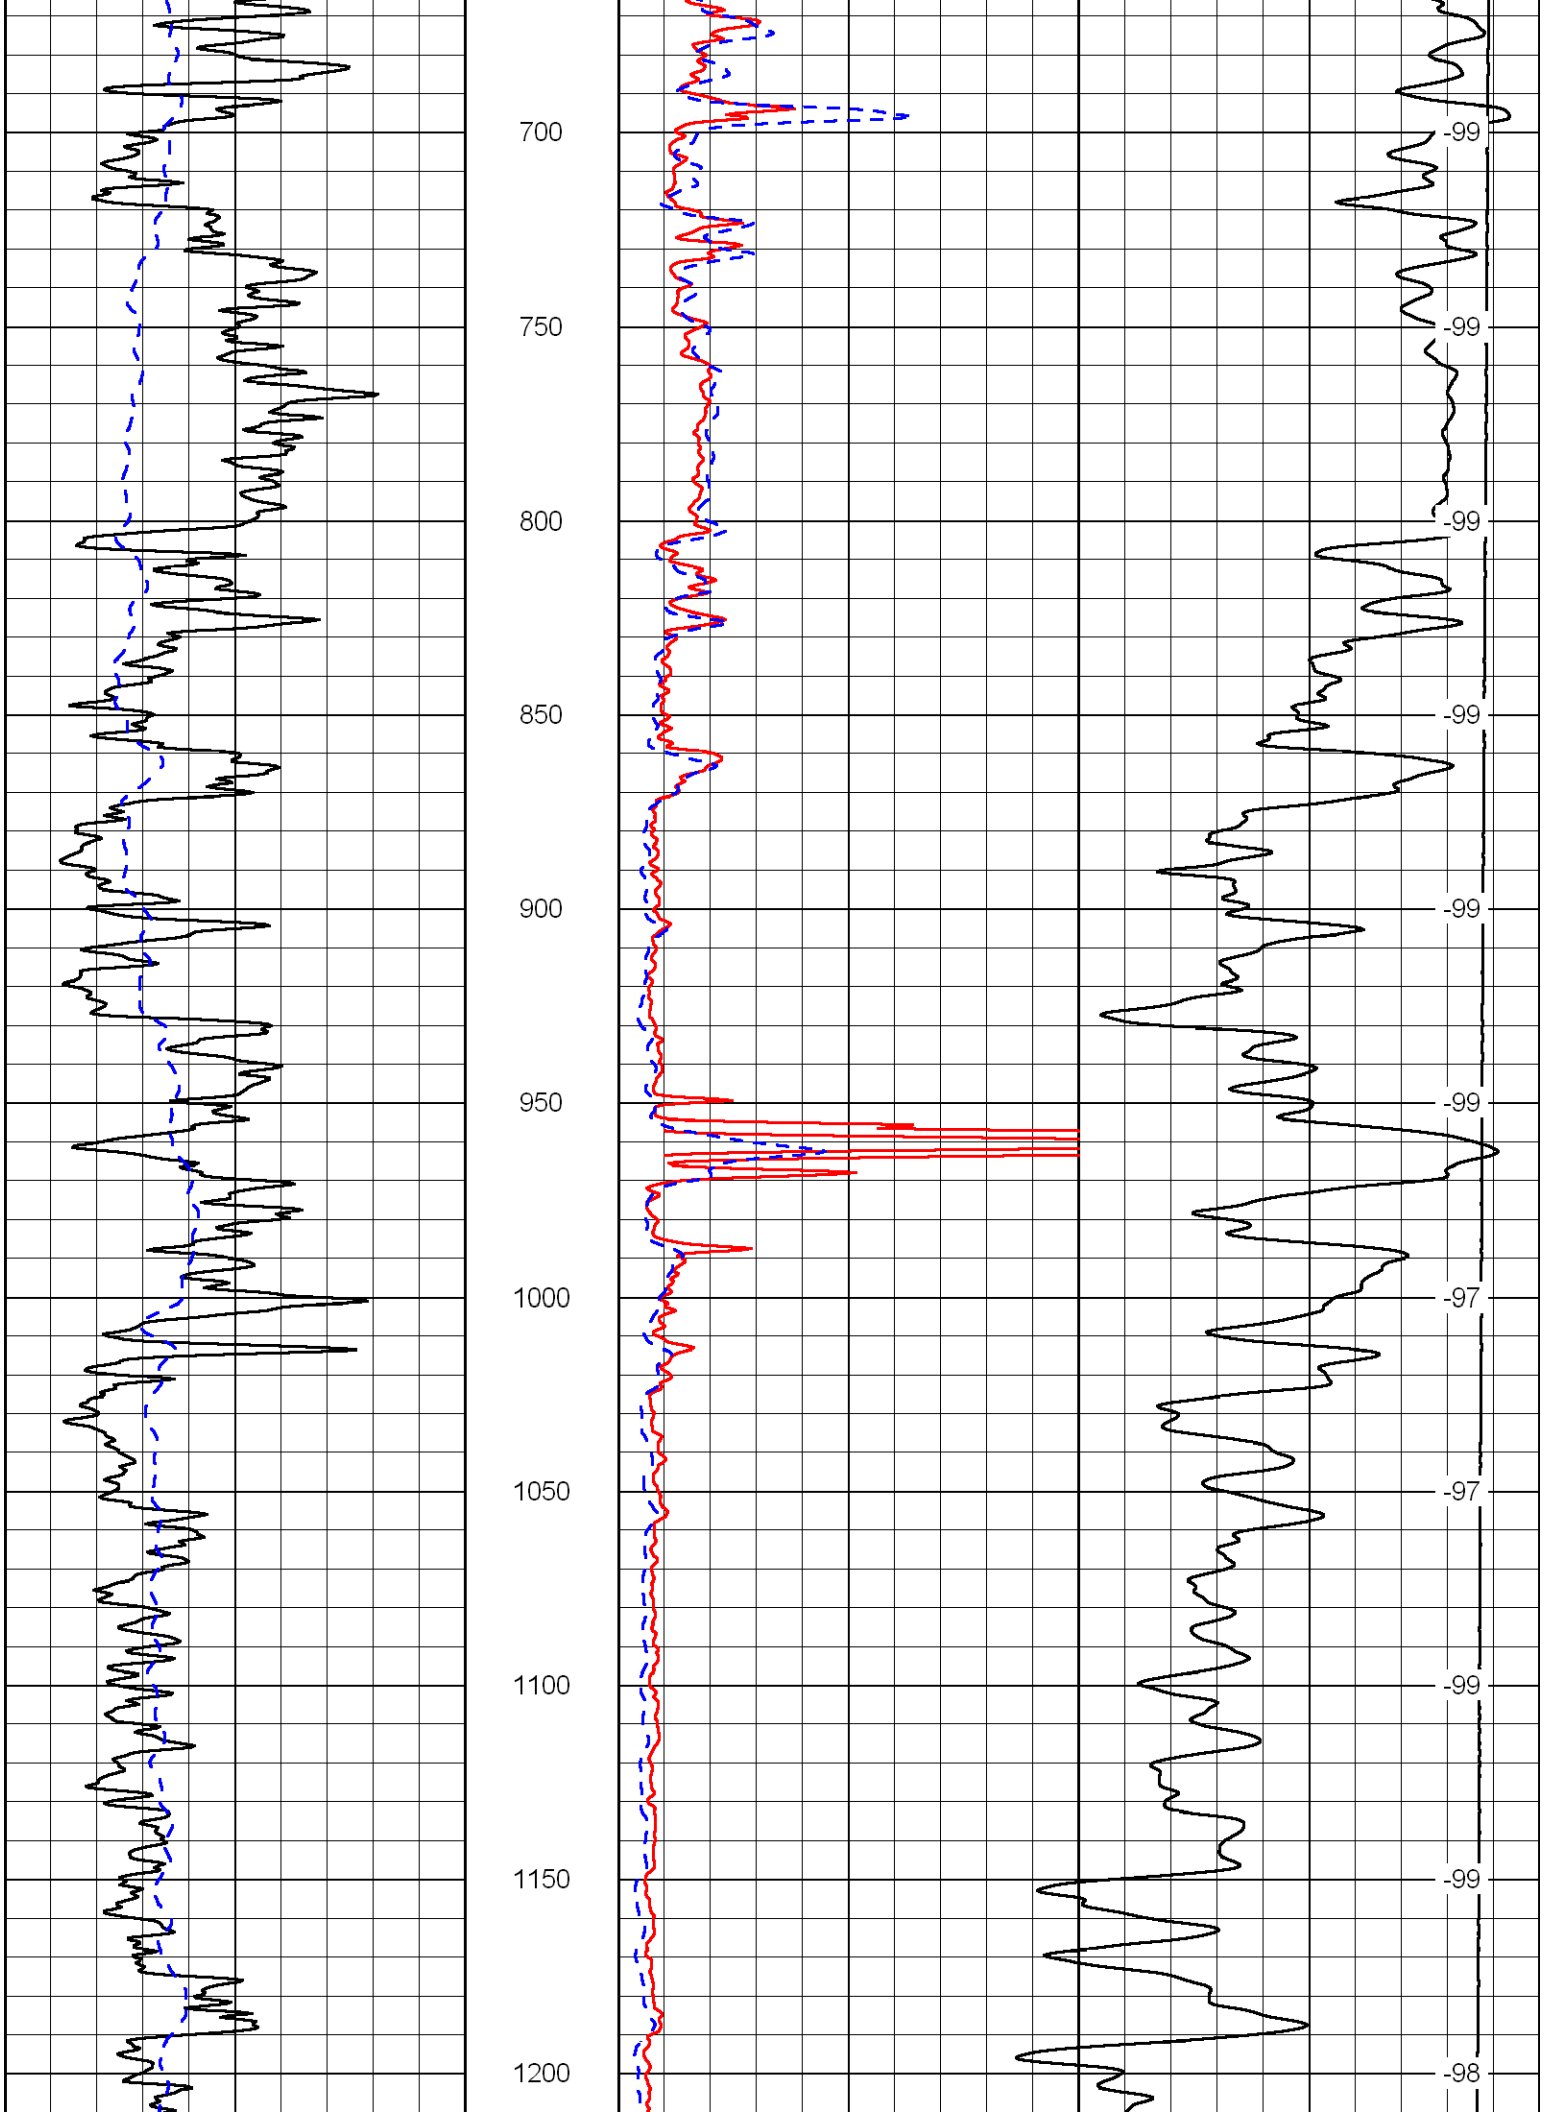
Comments

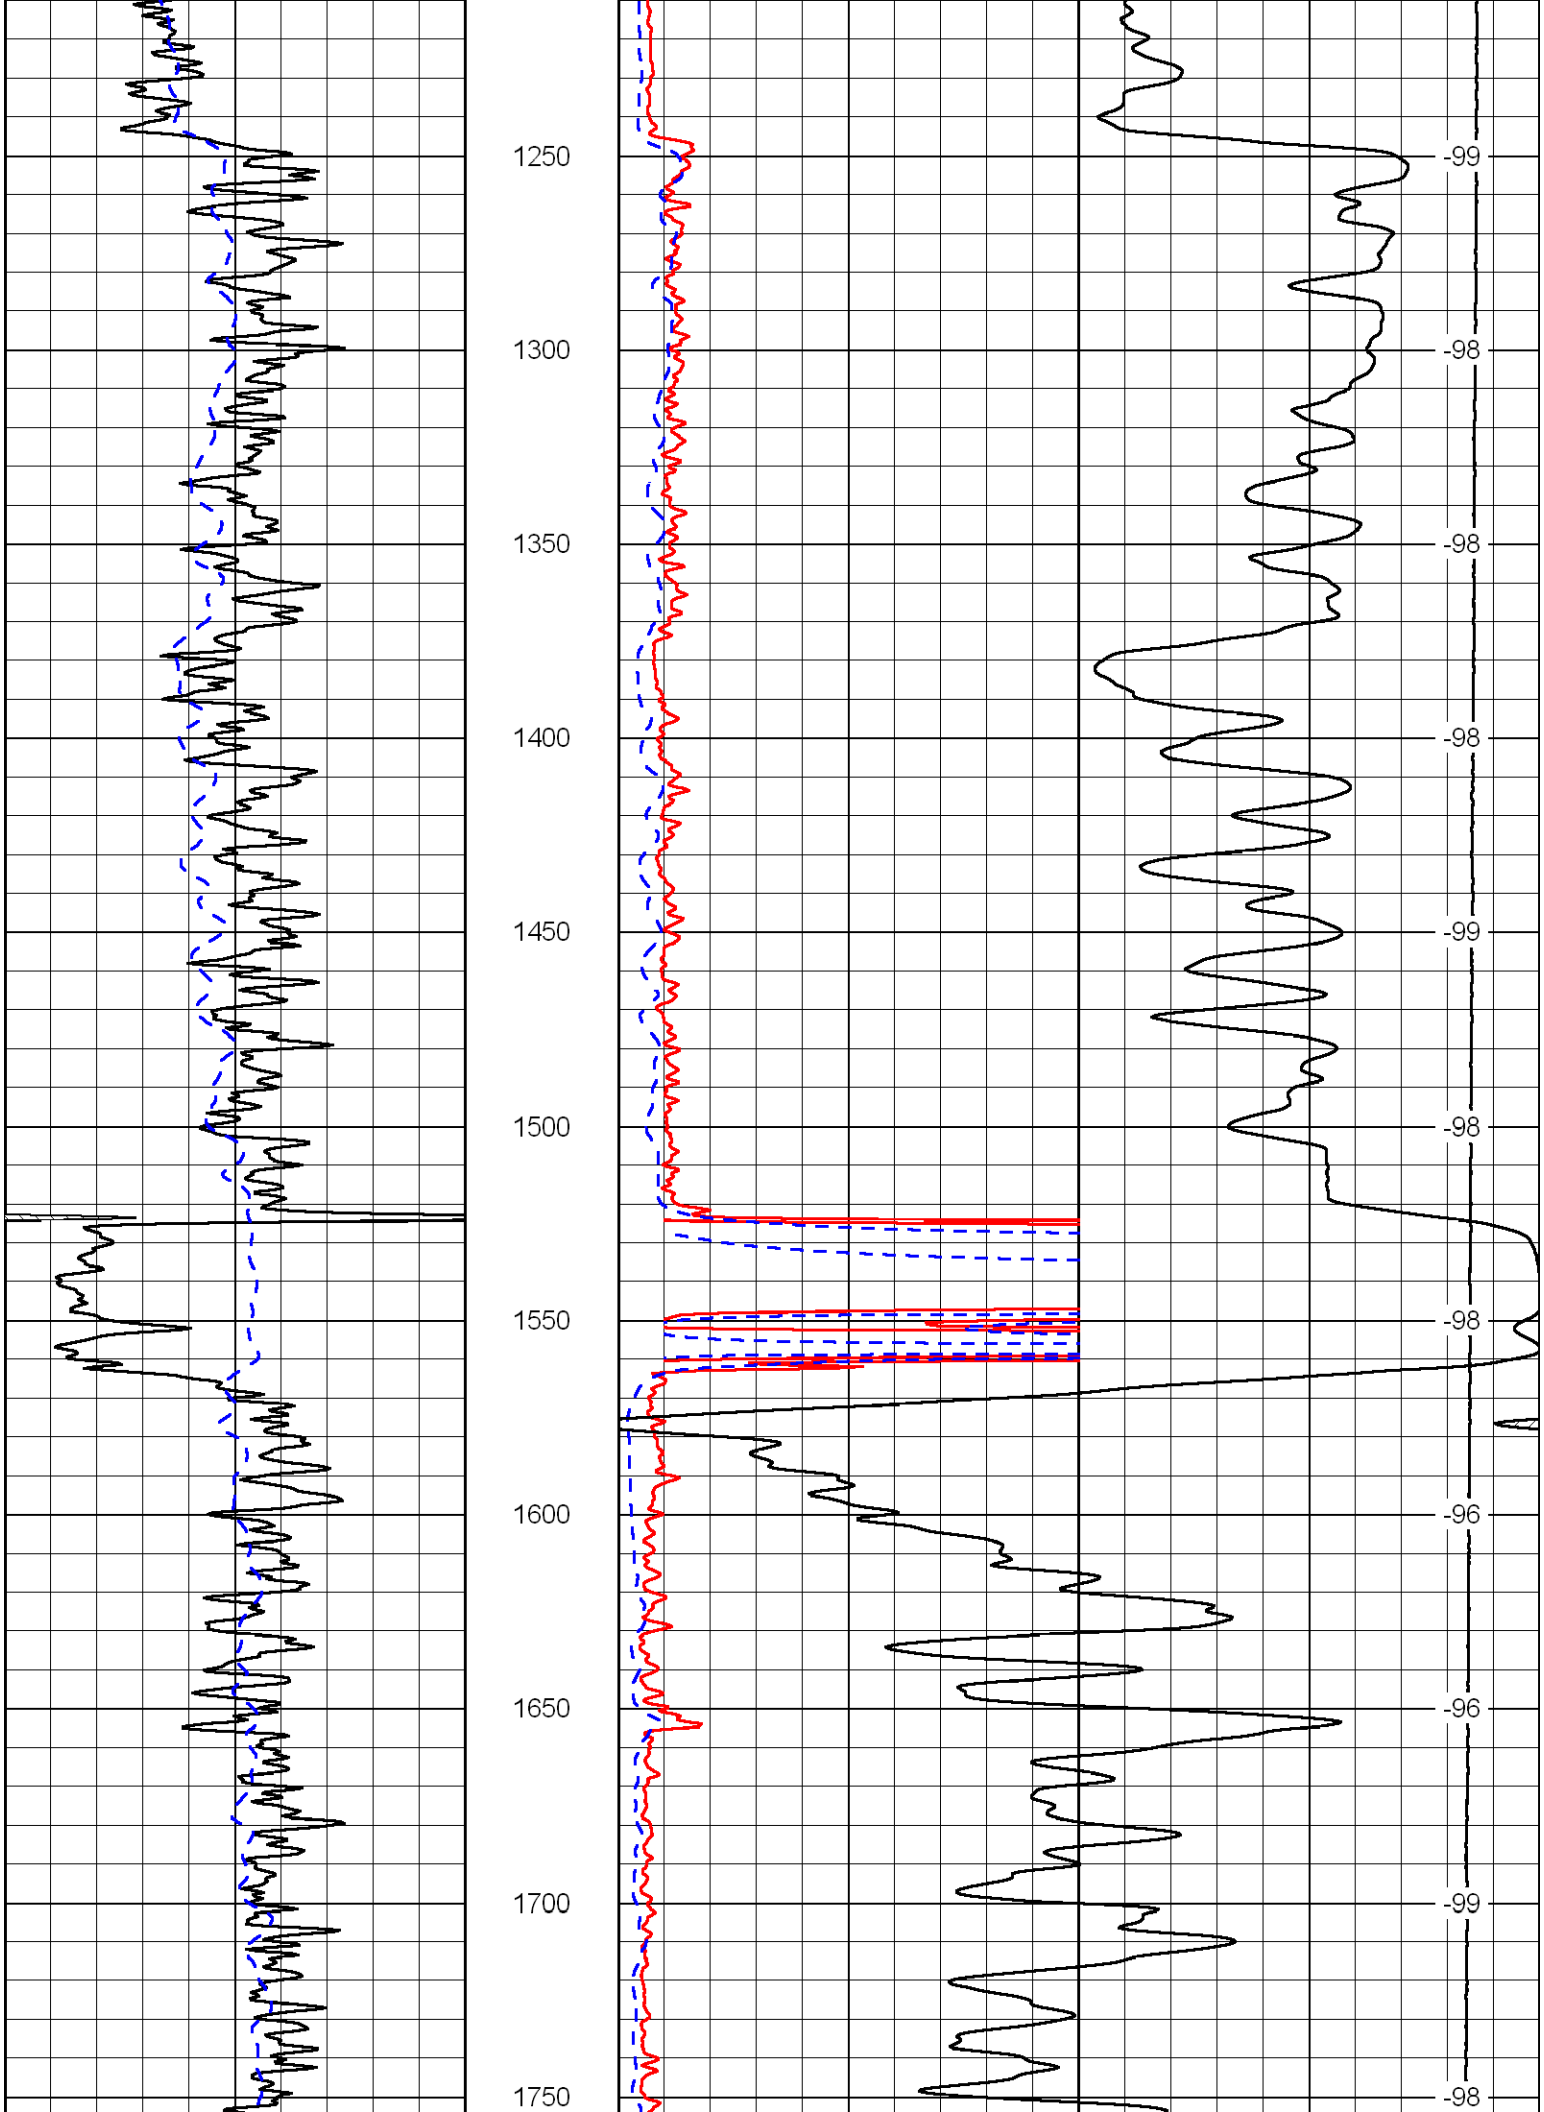
Thank you for using Log-Tech, Inc.
(785) 625-3858

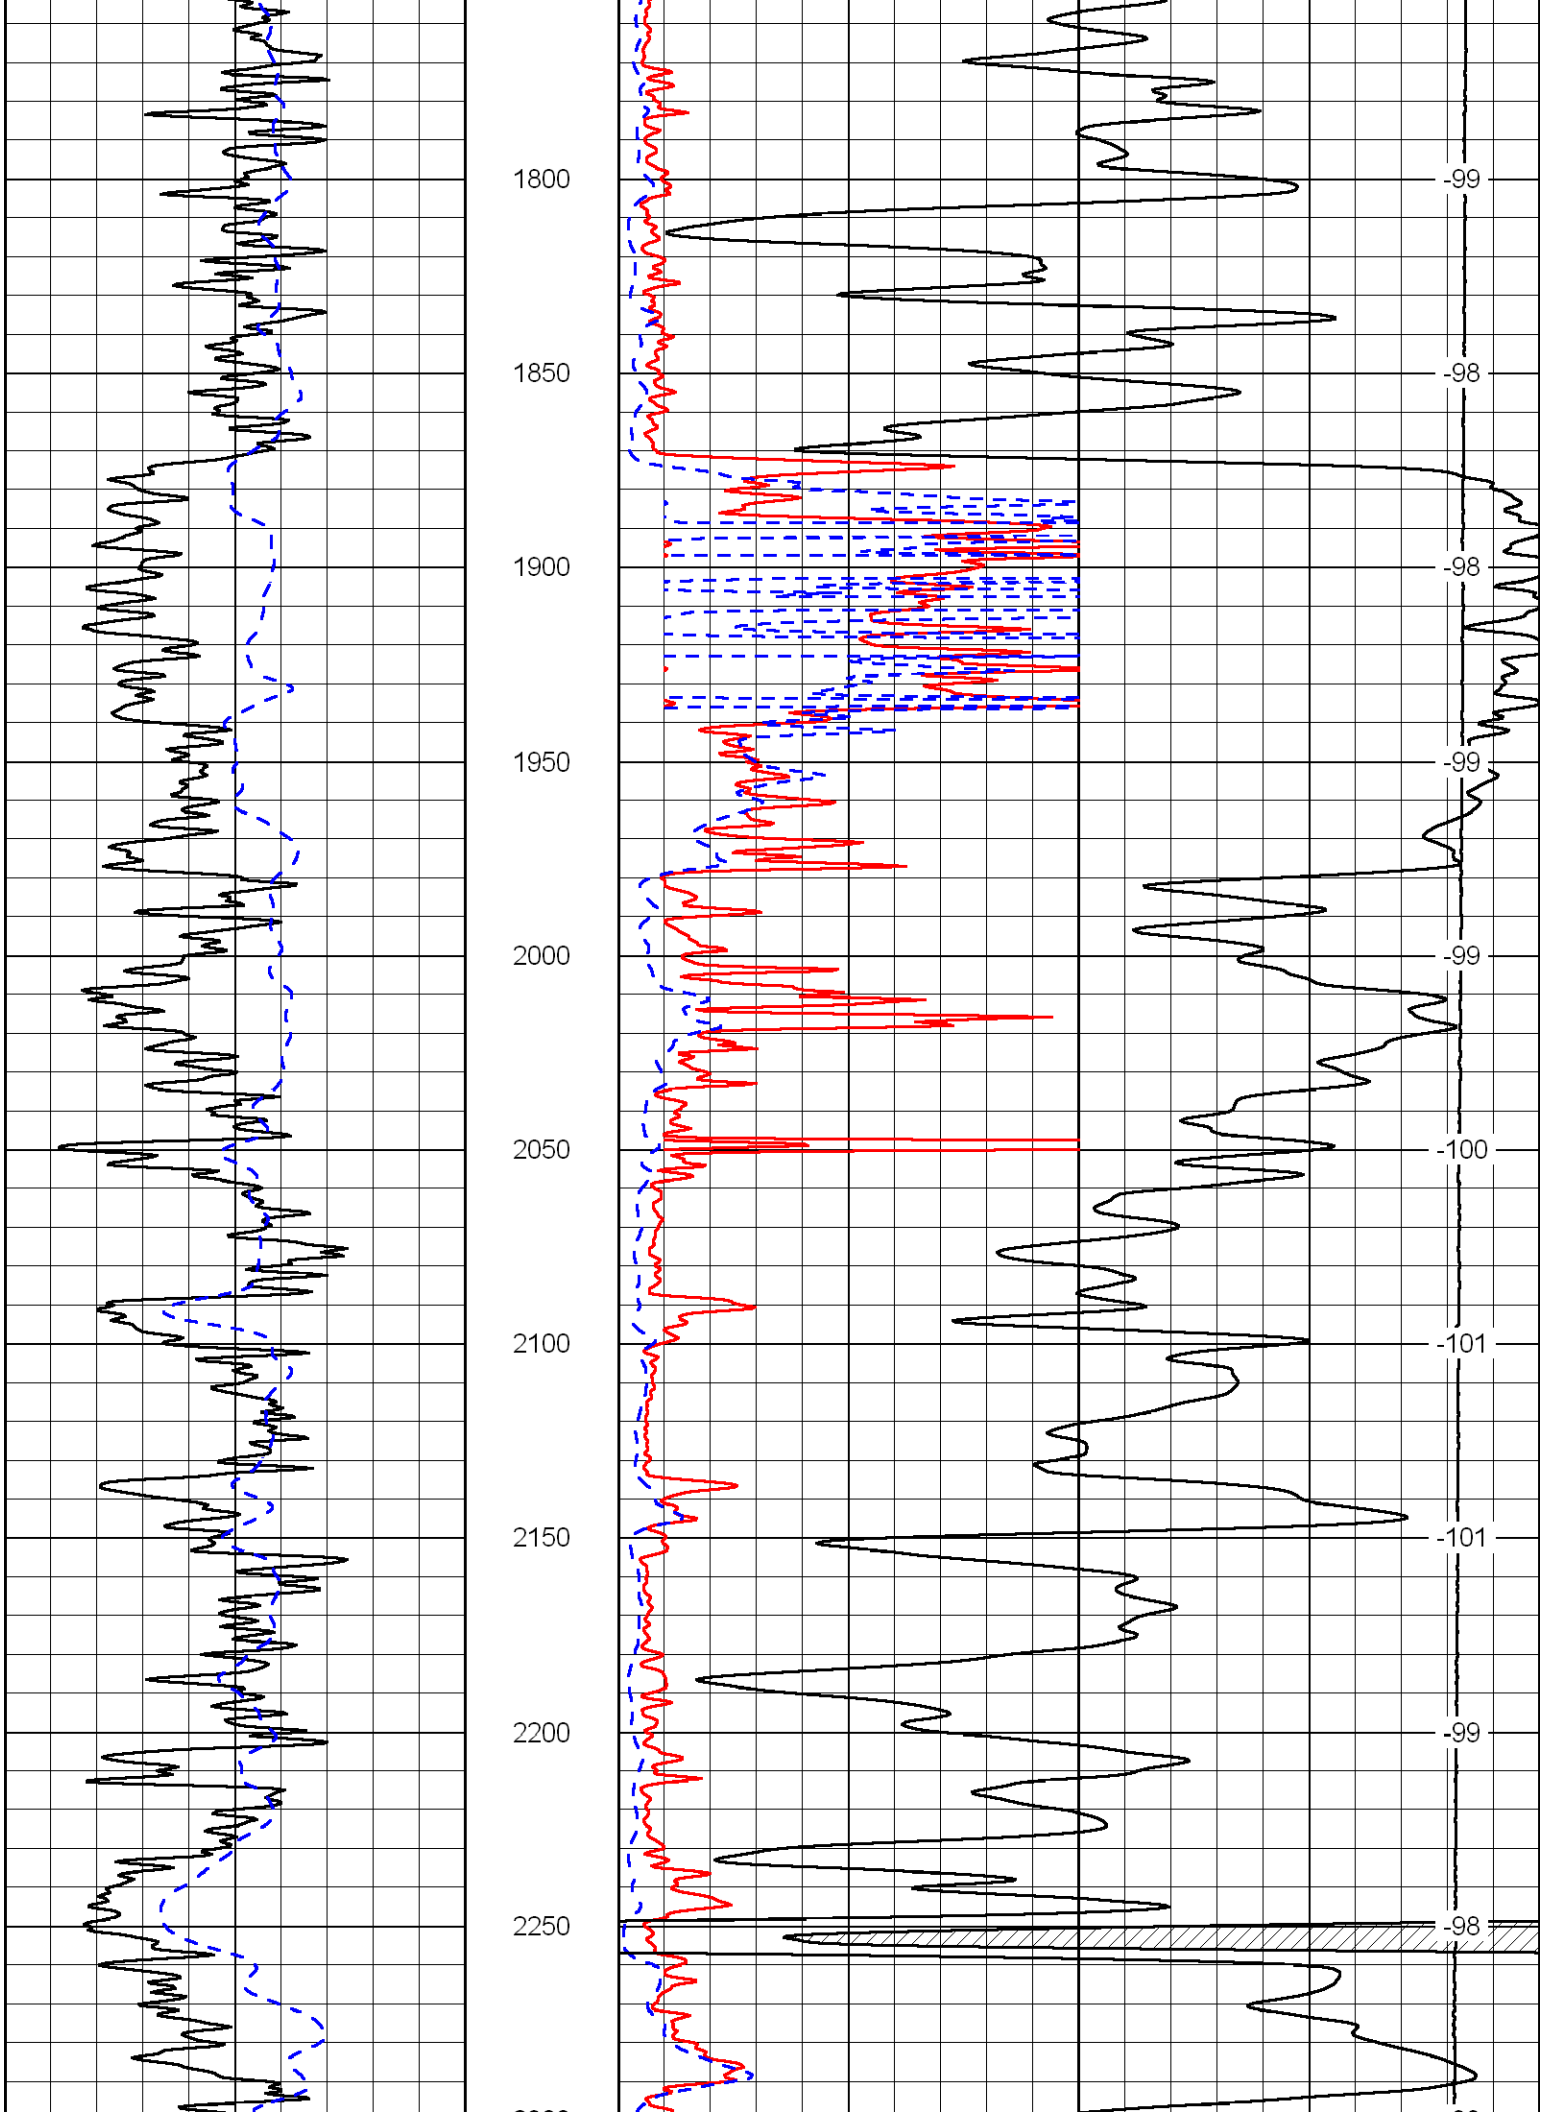
Plainville, KS:
Hwy 183 & 18: 4 1/2W,
1N, 1W, 1/4N, W into

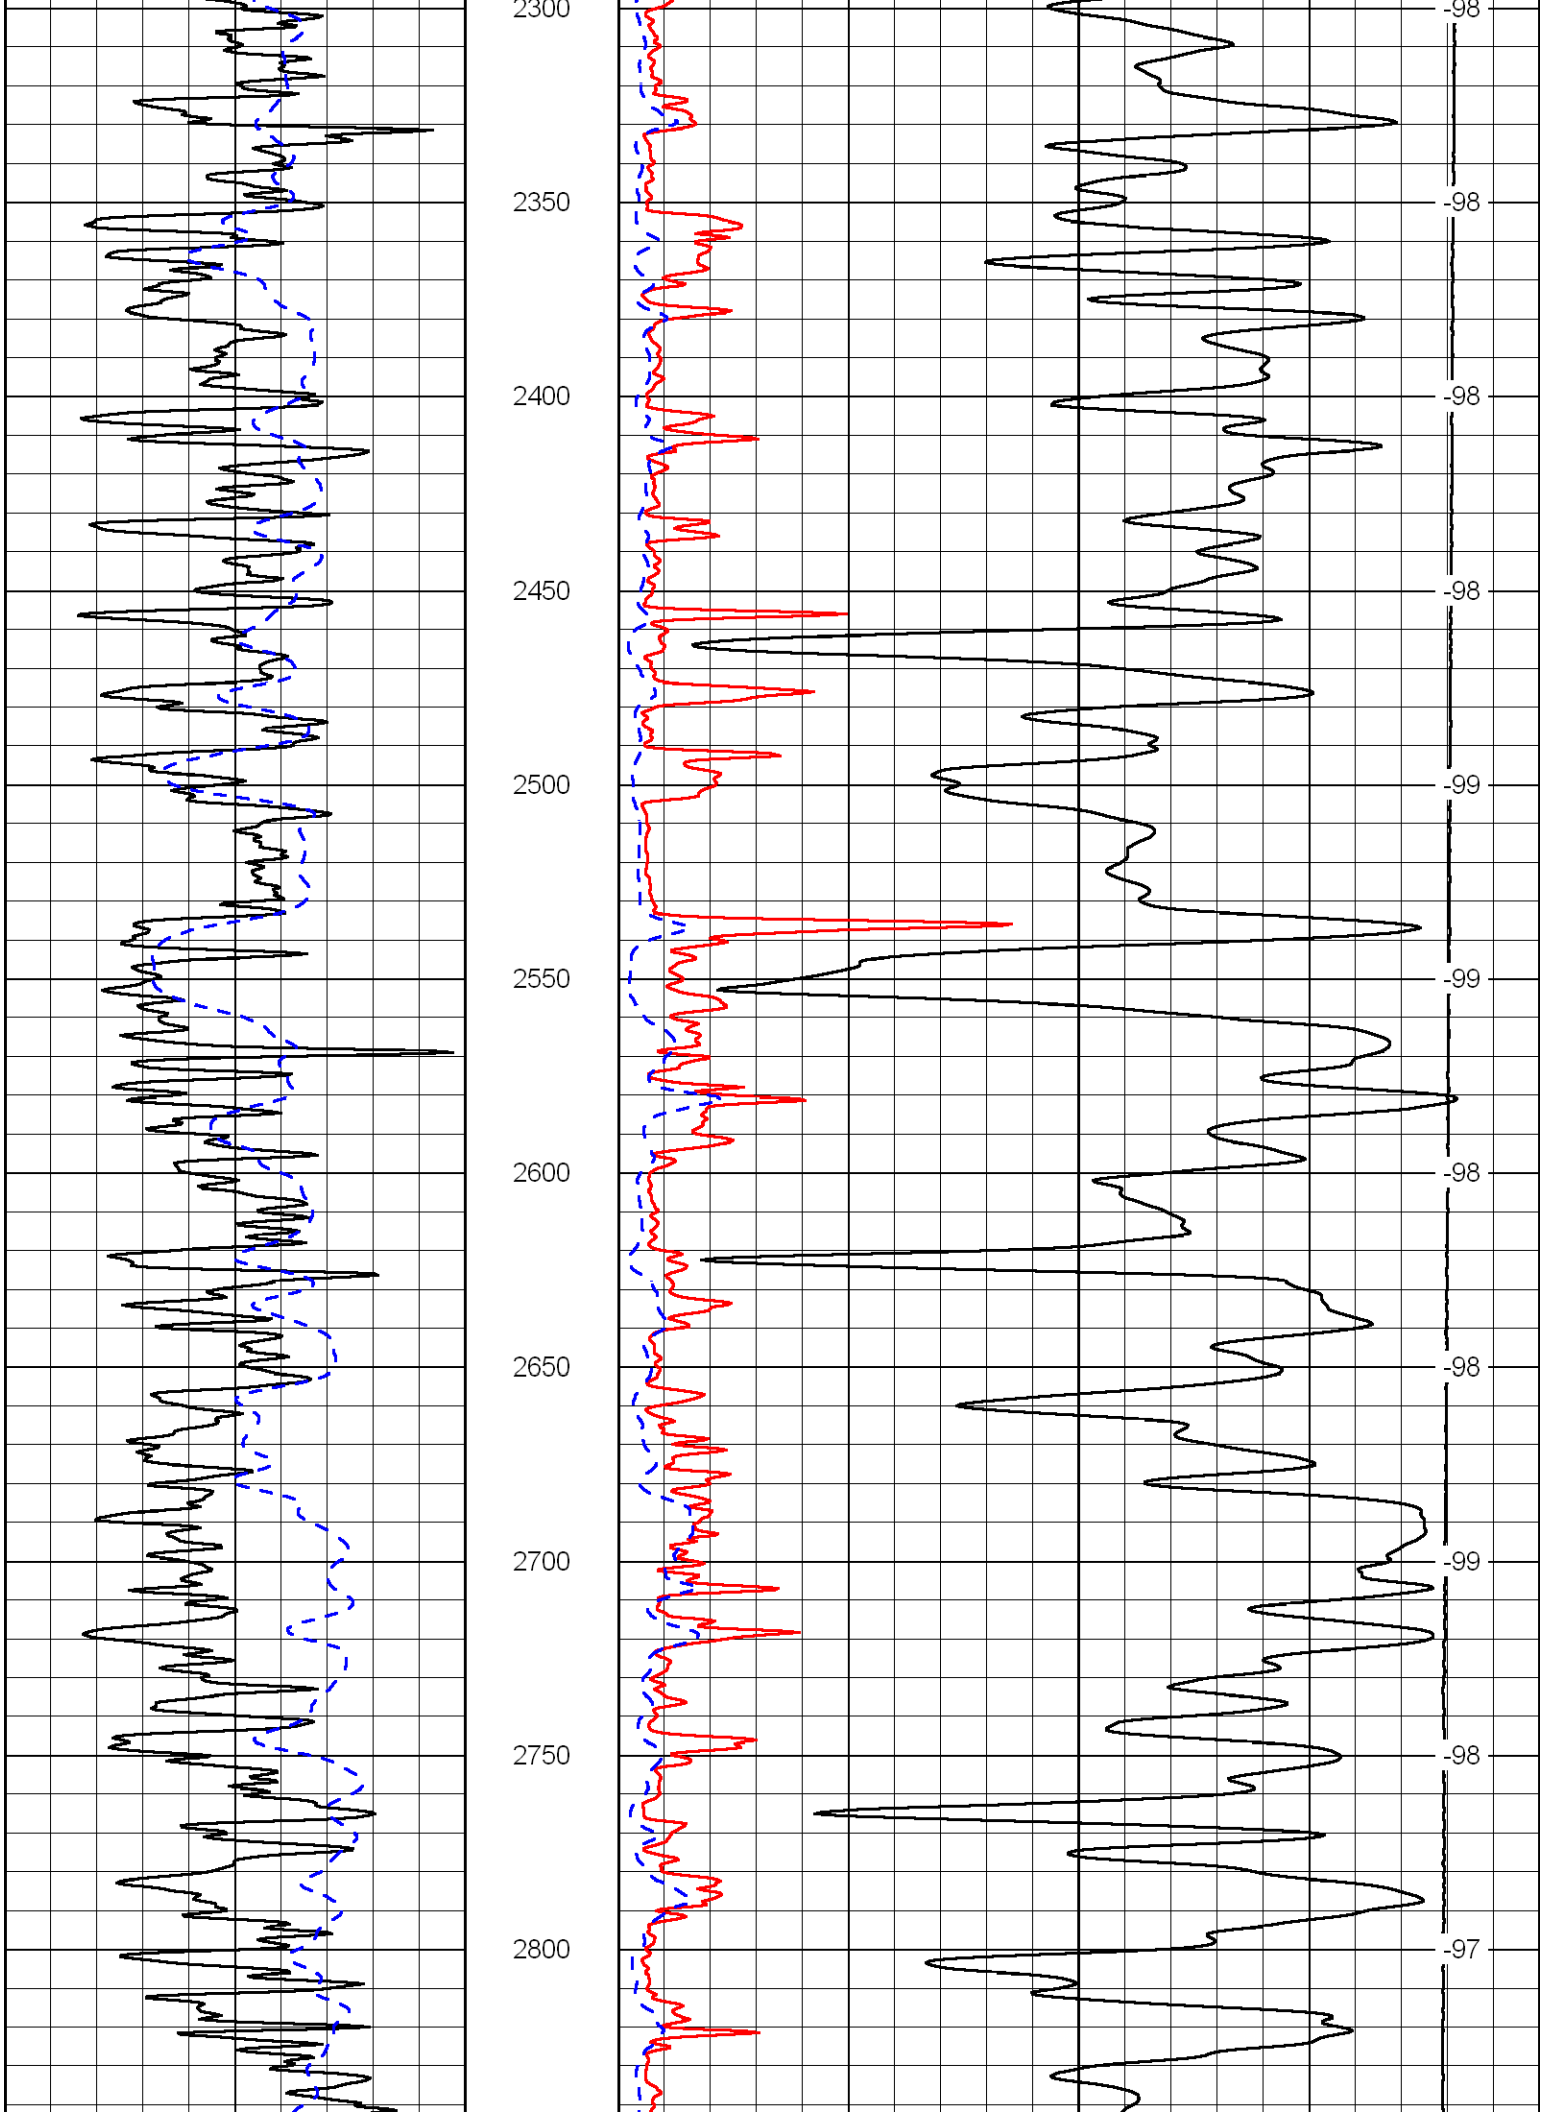
Database File:	bowmanhd.db
Dataset Pathname:	dil/bowmain
Presentation Format:	dil2in
Dataset Creation:	Mon Mar 19 01:01:02 2012
Charted by:	Depth in Feet scaled 1:600

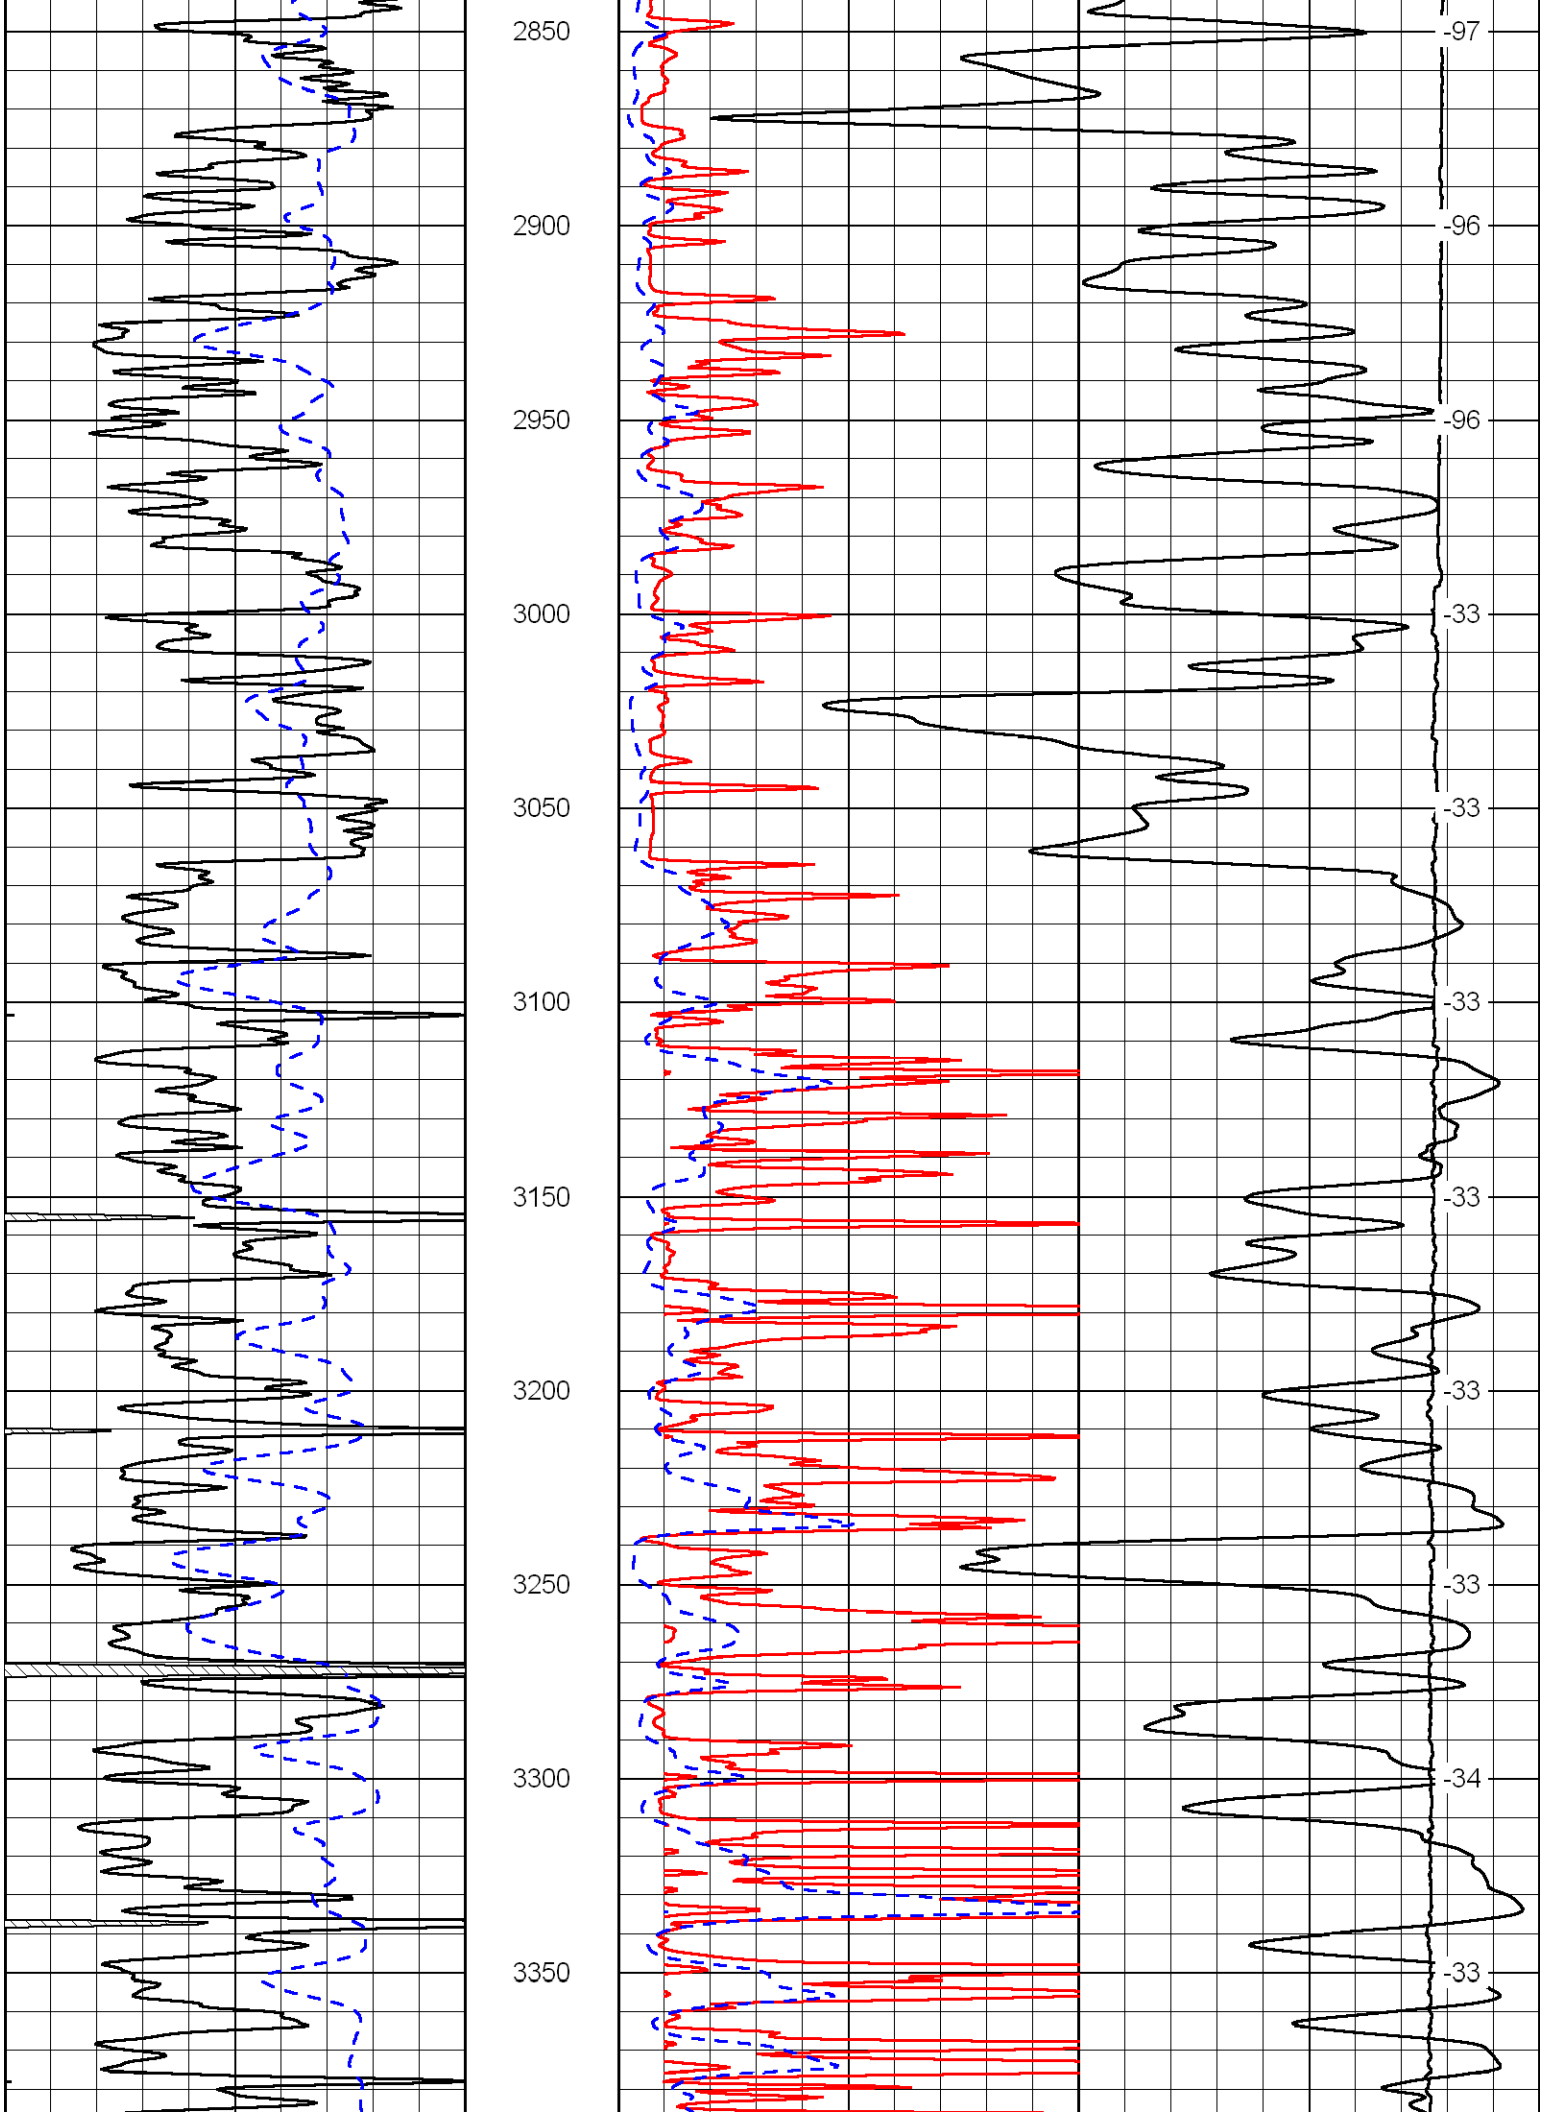

0 Gamma Ray 150
-200 SP 0
0 Shallow Resistivity 50
0 Deep Resistivity 50
1000 Conductivity 0
15000 Line Tension 0
LSPD
50 Shallow Resistivity 500
50 Deep Resistivity 500
200
250
300
350
400
450
500
550
600
650
-92
-67
-100
-100
-99
-99
-99
-99
-99

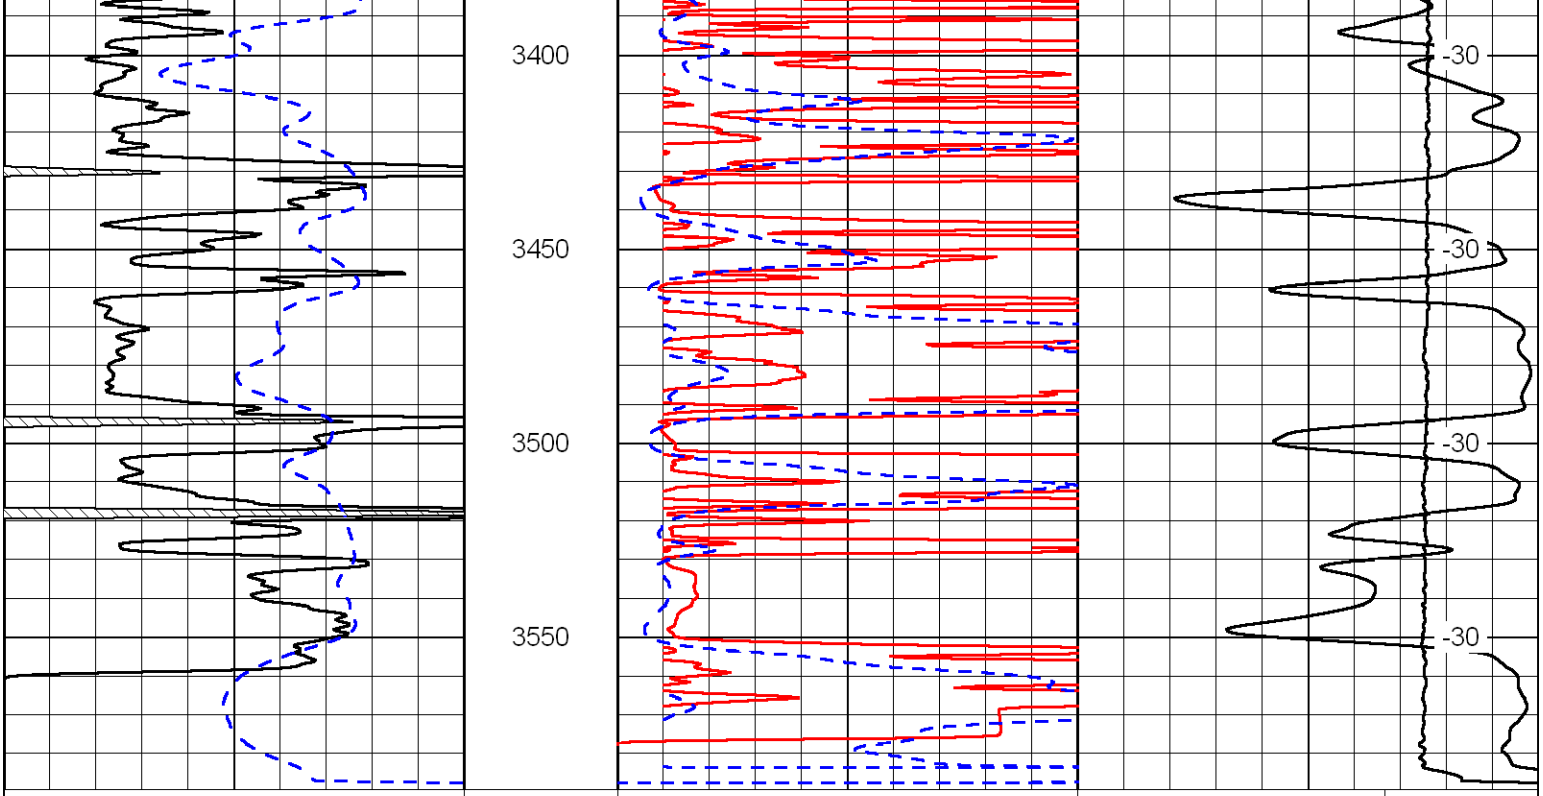

700
750
800
850
900
950
1000
1050
1100
1150
1200
-99
-99
-99
-99
-99
-99
-97
-97
-99
-99
-98


1250
1300
1350
1400
1450
1500
1550
1600
1650
1700
1750
-99
-98
-98
-98
-99
-98
-98
-96
-96
-99
-98

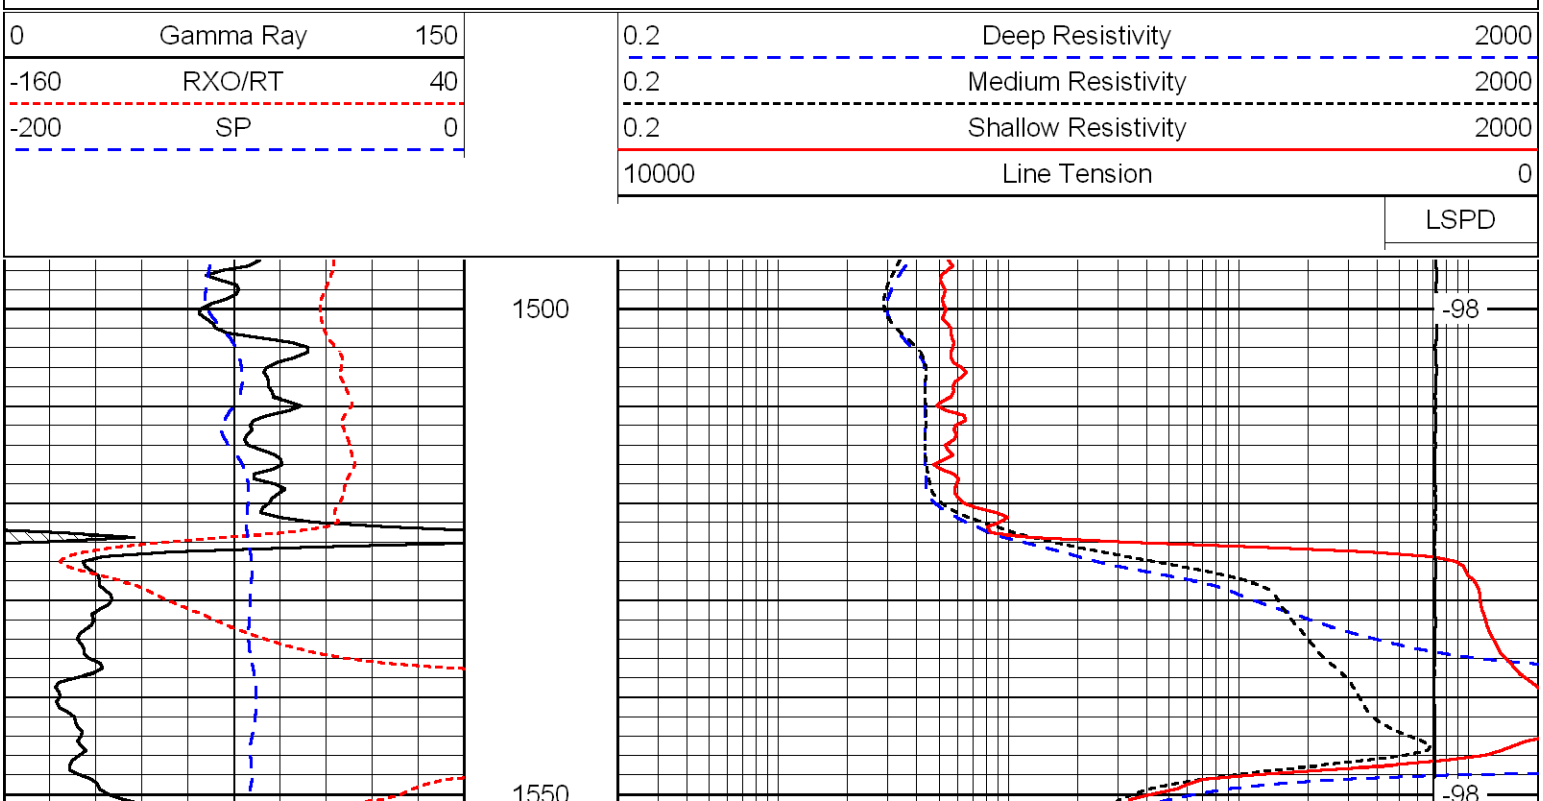

1800
1850
1900
1950
2000
2050
2100
2150
2200
2250
-99
-98
-98
-99
-99
-100
-101
-101
-99
-98

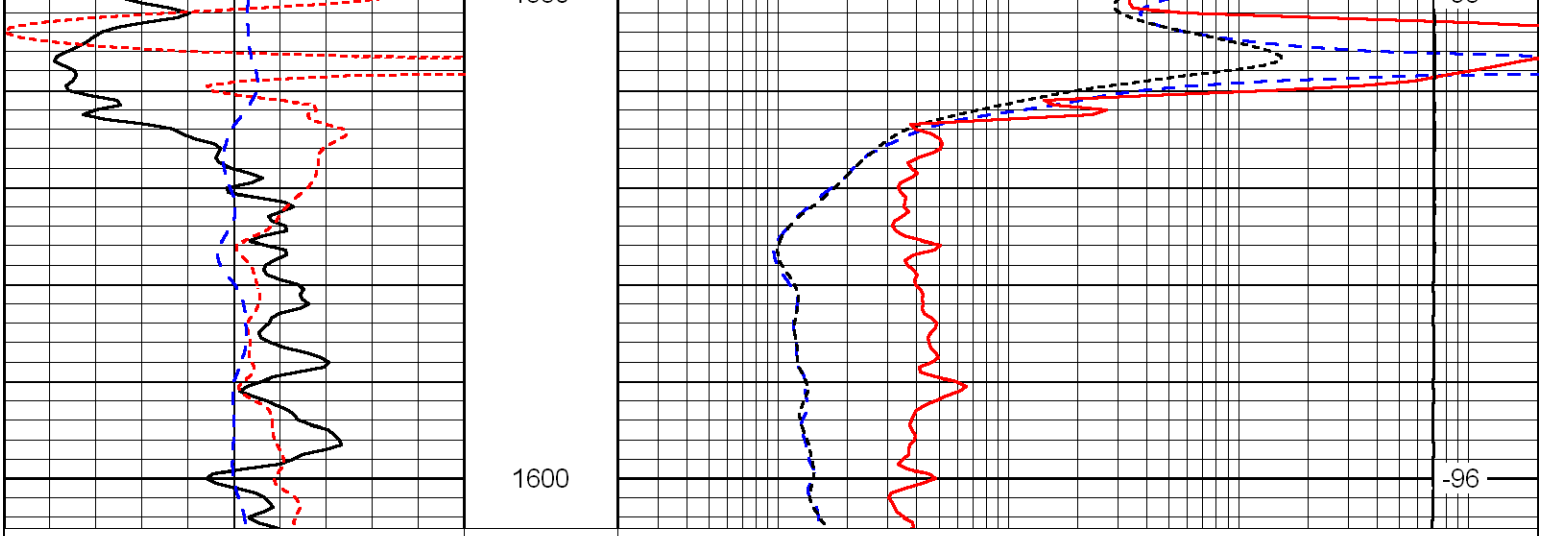

2300
2350
2400
2450
2500
2550
2600
2650
2700
2750
2800
-98
-98
-98
-98
-99
-99
-98
-98
-99
-98
-97


2850
2900
2950
3000
3050
3100
3150
3200
3250
3300
3350
-97
-96
-96
-33
-33
-33
-33
-33
-33
-34
-33

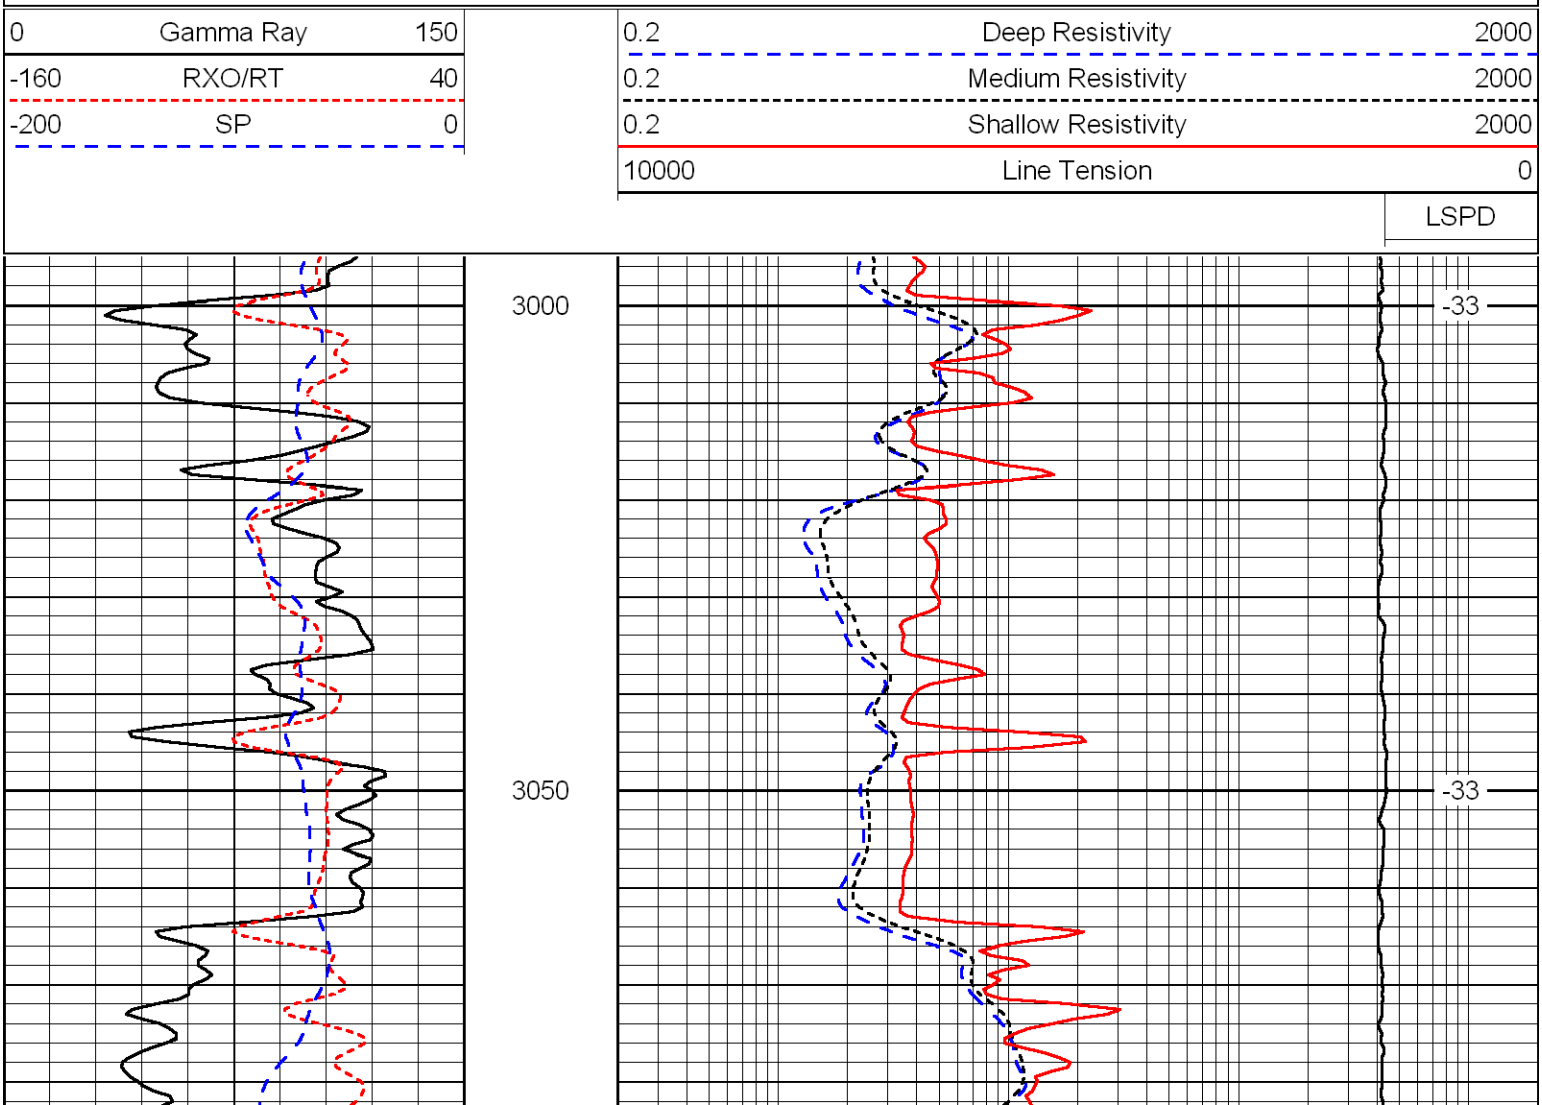


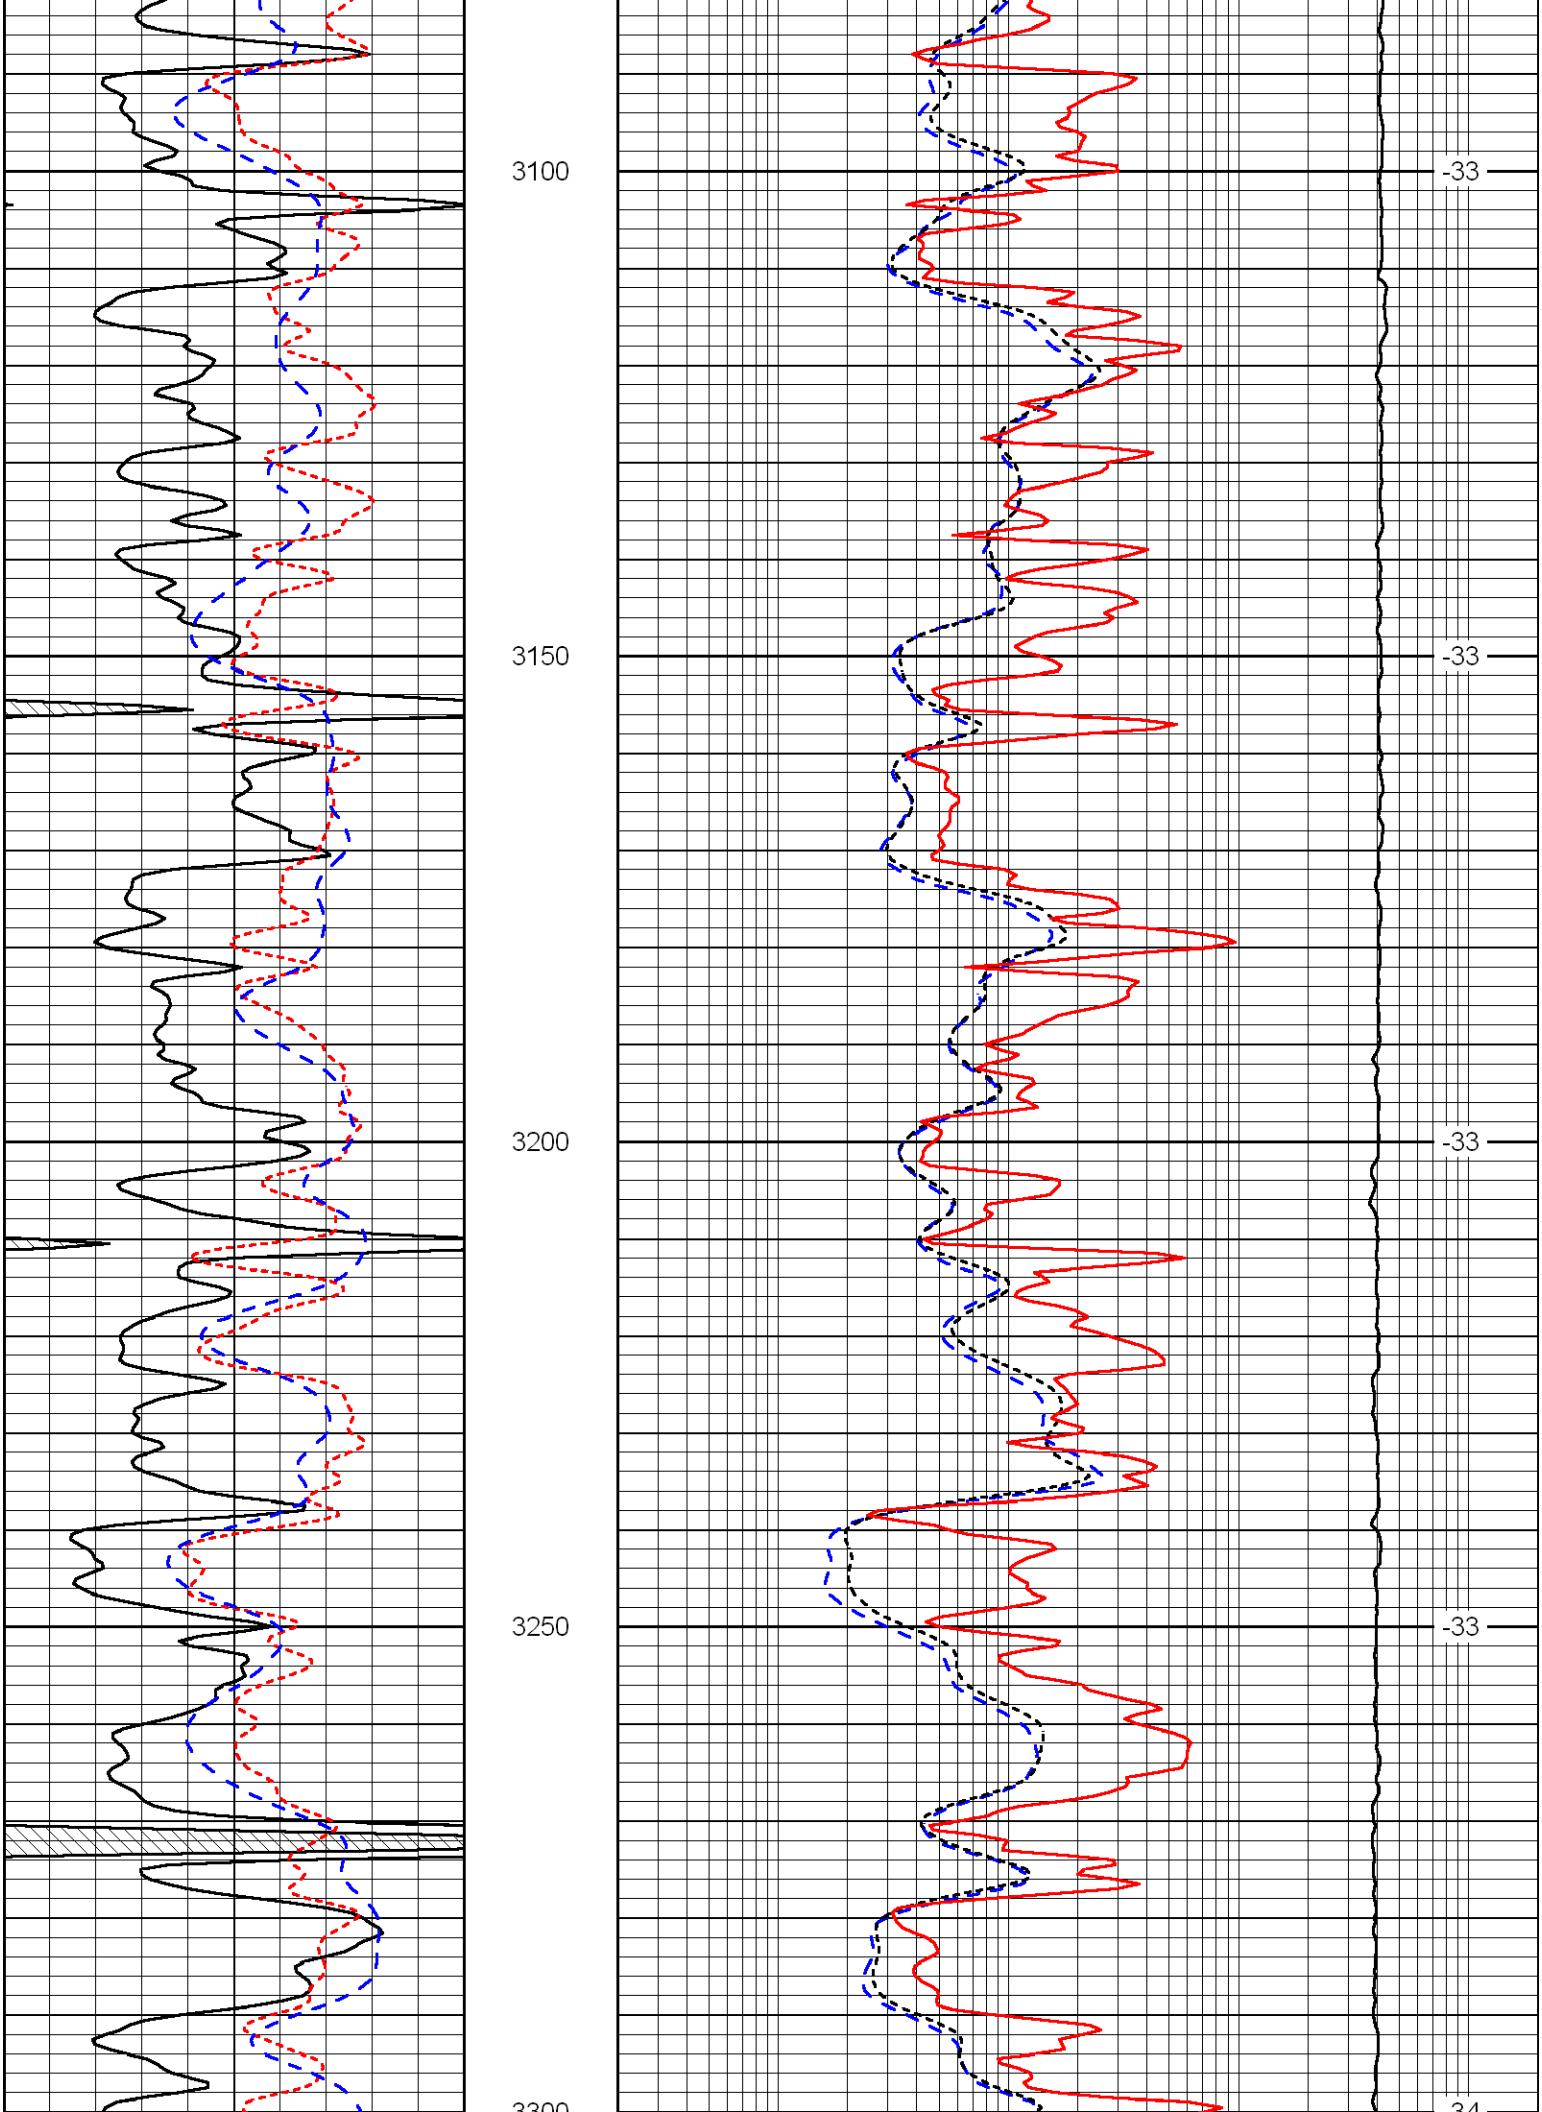
Database File: bowmanhd.db
Dataset Pathname: dil/bowmain
Presentation Format: dil
Dataset Creation: Mon Mar 19 01:01:02 2012
Charted by: Depth in Feet scaled 1:240

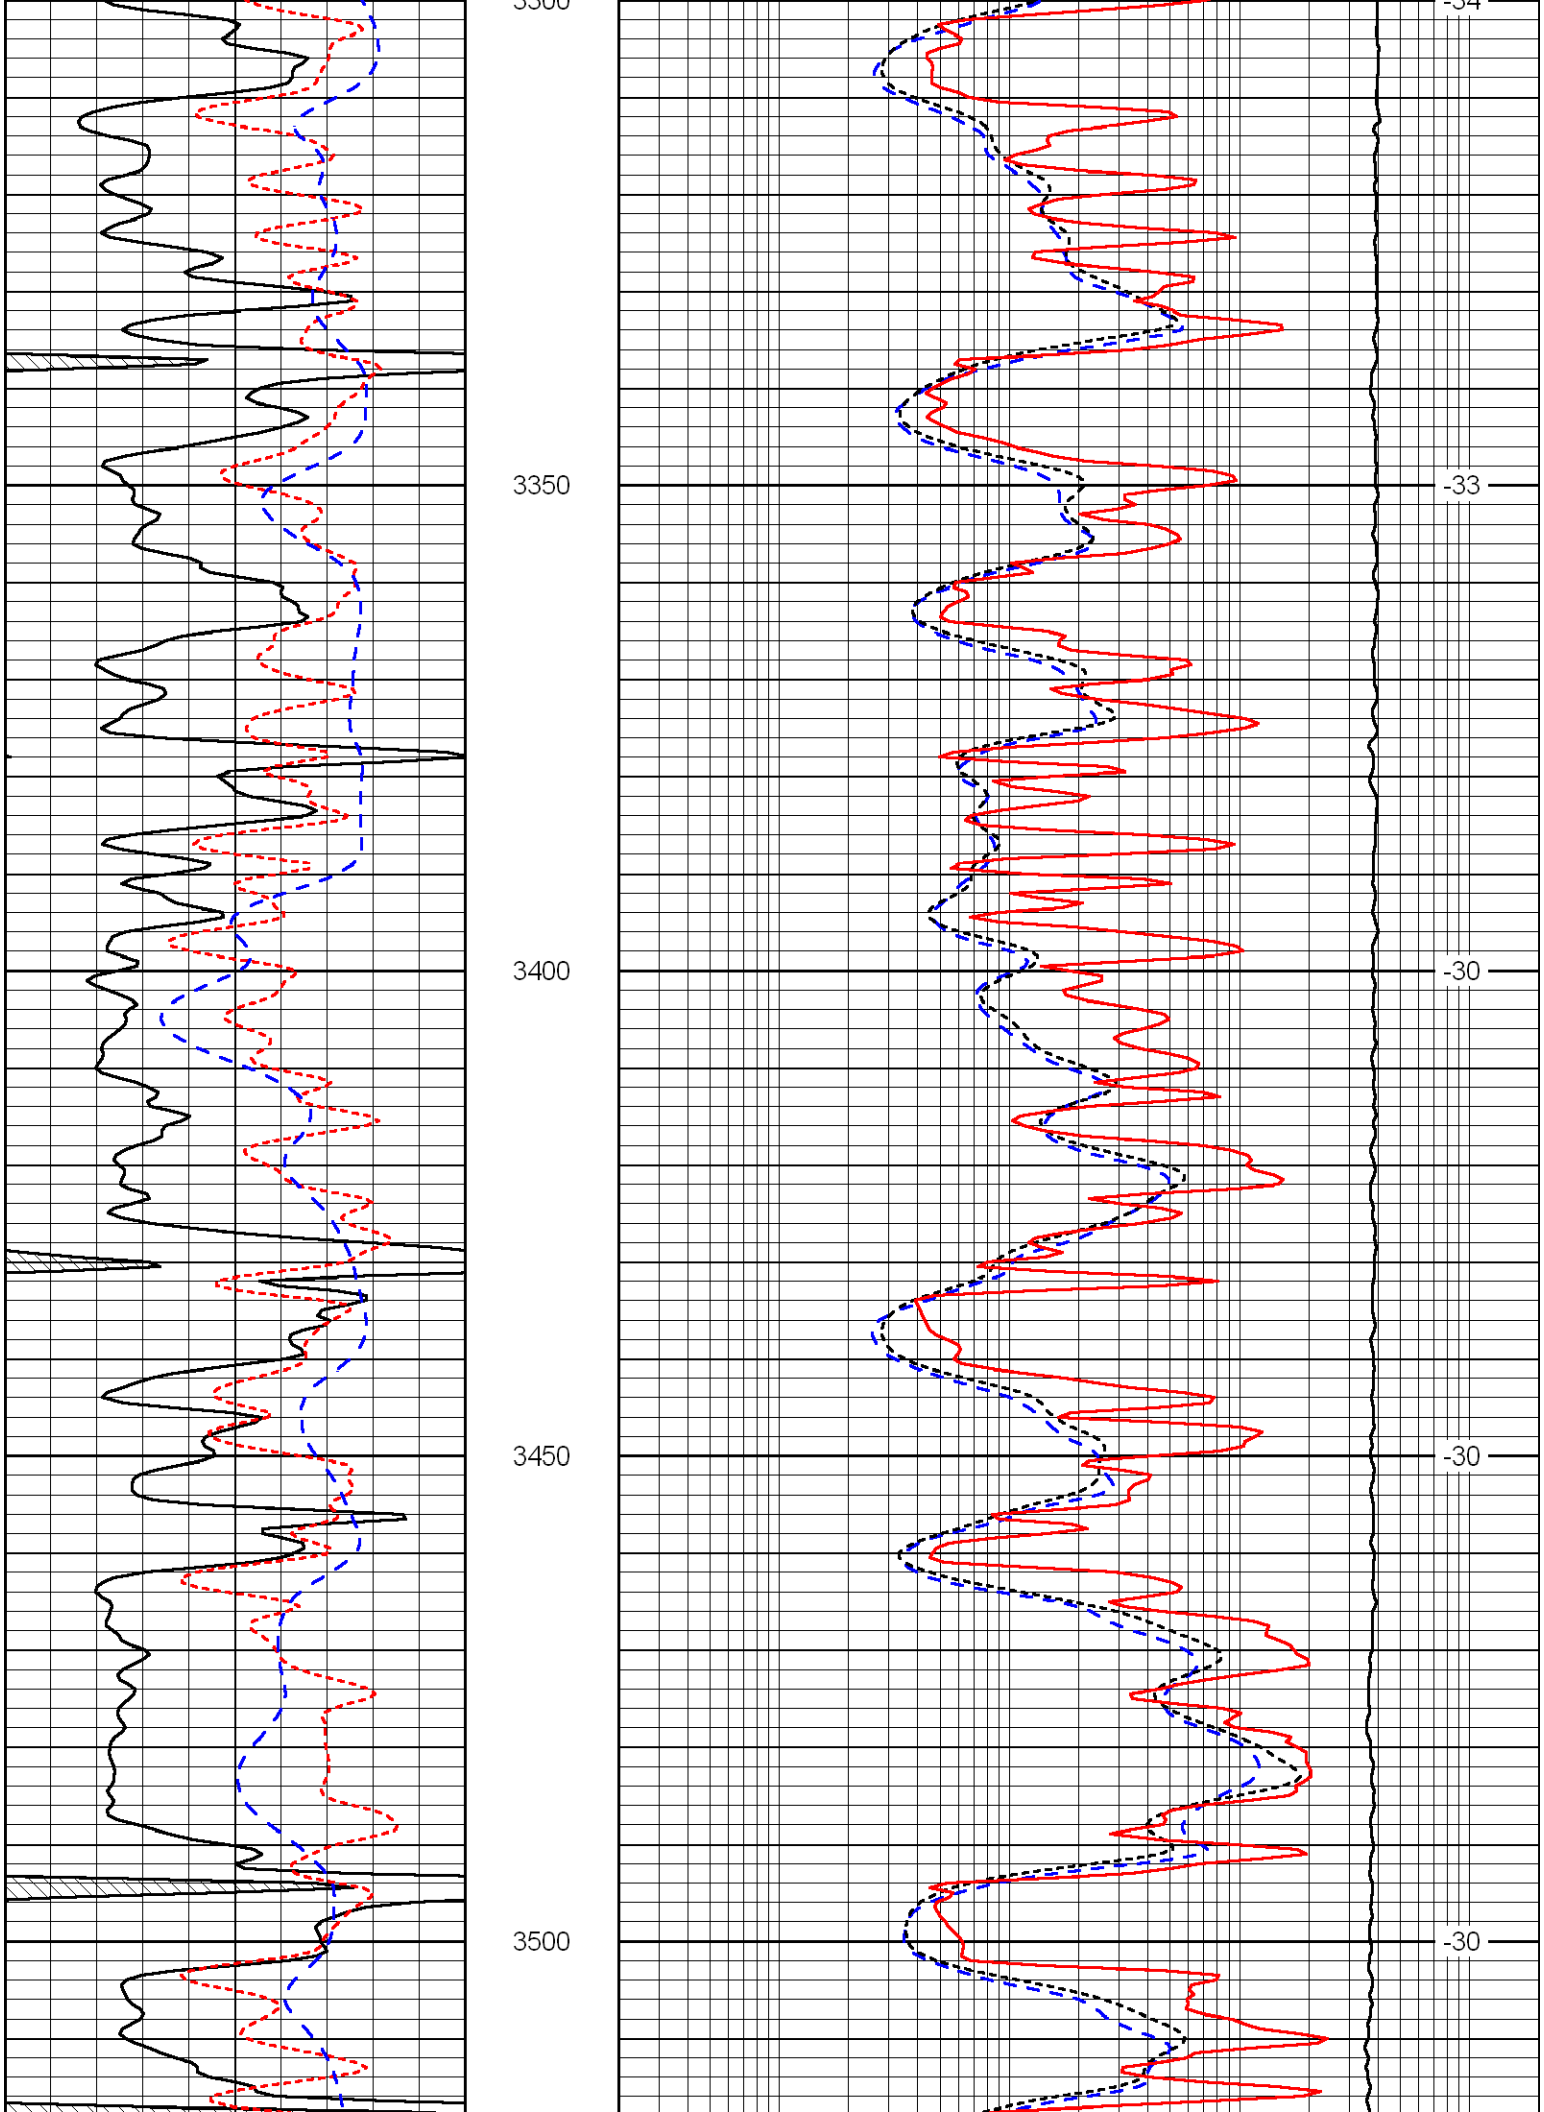


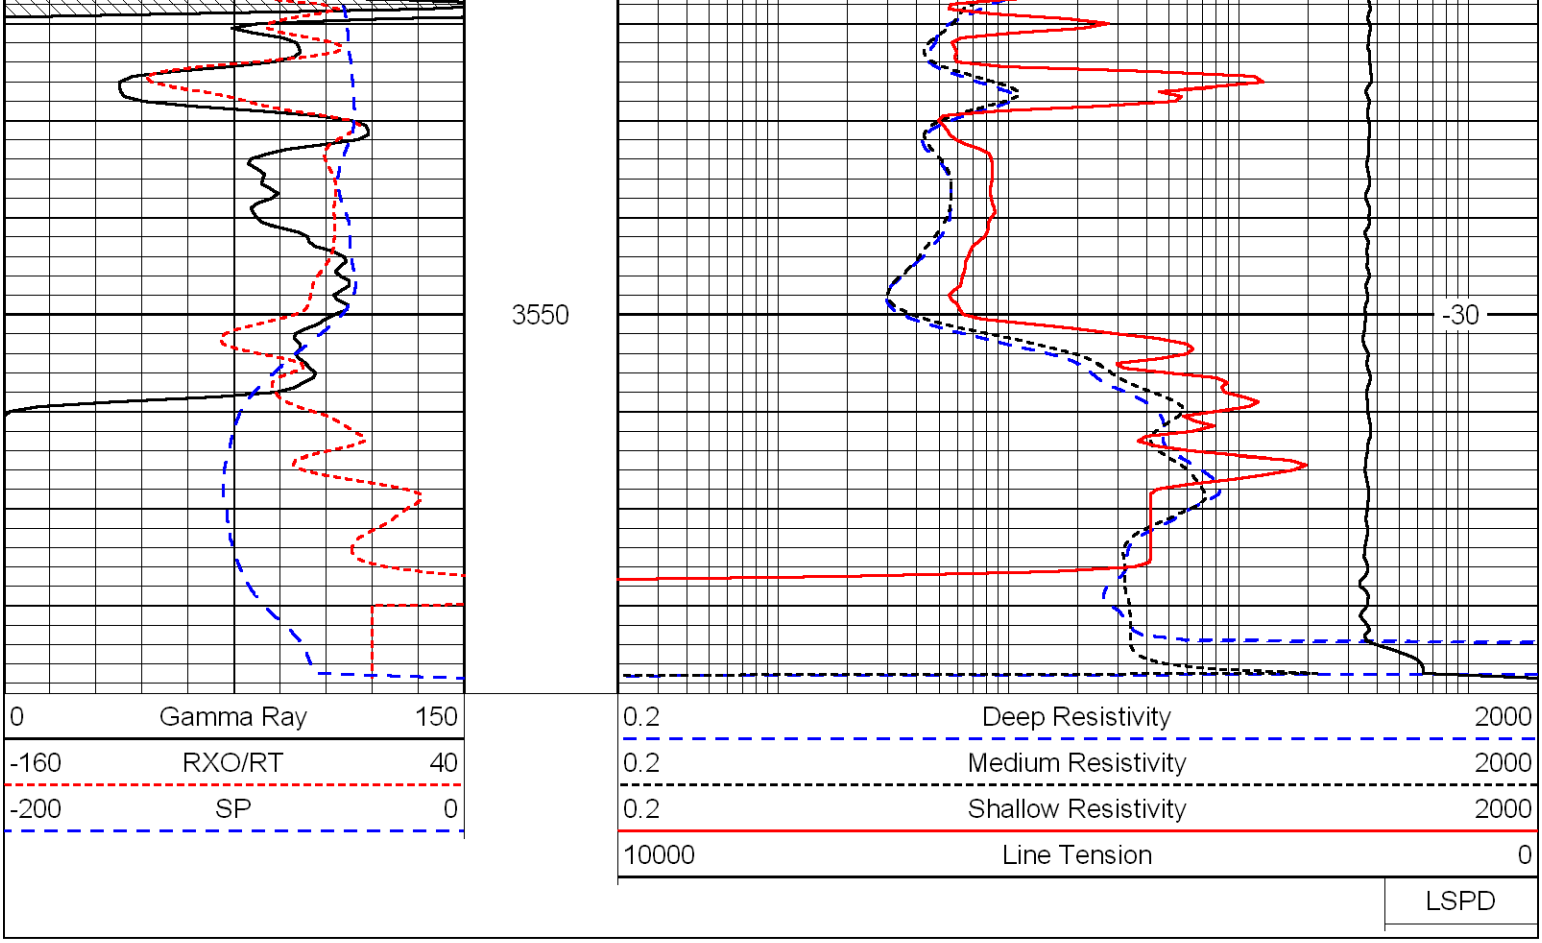


Database File:	bowmanhd.db
Dataset Pathname:	dil/bowmain
Presentation Format:	dil
Dataset Creation:	Mon Mar 19 01:01:02 2012
Charted by:	Depth in Feet scaled 1:240




3100
3150
3200
3250
-33
-33
-33
-33
-34


3300
3350
3400
3450
3500
-34
-33
-30
-30
-30


3550
-30
0
Gamma Ray
150
-160
RXO/RT
40
-200
SP
0
0.2
Deep Resistivity
2000
0.2
Medium Resistivity
2000
0.2
Shallow Resistivity
2000
10000
Line Tension
0
LSPD