LOG-TECH

DIGITAL LOG (785) 625-3858

Dual Compensated Porosity Log

API No. 15-193-20,842-00-00

Company Credo Petroleum Corporation

Well Mary No.1-22

Field Wildcat

County Thomas State Kansas

Location 330' FSL & 2150' FWL

Sec: 22 Twp: 10S Rge: 35W

Other Services
DIL
MEL/BHCS

Elevation
K.B. 3284
D.F.
G.L. 3279

Permanent Datum Ground Level
Log Measured From Kelly Bushing 5 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

Elevation 3279

Date	3/11/2012
Run Number	One
Type Log	CNL / CDL
Depth Driller	4920
Depth Logger	4923
Bottom Logged Interval	4902
Top Logged Interval	3800
Type Fluid In Hole	Chemical
Salinity, PPM CL	7,000
Density	9.4
Level	Full
Max. Rec. Temp. F	125
Operating Rig Time	4 1/2 Hours
Equipment -- Location	17 Hays
Recorded By	C. Desaire
Witnessed By	Bruce Ard

Borehole Record

Run No.	Bit	From	To
1	12.25	00	238
2	7.875	238	4920

Casing Record

Size	Wgt.	From	To
8.625	24#	00	238

<<< Fold Here >>>

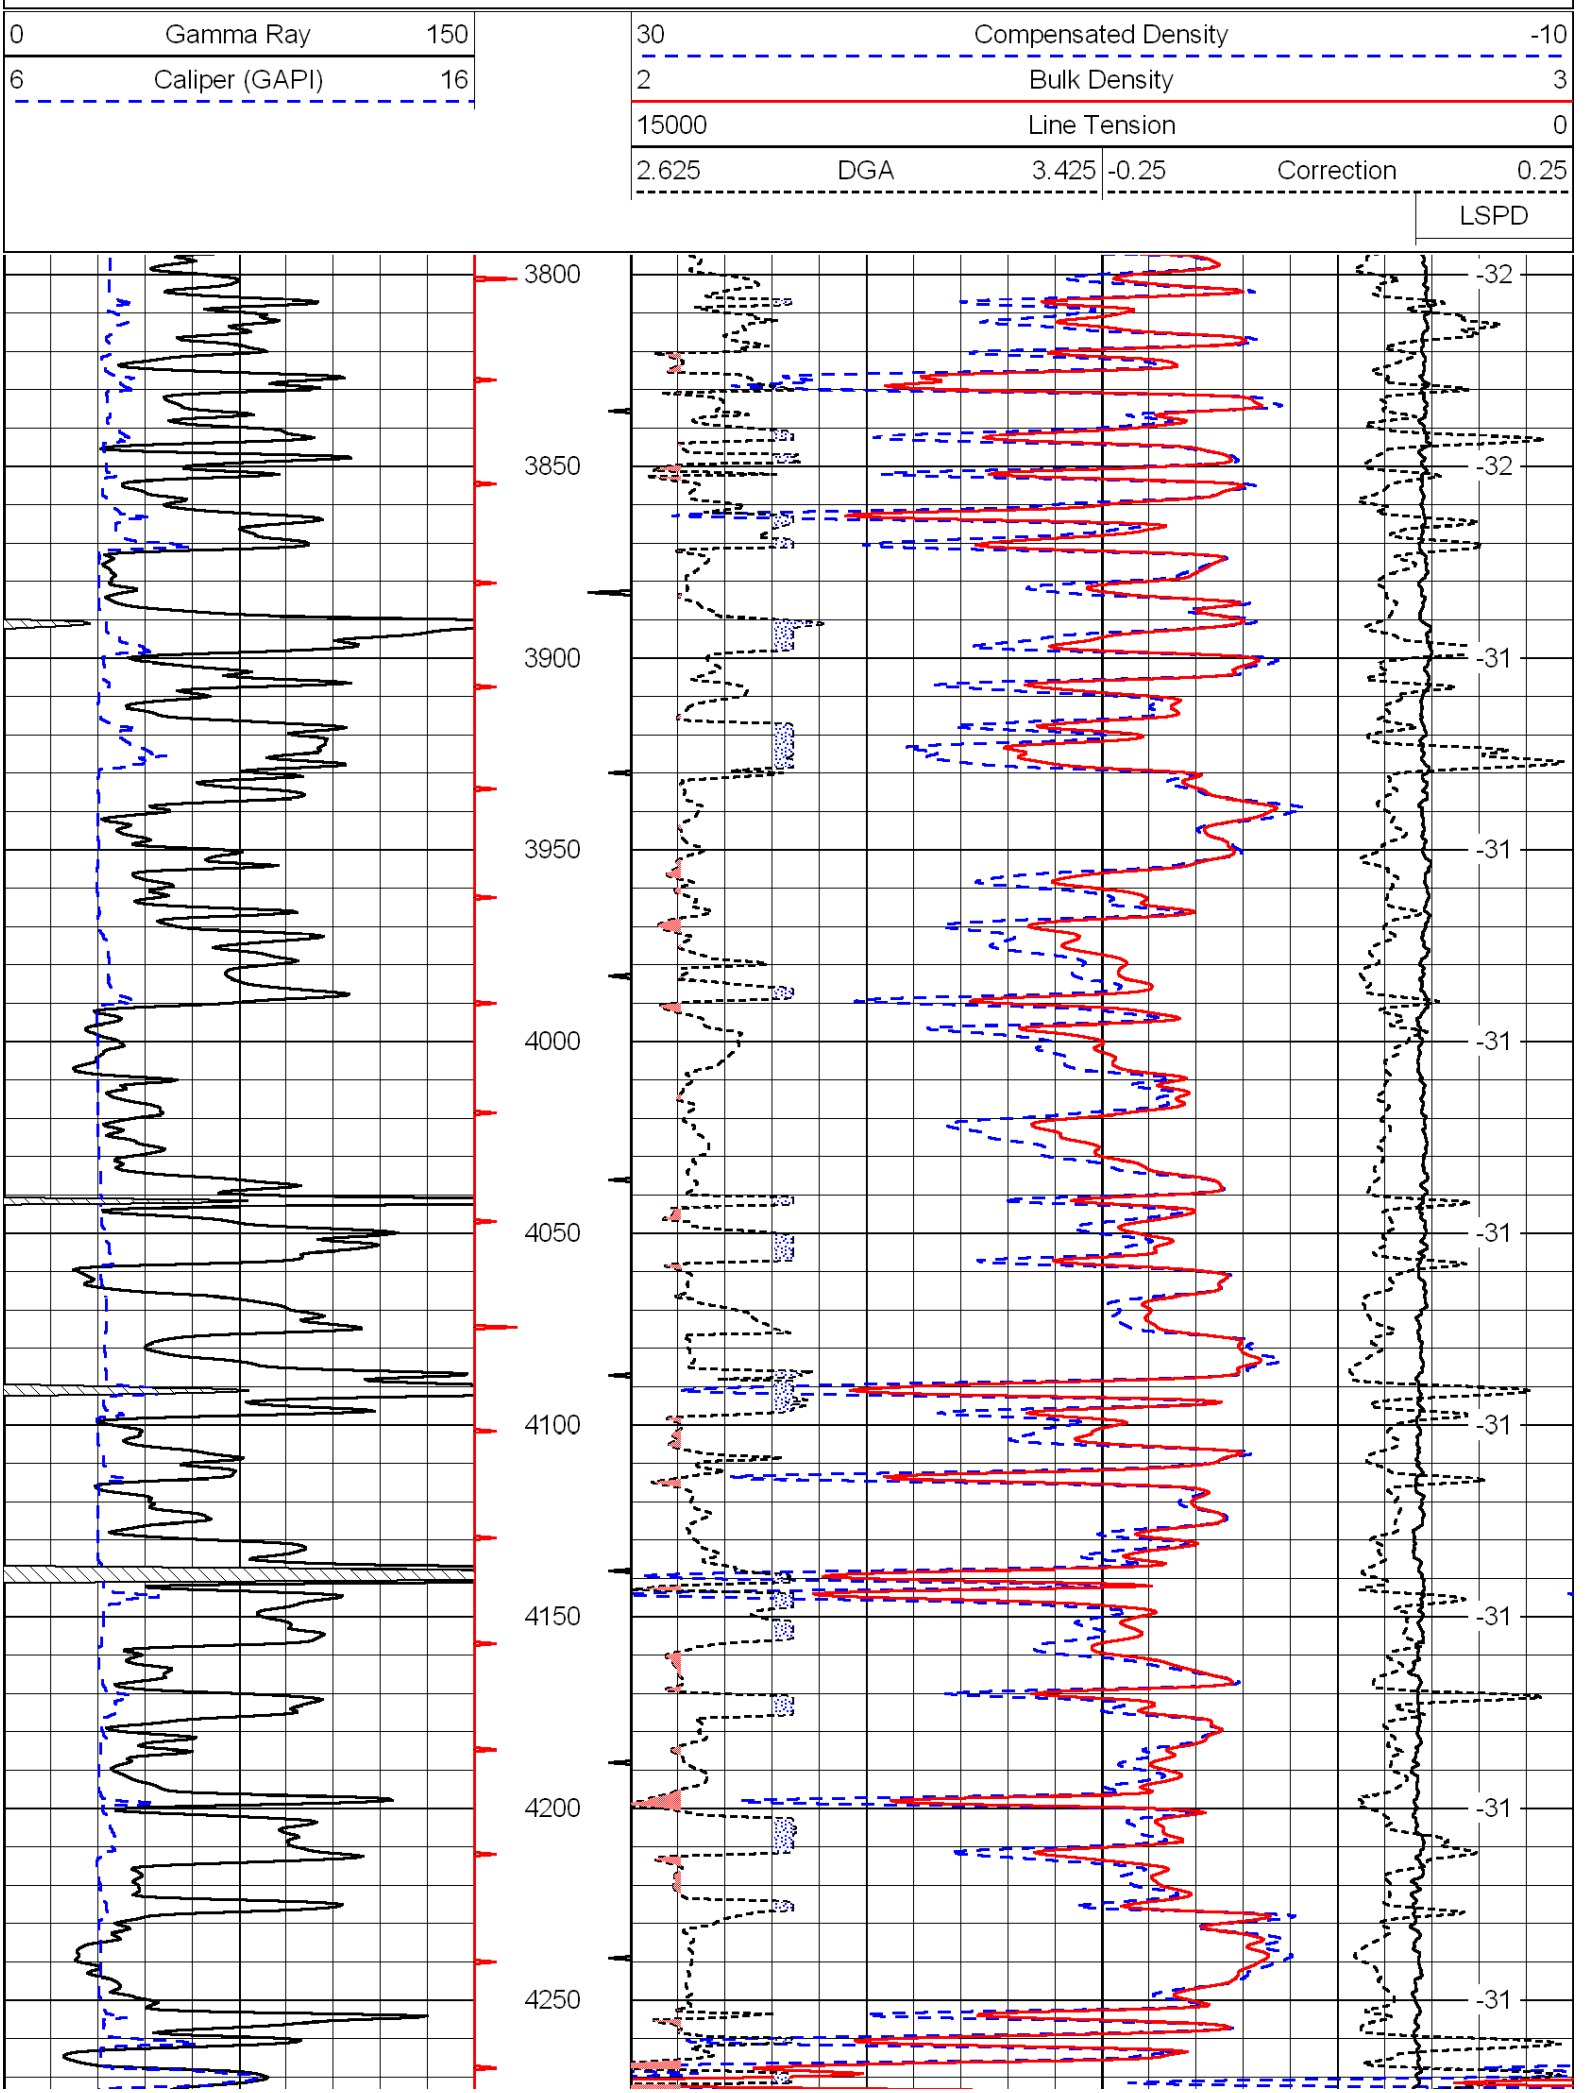
All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

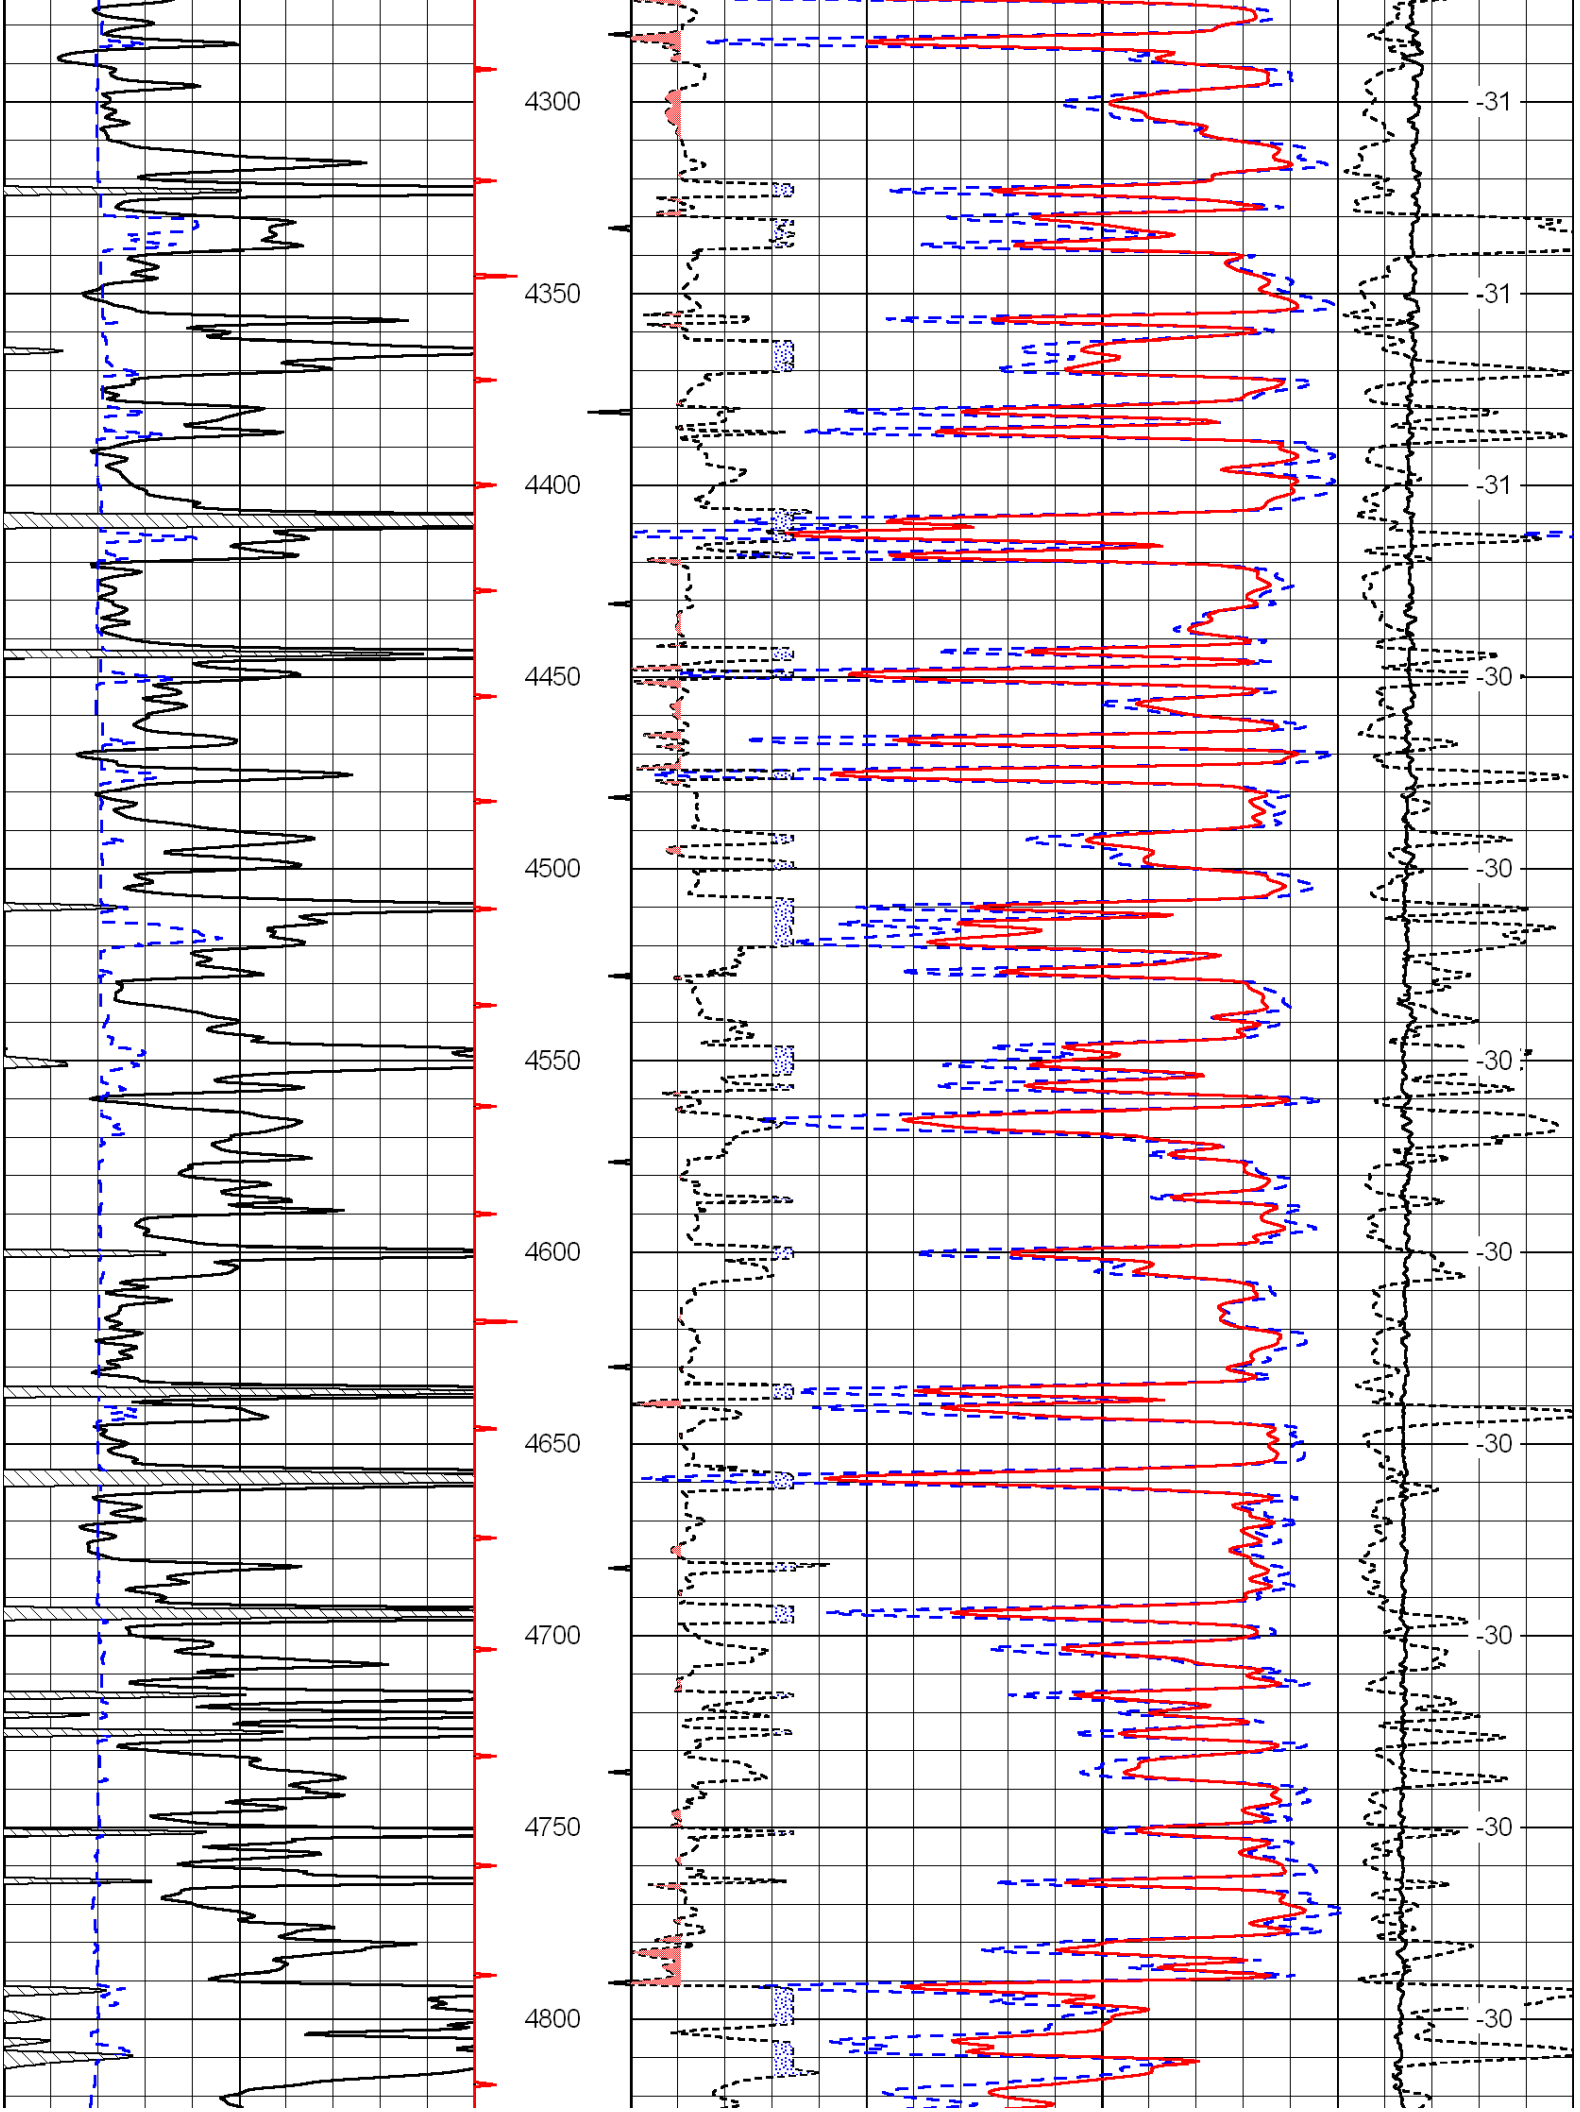
Comments

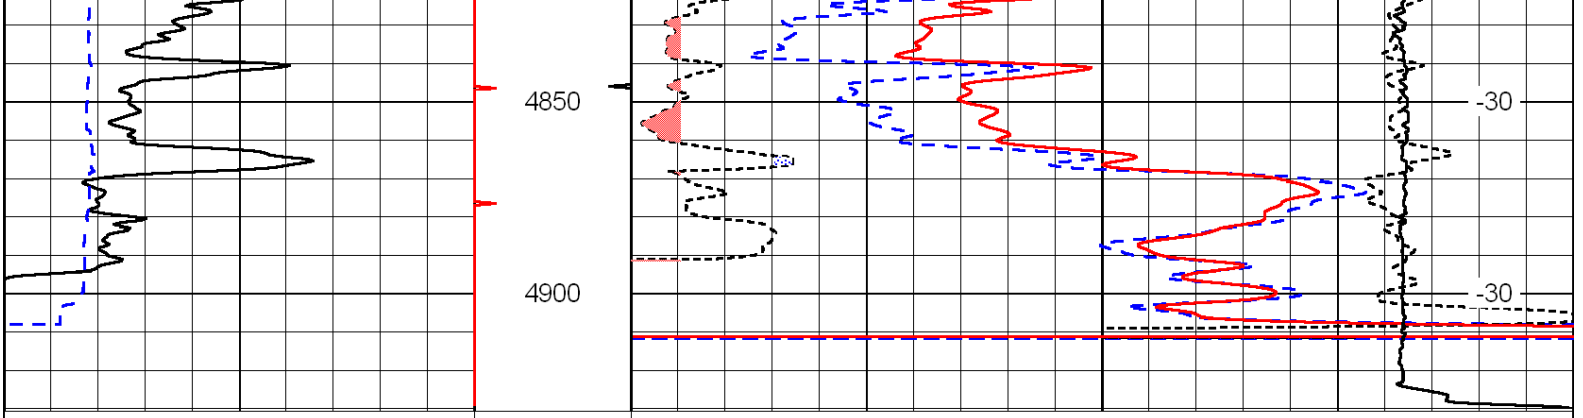
Thank you for using Log-Tech, Inc.
(785) 625-3858

I-70 and Levant Exit,
13 3/4 S, W-S-W Into

Database File:	c:\warrior\data\credo_mary no.1-22\credohd.db
Dataset Pathname:	dil/crdostk
Presentation Format:	cdl
Dataset Creation:	Sun Mar 11 18:42:24 2012
Charted by:	Depth in Feet scaled 1:600


0 Gamma Ray 150
6 Caliper (GAPI) 16
30 Compensated Density -10
2 Bulk Density 3
15000 Line Tension 0
2.625 DGA 3.425
-0.25 Correction 0.25
LSPD
3800
3850
3900
3950
4000
4050
4100
4150
4200
4250
-32
-32
-31
-31
-31
-31
-31
-31
-31


4300
4350
4400
4450
4500
4550
4600
4650
4700
4750
4800
-31
-31
-31
-30
-30
-30
-30
-30
-30
-30
-30



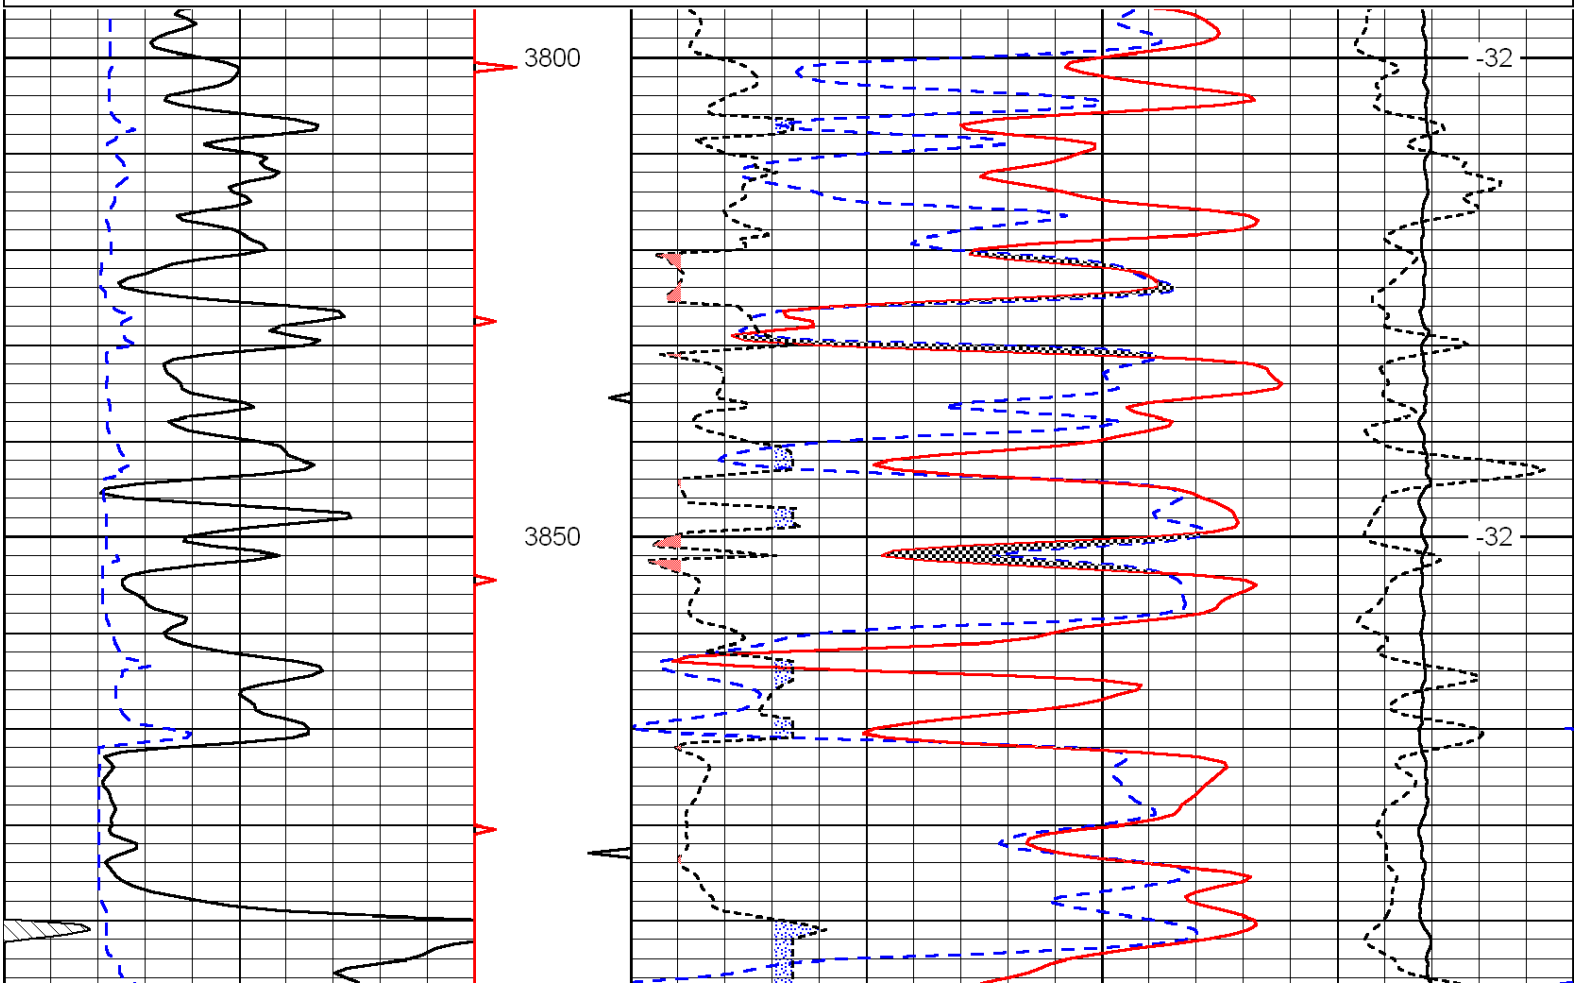
0	Gamma Ray	150
6	Caliper (GAPI)	16

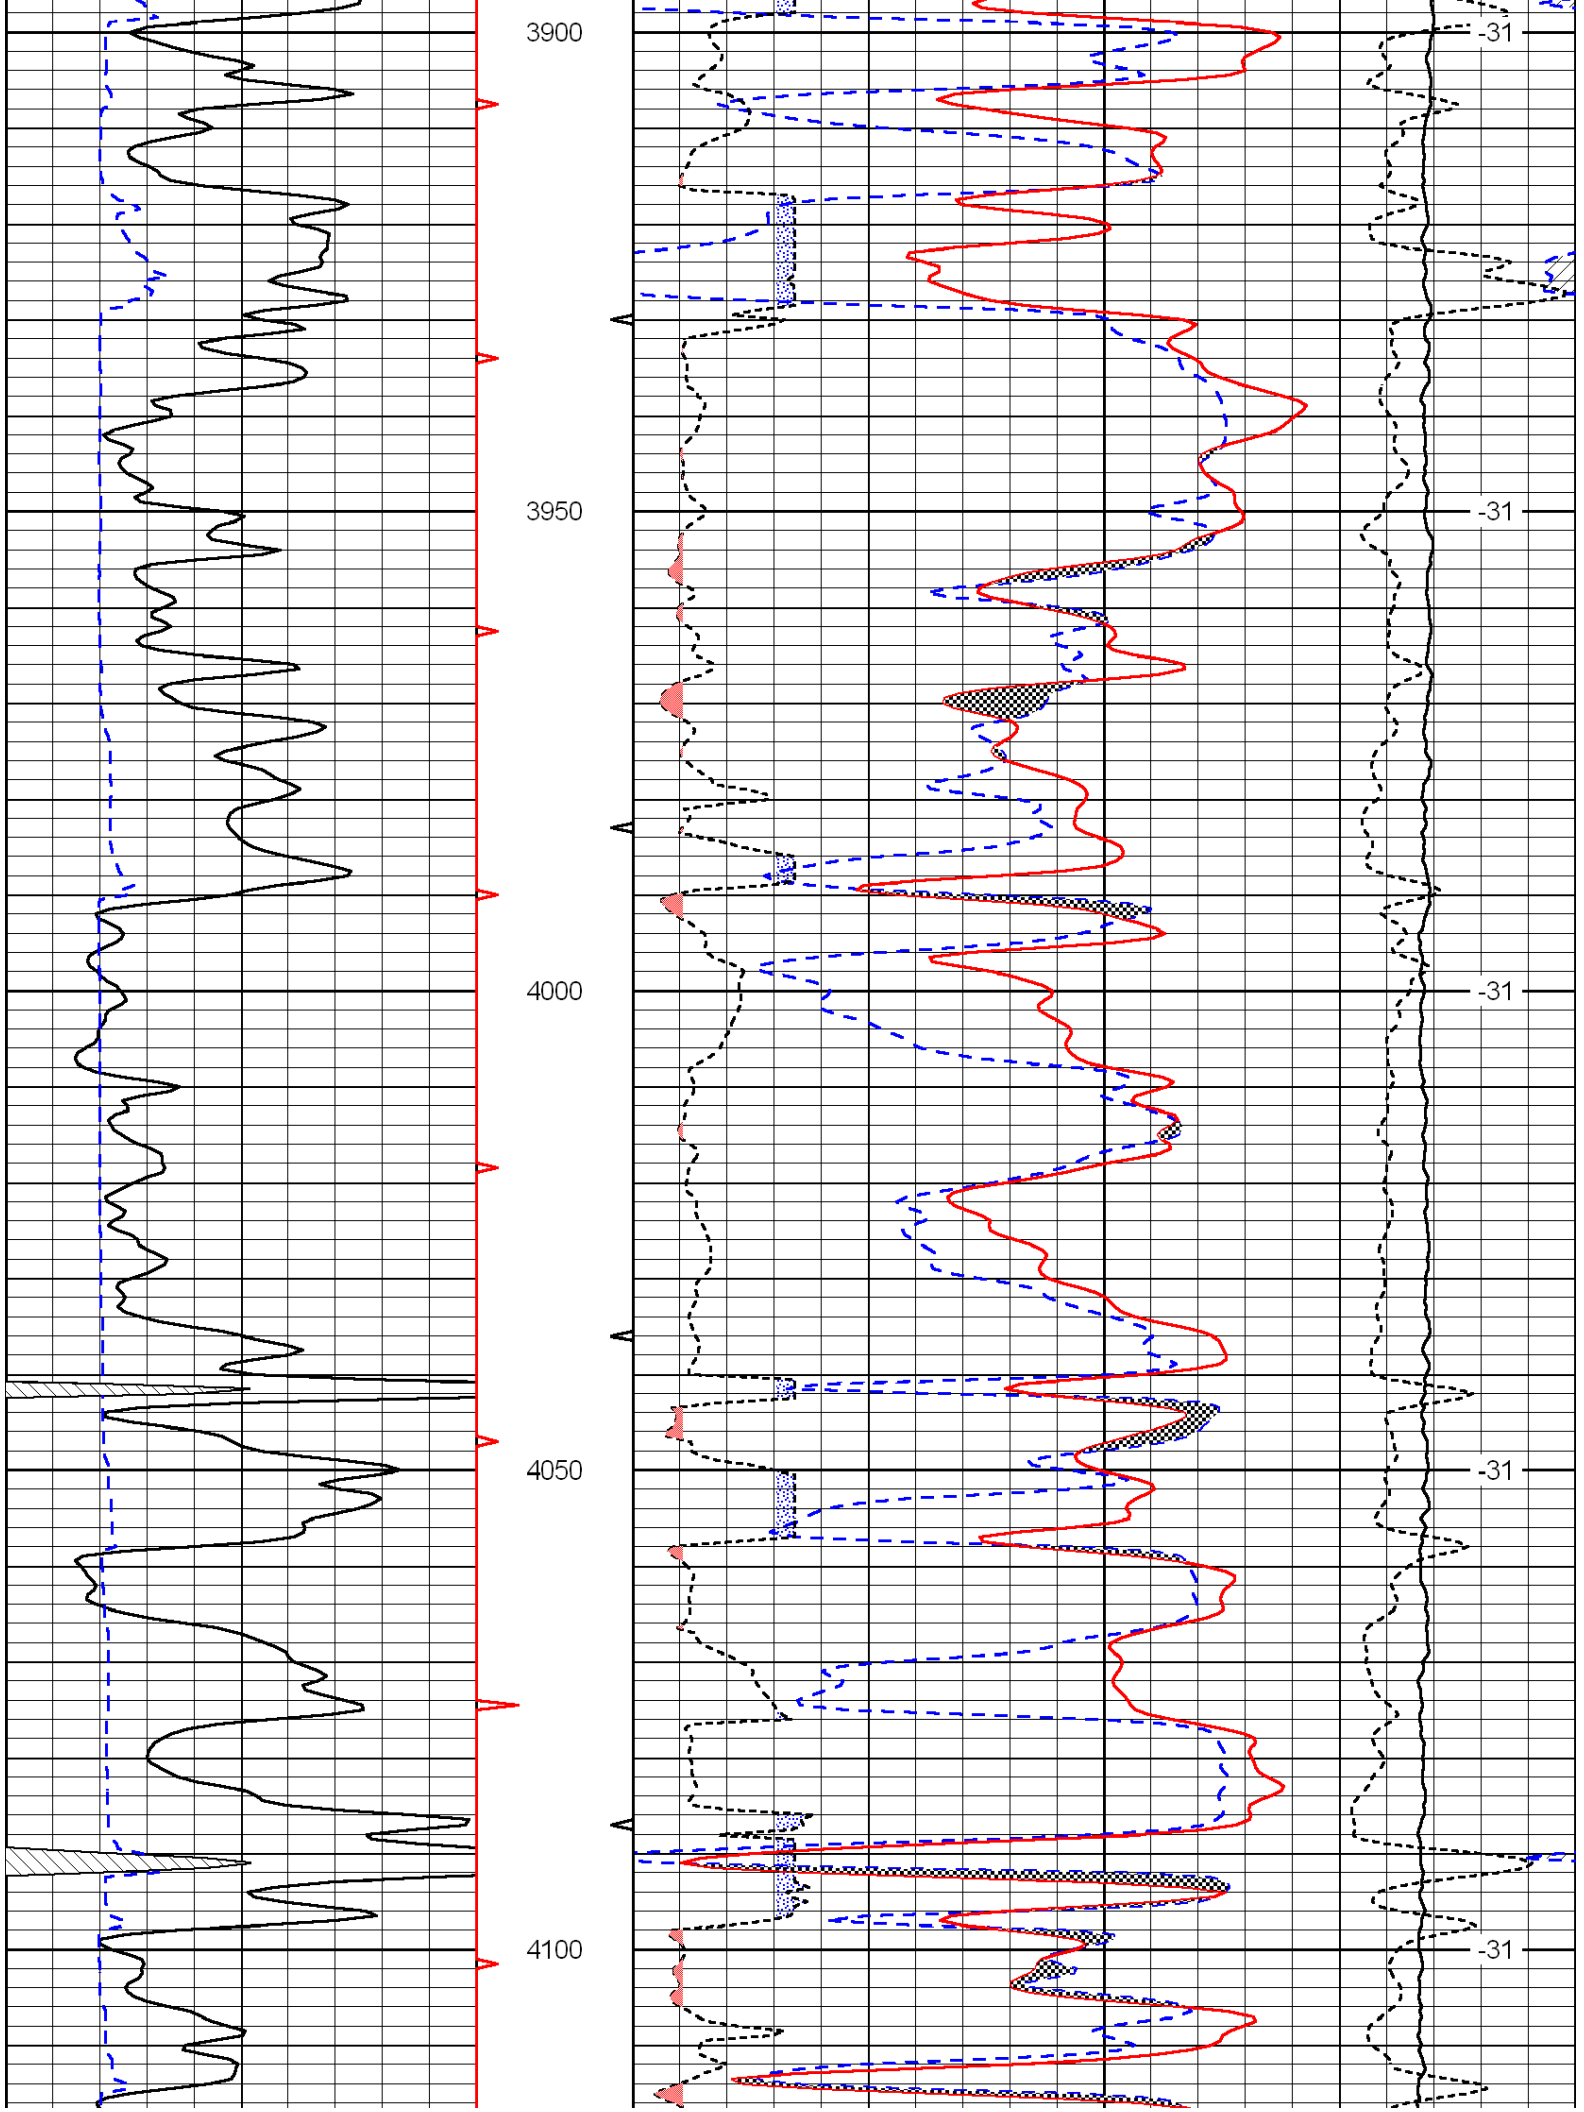
30	Compensated Density				-10
2	Bulk Density				3
15000	Line Tension				0
2.625	DGA	3.425	-0.25	Correction	0.25
					LSPD

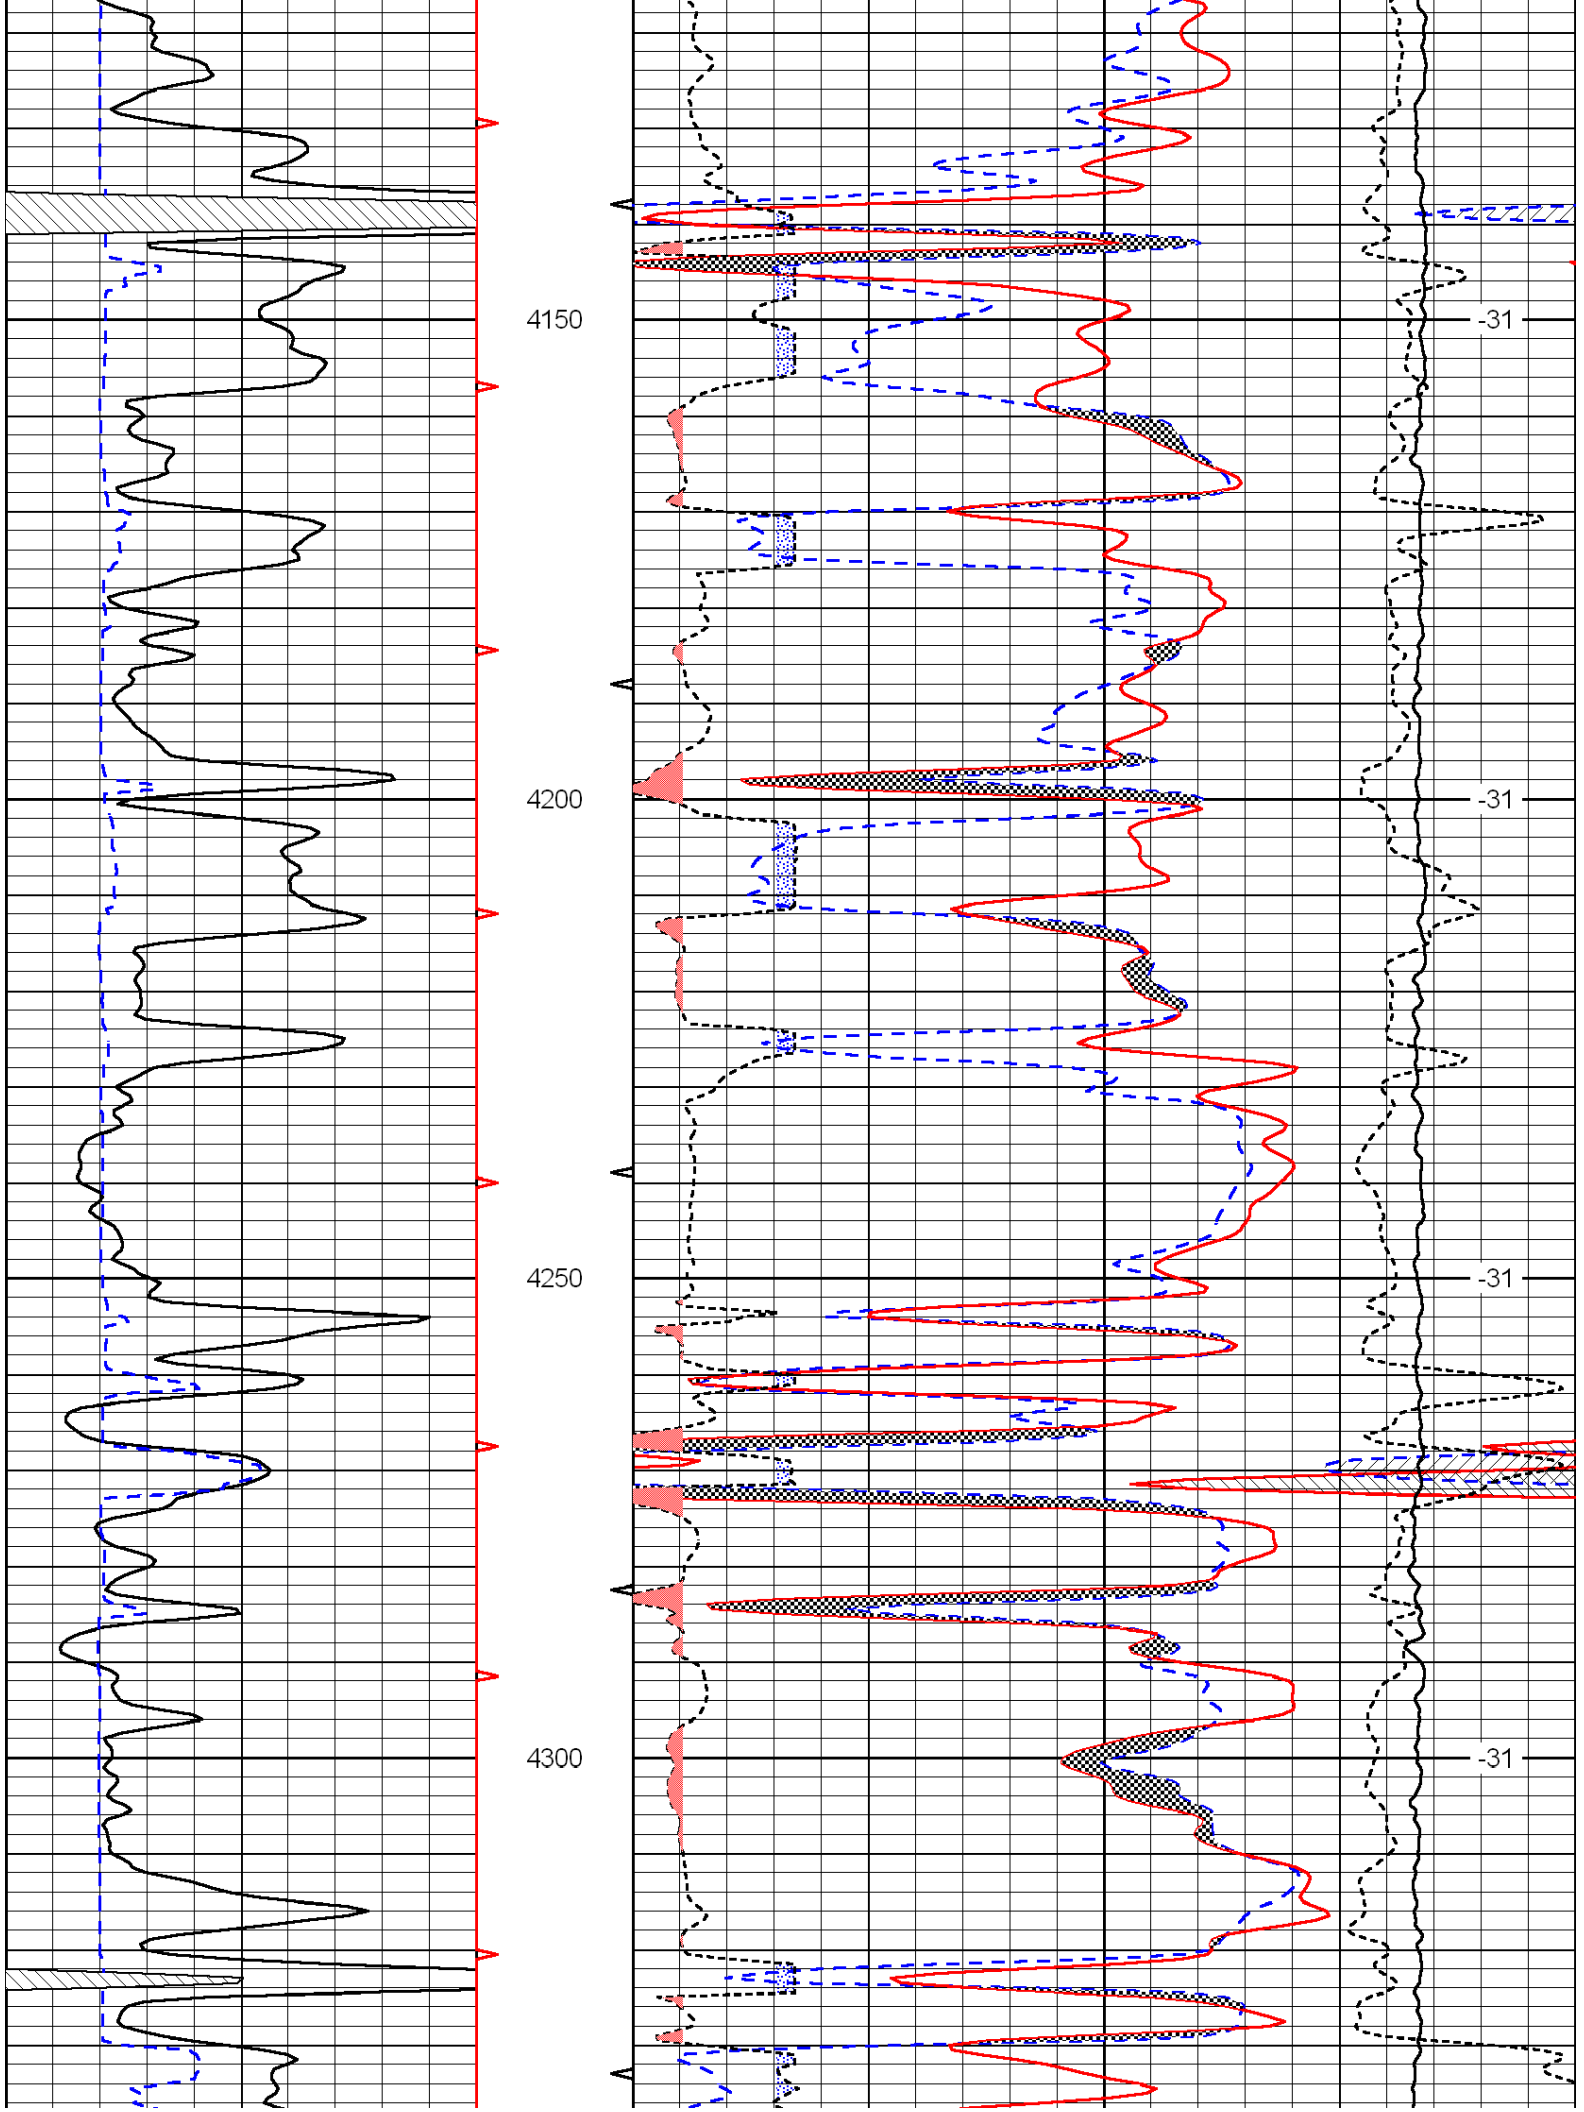
Database File:	c:\warrior\data\credo_mary no.1-22\credohd.db
Dataset Pathname:	dil/crdostk
Presentation Format:	cndlspec
Dataset Creation:	Sun Mar 11 18:42:24 2012
Charted by:	Depth in Feet scaled 1:240

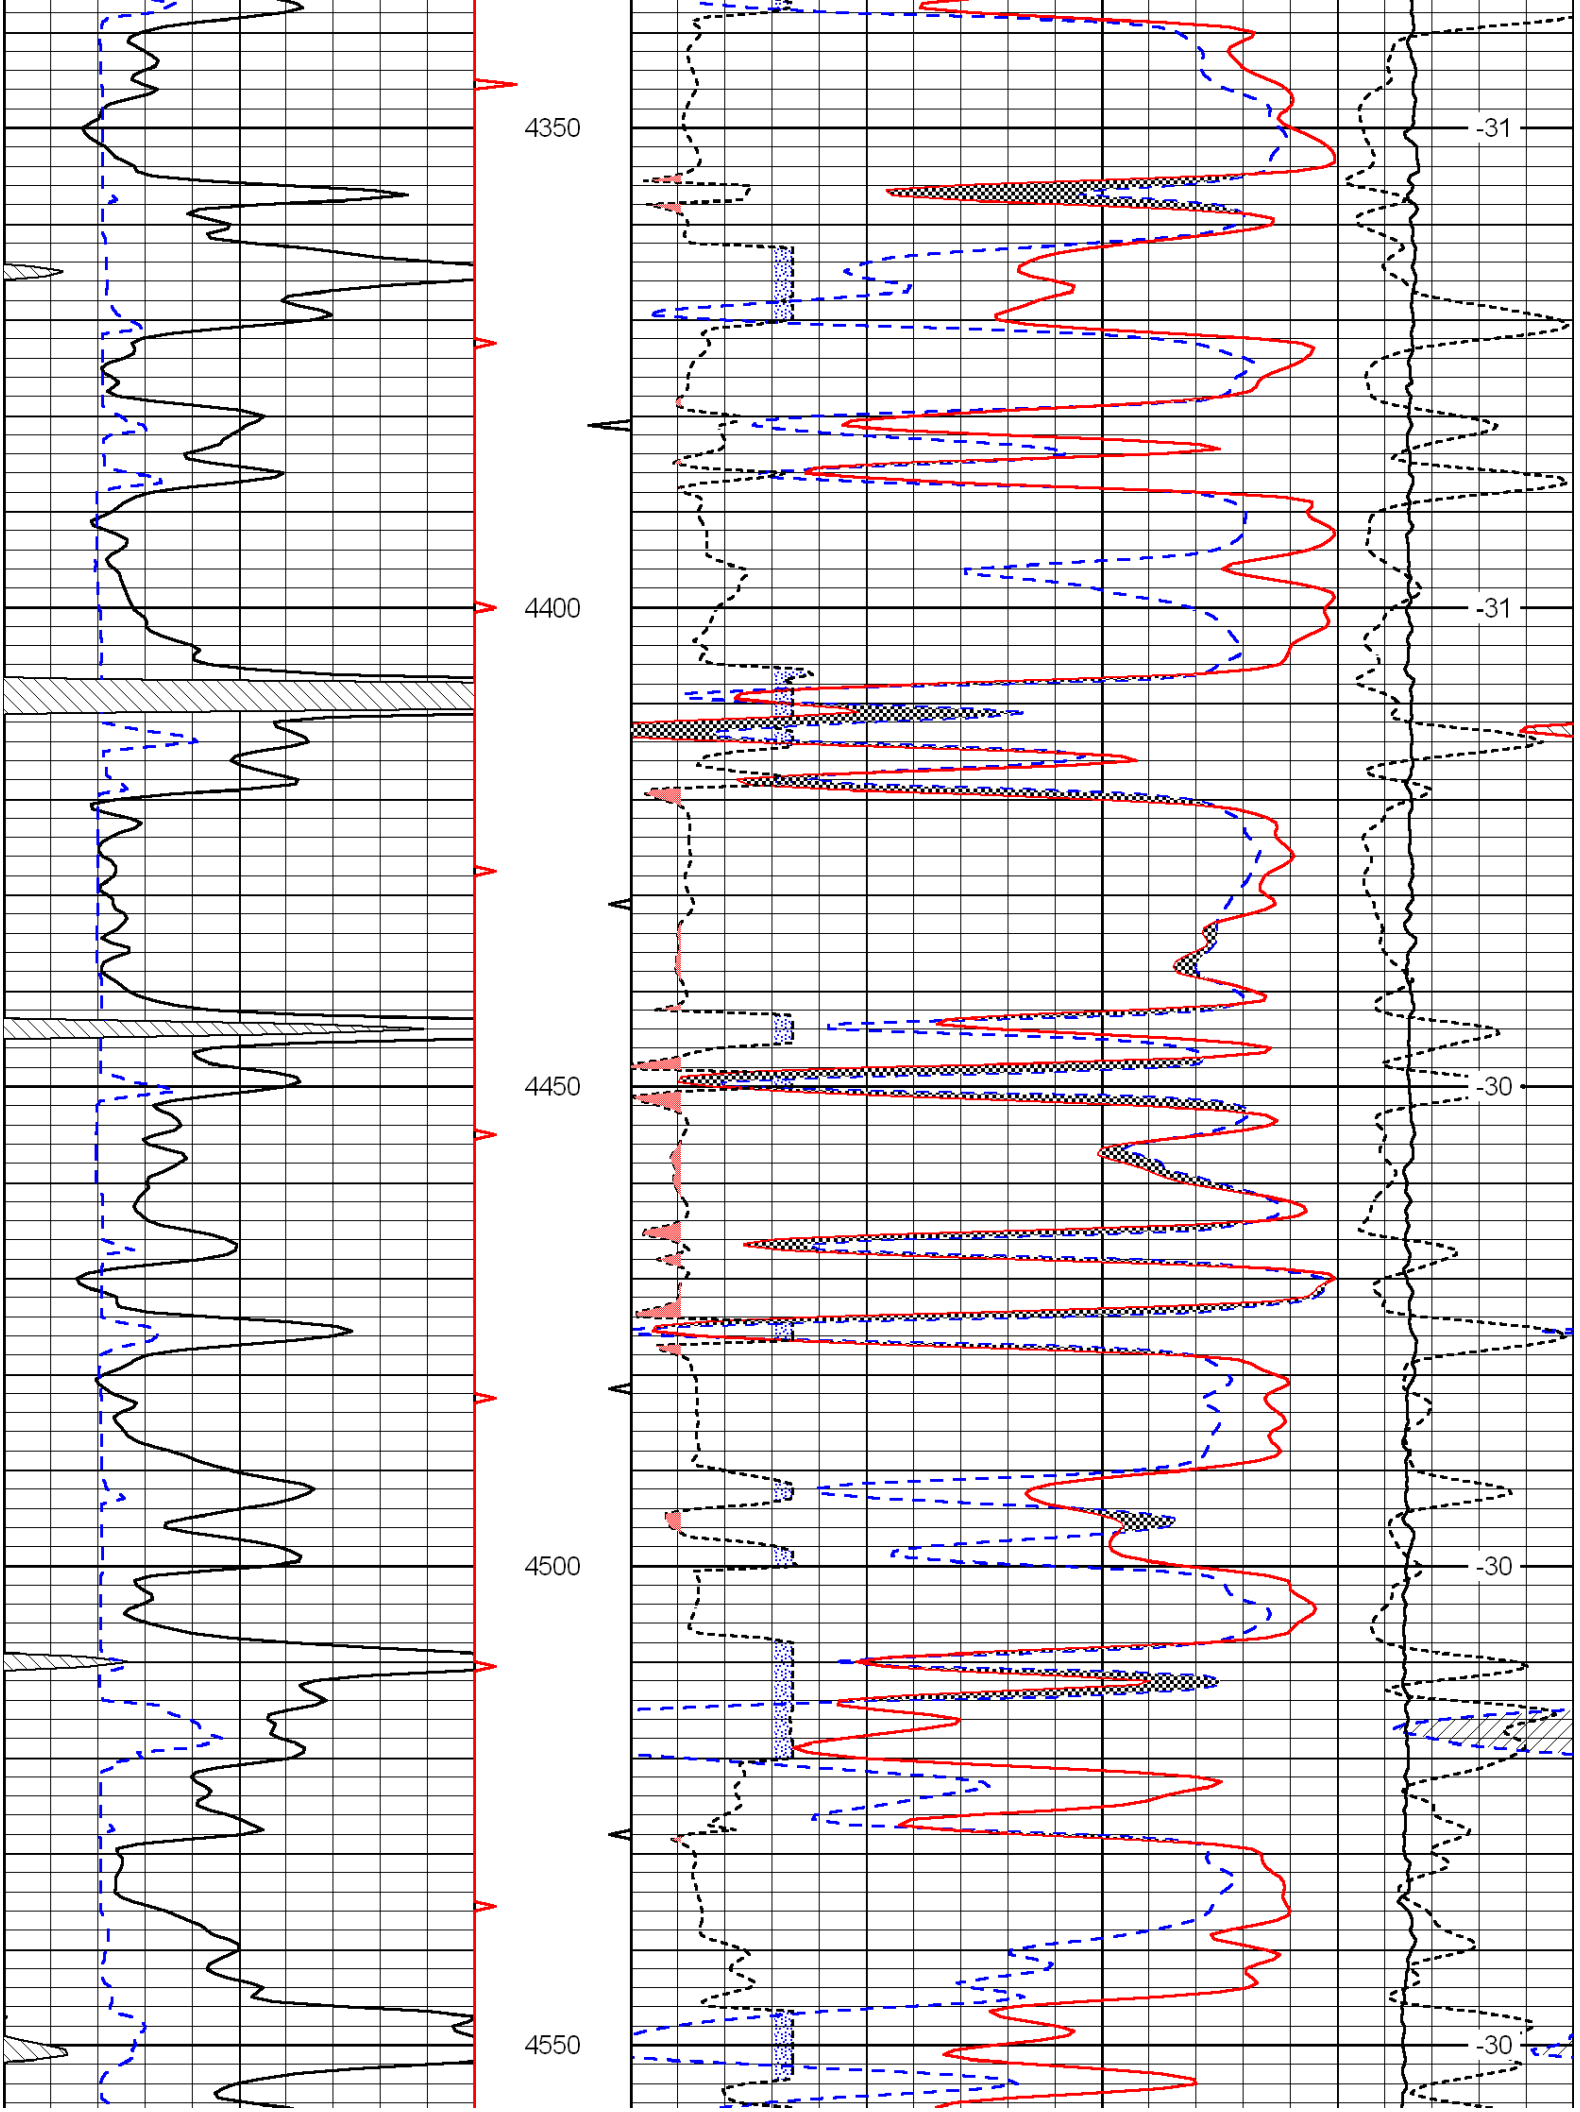
0	Gamma Ray	150
6	Caliper (GAPI)	16

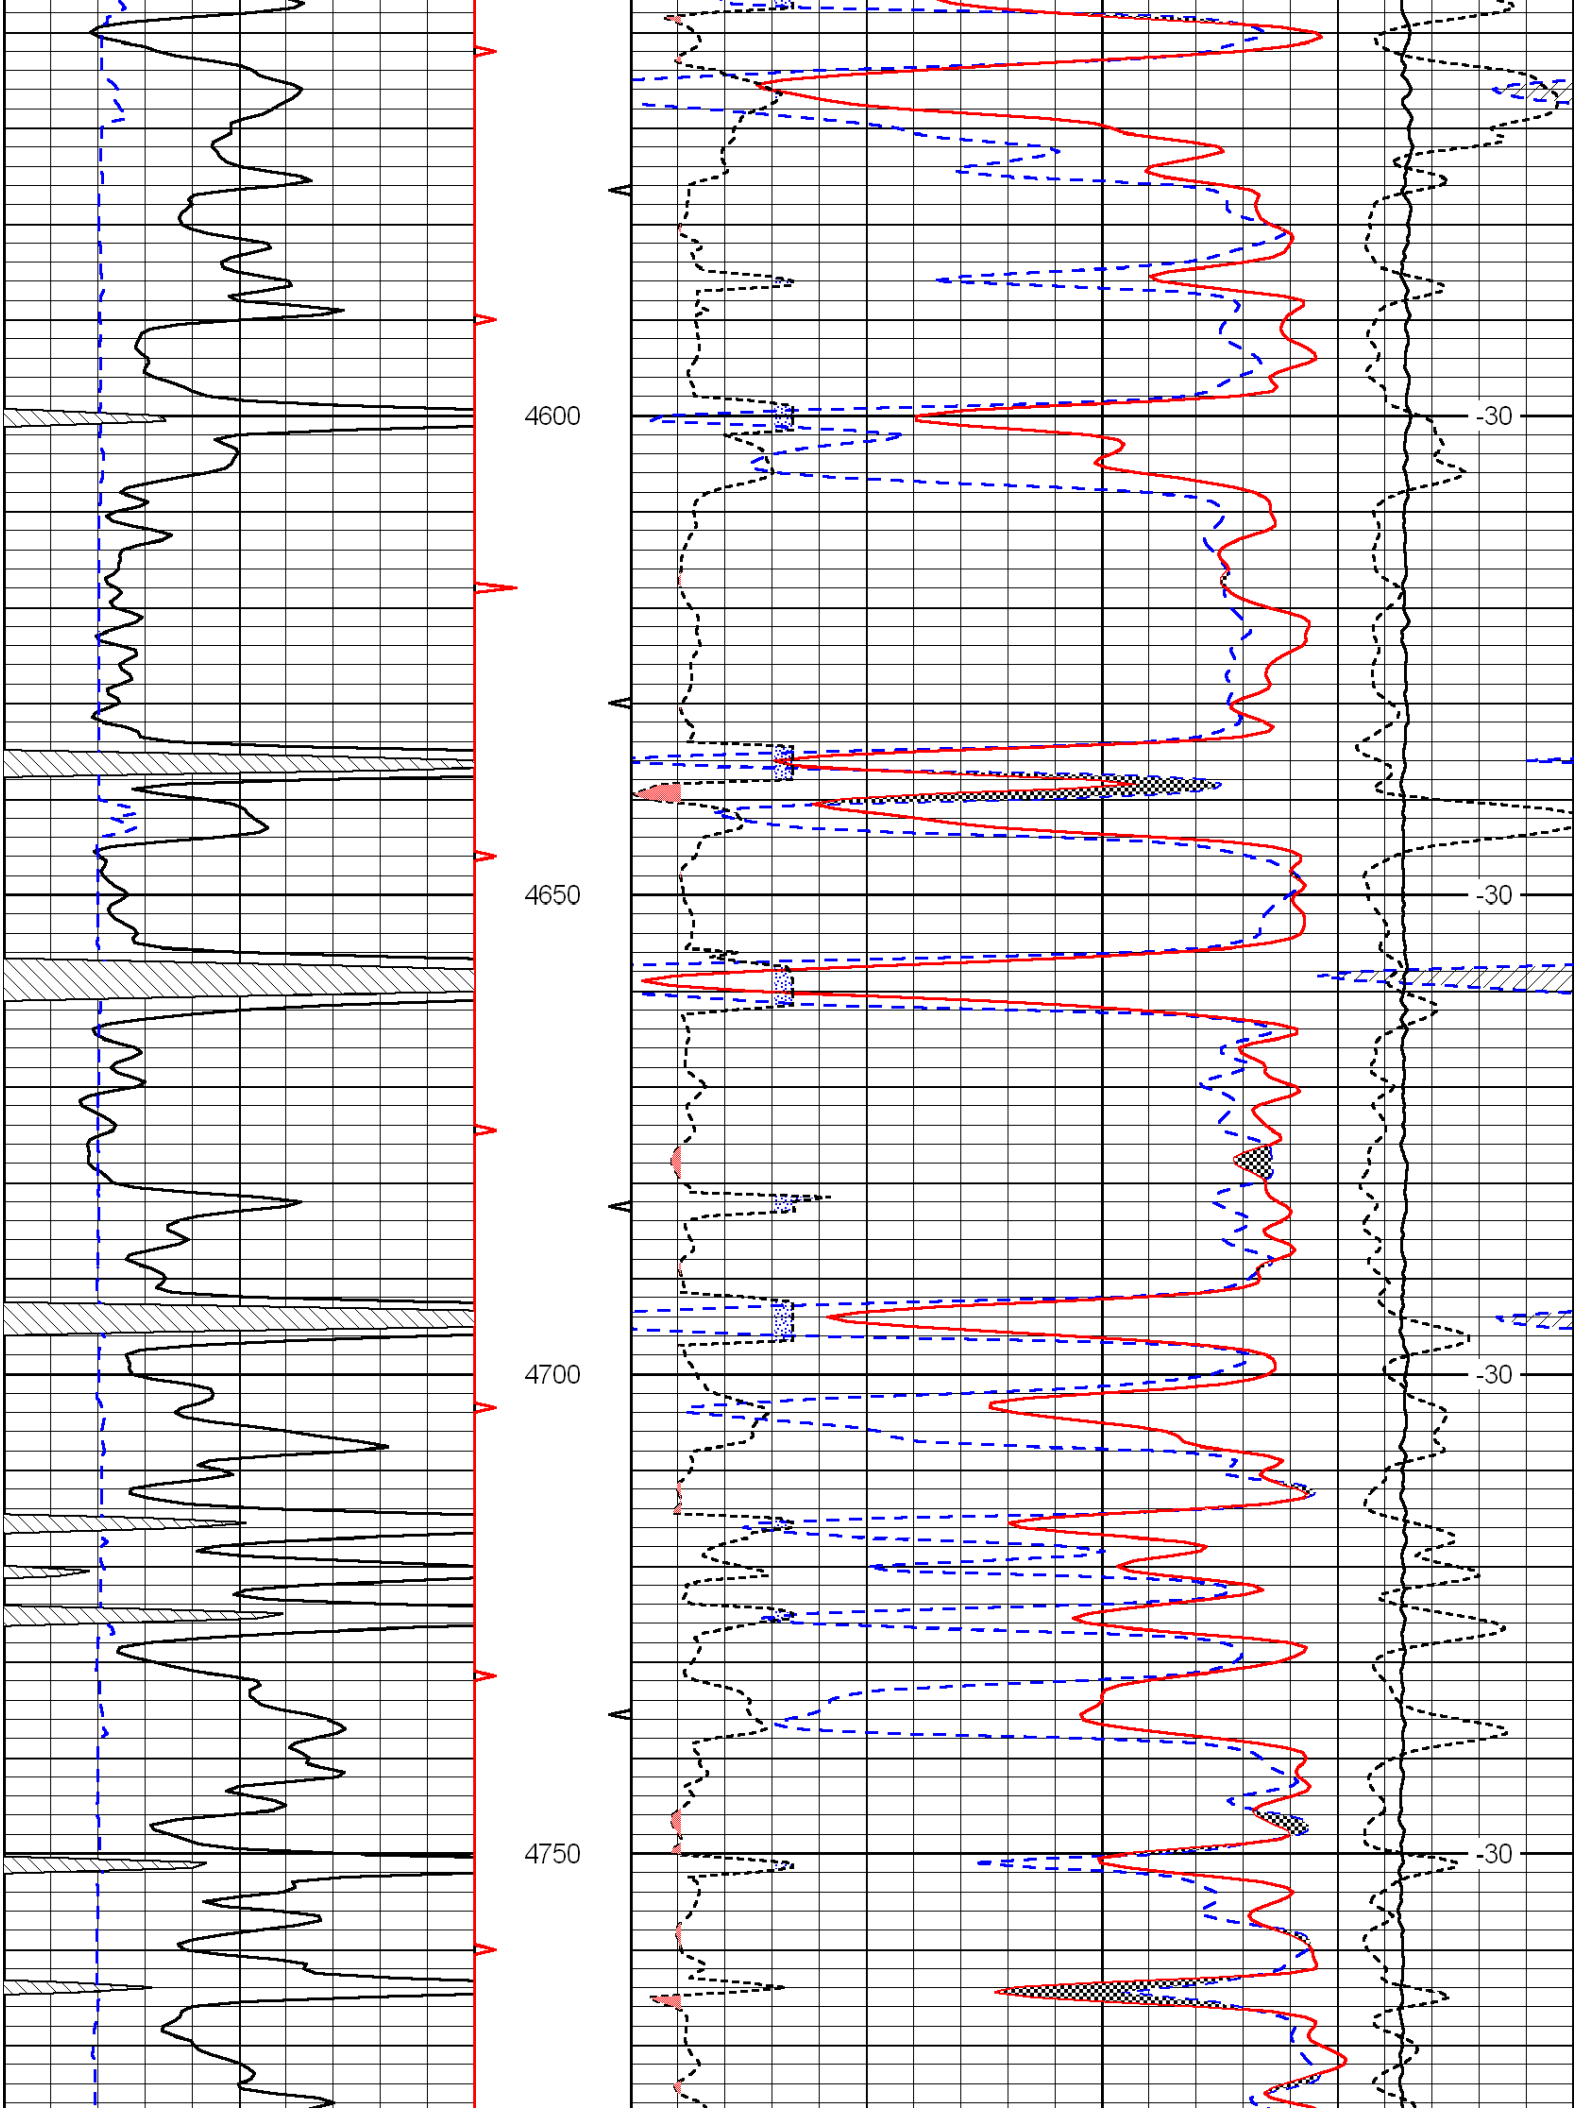
30	Compensated Neutron (Limestone)				-10
30	Compensated Density (Limestone)				-10
2.625	DGA	3.425	-0.25	Correction	0.25
15000	Line Tension				0
					LSPD

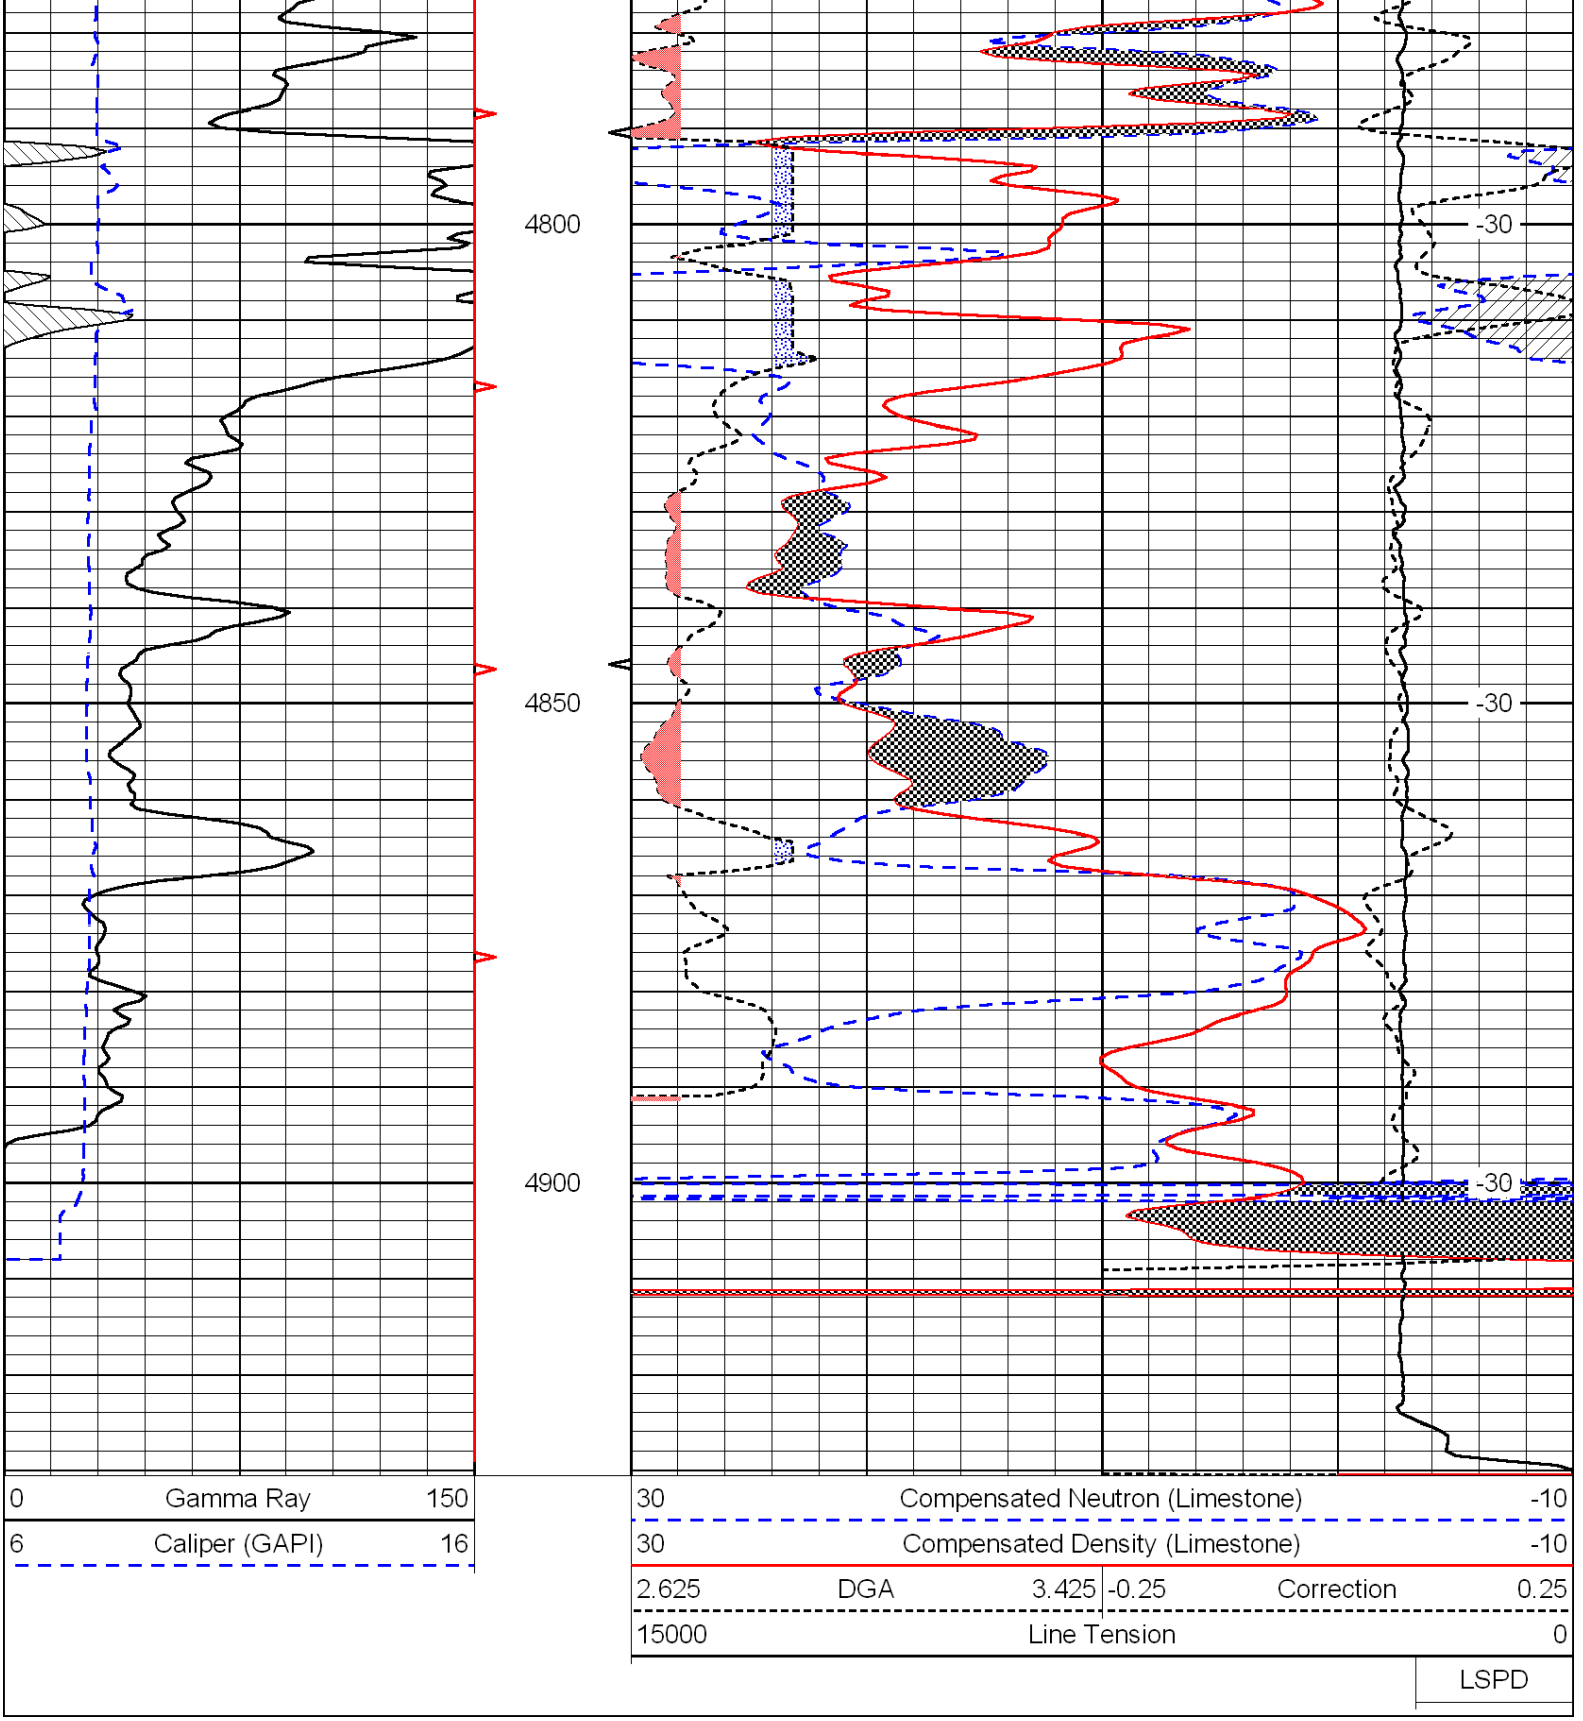



3900
3950
4000
4050
4100
-31
-31
-31
-31
-31


4150
4200
4250
4300
-31
-31
-31
-31


4350
4400
4450
4500
4550
-31
-31
-30
-30
-30


4600
4650
4700
4750
-30
-30
-30
-30



0	Gamma Ray	150
6	Caliper (GAPI)	16

30	Compensated Neutron (Limestone)	-10
30	Compensated Density (Limestone)	-10
2.625	DGA	3.425
-0.25	Correction	0.25
15000	Line Tension	0

LSPD