LOG-TECH

DIGITAL LOG (785) 625-3858

Microresistivity Log

API No. 15-193-20,842-00-00

Company Credo Petroleum Corporation

Well Mary No.1-22

Field Wildcat

County Thomas State Kansas

Location 330' FSL & 2150' FWL

Sec: 22 Twp: 10S Rge: 35W

Permanent Datum Ground Level Elevation 3279

Log Measured From Kelly Bushing 5 Ft. Above Perm. Datum

Drilling Measured From Kelly Bushing

Other Services
CNL/CDL
DIL/BHCS

Elevation
K.B. 3284
D.F.
G.L. 3279

Date	3/11/2012			
Run Number	Two			
Depth Driller	4920			
Depth Logger	4923			
Bottom Logged Interval	4922			
Top Log Interval	3800			
Casing Driller	8.625 @ 238			
Casing Logger	237			
Bit Size	7.875			
Type Fluid in Hole	Chemical			
Salinity,ppm CL	7,000			
Density / Viscosity	9.4 | 59			
pH / Fluid Loss	10.5 | 8.0			
Source of Sample	Flowline			
Rm @ Meas. Temp	.35 @ 64			
Rmf @ Meas. Temp	.26 @ 64			
Rmc @ Meas. Temp	.47 @ 64			
Source of Rmf / Rmc	Charts			
Rm @ BHT	.18 @ 125			
Operating Rig Time	4 1/2 Hours			
Max Rec. Temp. F	125			
Equipment Number	17			
Location	Hays			
Recorded By	C. Desaire			
Witnessed By	Bruce Ard			

<<< Fold Here >>>

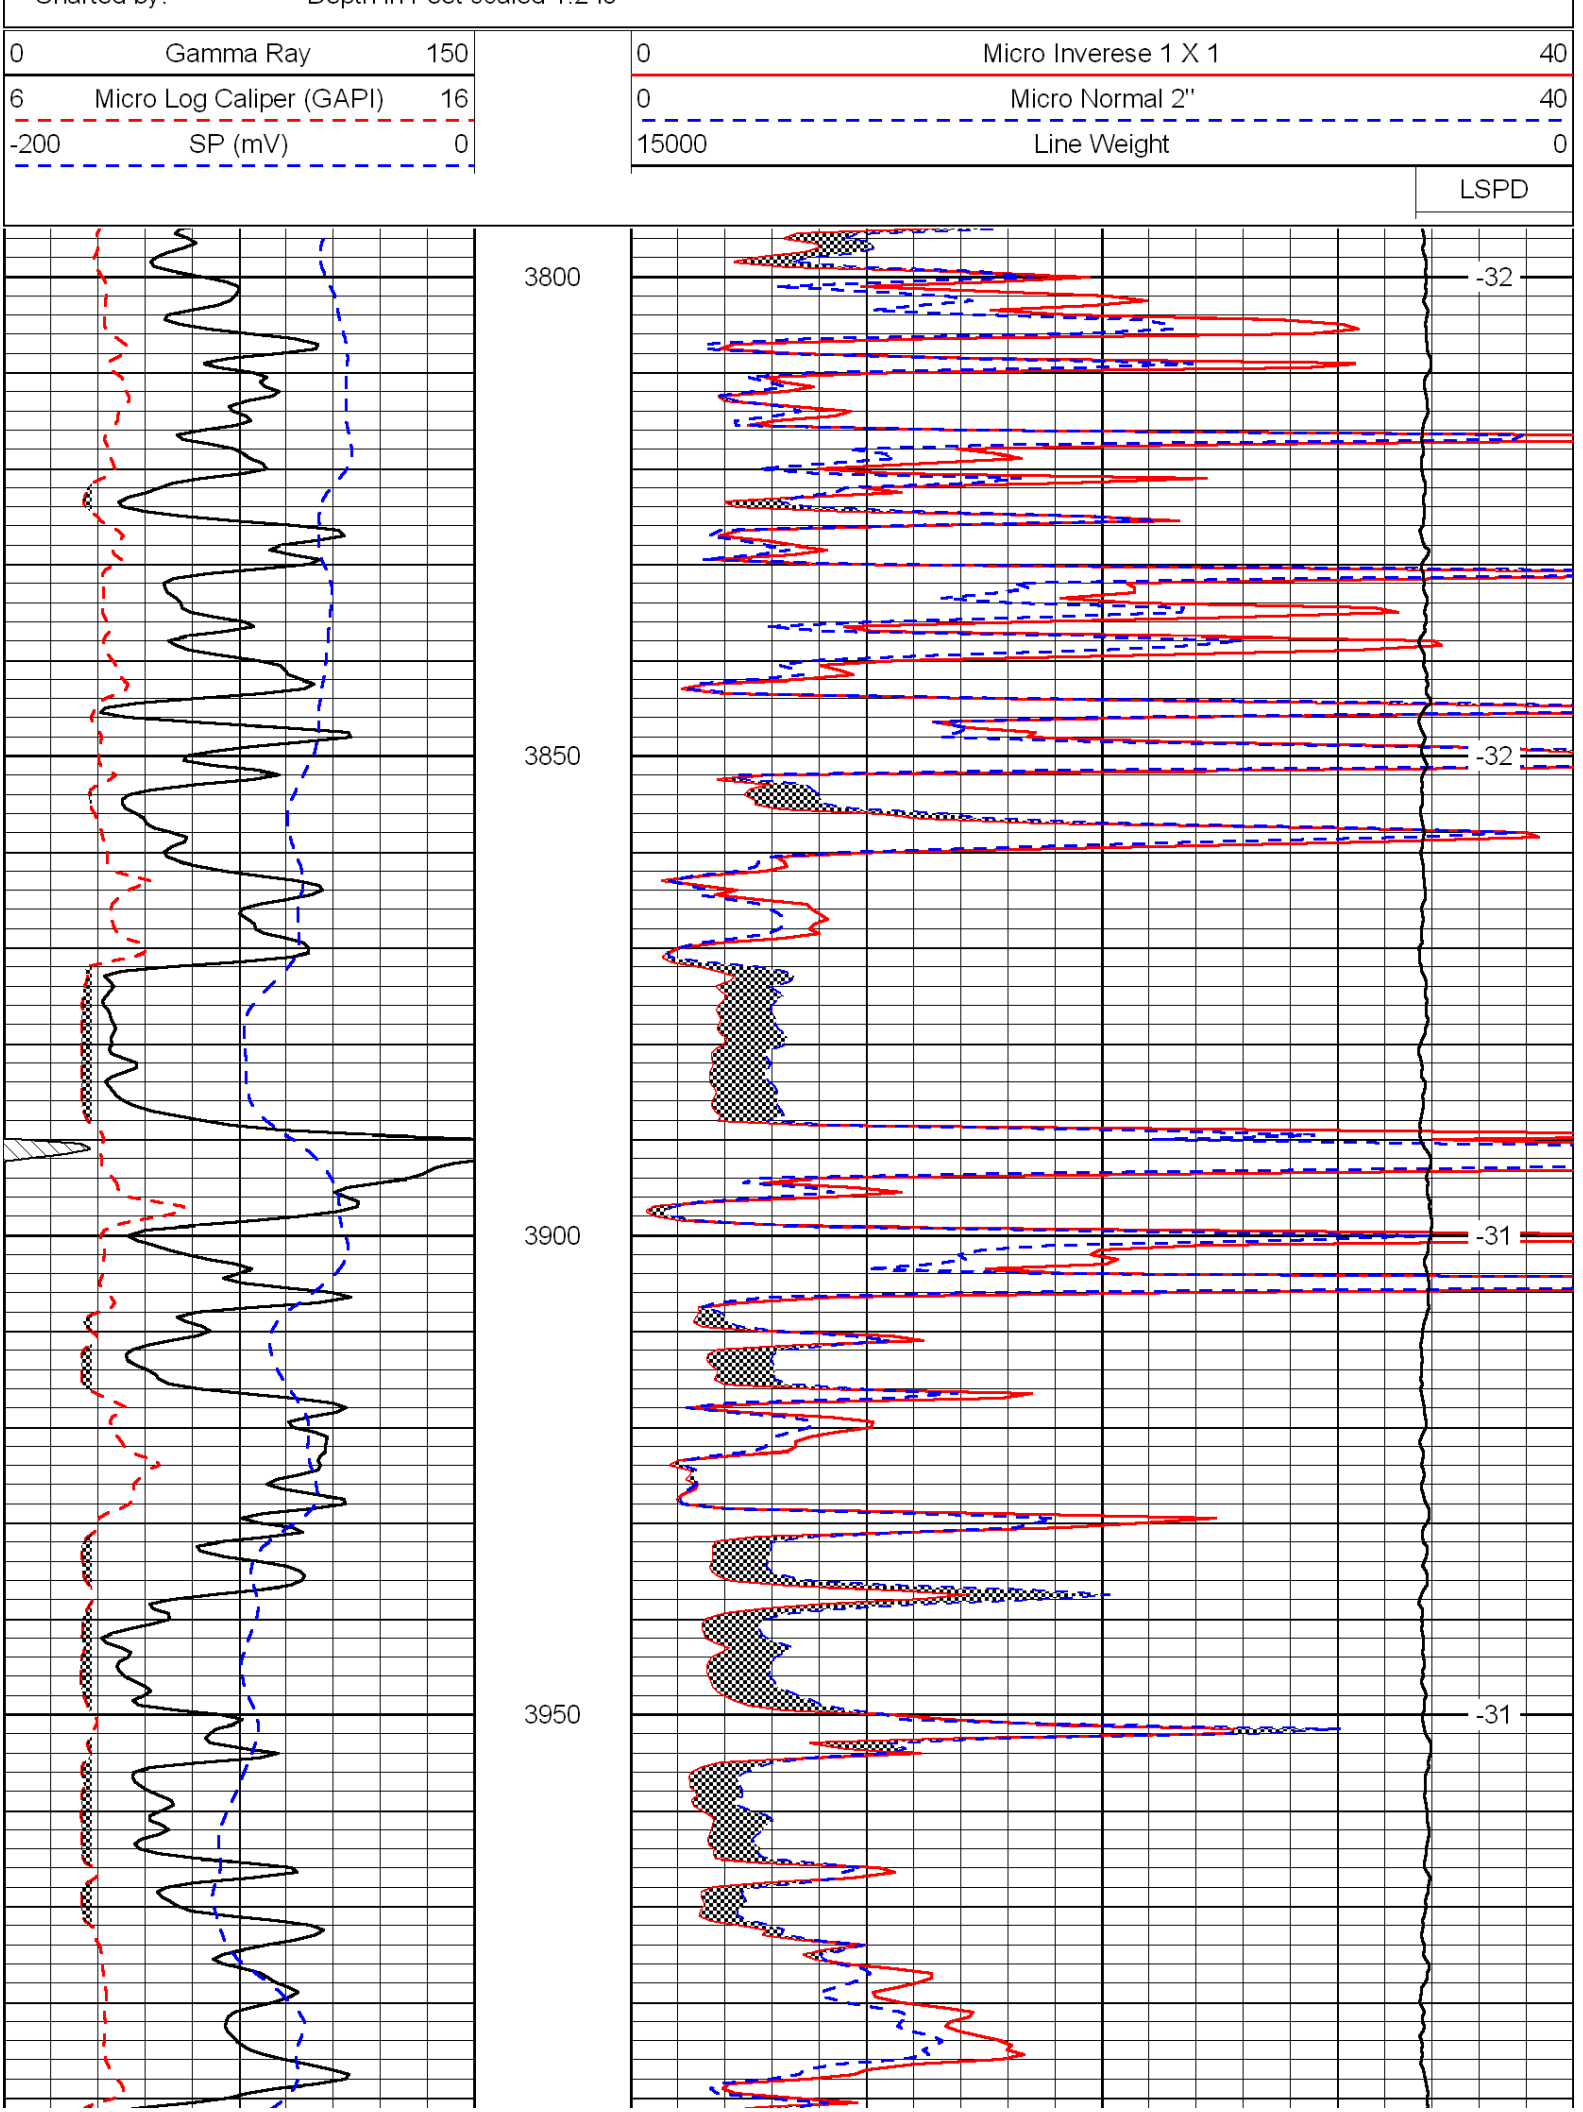
All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

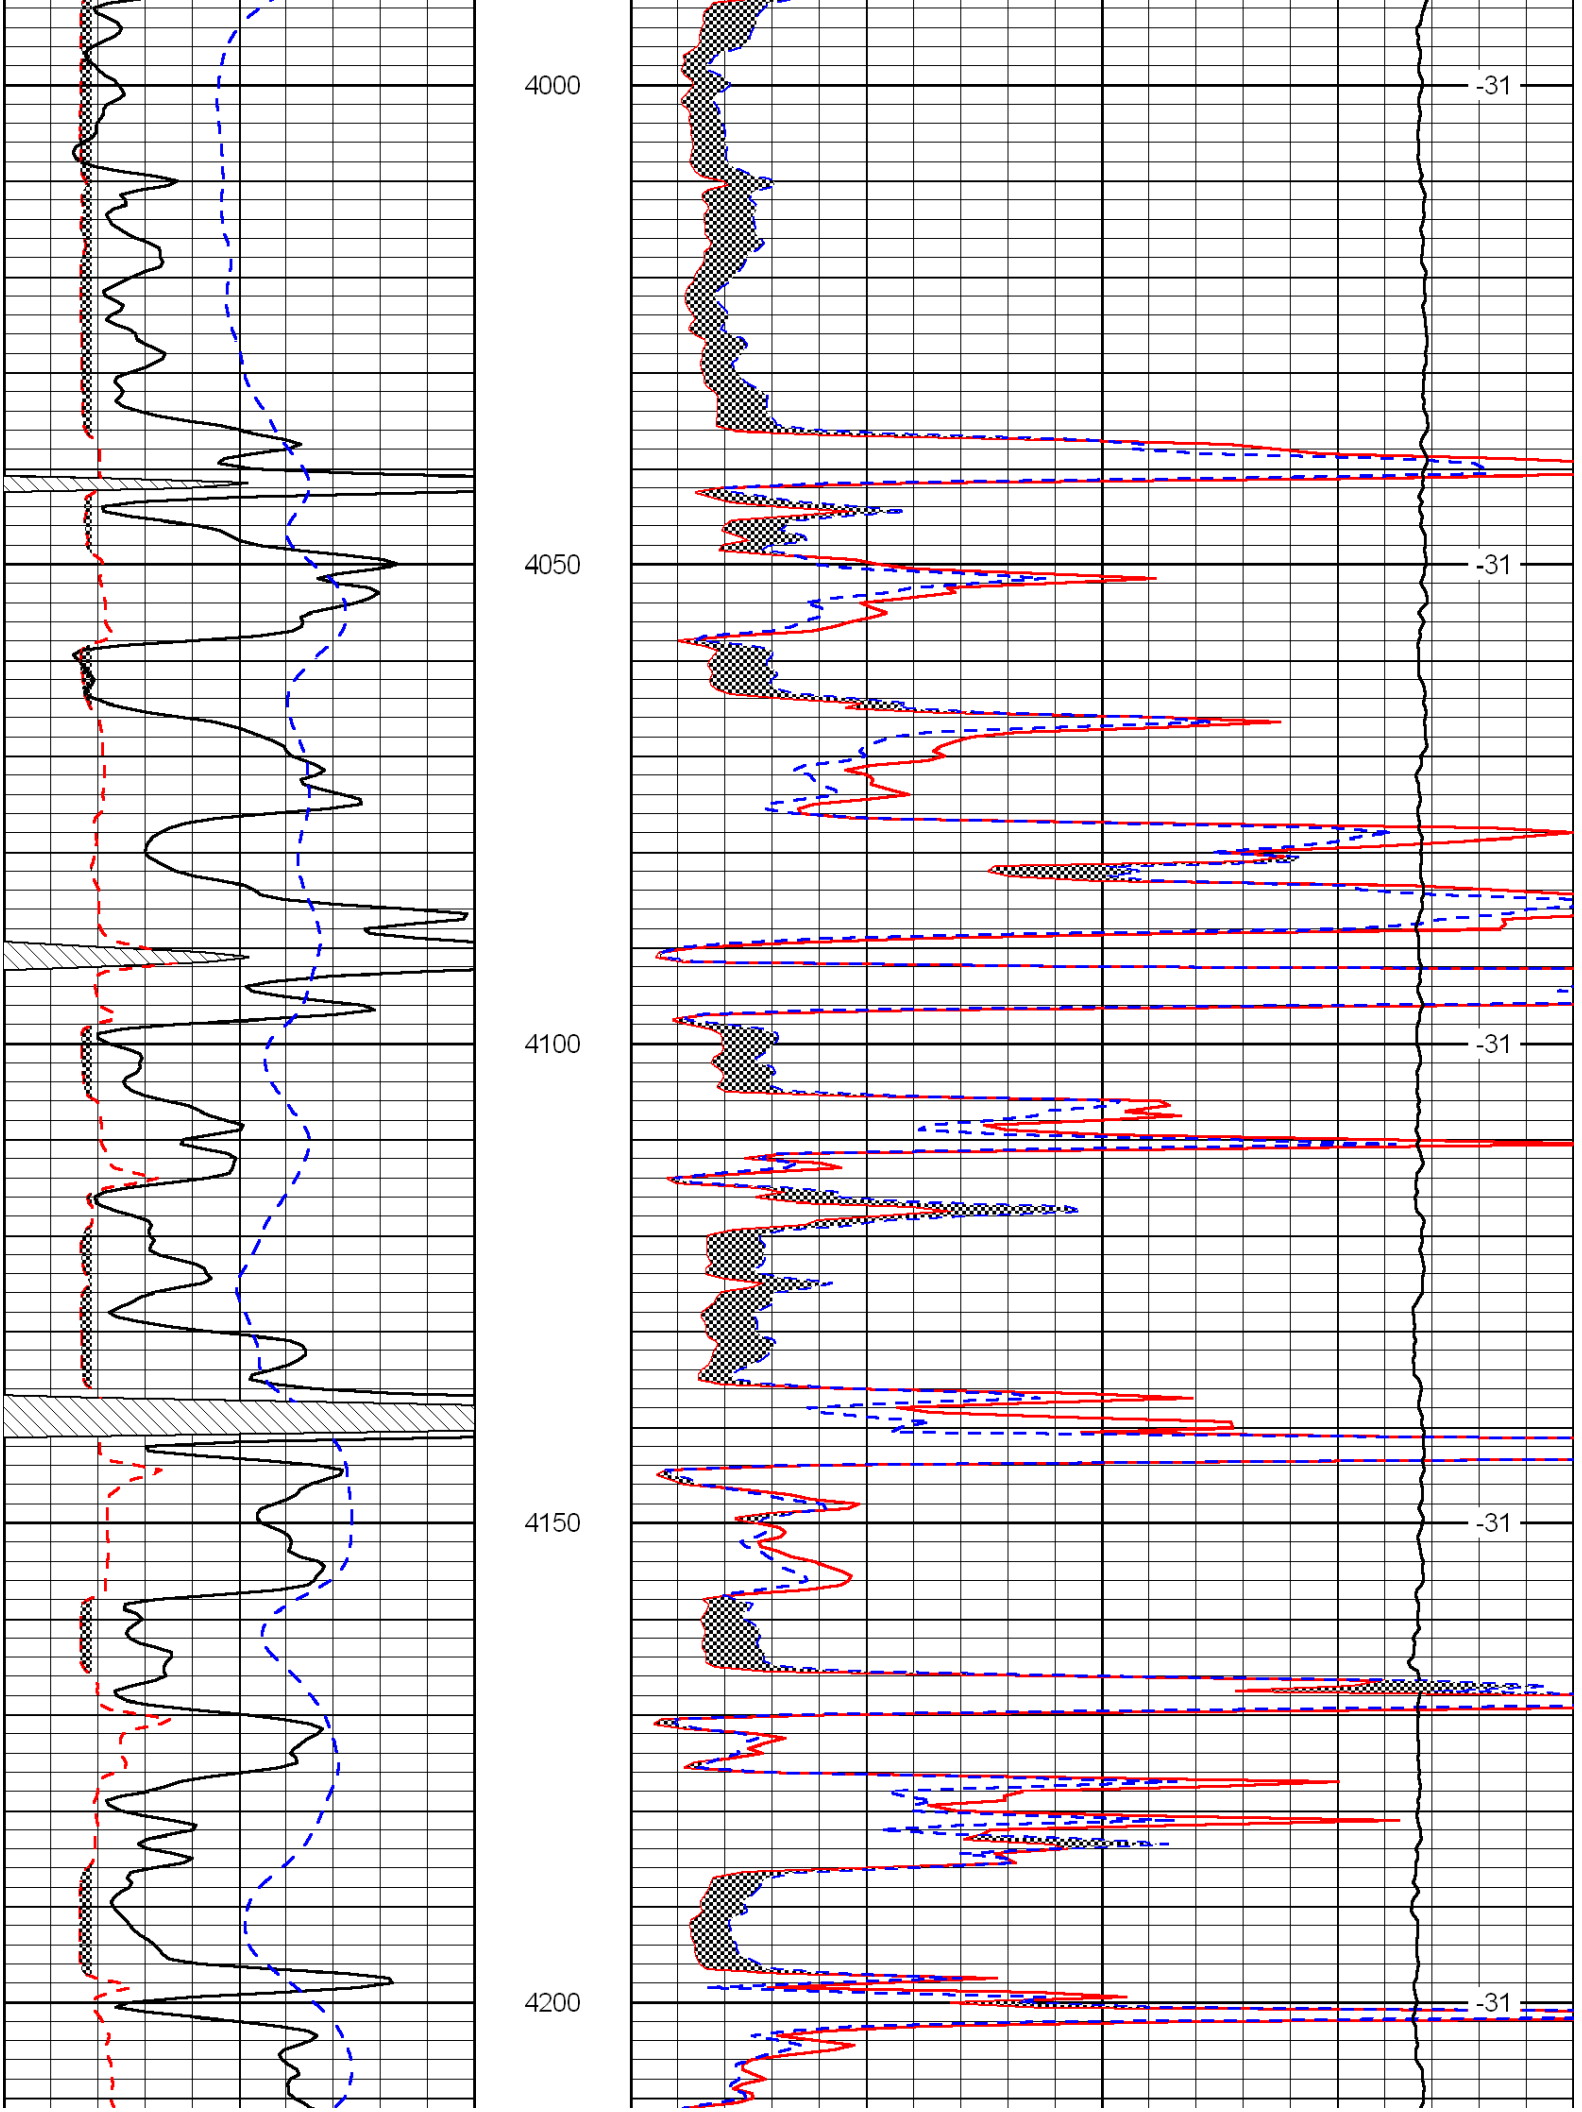
Comments

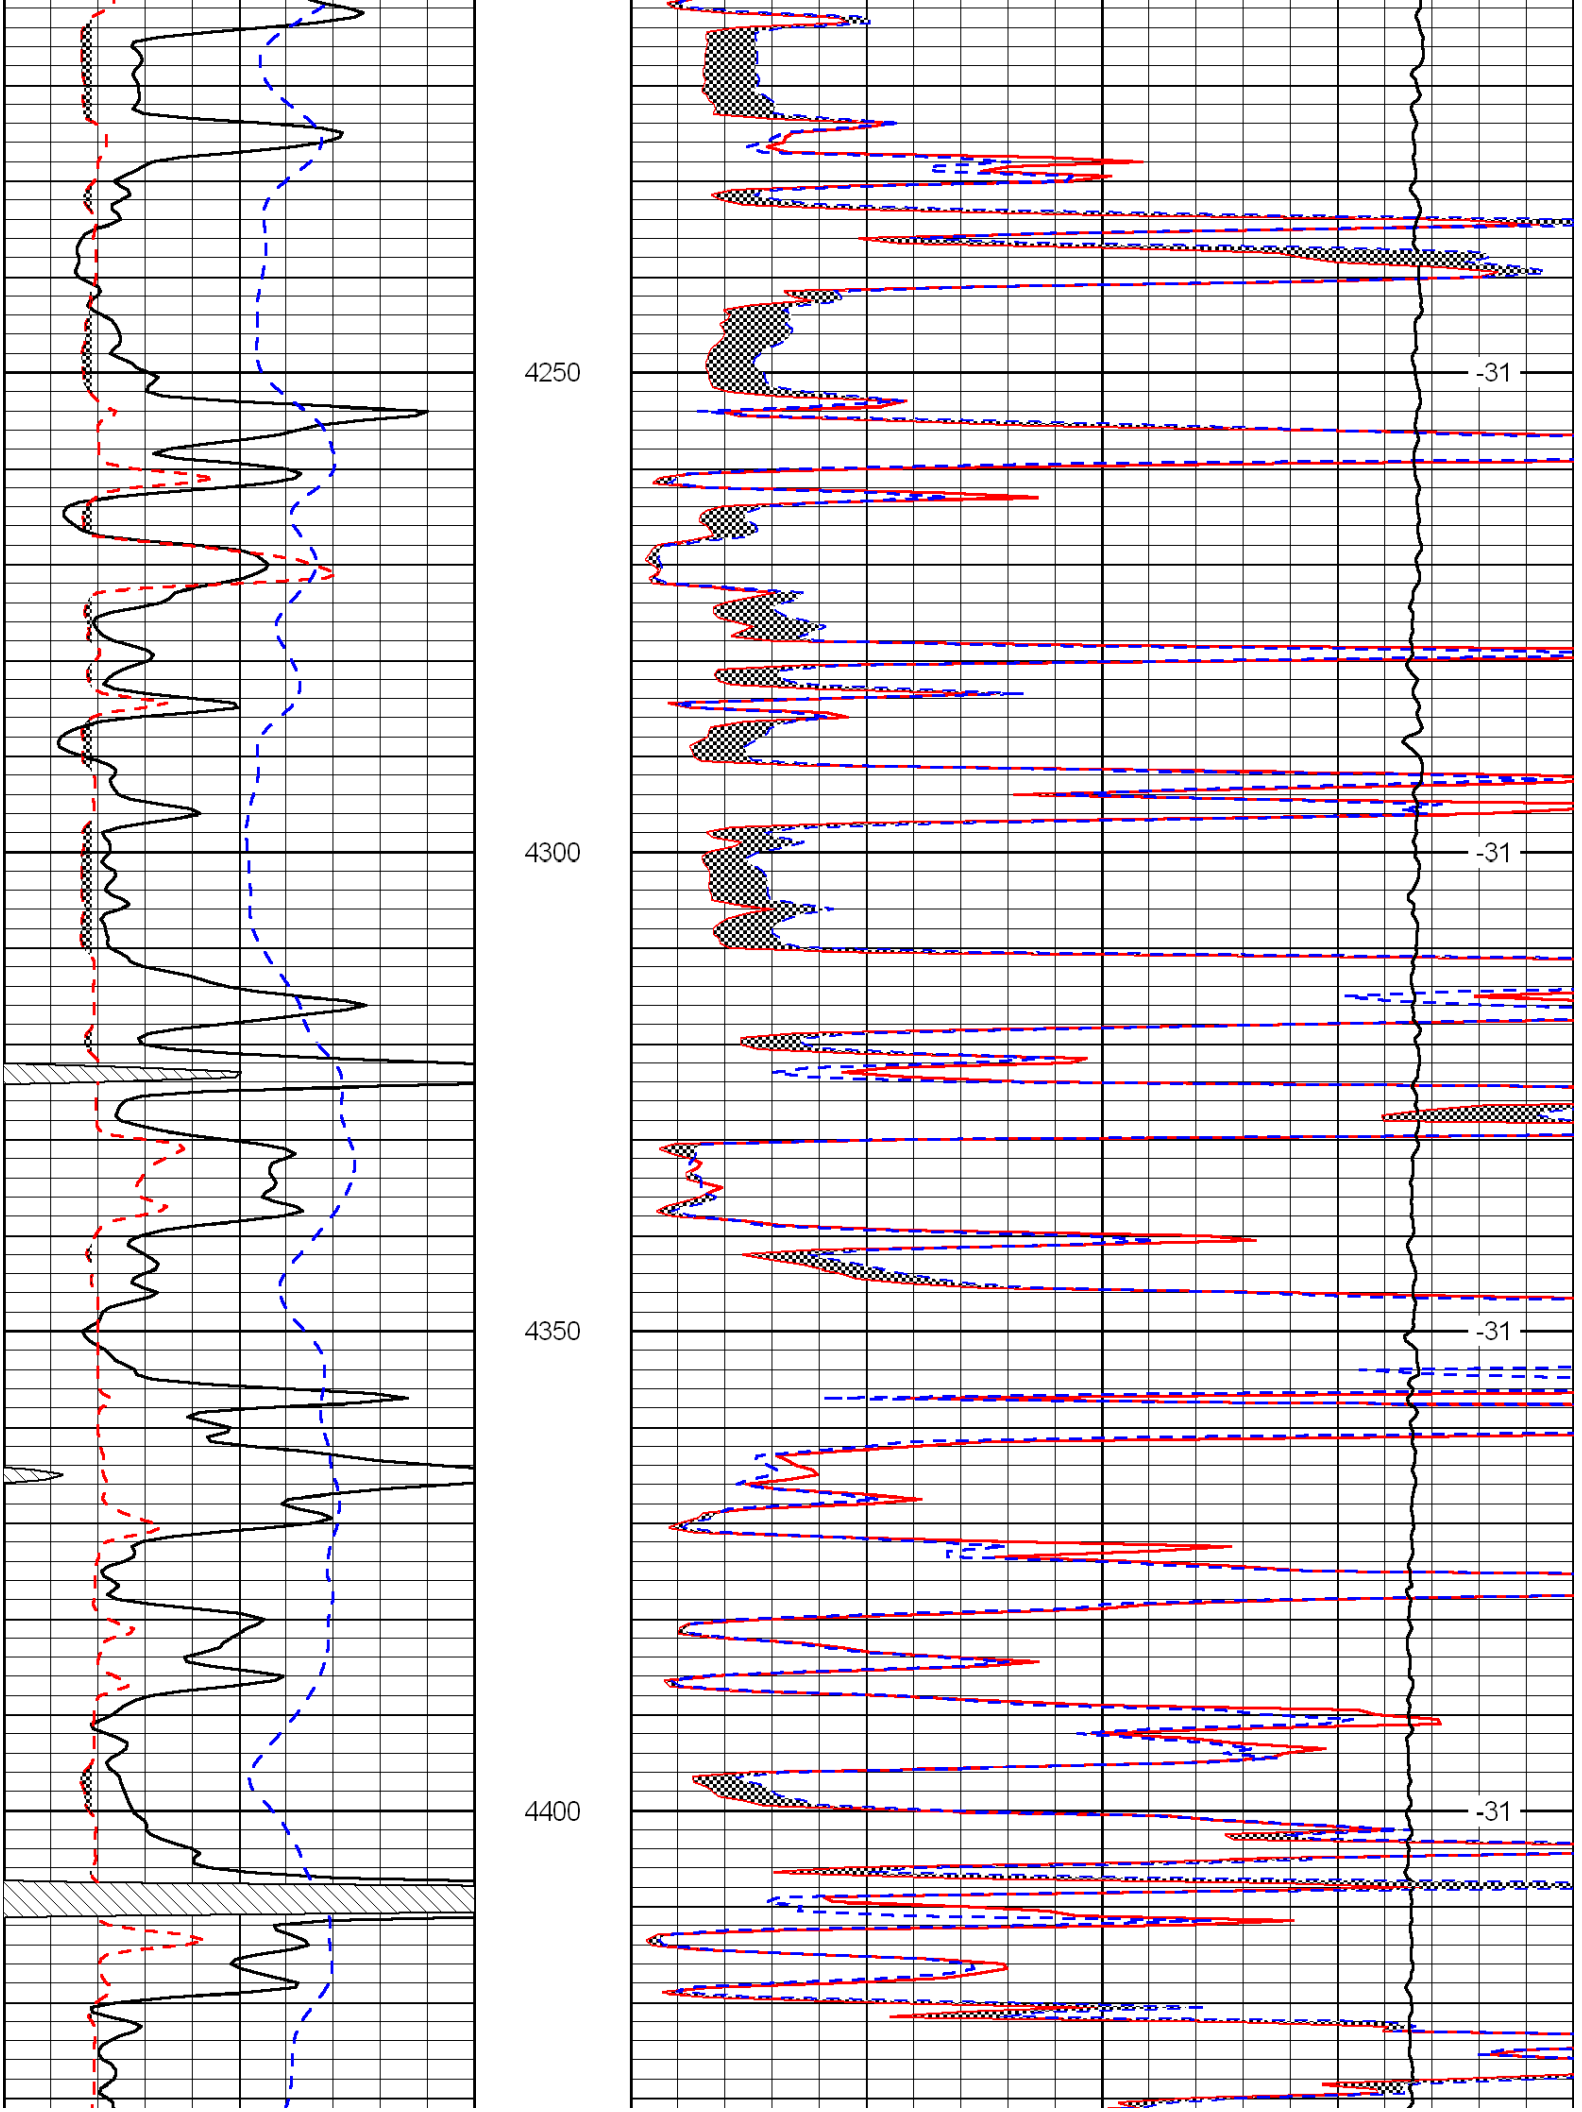
Thank you for using Log-Tech, Inc.
(785) 625-3858

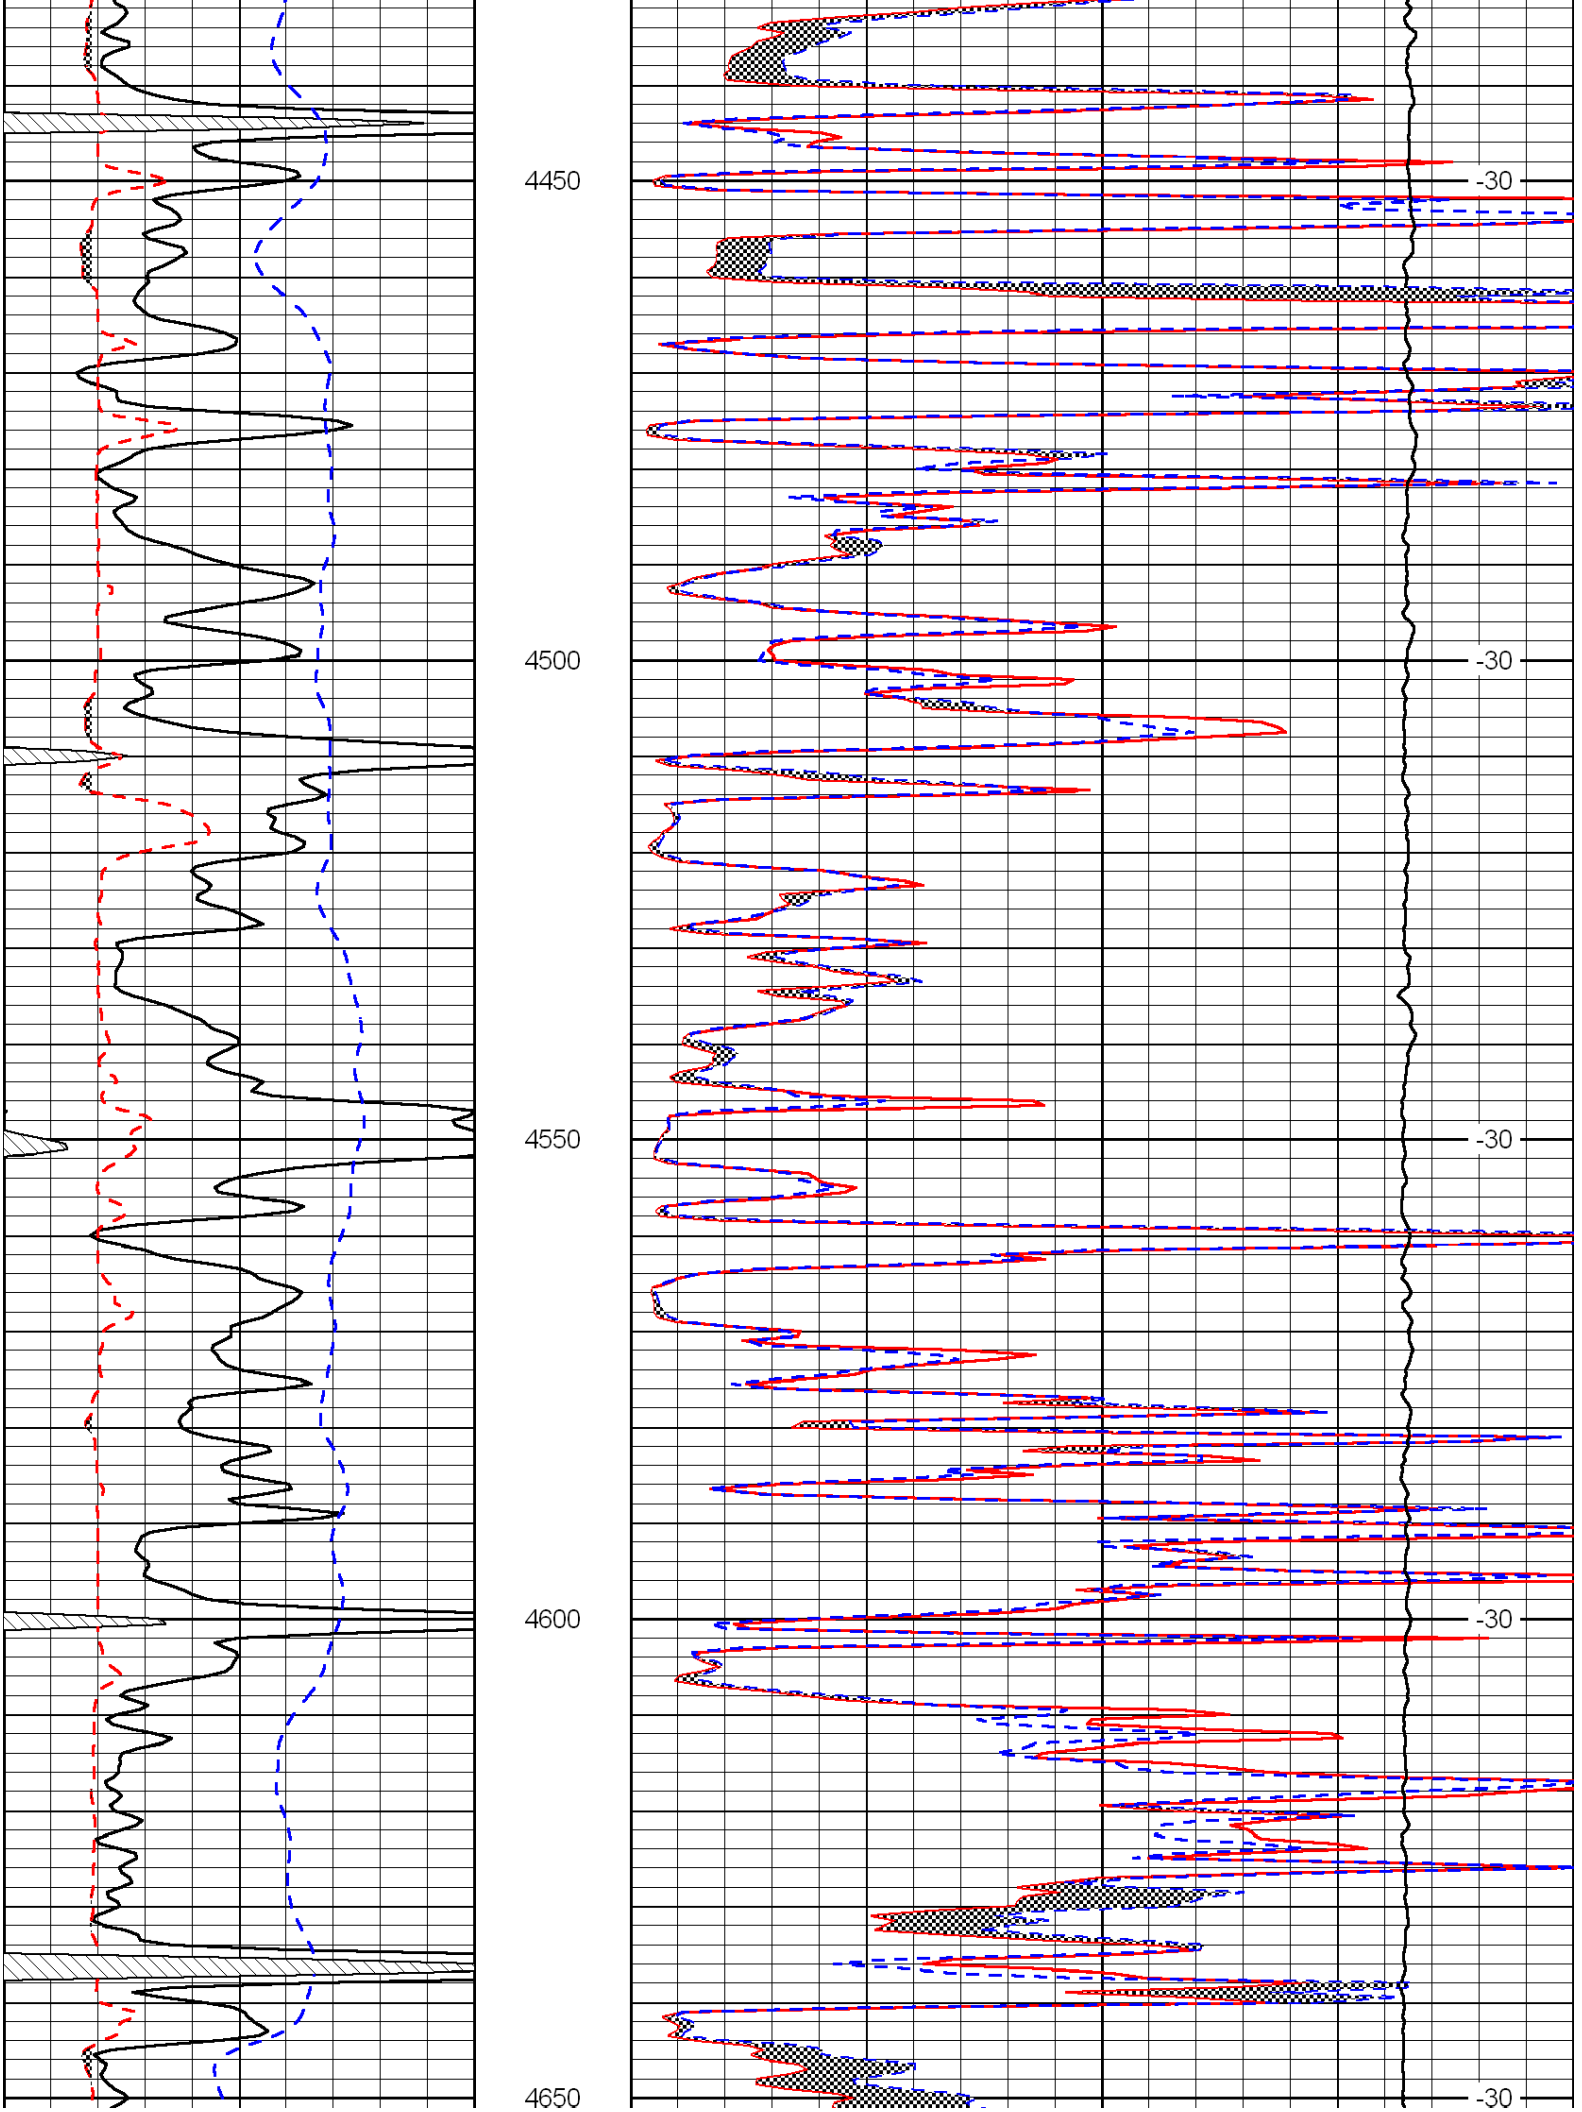
I-70 and Levant Exit,
13 3/4 S, W-S-W Into

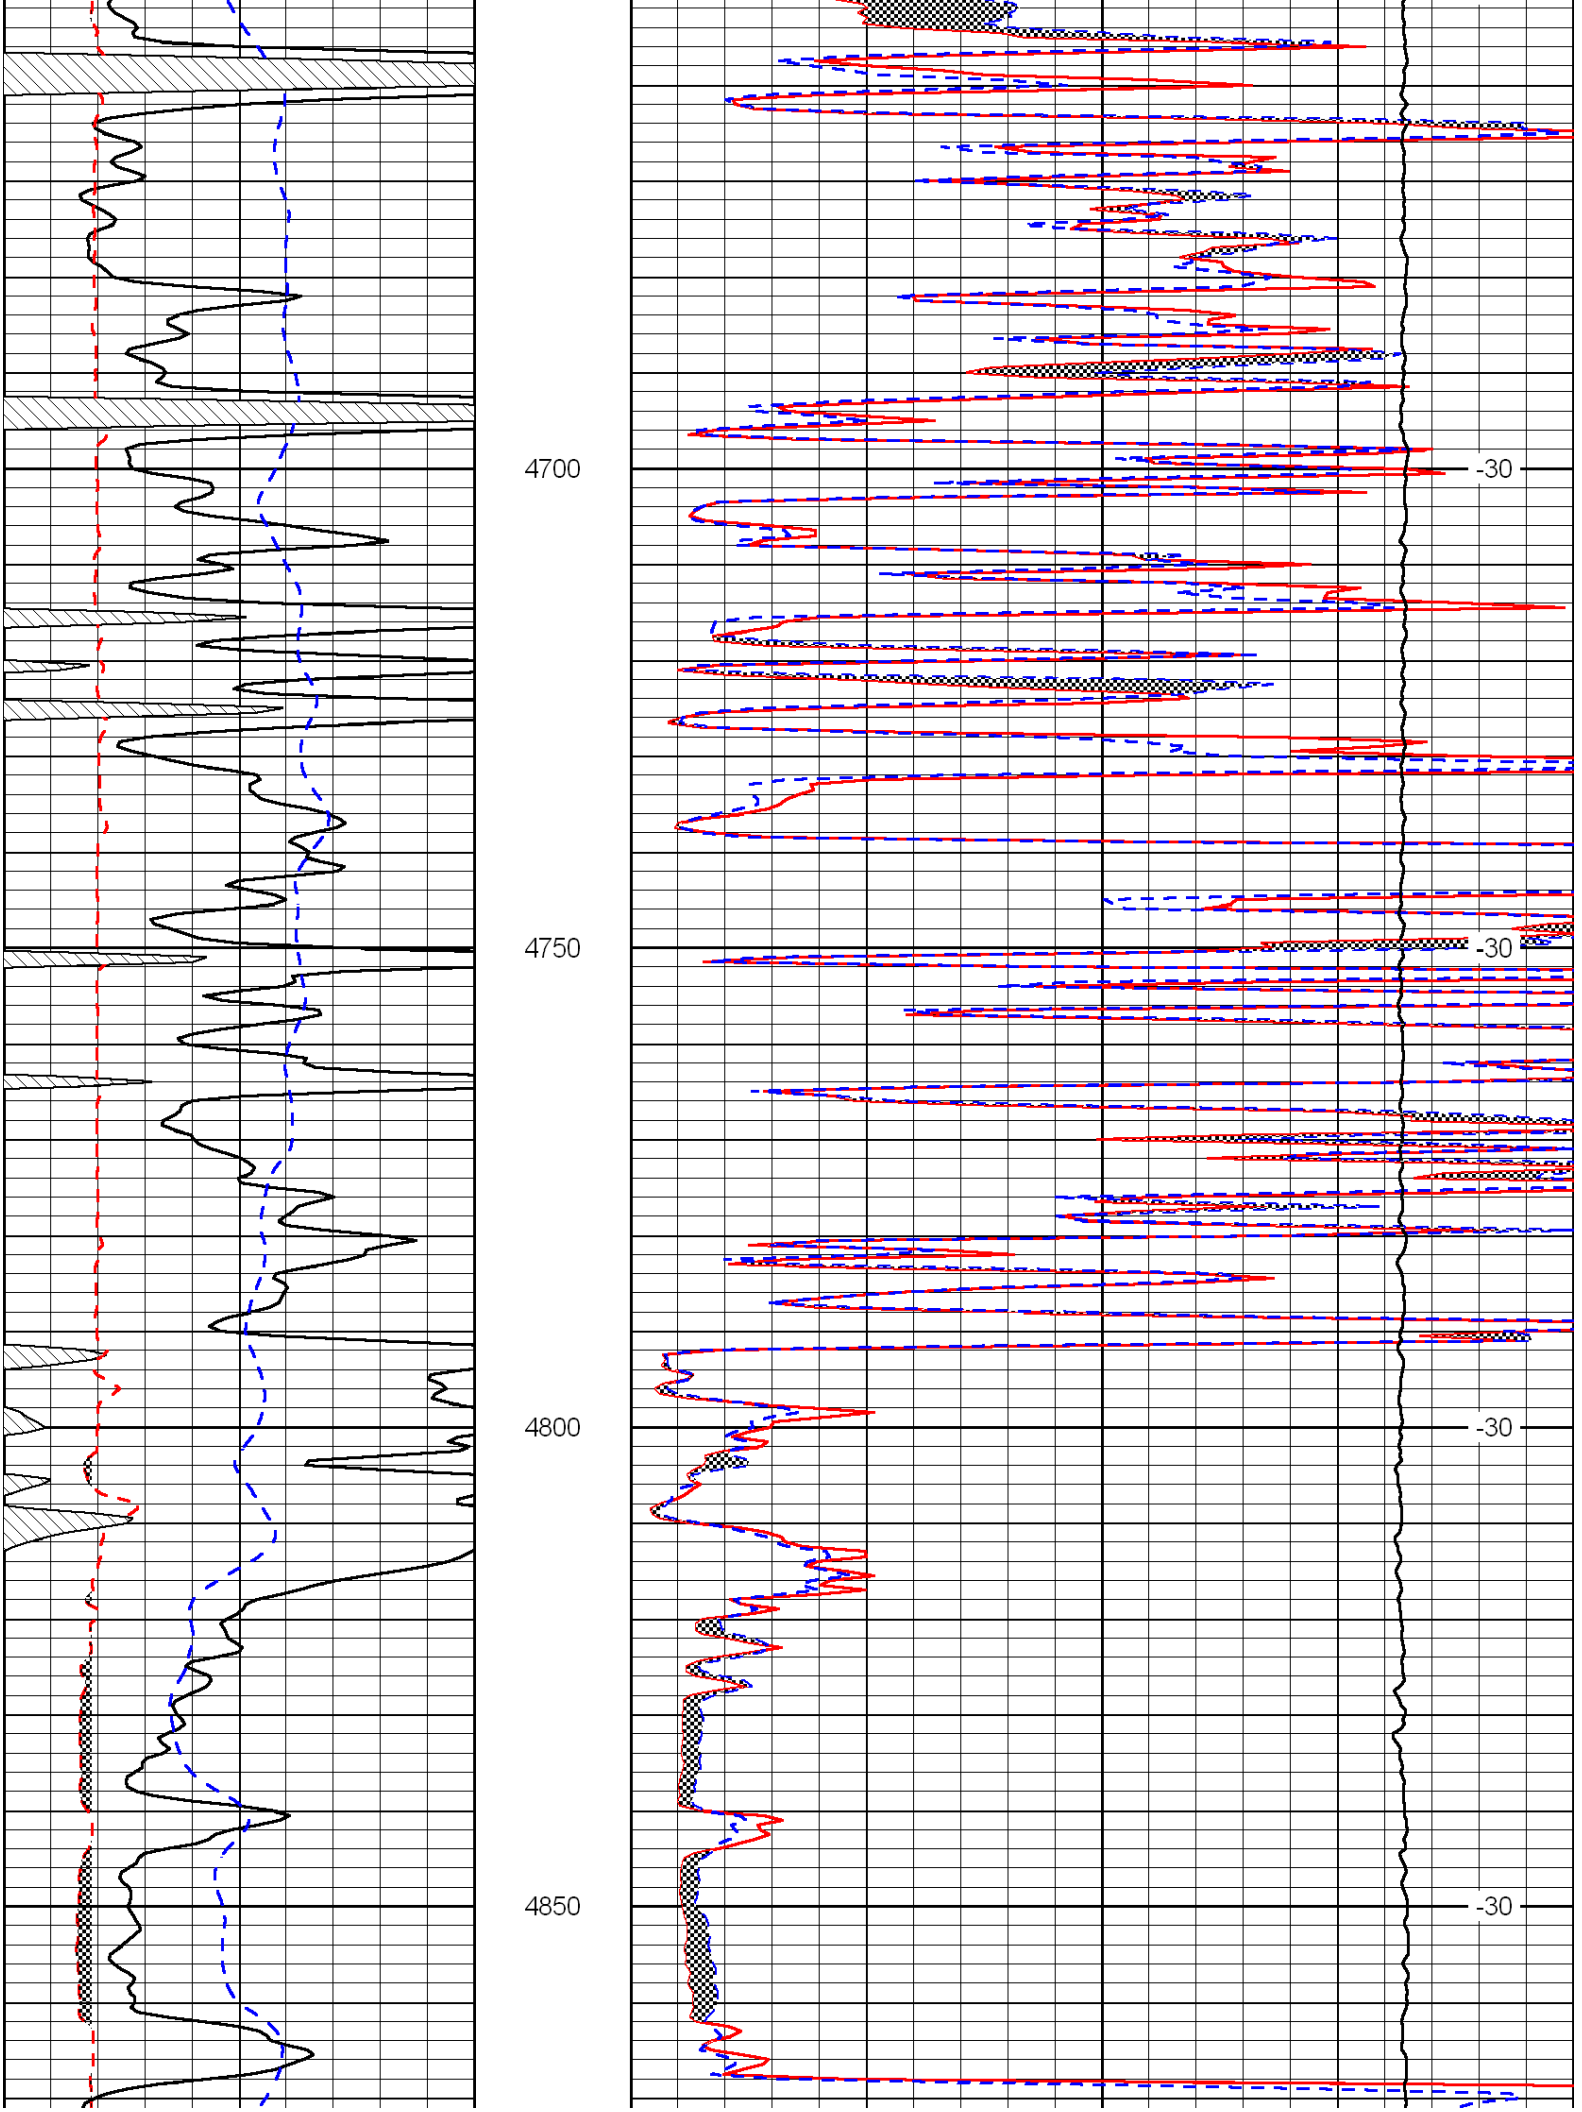
Database File:	c:\warrior\data\credo_mary no.1-22\credohd.db
Dataset Pathname:	dil/crdostk
Presentation Format:	micro
Dataset Creation:	Sun Mar 11 18:42:24 2012
Charted by:	Depth in Feet scaled 1:240

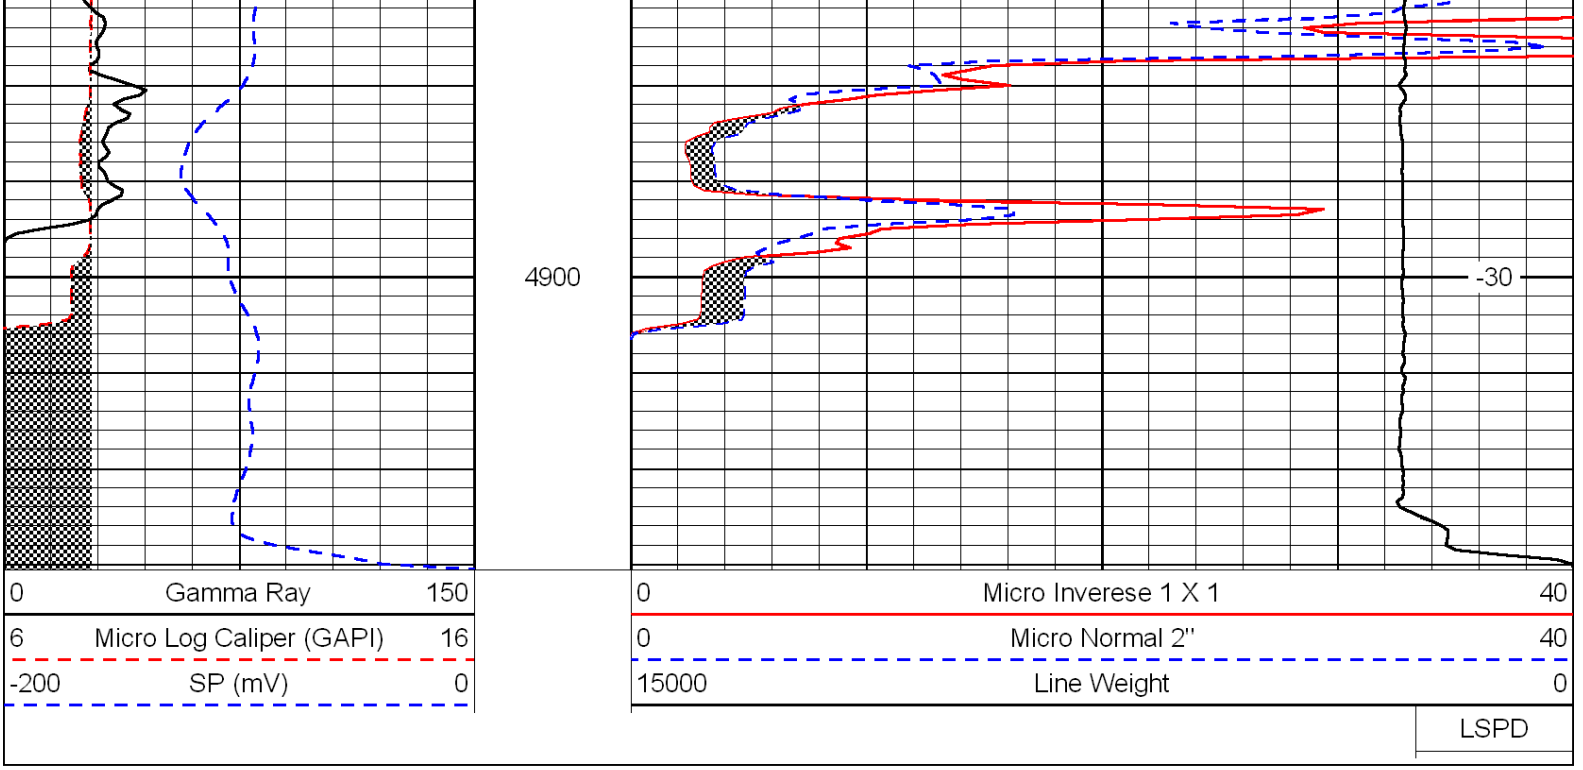

0 Gamma Ray 150
6 Micro Log Caliper (GAPI) 16
-200 SP (mV) 0
0 Micro Inverese 1 X 1 40
0 Micro Normal 2" 40
15000 Line Weight 0
LSPD
3800
3850
3900
3950
-32
-32
-31
-31


4000
4050
4100
4150
4200
-31
-31
-31
-31
-31


4250
-31
4300
-31
4350
-31
4400
-31


4450
4500
4550
4600
4650
-30
-30
-30
-30
-30


4700
4750
4800
4850
-30
-30
-30
-30



0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

0	Micro Inverese 1 X 1	40
0	Micro Normal 2''	40
15000	Line Weight	0

LSPD