



Microresistivity
Log

DIGITAL LOG (785) 625-3858

API No.		Company Range Oil Company, Inc.	
15-015-23,935-00-00		Well Dow "A" No.1	
Field Mellor East		County Butler State Kansas	
Location 330' FNL & 1750' FEL		Other Services CNL/CDL DIL	
Sec: 18 Twp: 24S Rge: 4E		Elevation	
Permanent Datum Ground Level		K.B. 1333	
Log Measured From Kelly Bushing		D.F. 1323	
Drilling Measured From Kelly Bushing		G.L. 1323	
Date	3/9/2012		
Run Number	One		
Depth Driller	2535		
Depth Logger	2538		
Bottom Logged Interval	2537		
Top Log Interval	1400		
Casing Driller	8.625 @ 227		
Casing Logger	226		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	1.400		
Density / Viscosity	9.3 56		
pH / Fluid Loss	9.5 8.2		
Source of Sample	Flowline		
Rm @ Meas. Temp	1.35 @ 61		
Rmf @ Meas. Temp	1.02 @ 61		
Rmc @ Meas. Temp	1.82 @ 61		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.81 @ 101		
Operating Rig Time	3 Hours		
Max Rec. Temp. F	101		
Equipment Number	17		
Location	Hays		
Recorded By	C. Desaire		
Witnessed By	Roger Martin		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Potwin, E to River Valley Rd,
2 1/2 N to 100 Rd,
1 1/2 W, S Into

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

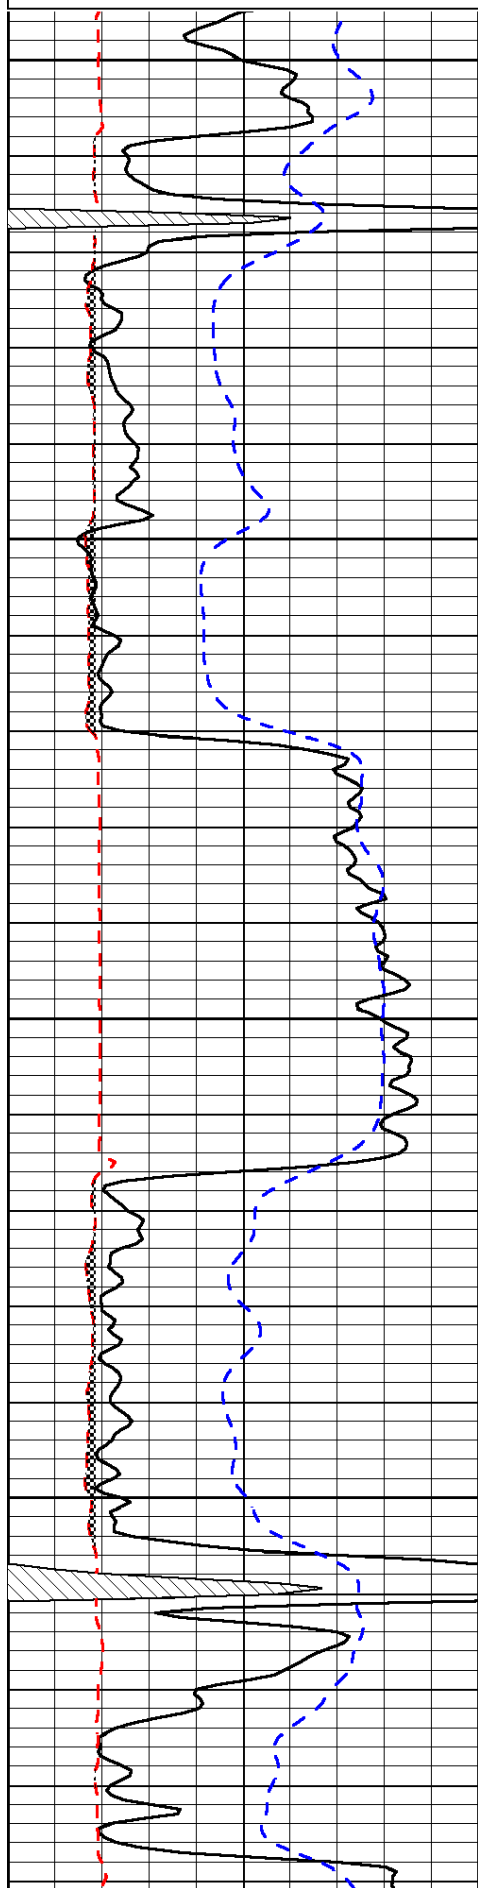


1400

1450

1500

1550

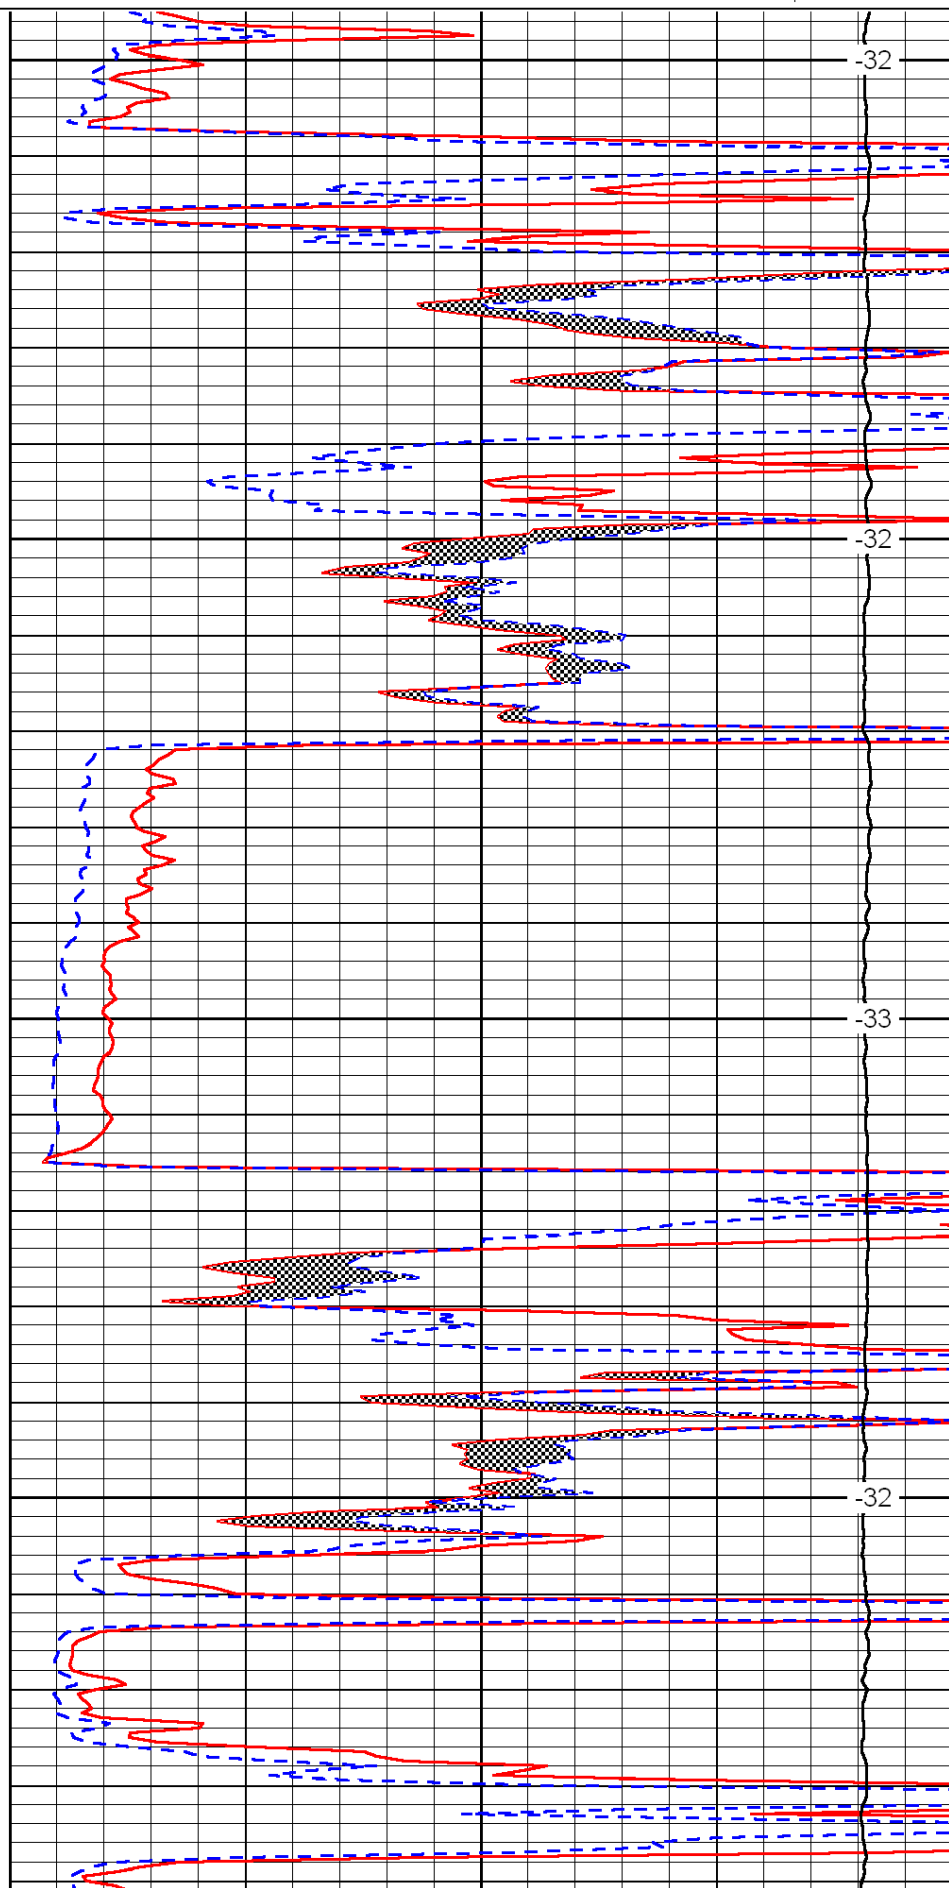



-32


-32

-33

-32

LSPD

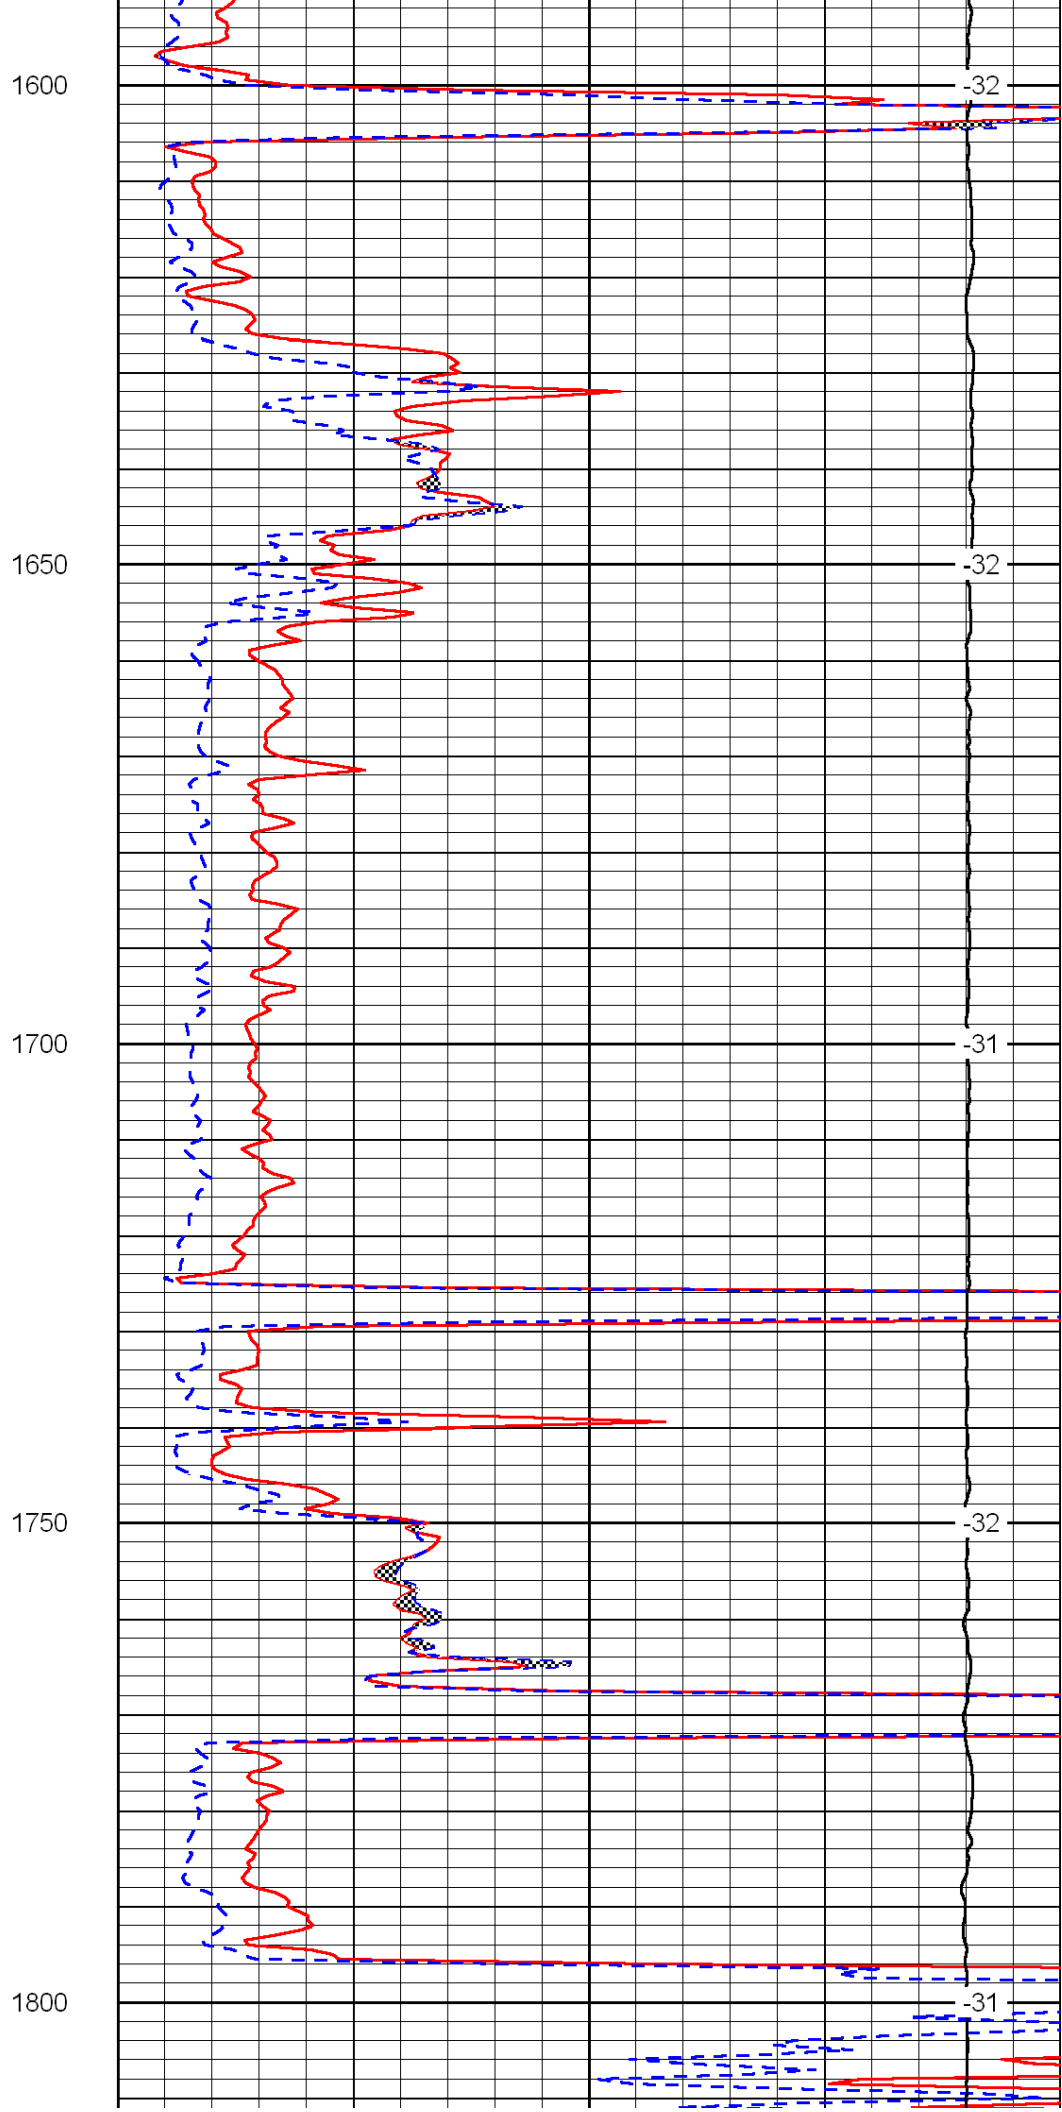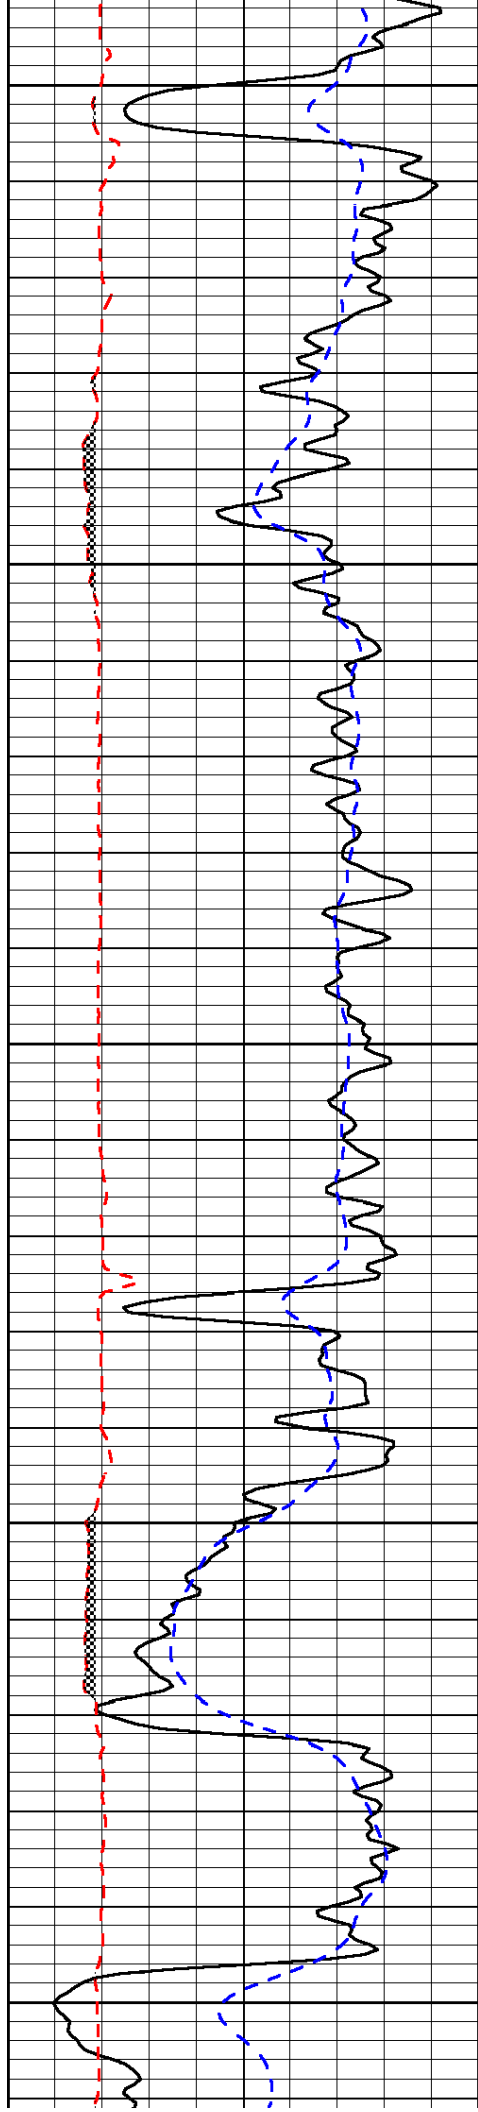

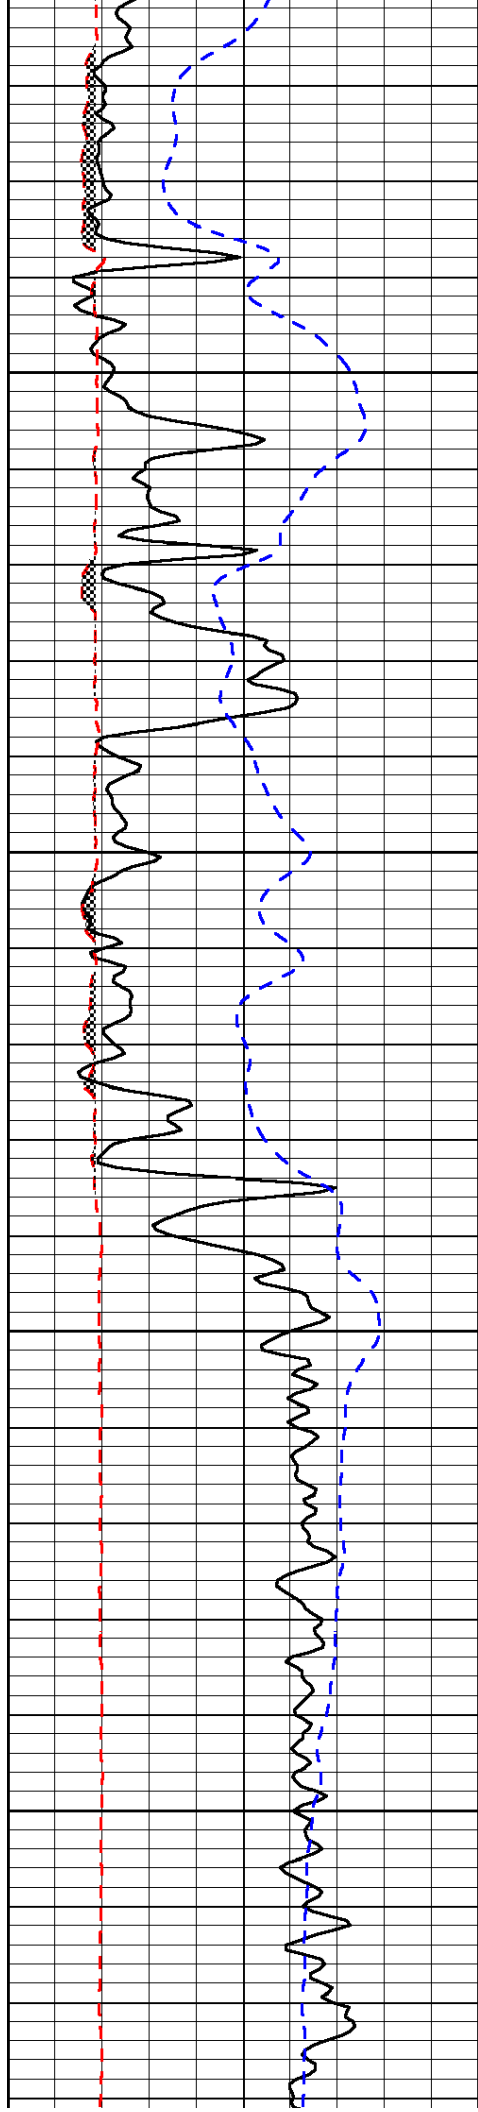


1850

1900

1950

2000

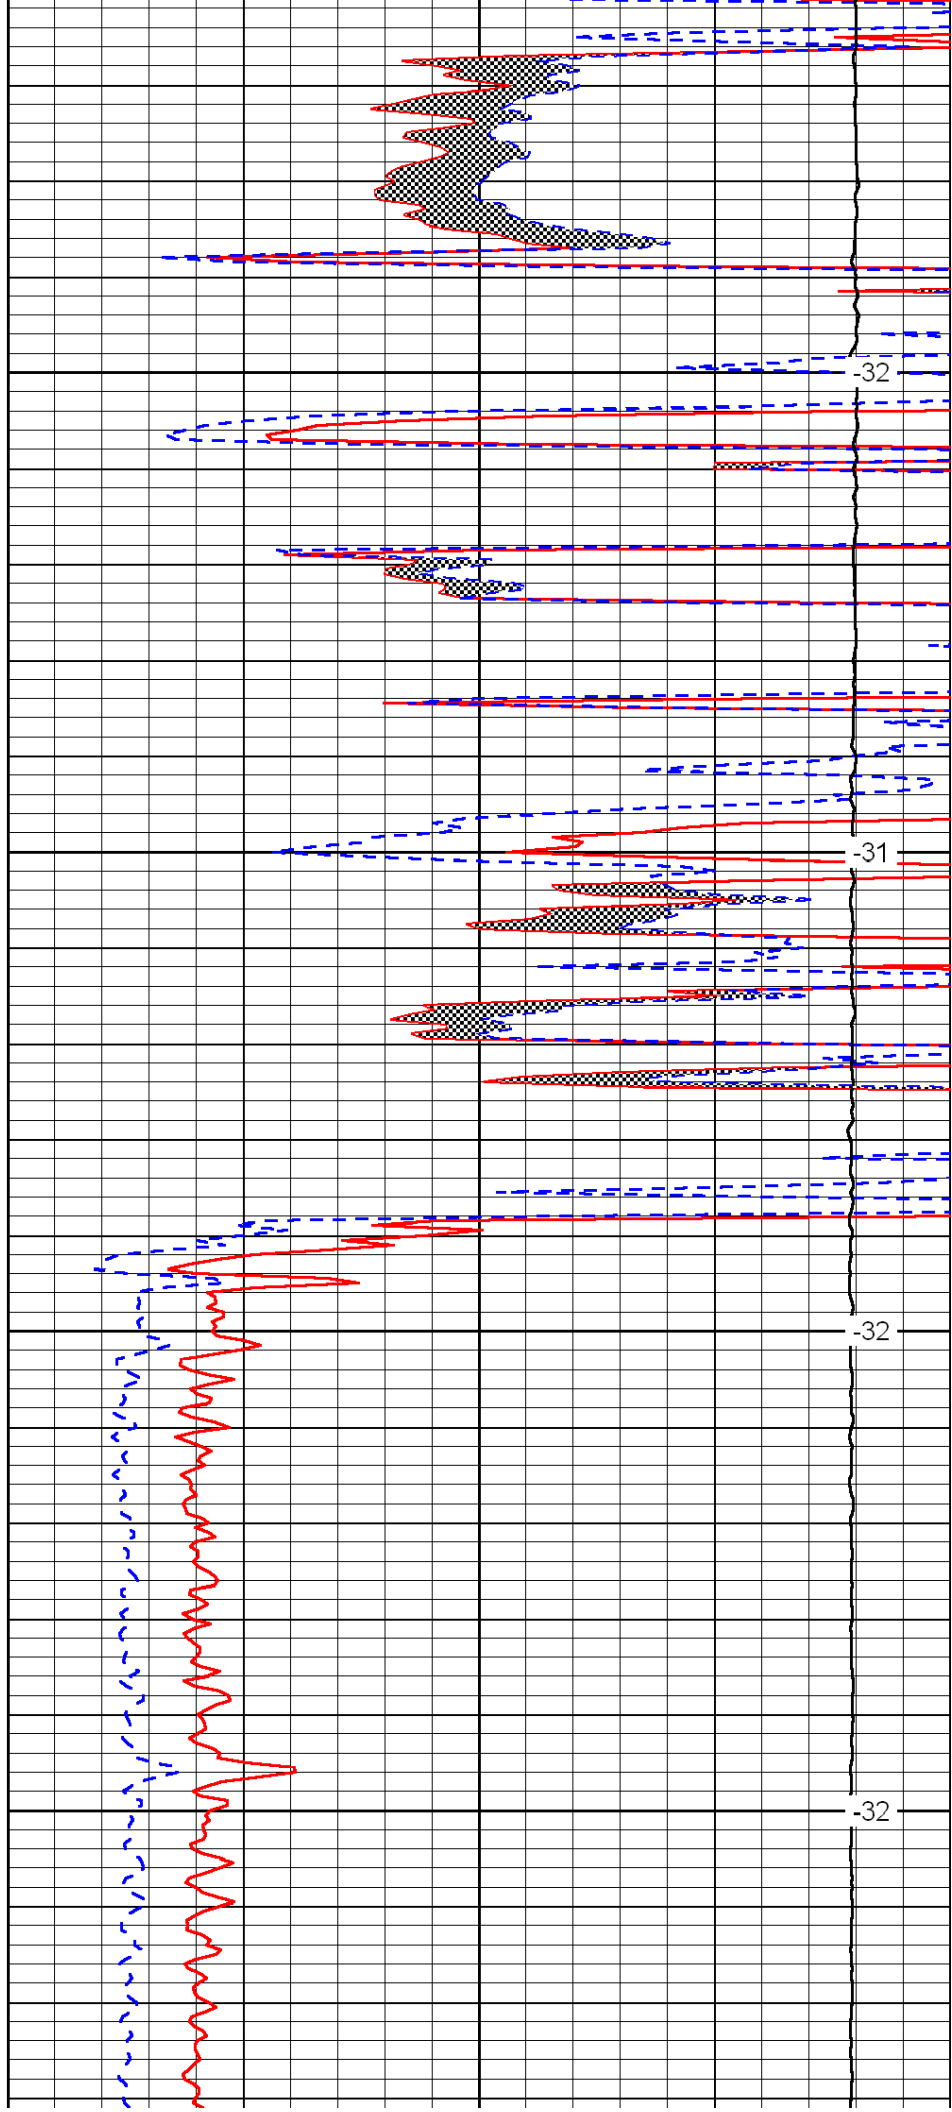


-32

-31

-32

-32

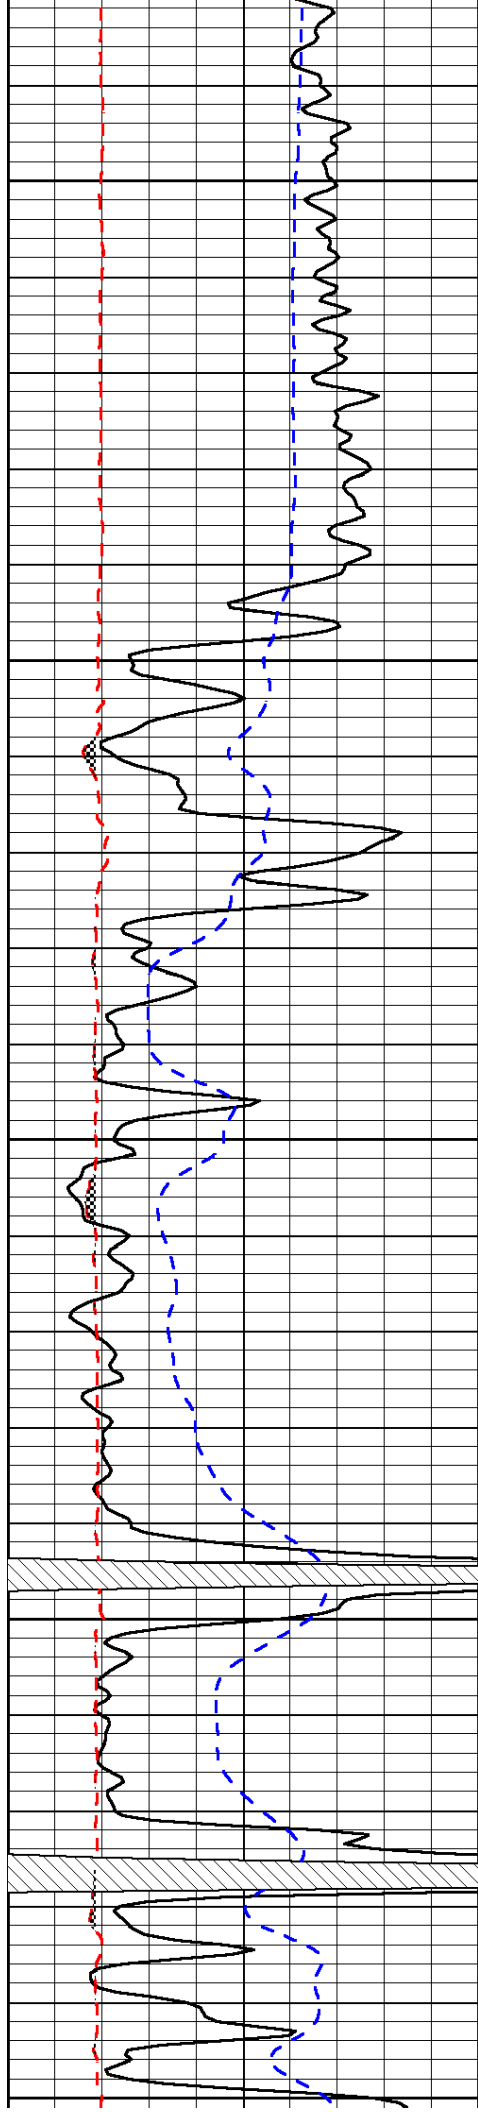


2050

2100

2150

2200

2250

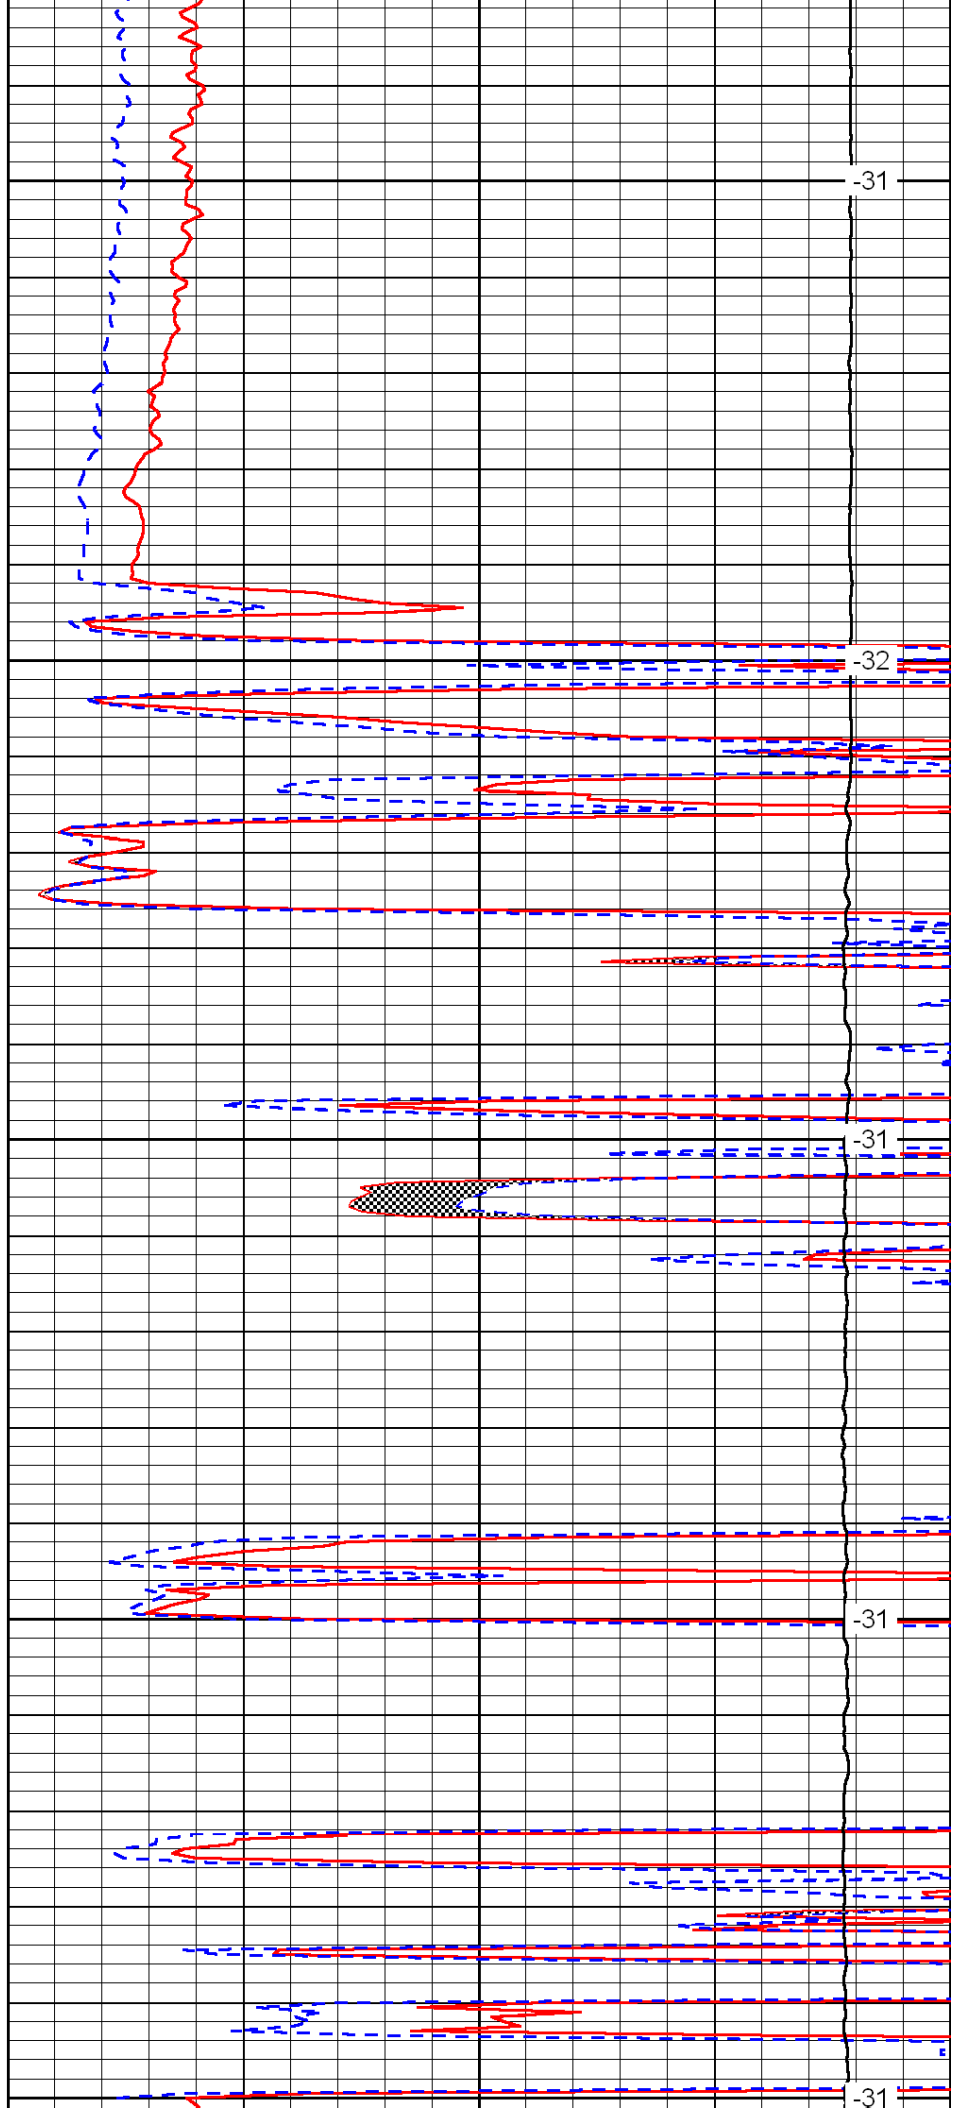


-31

-32

-31

-31

-31

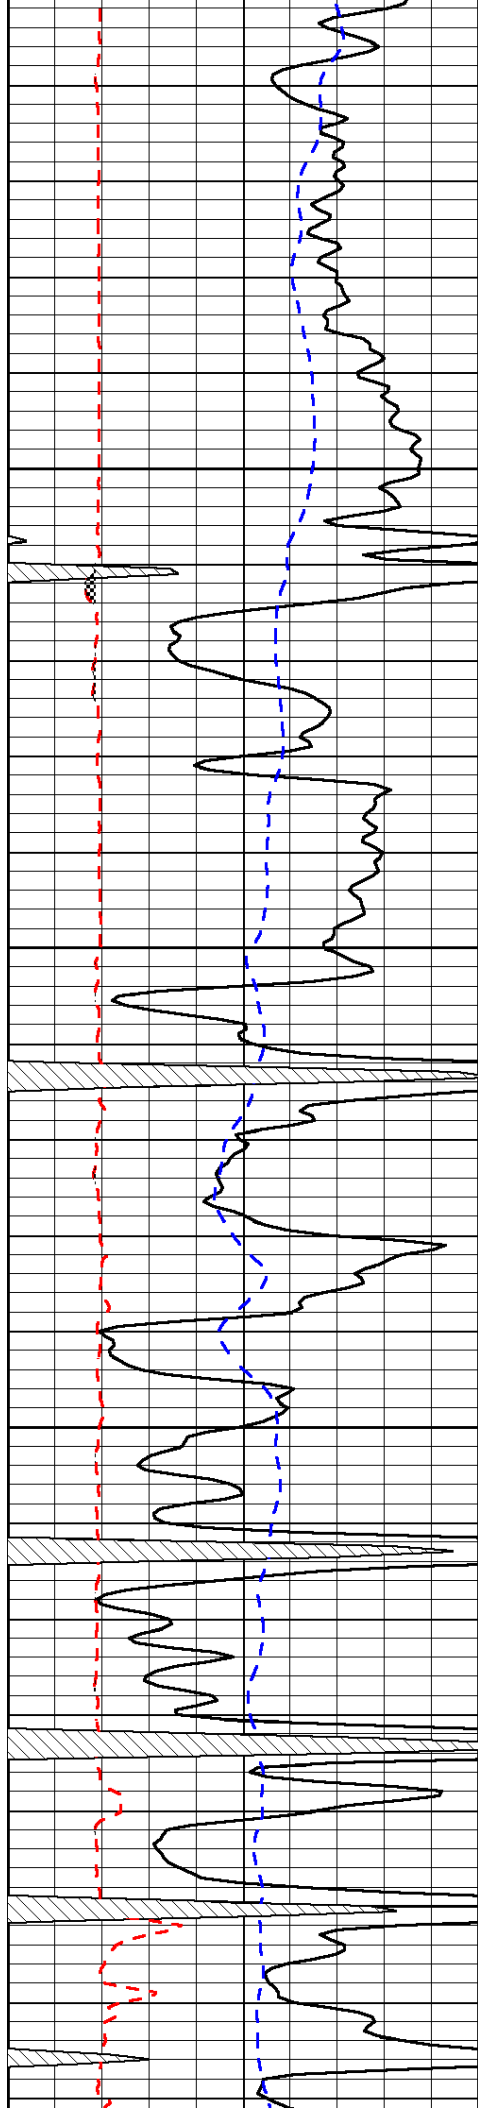


2300

2350

2400

2450

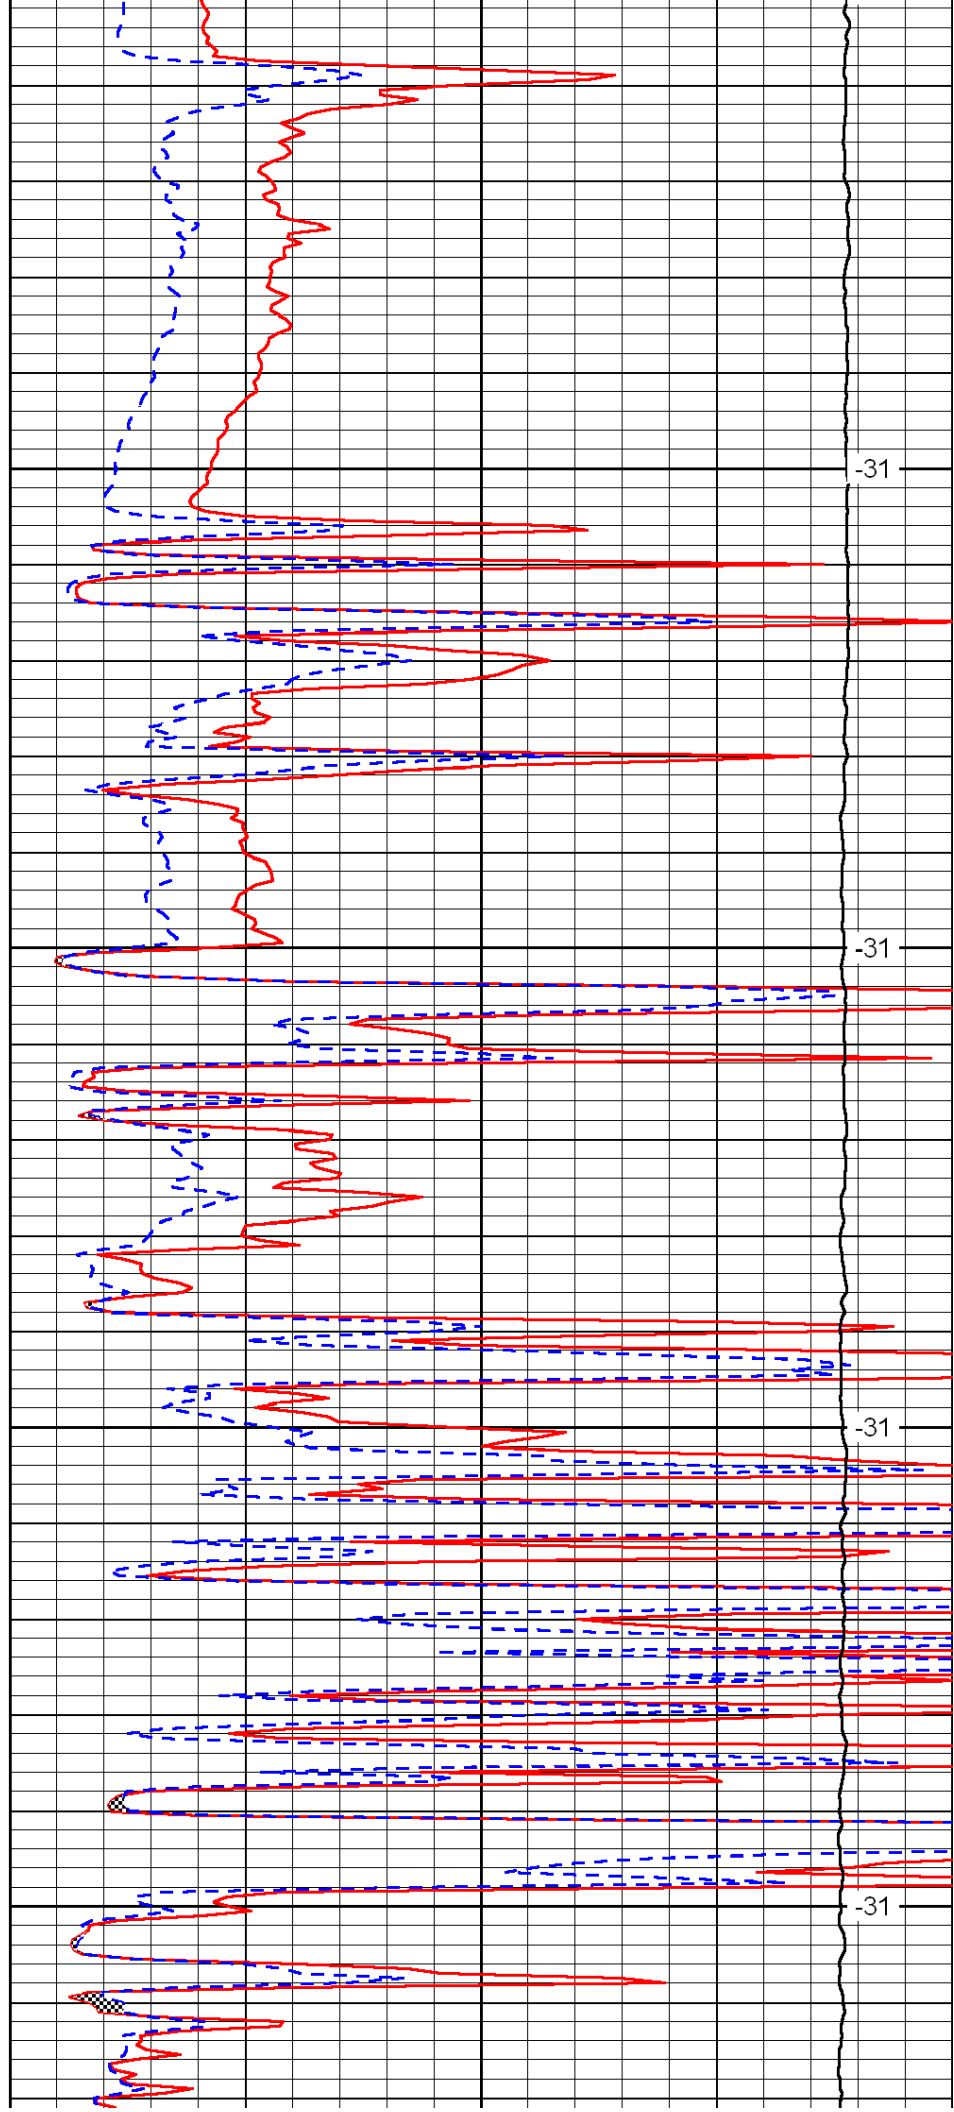


-31


-31

-31

-31

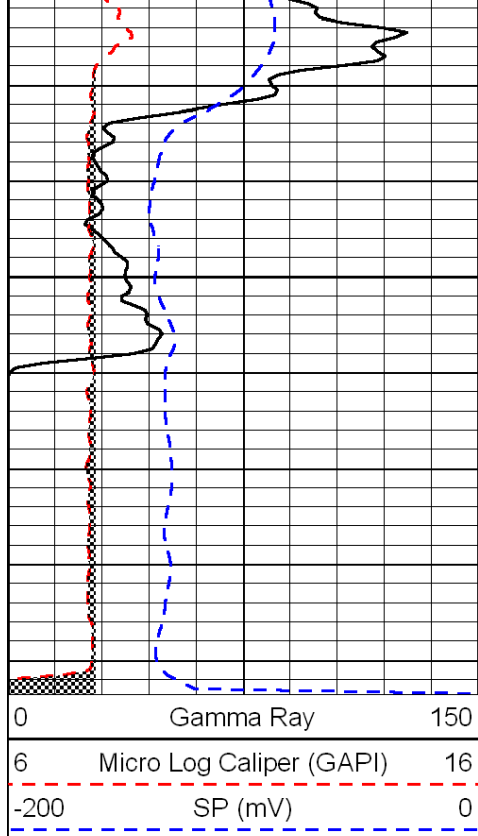

2500

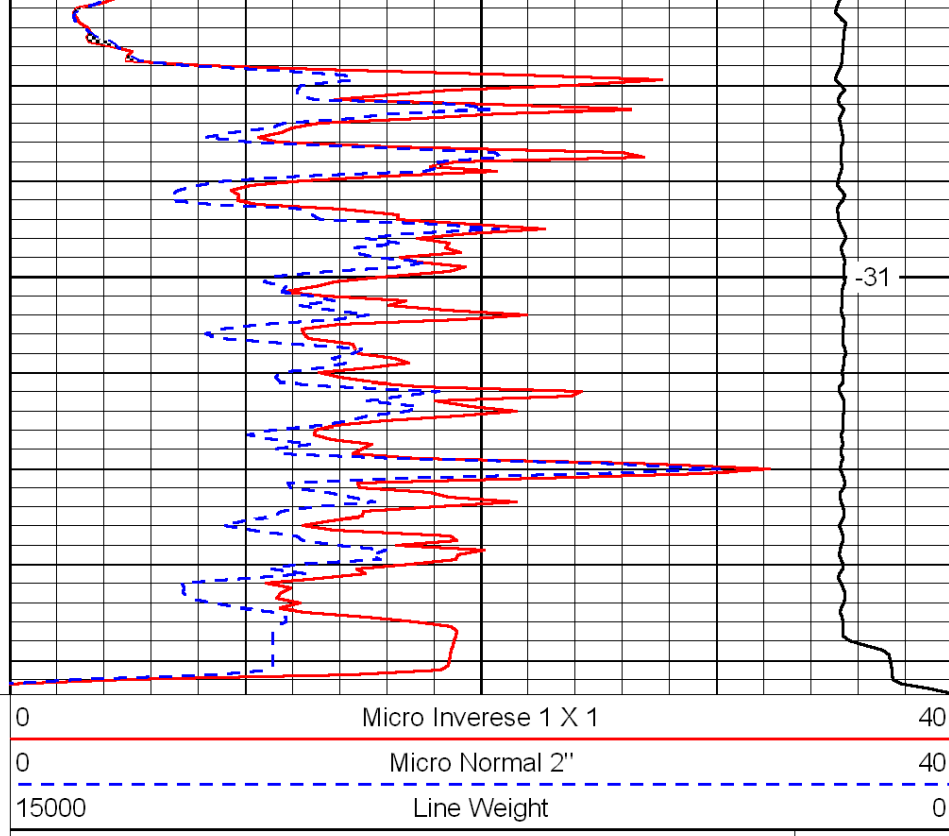

LSPD