



Microresistivity
Log

DIGITAL LOG (785) 625-3858

API No.		Company RAMA Operating Co., Inc.			
		Well Moore #1-27			
		Field North Star			
		County	Stafford	State	Kansas
15-185-23738-00-00		Location	NE SE SW NE 765' FNL / 1560' FEL		
		Sec: 27	Twp: 24S	Rge: 12W	Other Services CNL / CDL DIL
Permanent Datum		Ground Level	Elevation 1876	K.B. 1885	
Log Measured From		Kelly Bushing	9 Ft. Above Perm. Datum	D.F. 1876	
Drilling Measured From		Kelly Bushing	G.L. 1876		
Date		3/8/2012			
Run Number		Two			
Depth Driller		4150			
Depth Logger		4152			
Bottom Logged Interval		4151			
Top Log Interval		2900			
Casing Driller		8.625 @ 280			
Casing Logger		277			
Bit Size		7.875			
Type Fluid in Hole		Chemical			
Salinity, ppm CL		7000			
Density / Viscosity		9.3	65		
pH / Fluid Loss		9.0	11.2		
Source of Sample		Flowline			
Rm @ Meas. Temp		1.30 @ 55			
Rmf @ Meas. Temp		0.98 @ 55			
Rmc @ Meas. Temp		1.76 @ 55			
Source of Rmf / Rmc		Charts			
Rm @ BHT		0.61 @ 118			
Operating Rig Time		4 Hours			
Max Rec. Temp. F		118			
Equipment Number		15			
Location		Hays			
Recorded By		R. Barnhart			
Witnessed By		Josh Austin			

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Stafford, KS:
1S, 1 1/4W, S into


0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

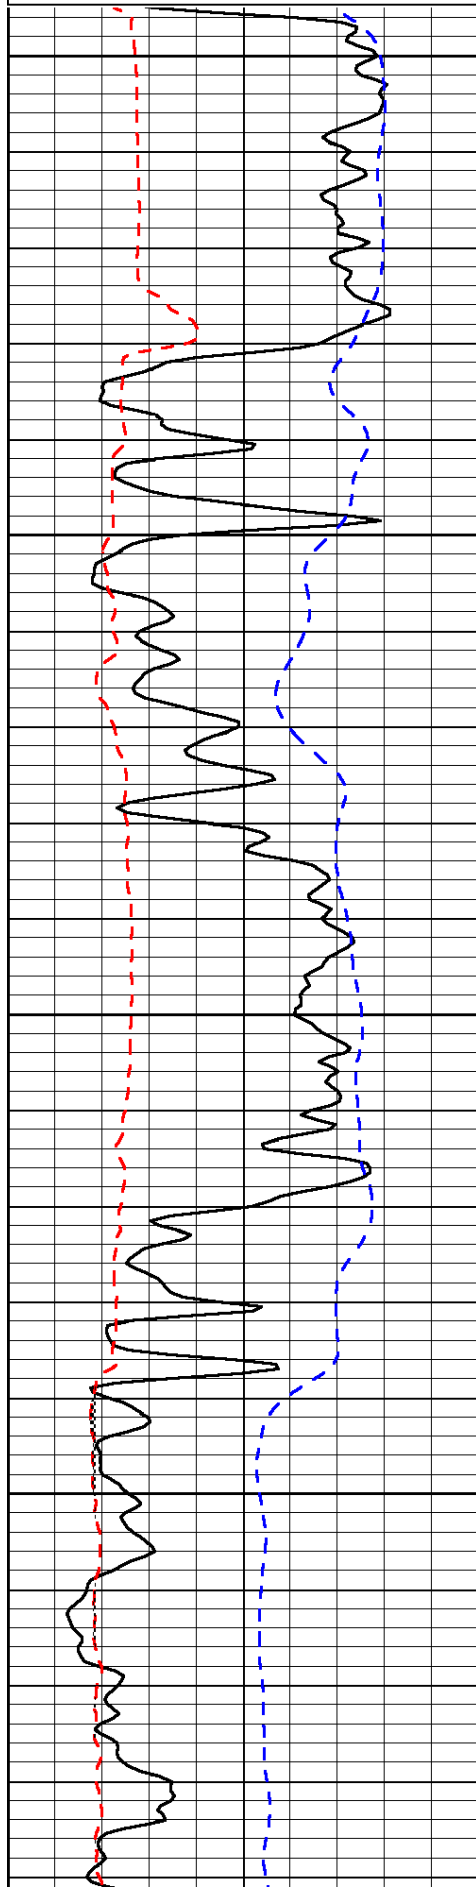


2900
2950
3000
3050

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

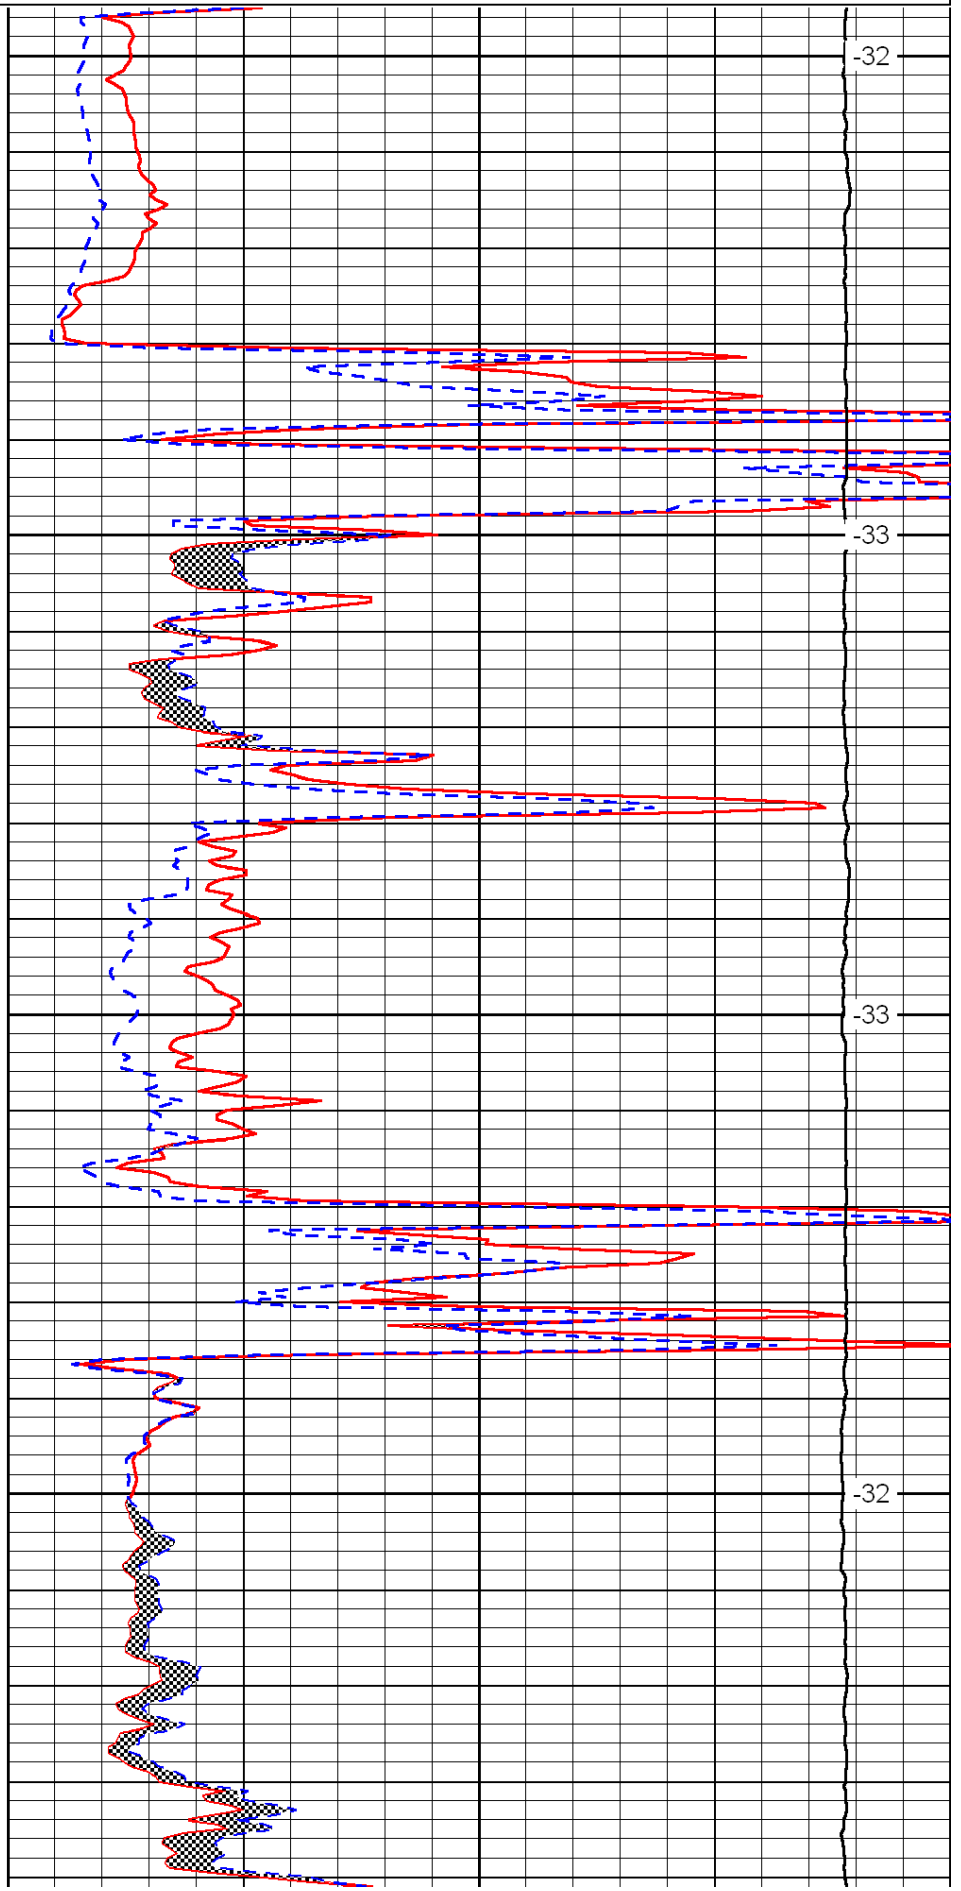

-32
-33
-33
-32

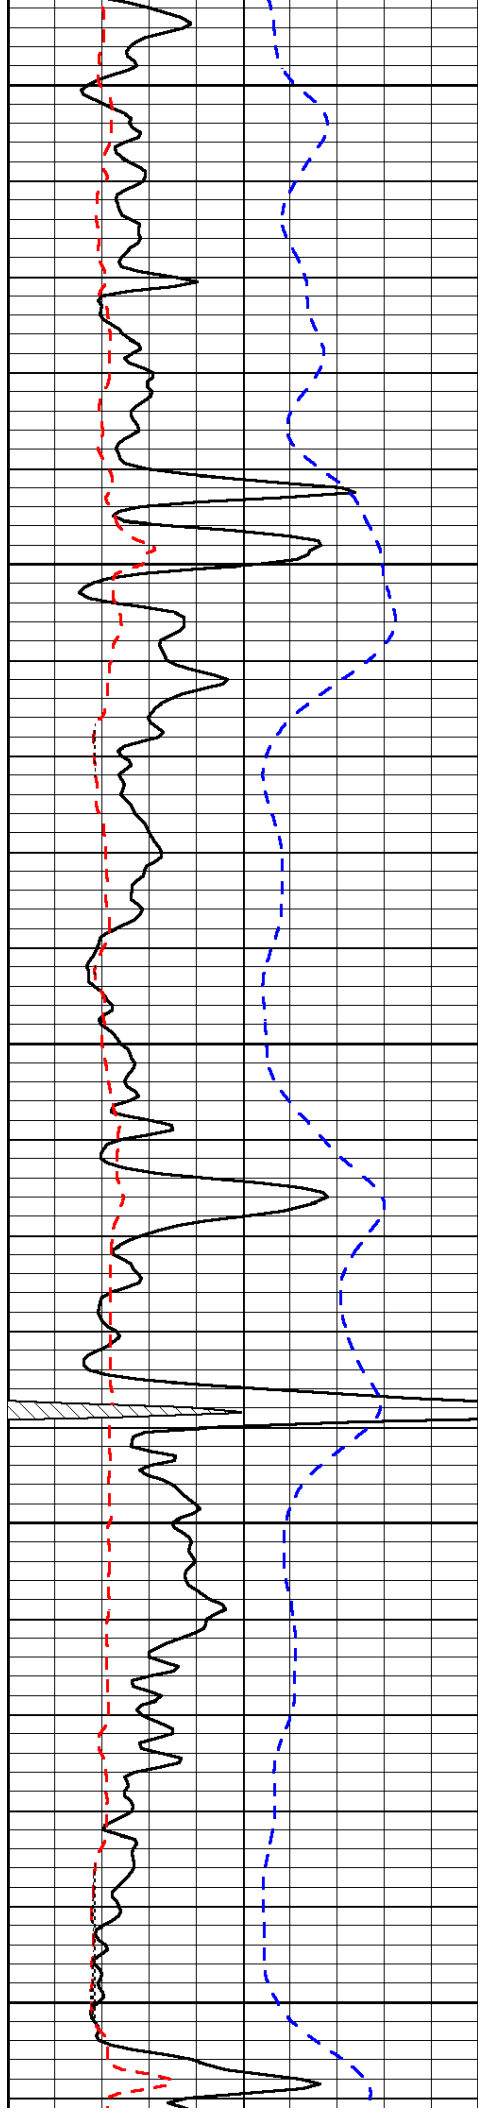


3100

3150

3200

3250

3300

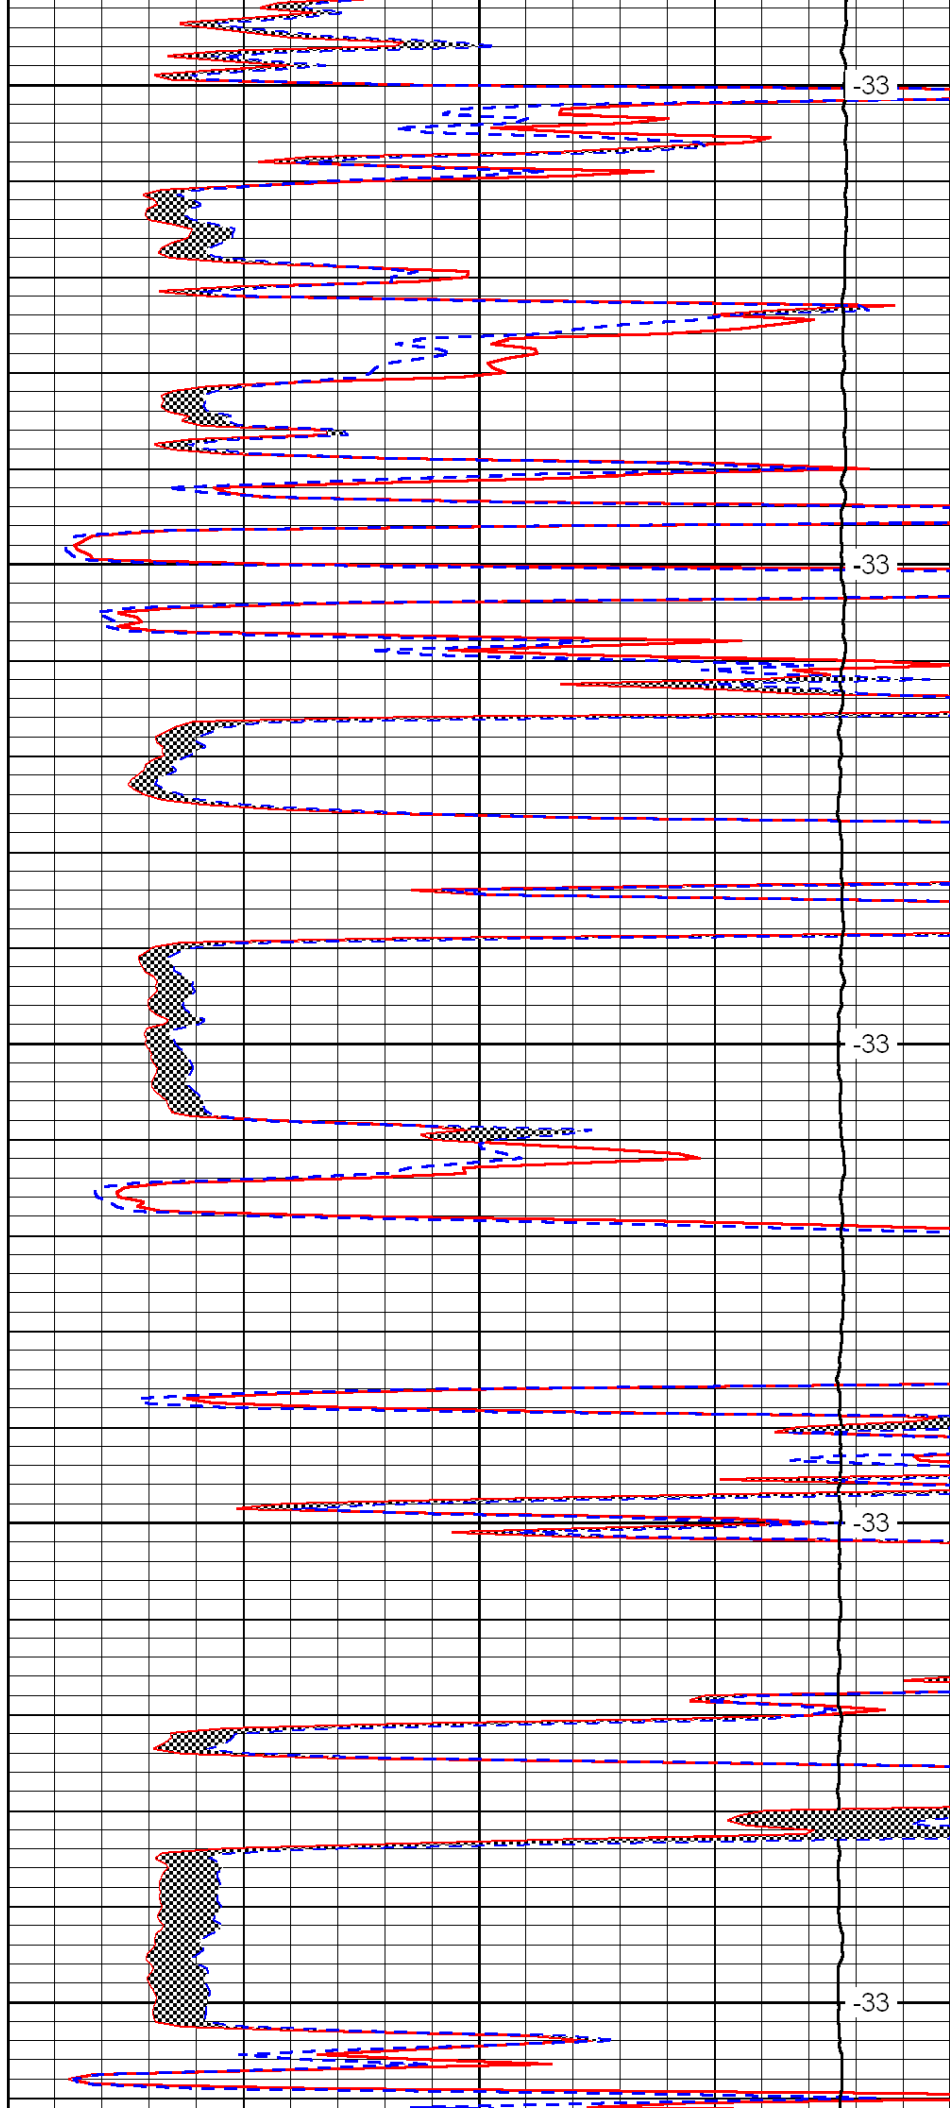


-33

-33

-33

-33

-33

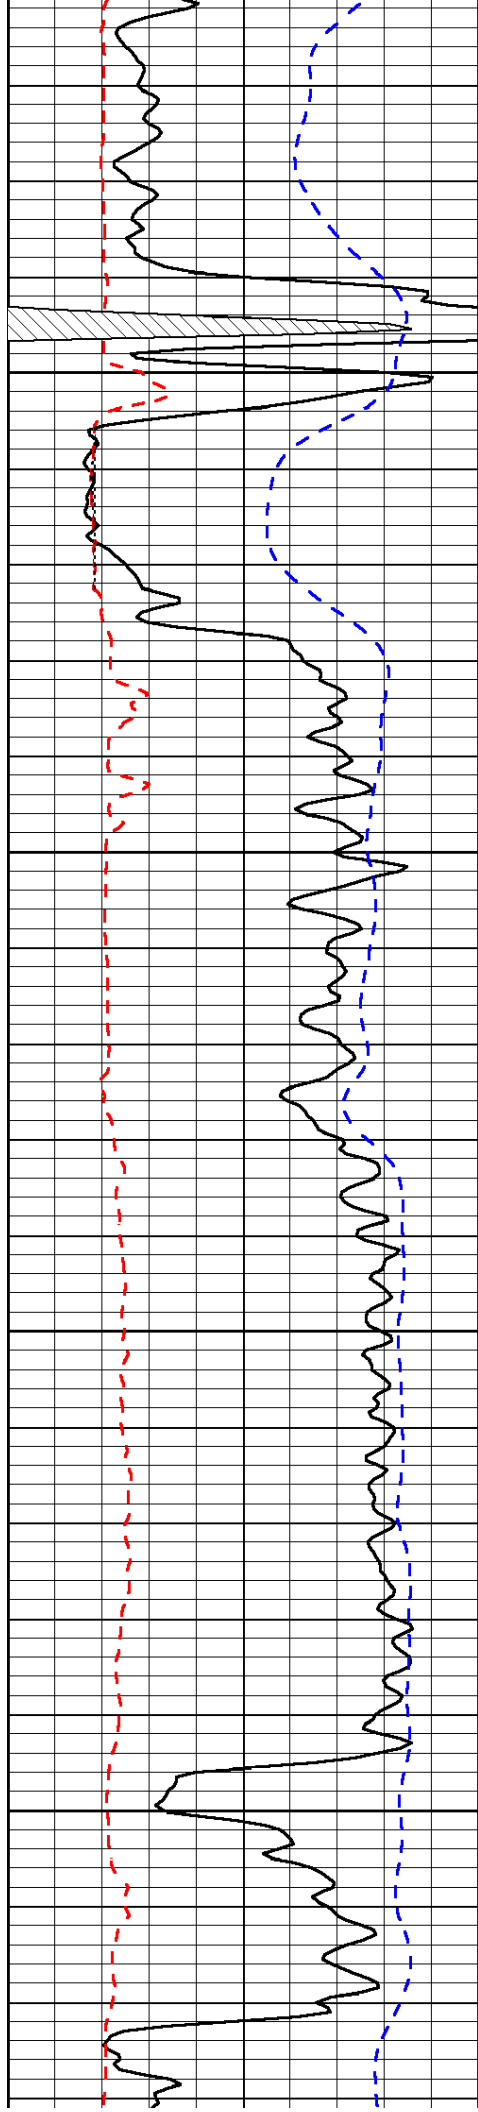



3350

3400

3450

3500

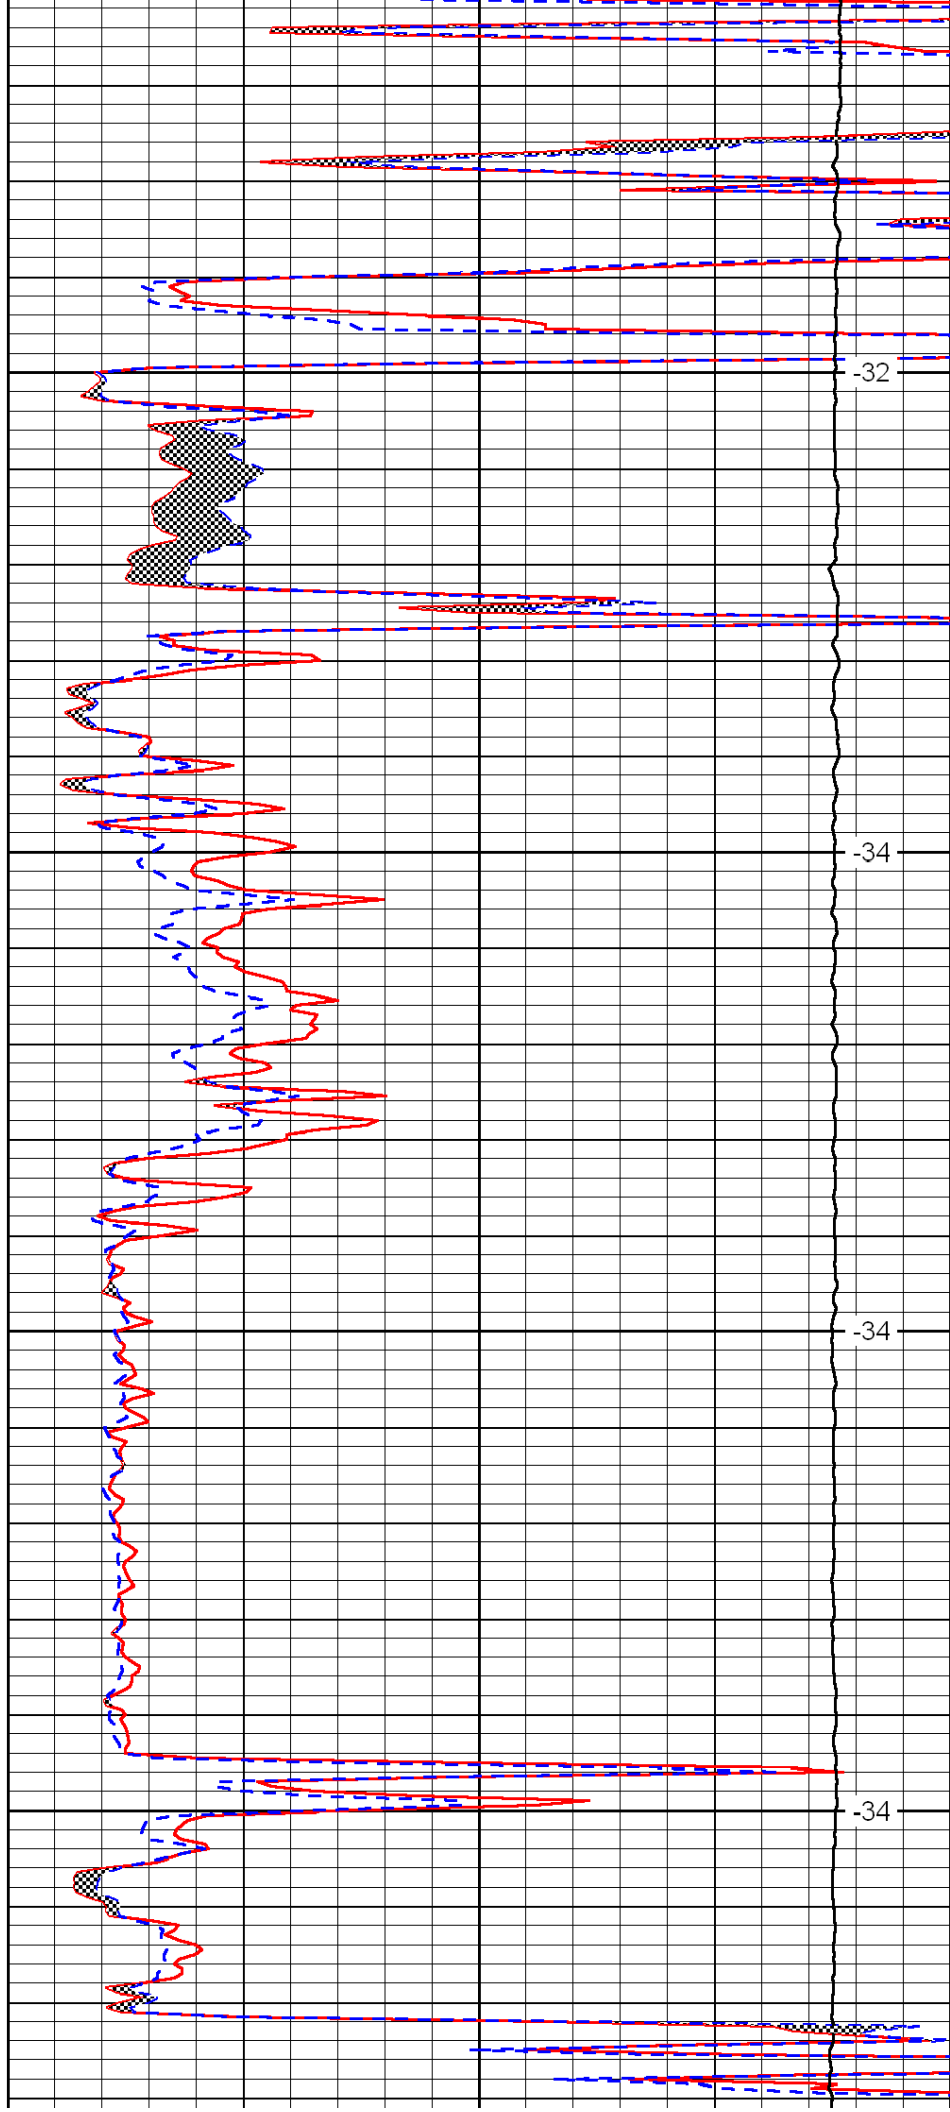

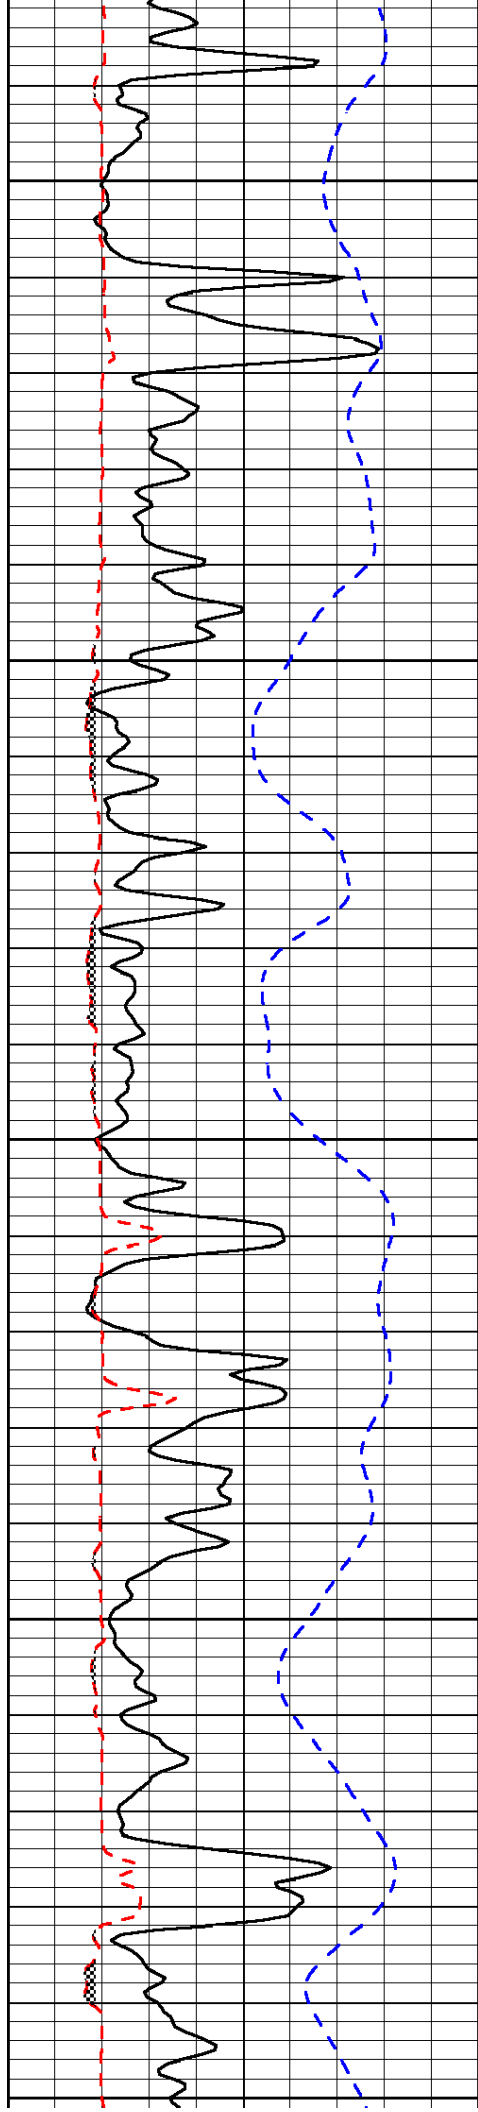


3550

3600

3650

3700

3750

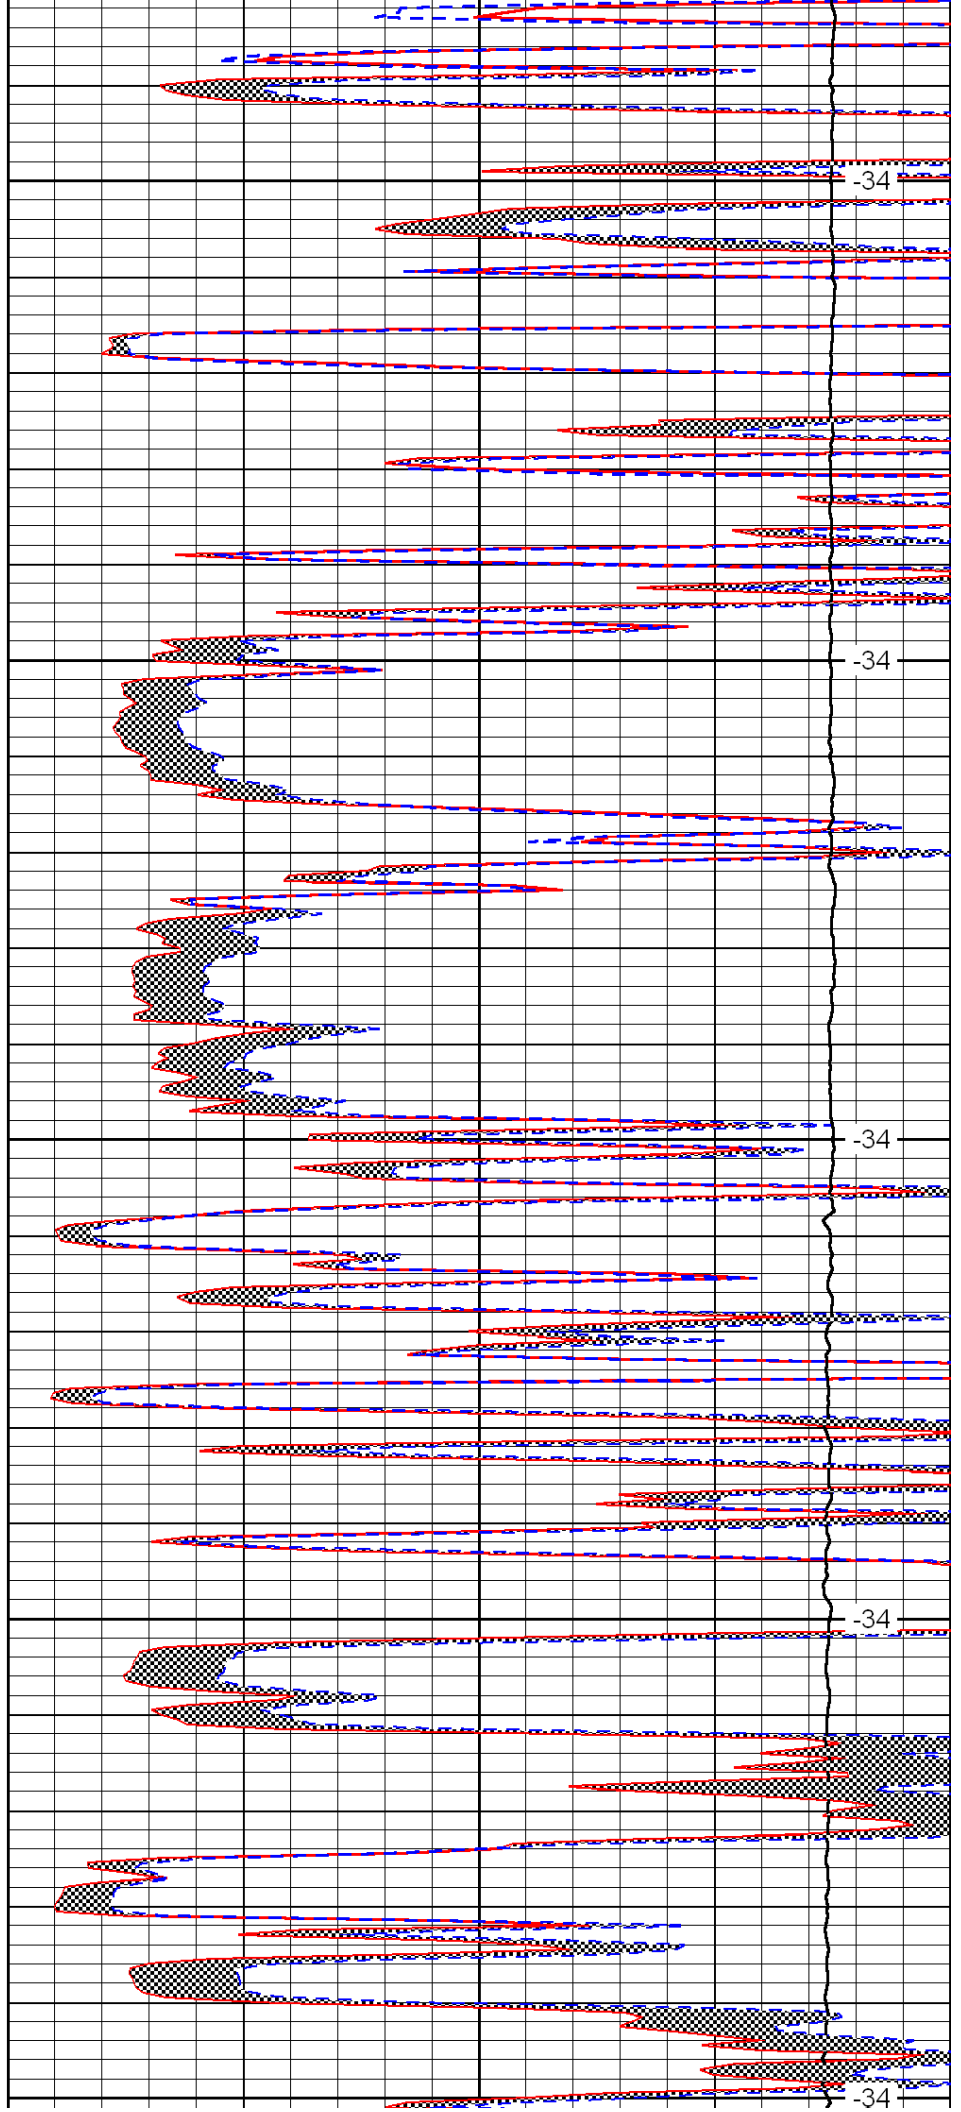


-34

-34

-34

-34

-34

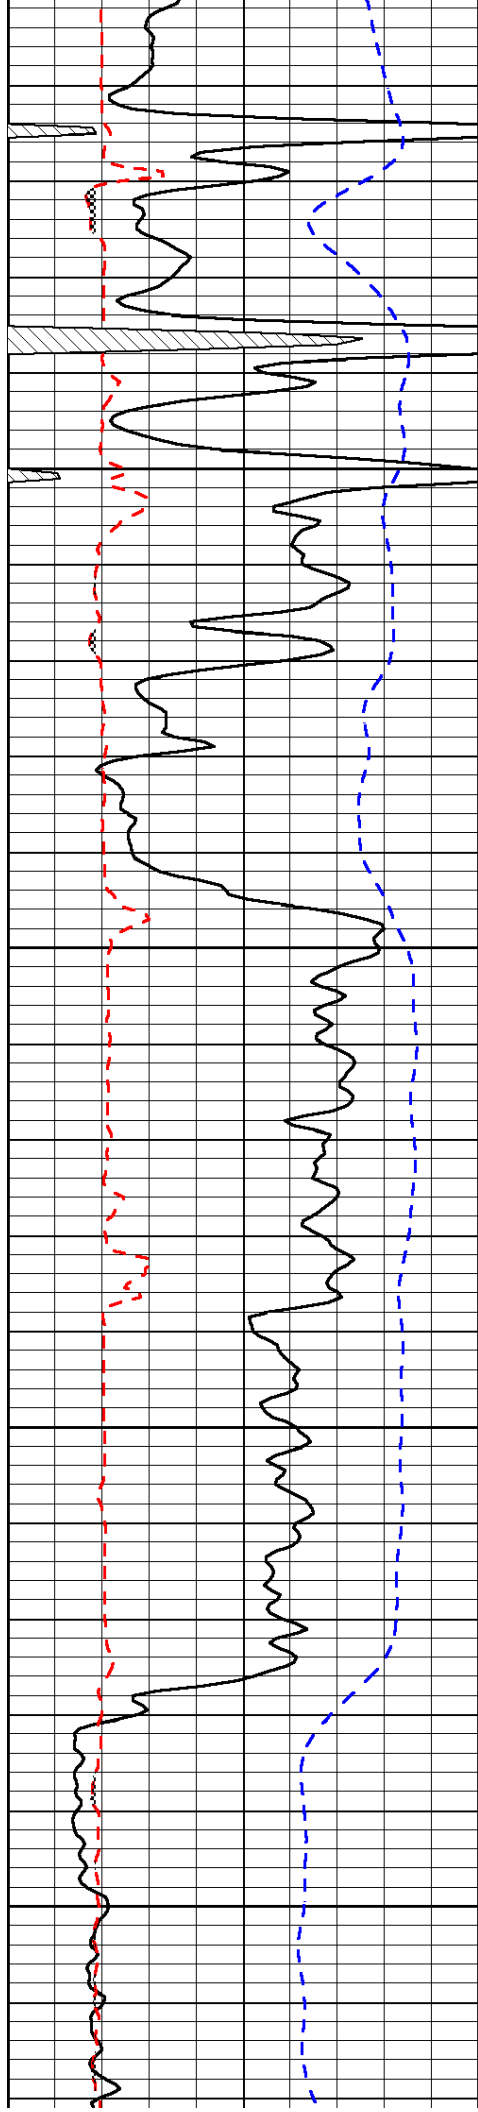


3800

3850

3900

3950

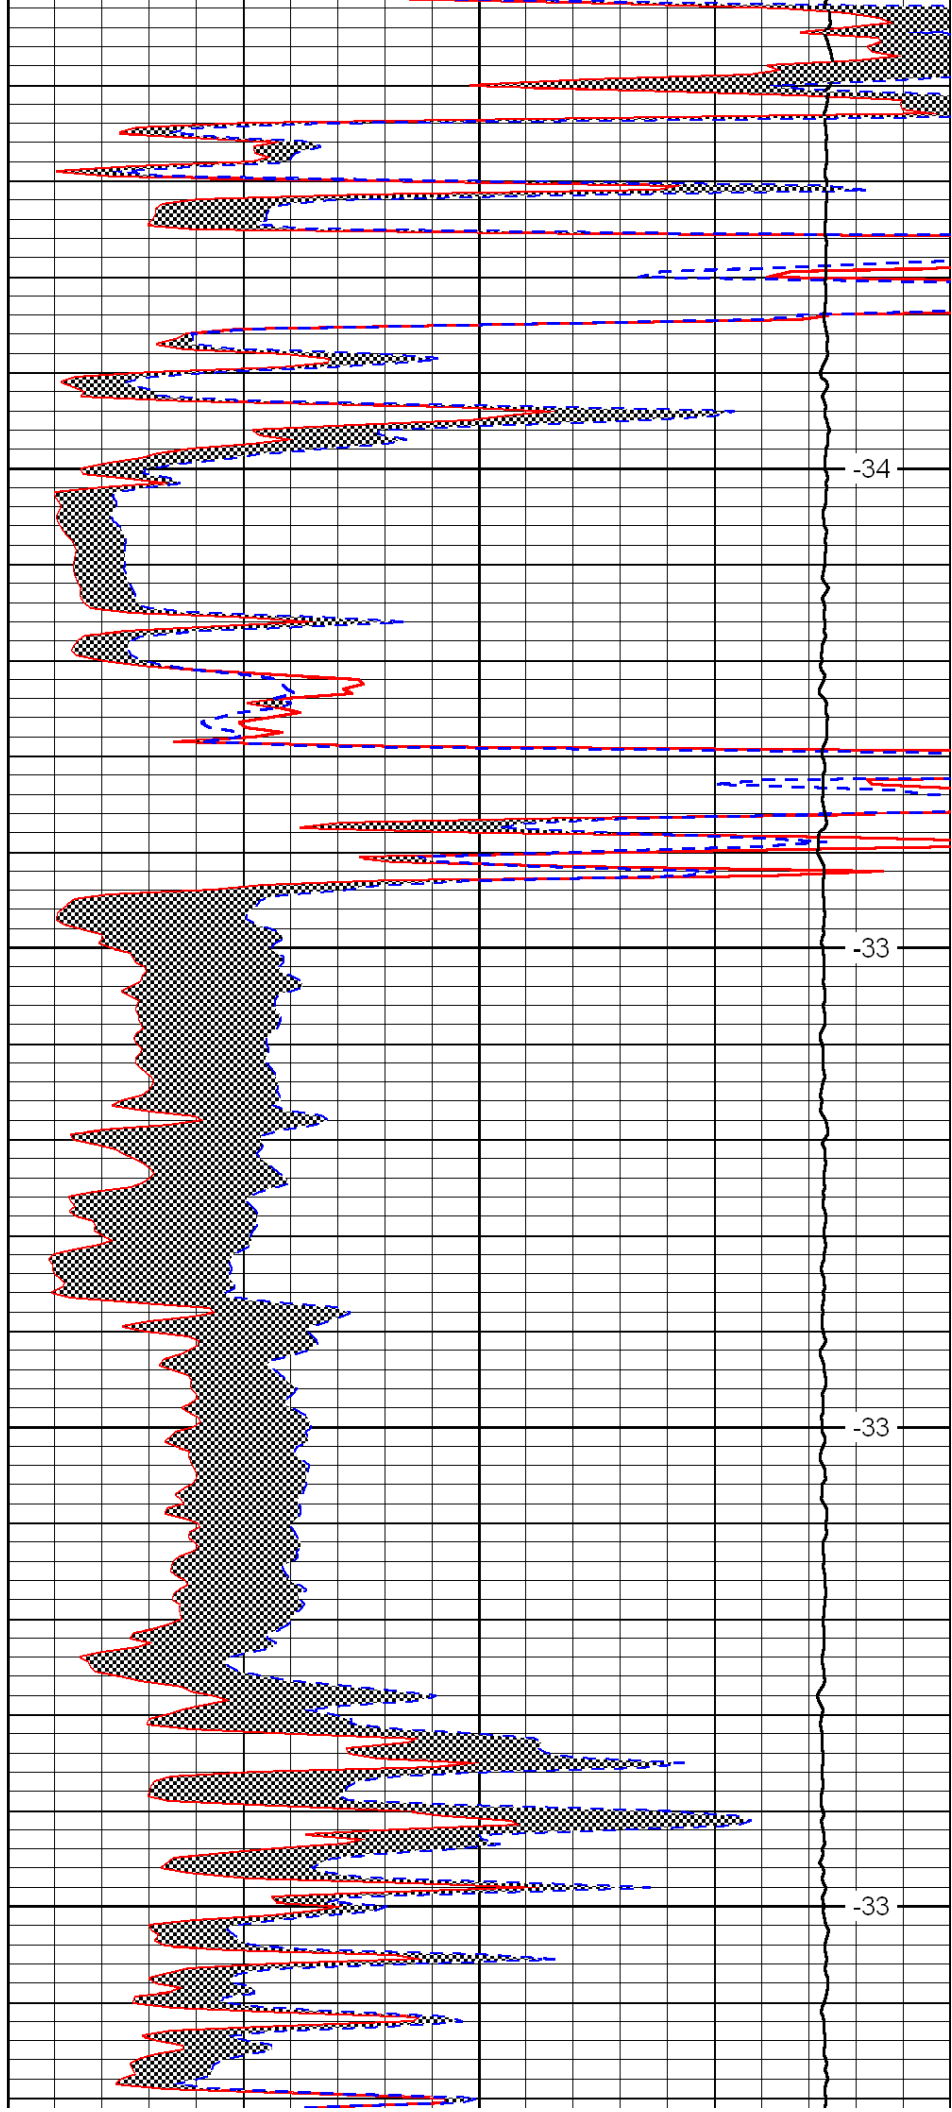

-34

-33

-33

-33

