



DIGITAL LOG (785) 625-3858

Microresistivity Log

API No.	15-101-22349-00-00		
Company	Credo Petroleum Corporation		
Well	Foote #1-10		
Field	Terwilliger West		
County	Lane	State	Kansas
Location	1315' FNL / 520' FWL		
Sec: 10	Twp: 17S	Rge: 29W	Other Services CNL / CDL DIL / BHCS
Permanent Datum	Ground Level	Elevation 2809	Elevation
Log Measured From	Kelly Bushing	5 Ft. Above Perm. Datum	K.B. 2814
Drilling Measured From	Kelly Bushing		D.F. 2809

Date	2/6/2012		
Run Number	Two		
Depth Driller	4620		
Depth Logger	4622		
Bottom Logged Interval	4621		
Top Log Interval	3500		
Casing Driller	8.625 @ 266		
Casing Logger	258		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity,ppm CL	2200		
Density / Viscosity	9.4 52		
pH / Fluid Loss	10.0 7.2		
Source of Sample	Flowline		
Rm @ Meas. Temp	1.30 @ 55		
Rmf @ Meas. Temp	0.98 @ 55		
Rmc @ Meas. Temp	1.76 @ 55		
Source of Rmf / Rmc	Charts		
Rm @ BHT	0.59 @ 122		
Operating Rig Time	5 Hours		
Max Rec. Temp. F	122		
Equipment Number	15		
Location	Hays		
Recorded By	R. Barnhart		
Witnessed By	Bruce Ard		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Healy, KS:
5E to Ike Rd., 1 1/4S, E into

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

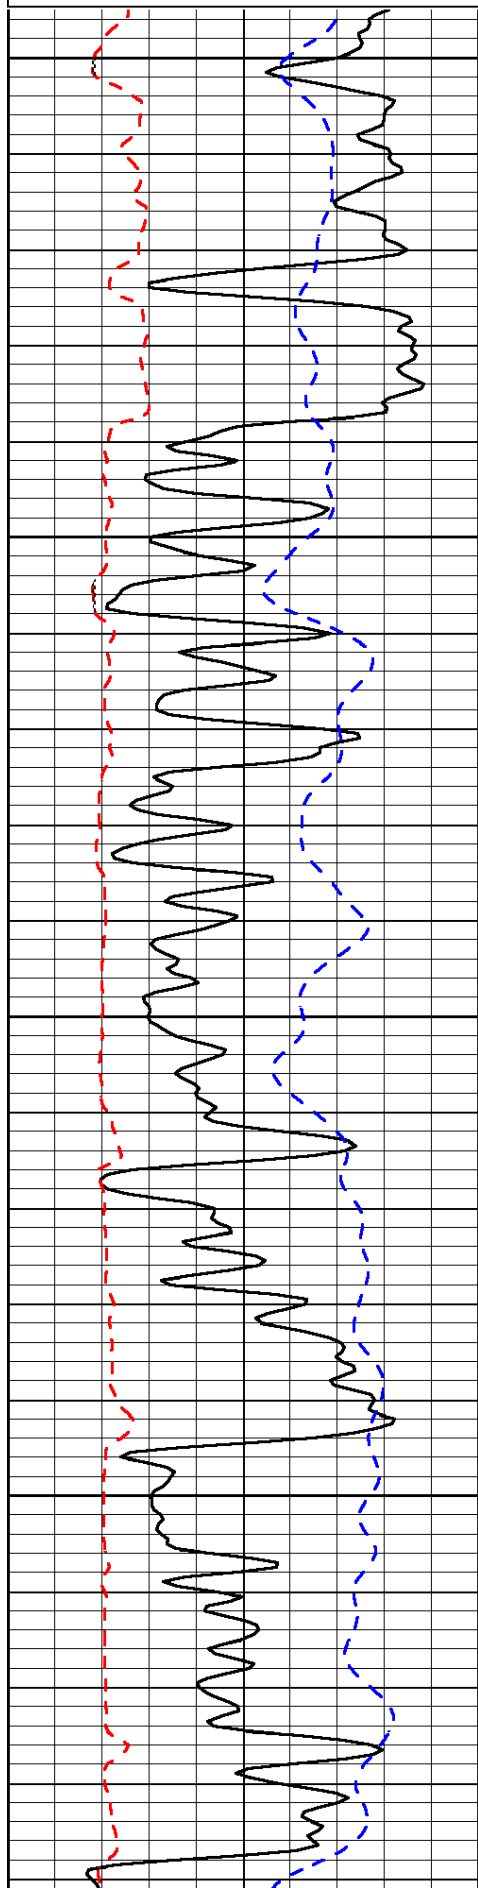

3500


3550


3600

3650

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

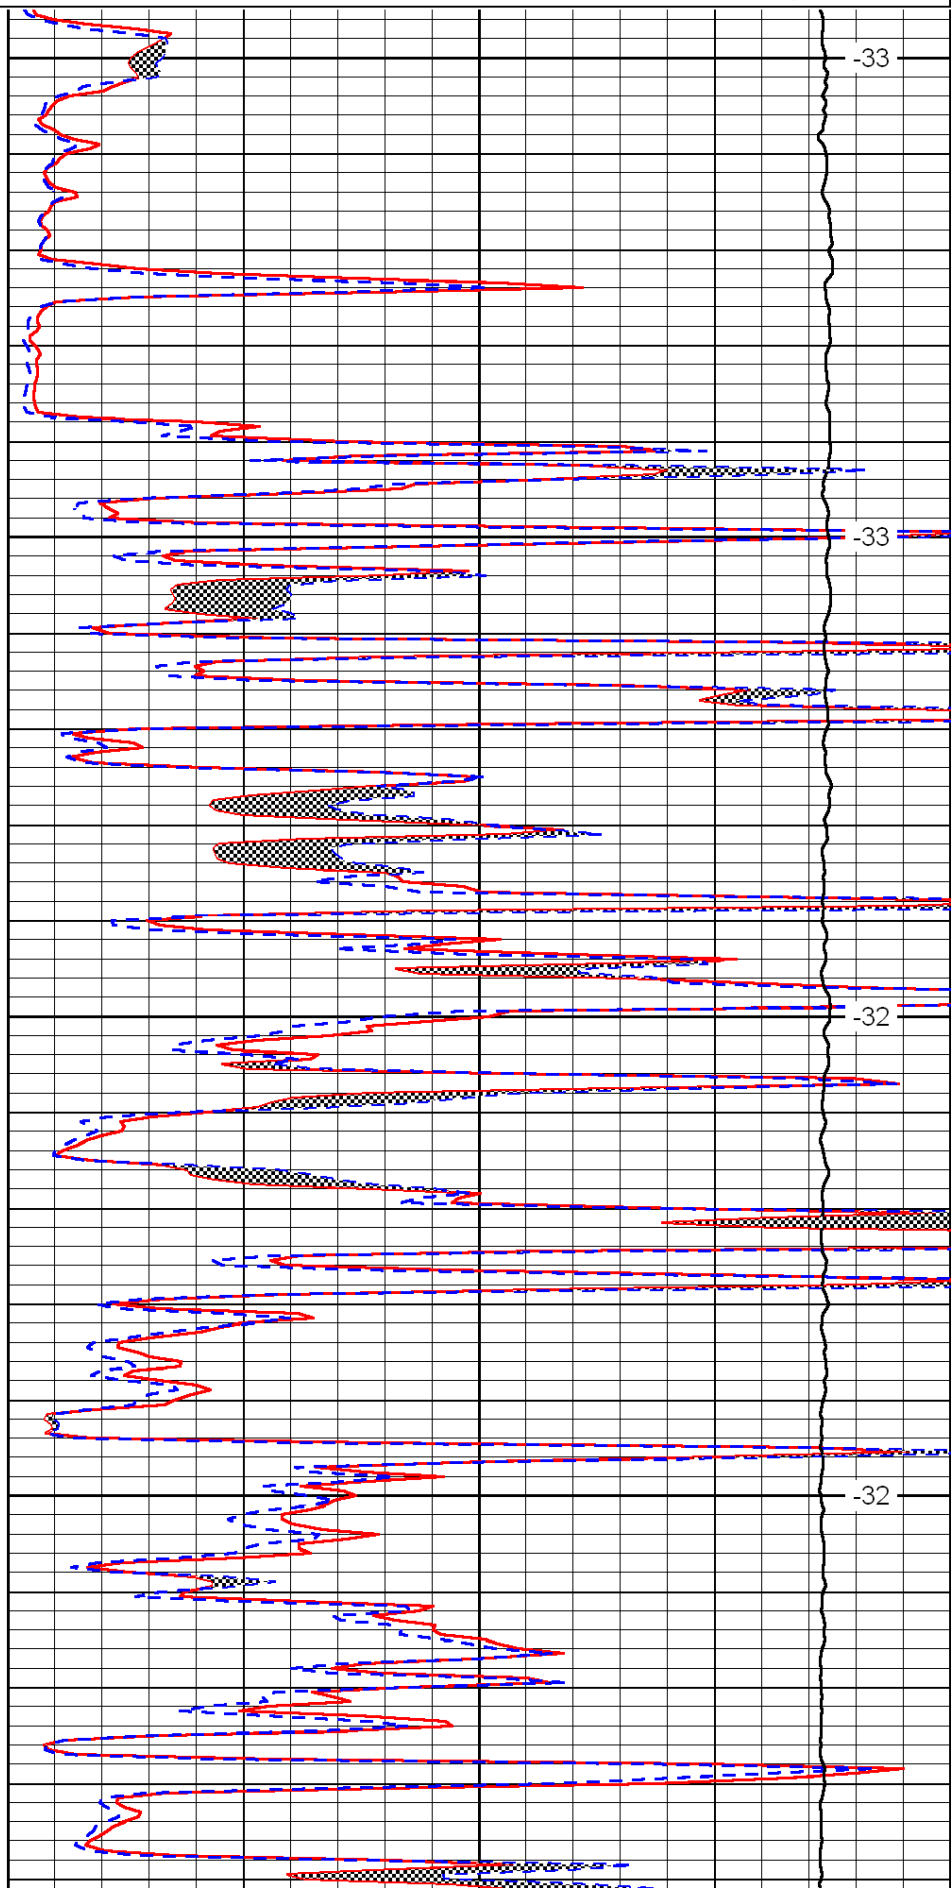

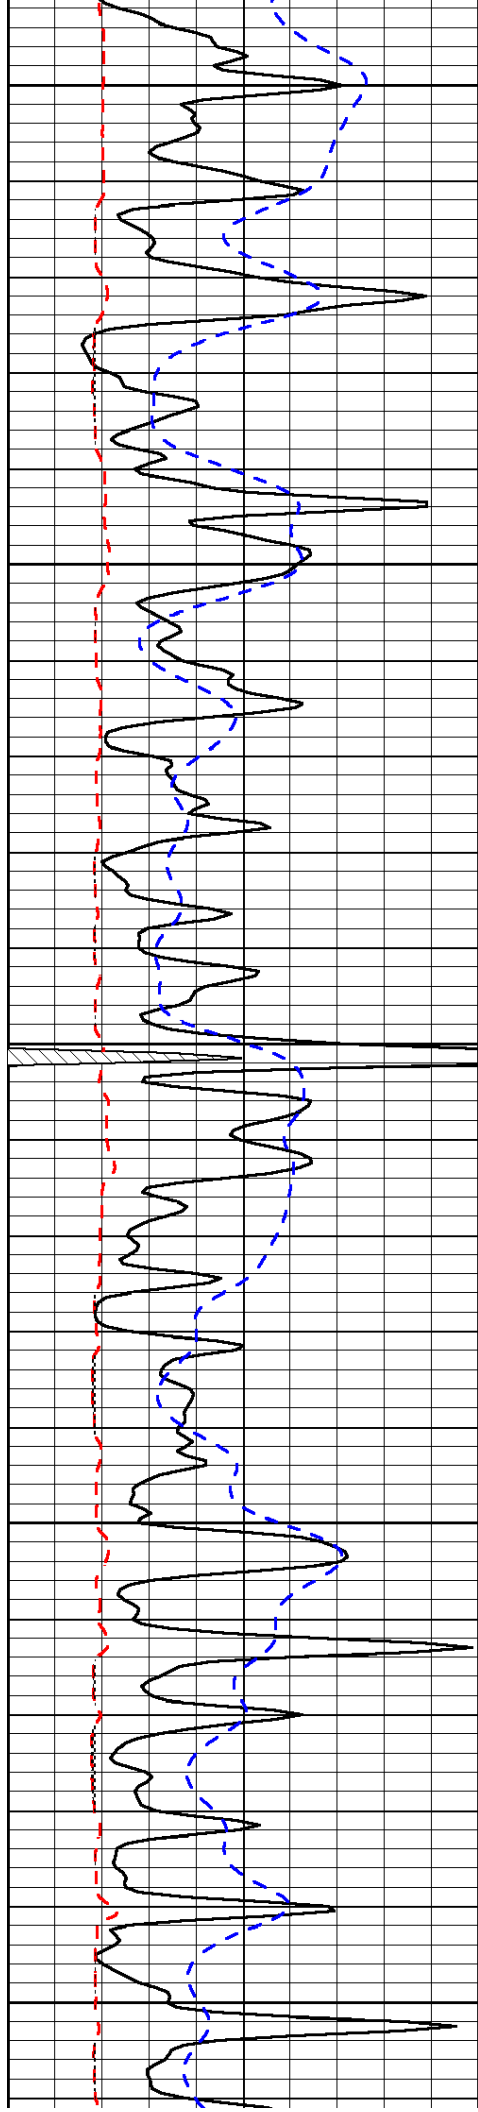


3700


3750

3800

3850

3900

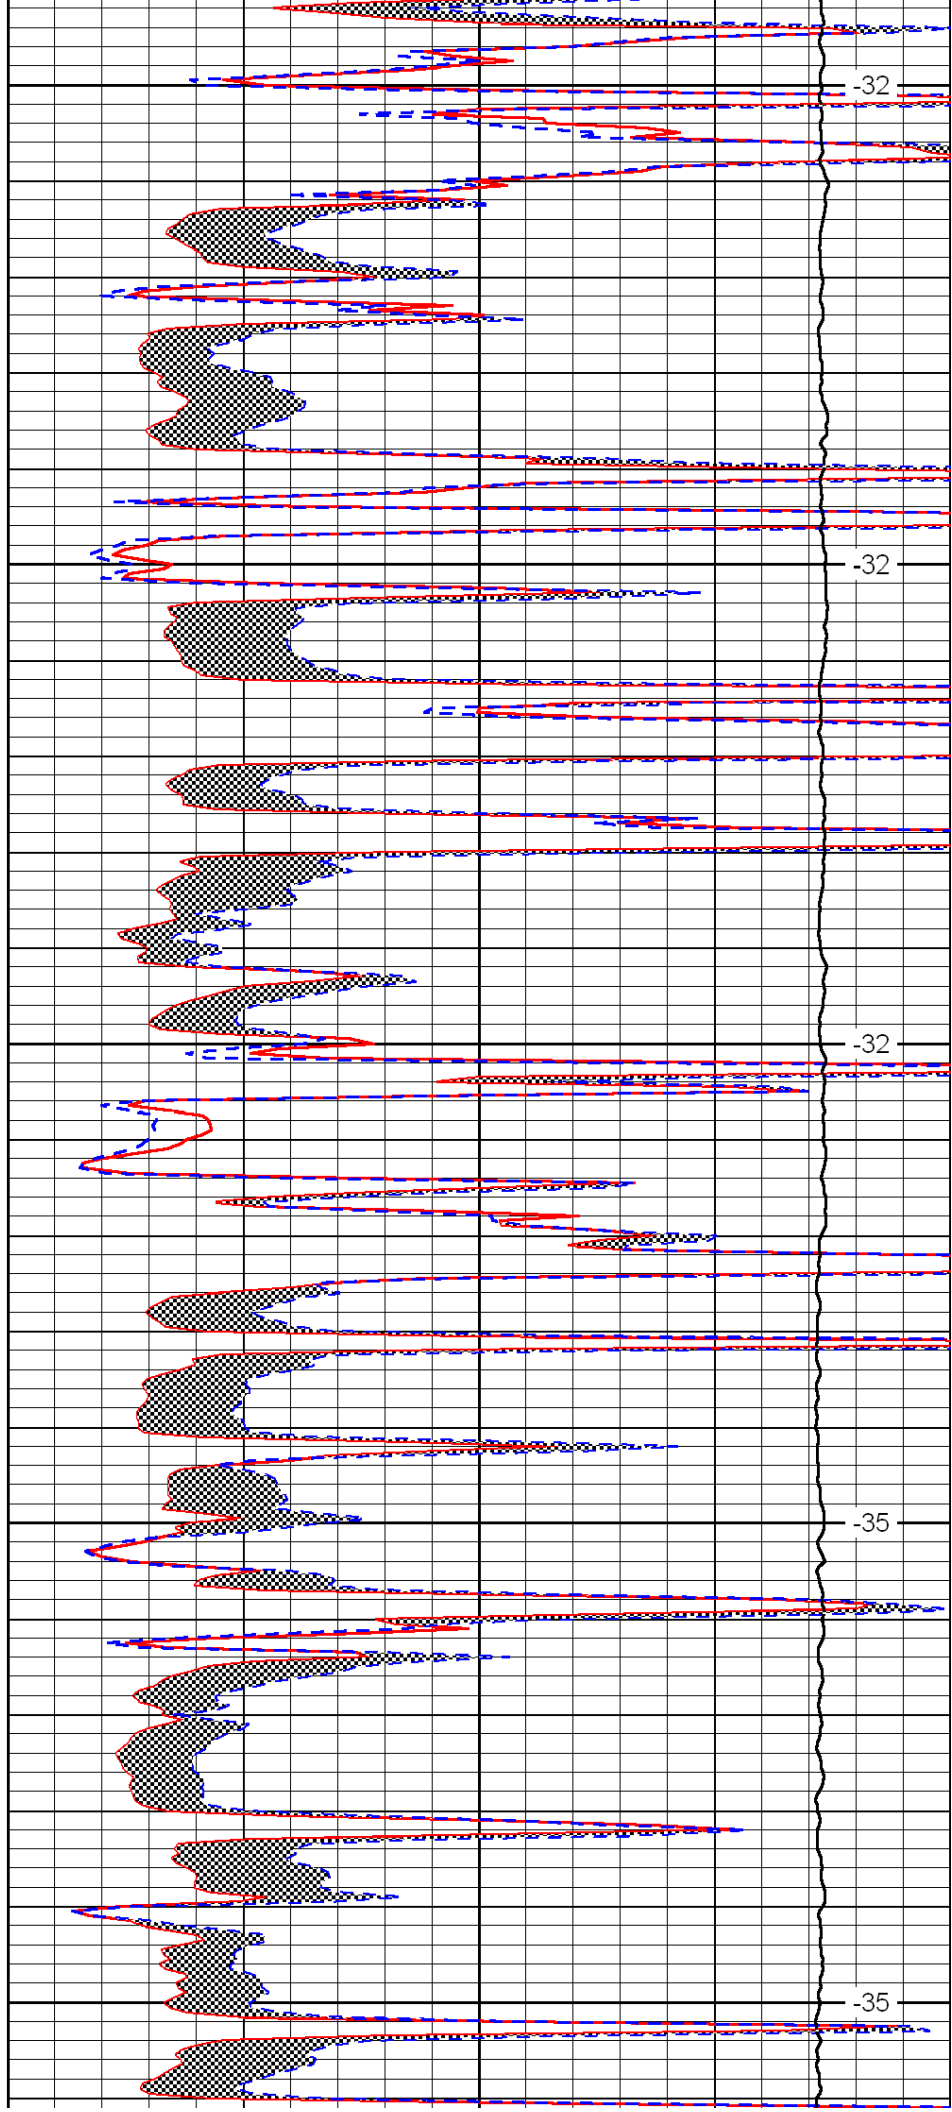

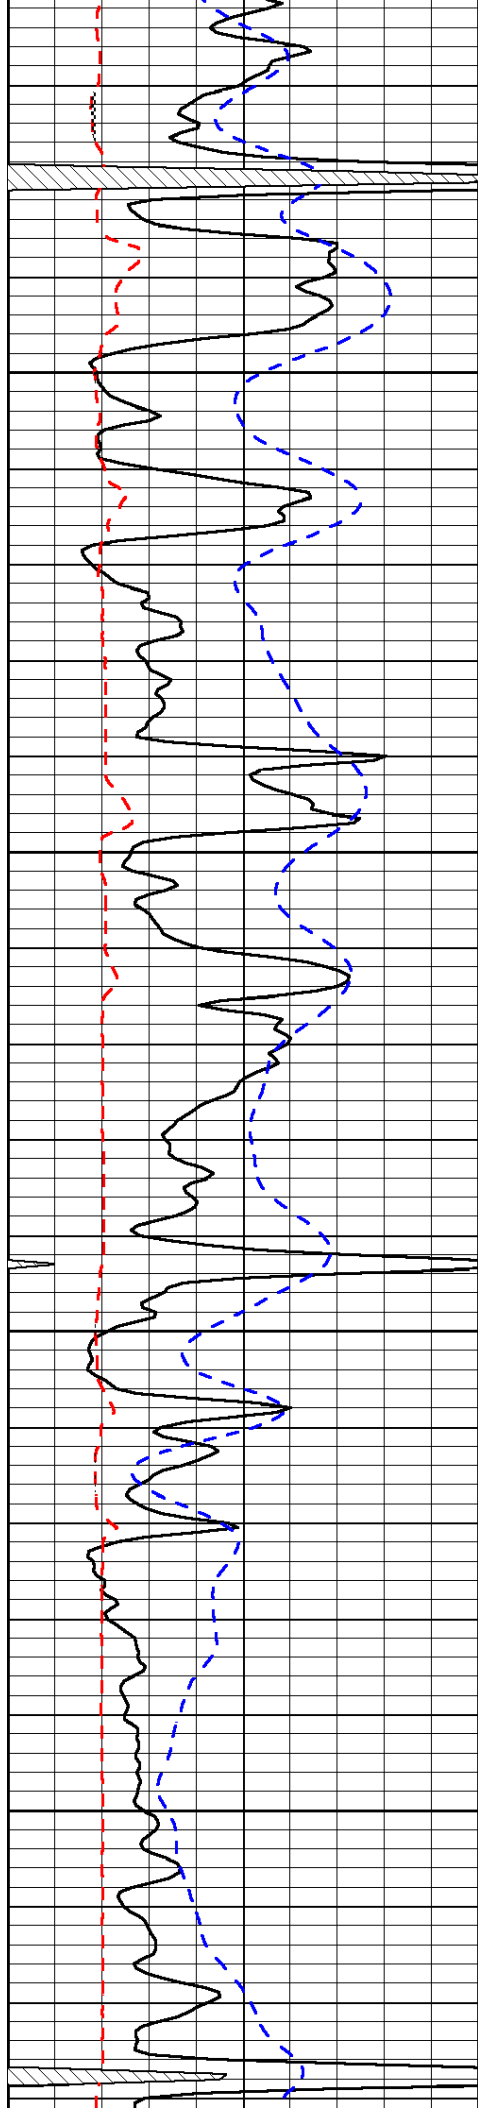


3950

4000

4050

4100

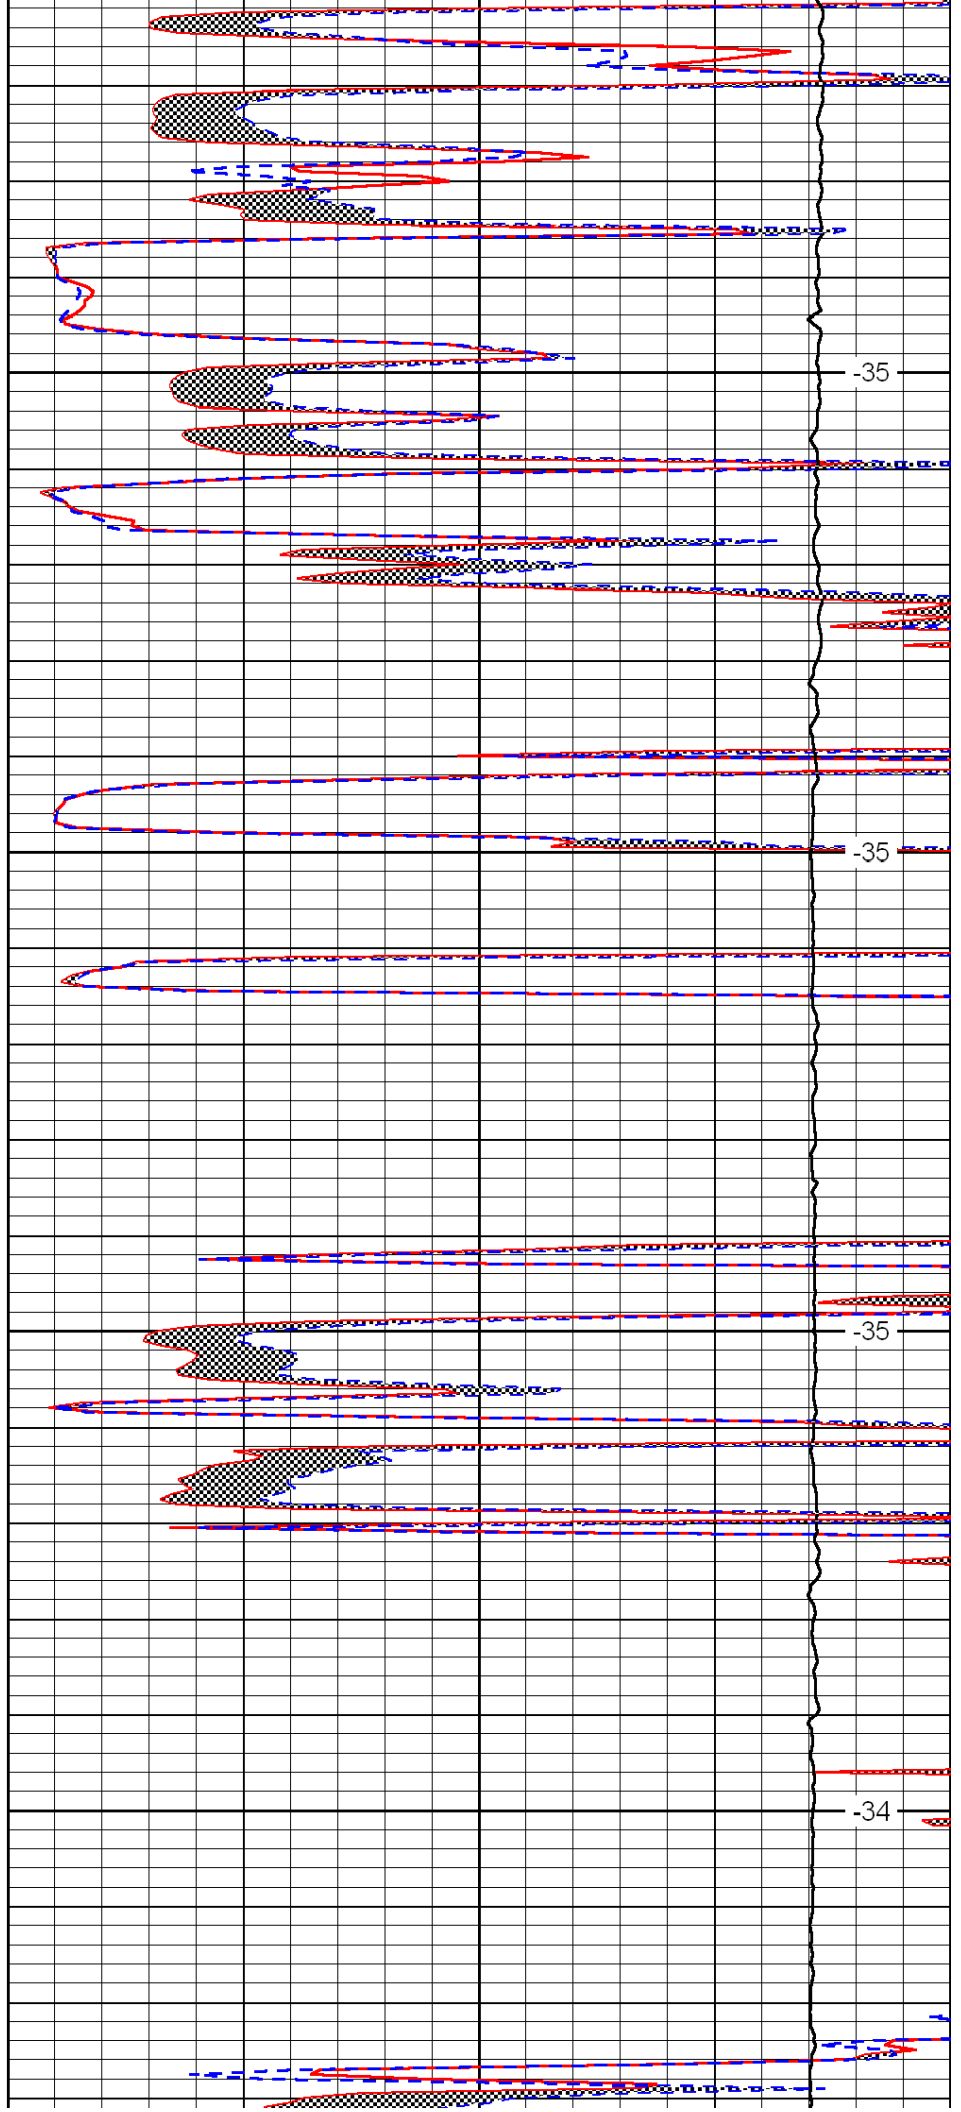


-35

-35

-35

-34

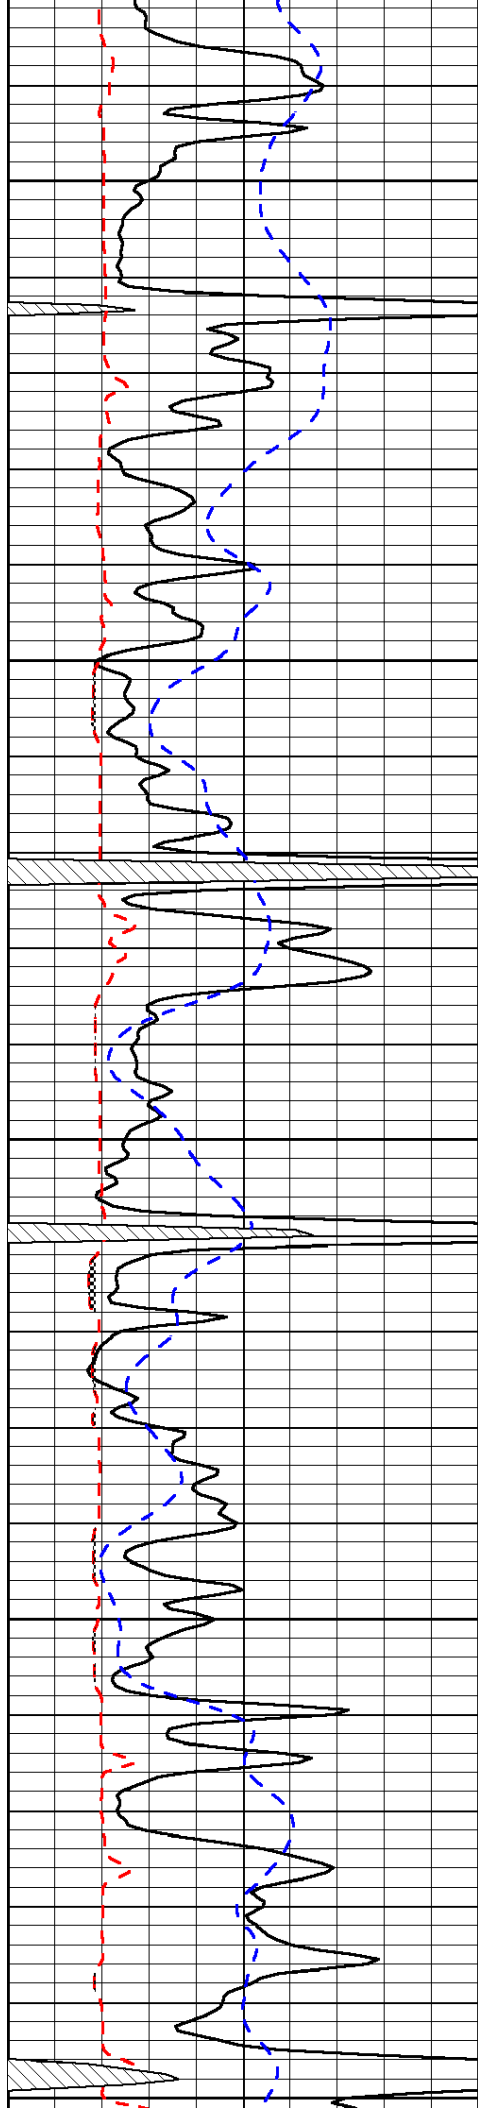


4150

4200

4250

4300

4350

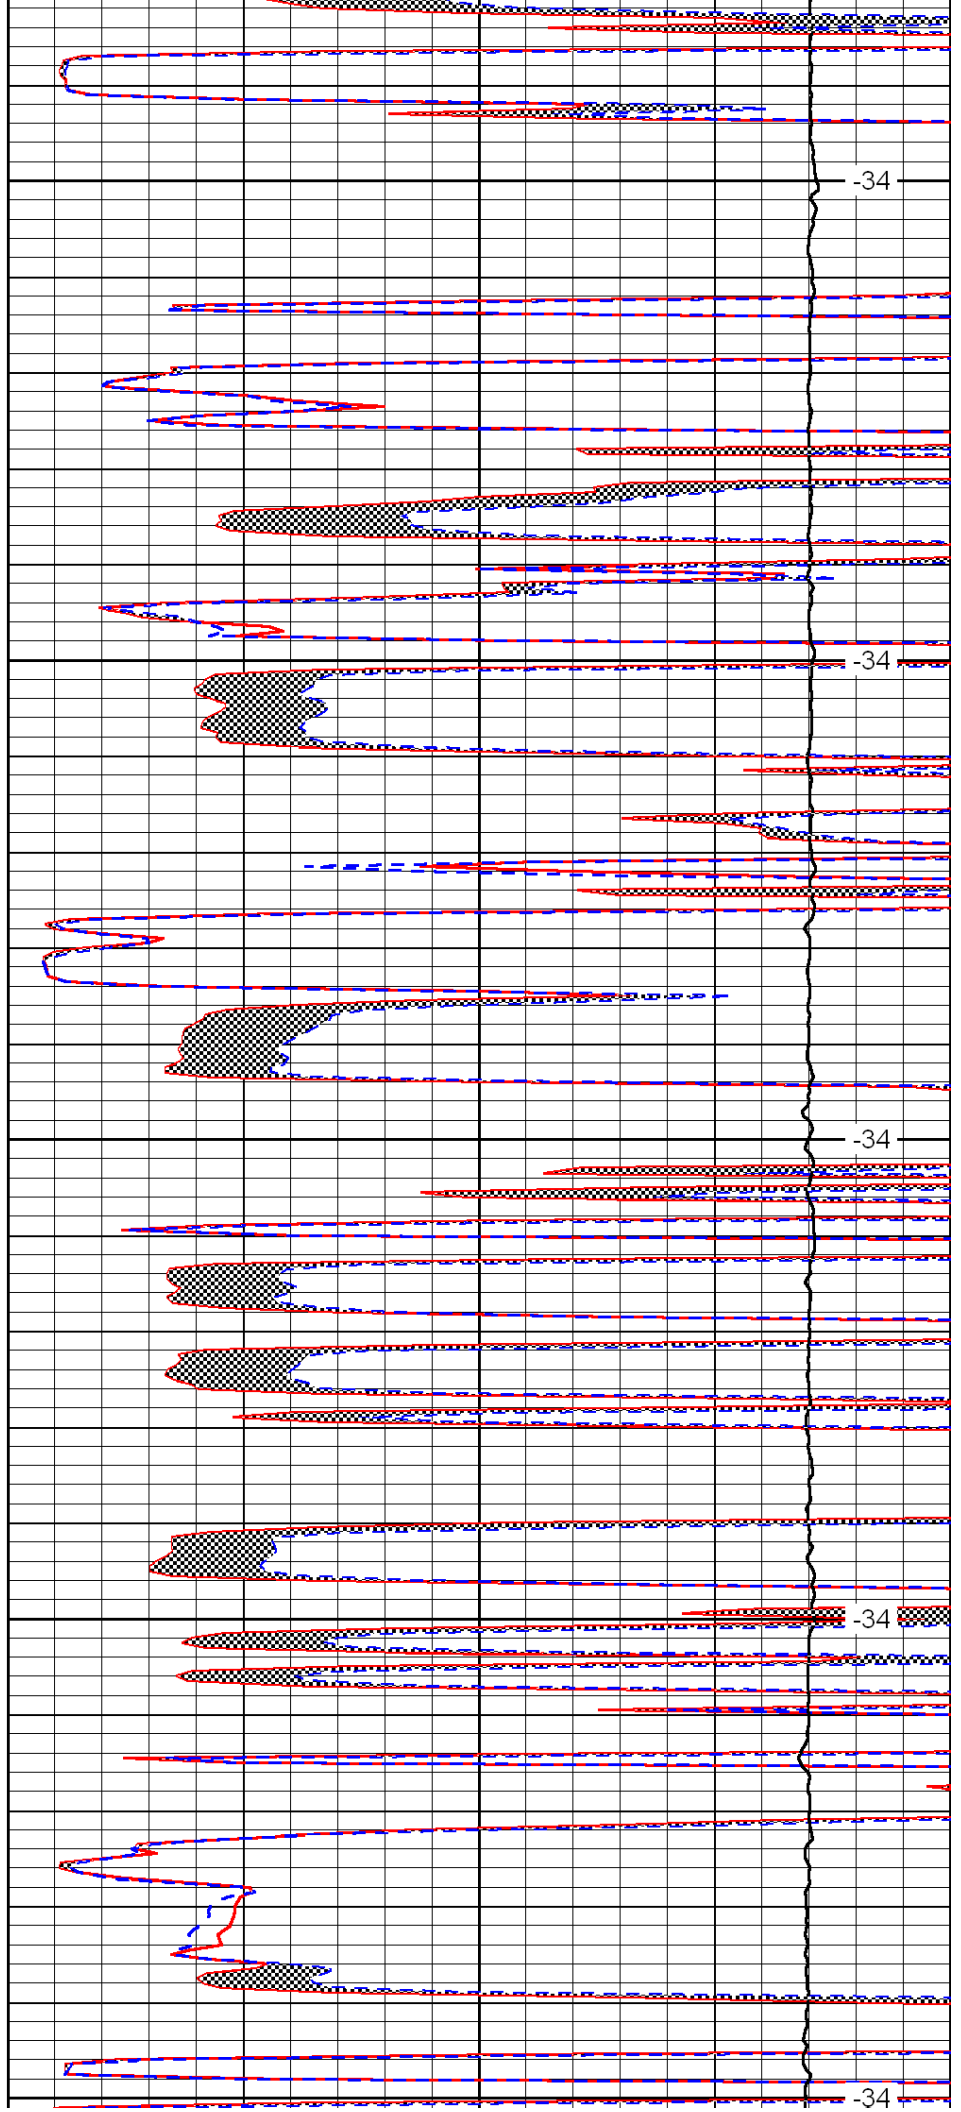


-34

-34

-34

-34

-34

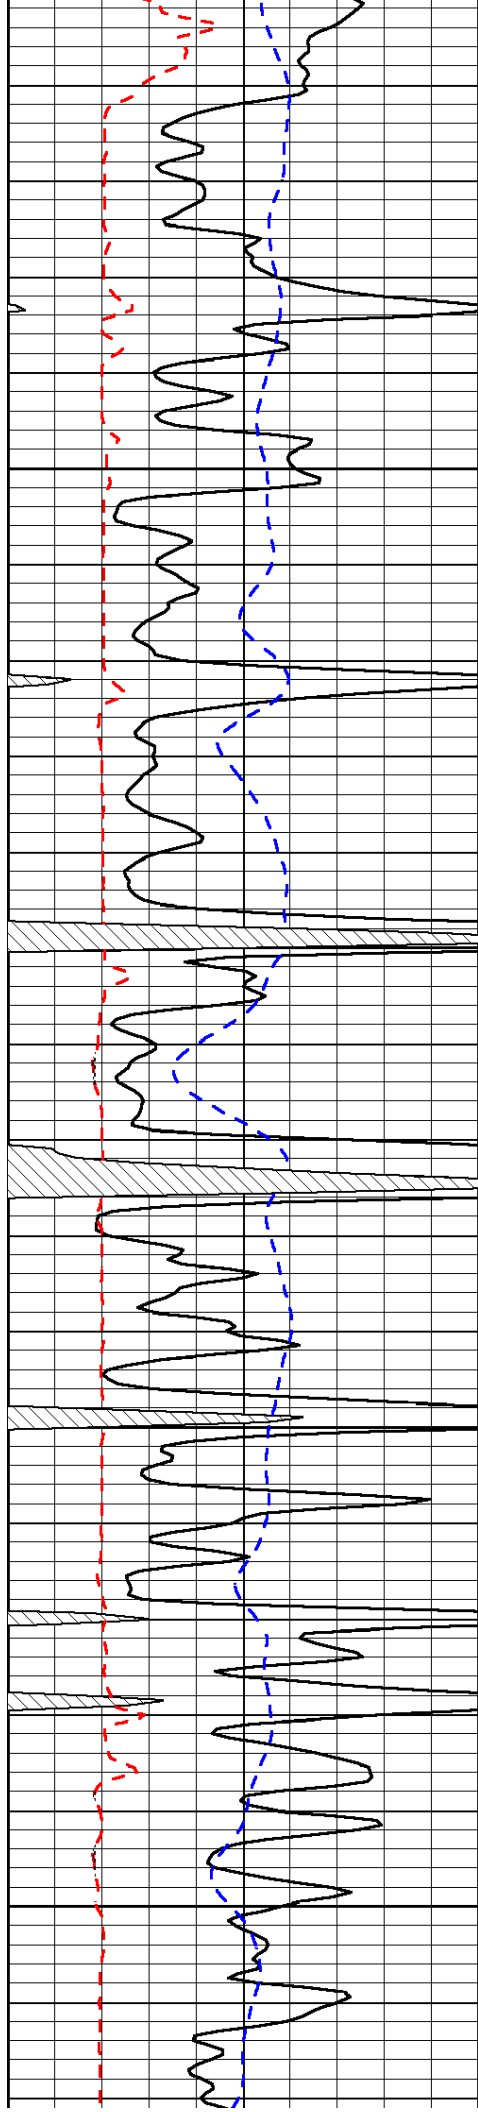



4400

4450


4500

4550

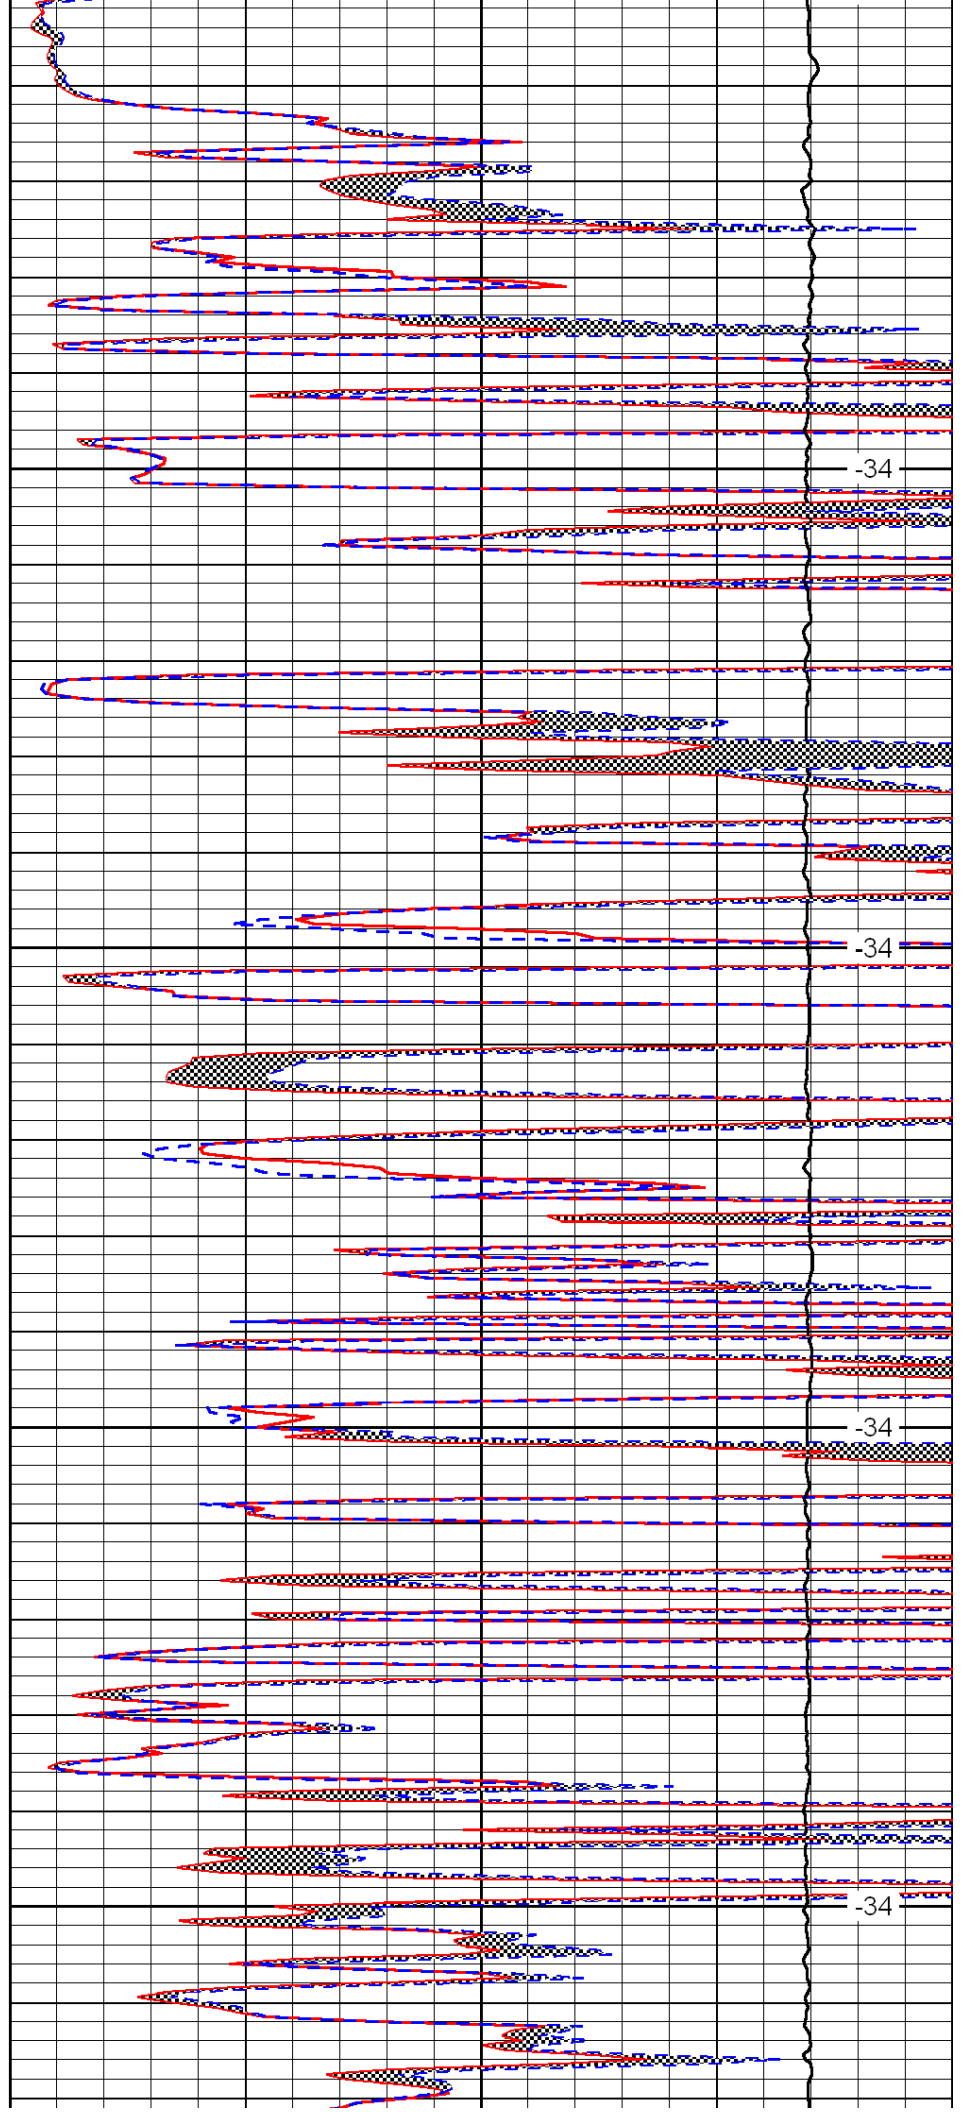

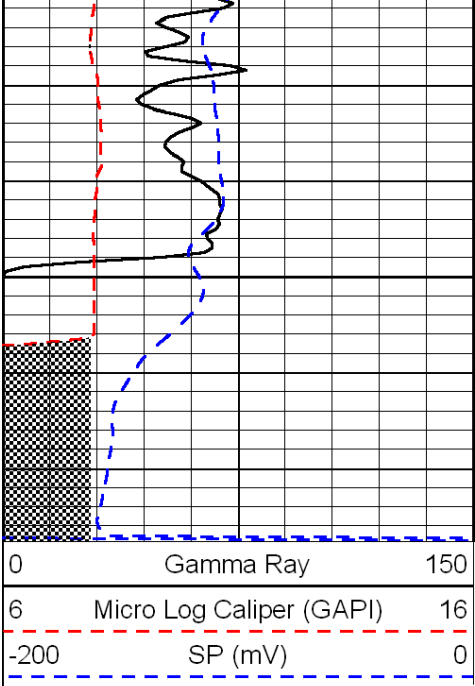

4600

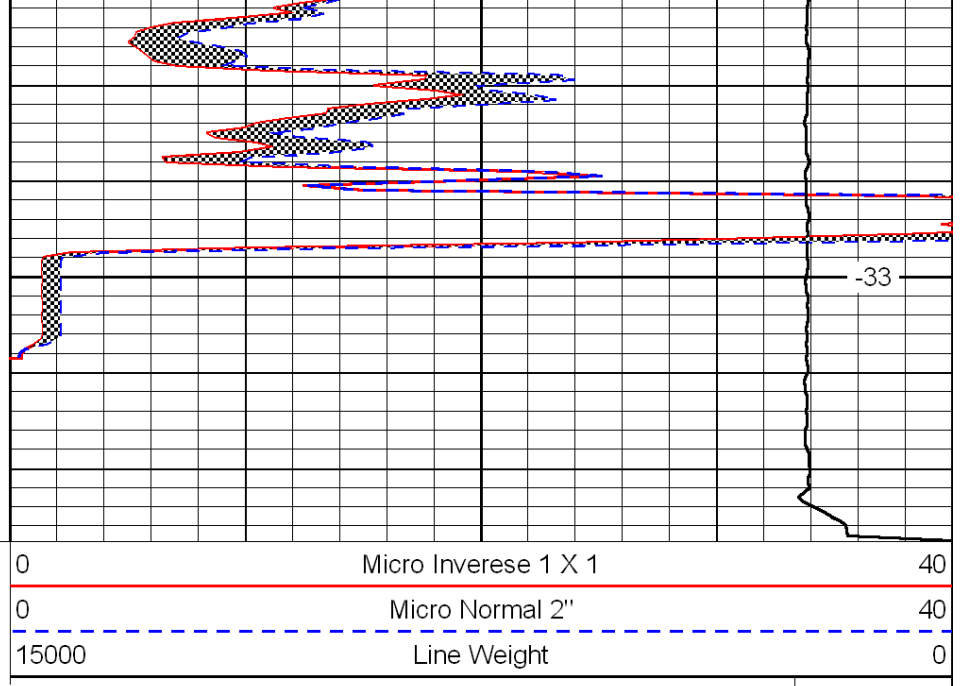

LSPD