



Microresistivity
Log

DIGITAL LOG (785) 625-3858

API No.		Company		Carrie Exploration & Development	
15-009-25,646-00-00		Well		H. Roth No. C-1	
		Field		Chase-Silica	
		County		Barton State Kansas	
Location		1010' FNL & 1320' FEL		Other Services CNL/CDL DIL	
Sec: 25		Twp: 19 S		Rge: 11 W	
Permanent Datum		Ground Level		Elevation 1771	
Log Measured From		Kelly Bushing		8 Ft. Above Perm. Datum	
Drilling Measured From		Kelly Bushing		K.B. 1779 D.F. 1771 G.L. 1771	
Date		1/23/2012			
Run Number		Two			
Depth Driller		3438			
Depth Logger		3438			
Bottom Logged Interval		3437			
Top Log Interval		2500			
Casing Driller		8.625 @ 256			
Casing Logger		254			
Bit Size		7.875			
Type Fluid in Hole		Chemical			
Salinity, ppm CL		7.000			
Density / Viscosity		9.2 48			
pH / Fluid Loss		10.0 8.8			
Source of Sample		Flowline			
Rm @ Meas. Temp		.65 @ 50			
Rmf @ Meas. Temp		.49 @ 50			
Rmc @ Meas. Temp		.88 @ 50			
Source of Rmf / Rmc		Charts			
Rm @ BHT		.29 @ 112			
Operating Rig Time		4 Hours			
Max Rec. Temp. F		112			
Equipment Number		91			
Location		Hays			
Recorded By		K. Bange			
Witnessed By		Herb Deines			

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Ellinwood, 4 E to county line,
1 1/2 N, W into


Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

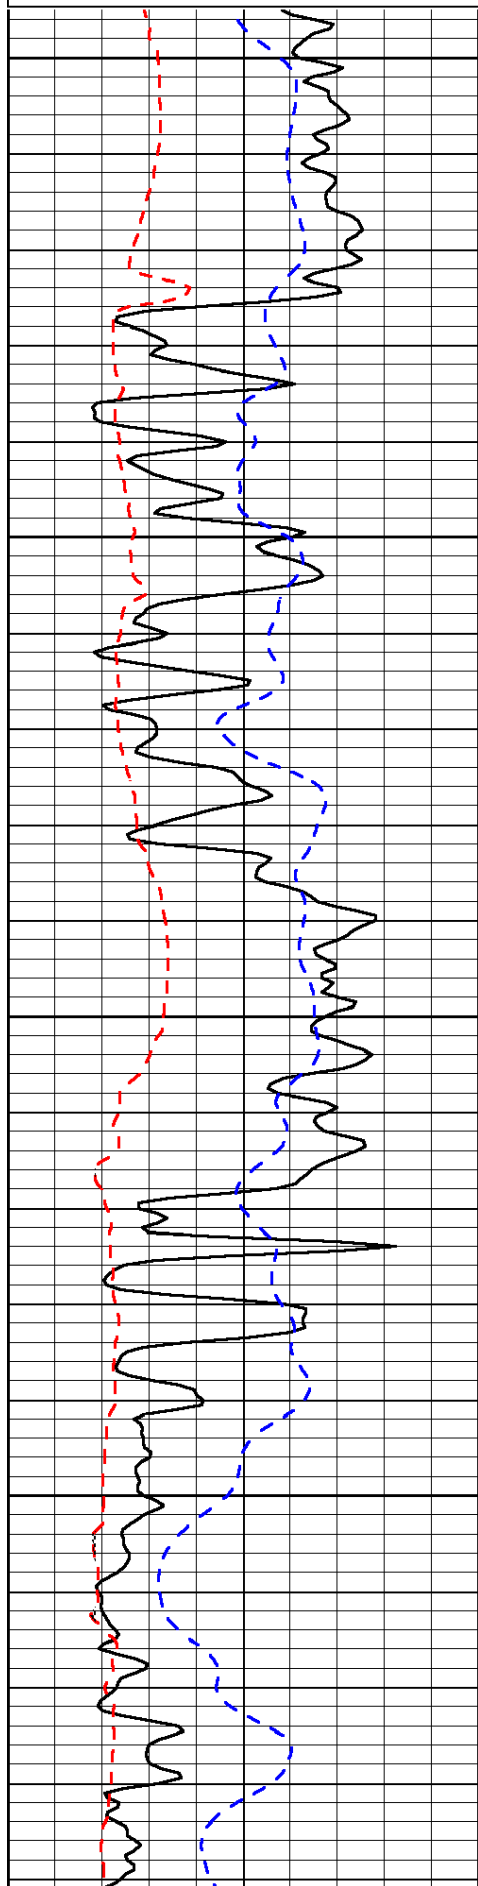


2500
2550
2600
2650

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

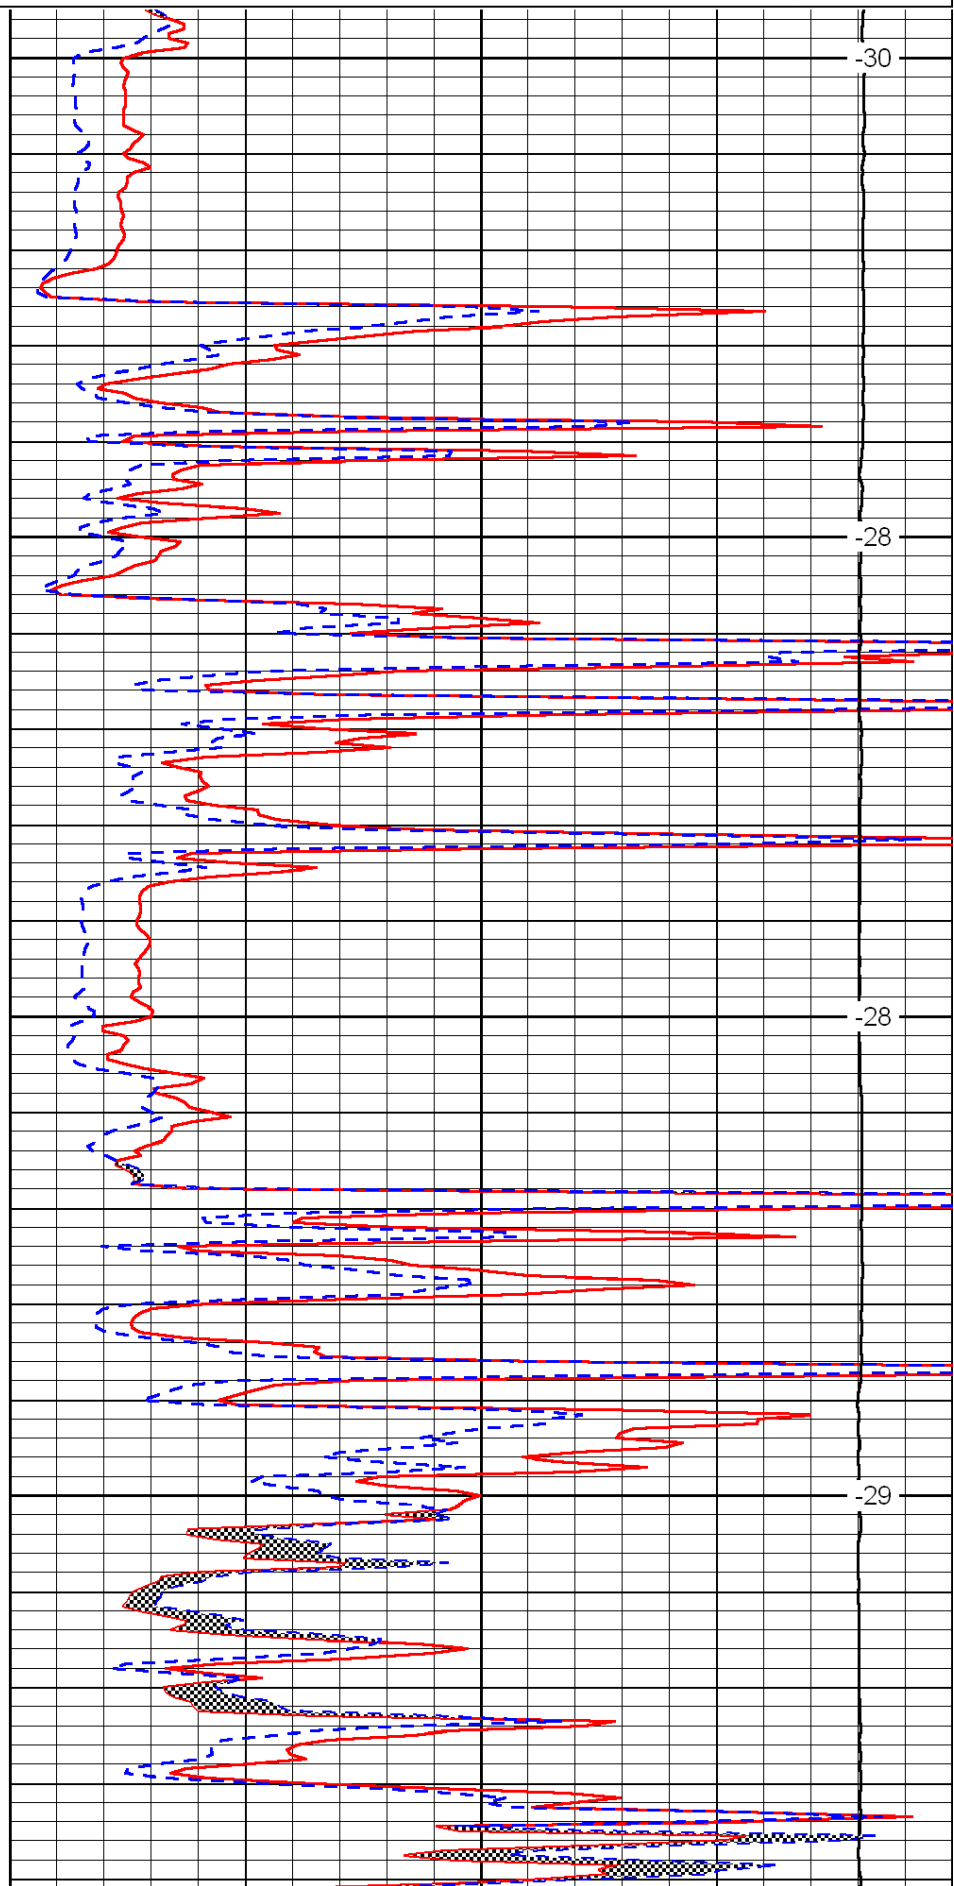

-30
-28
-28
-29

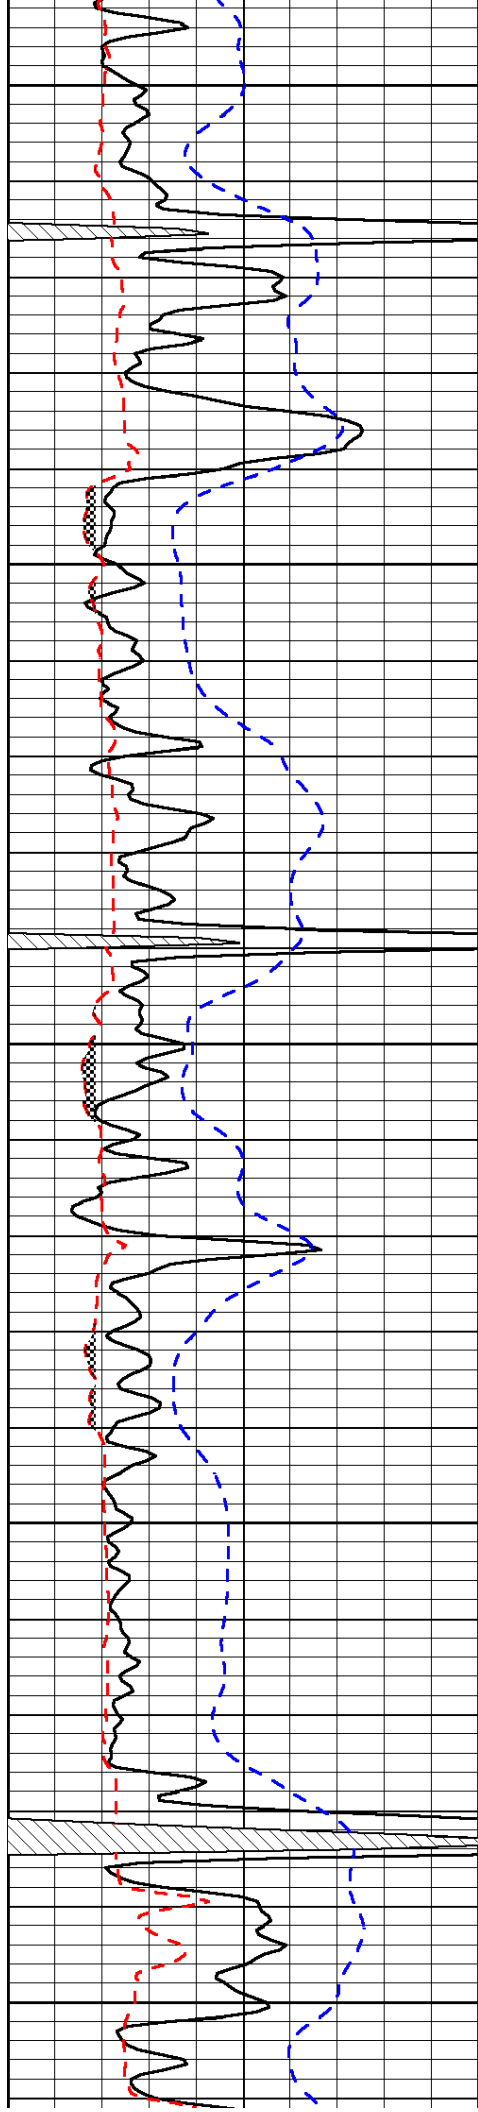


2700

2750

2800

2850

2900

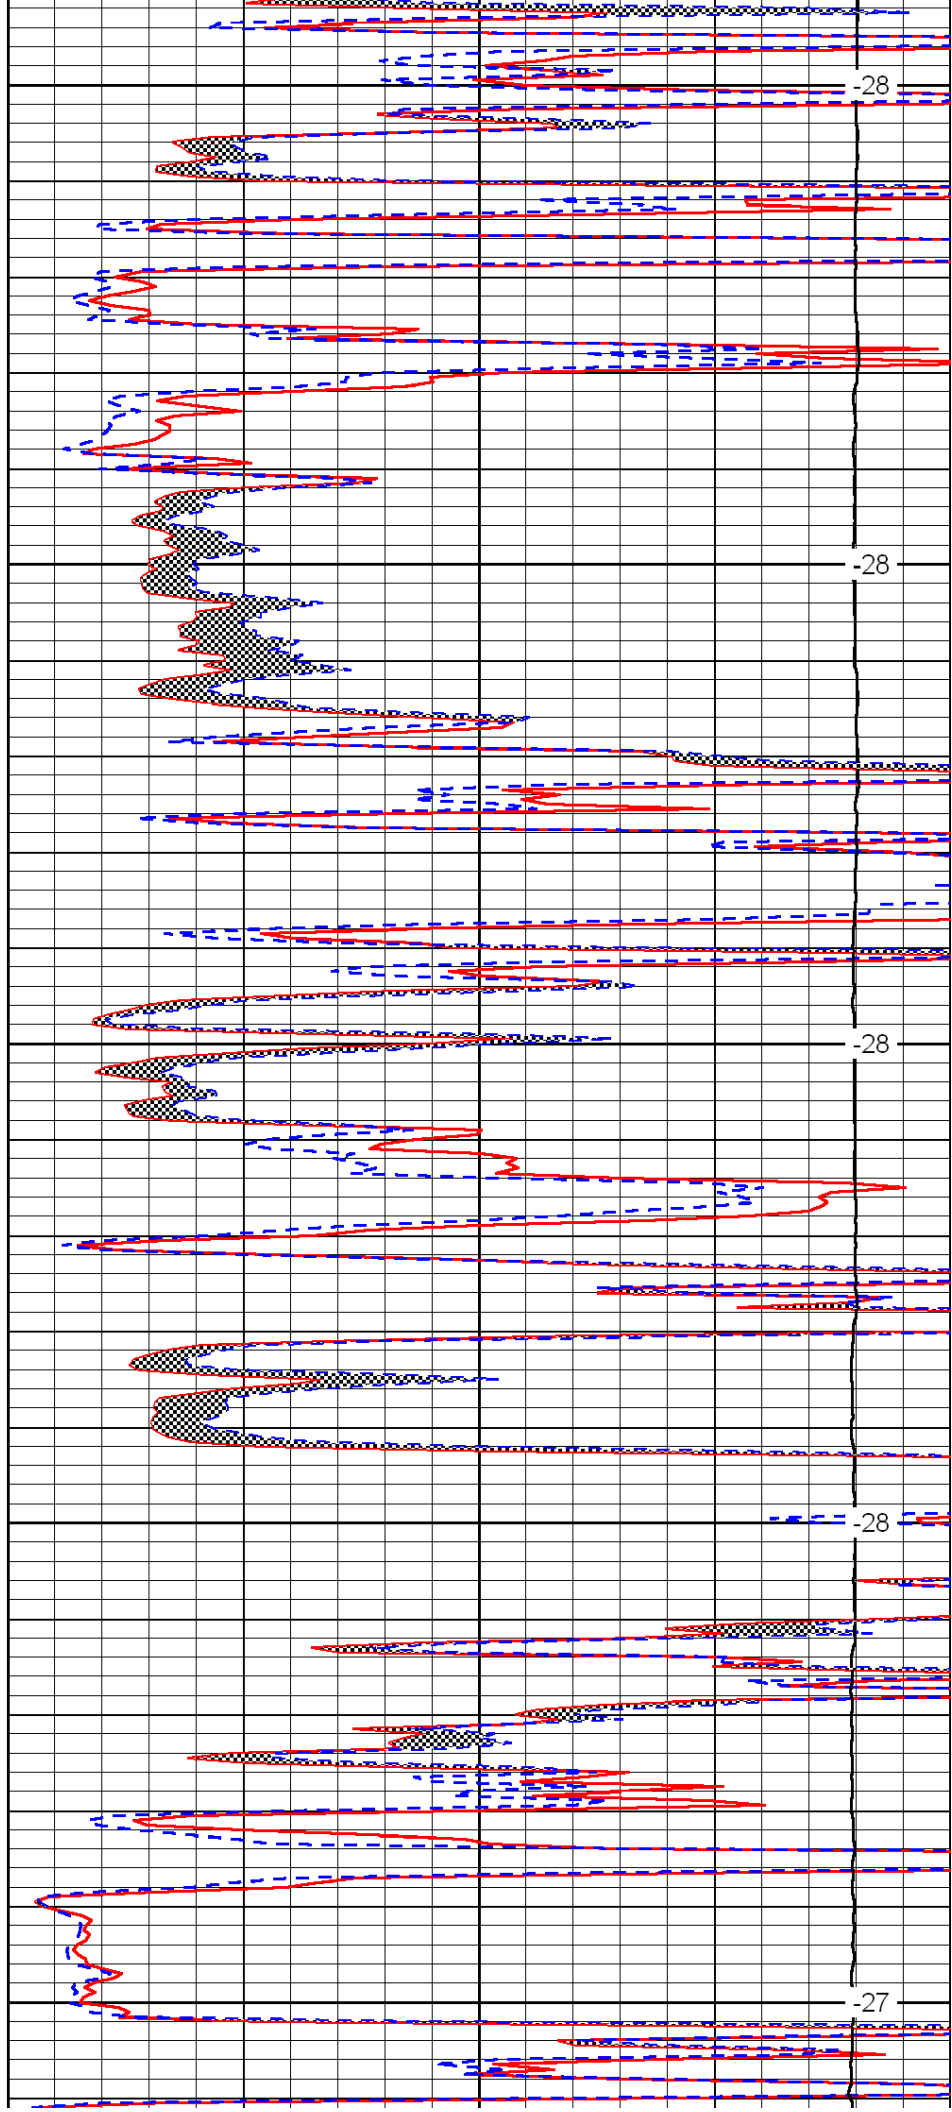


-28

-28

-28

-28

-27

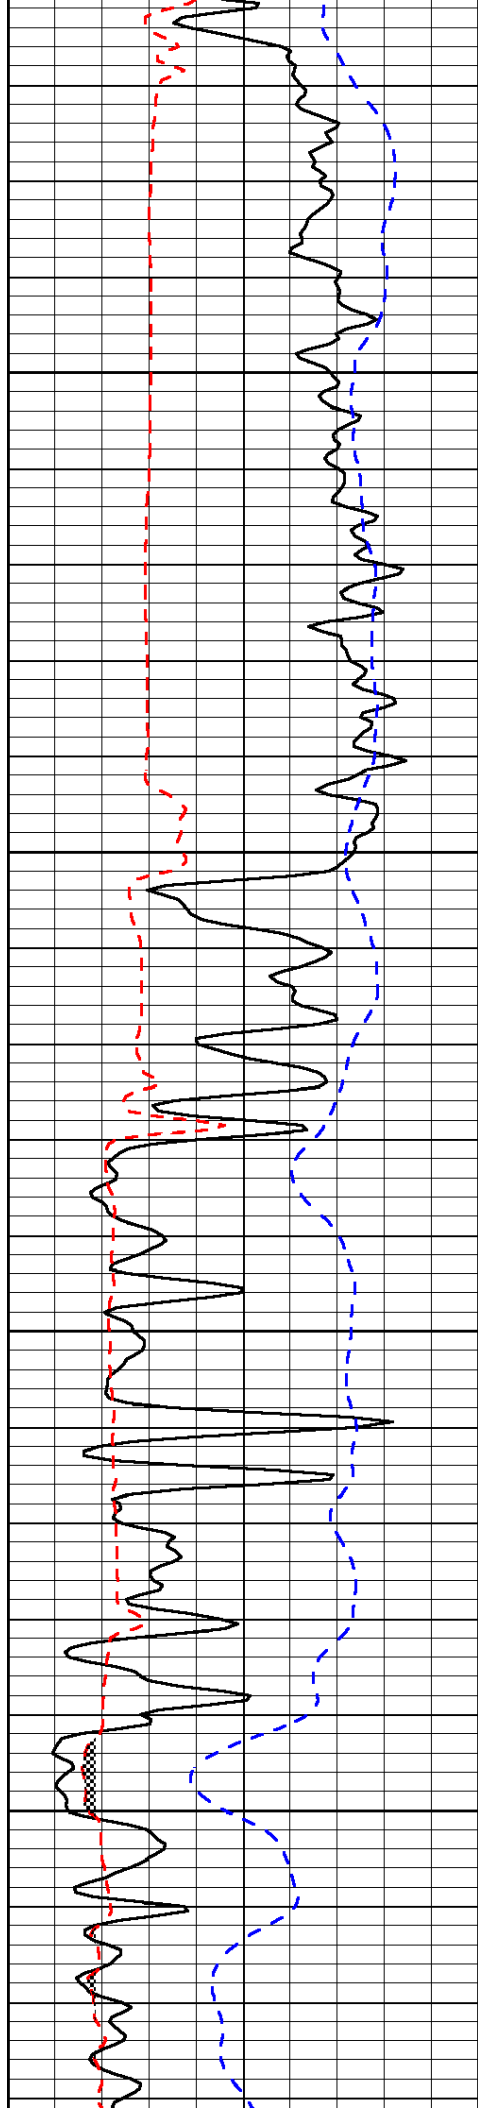


2950

3000

3050

3100

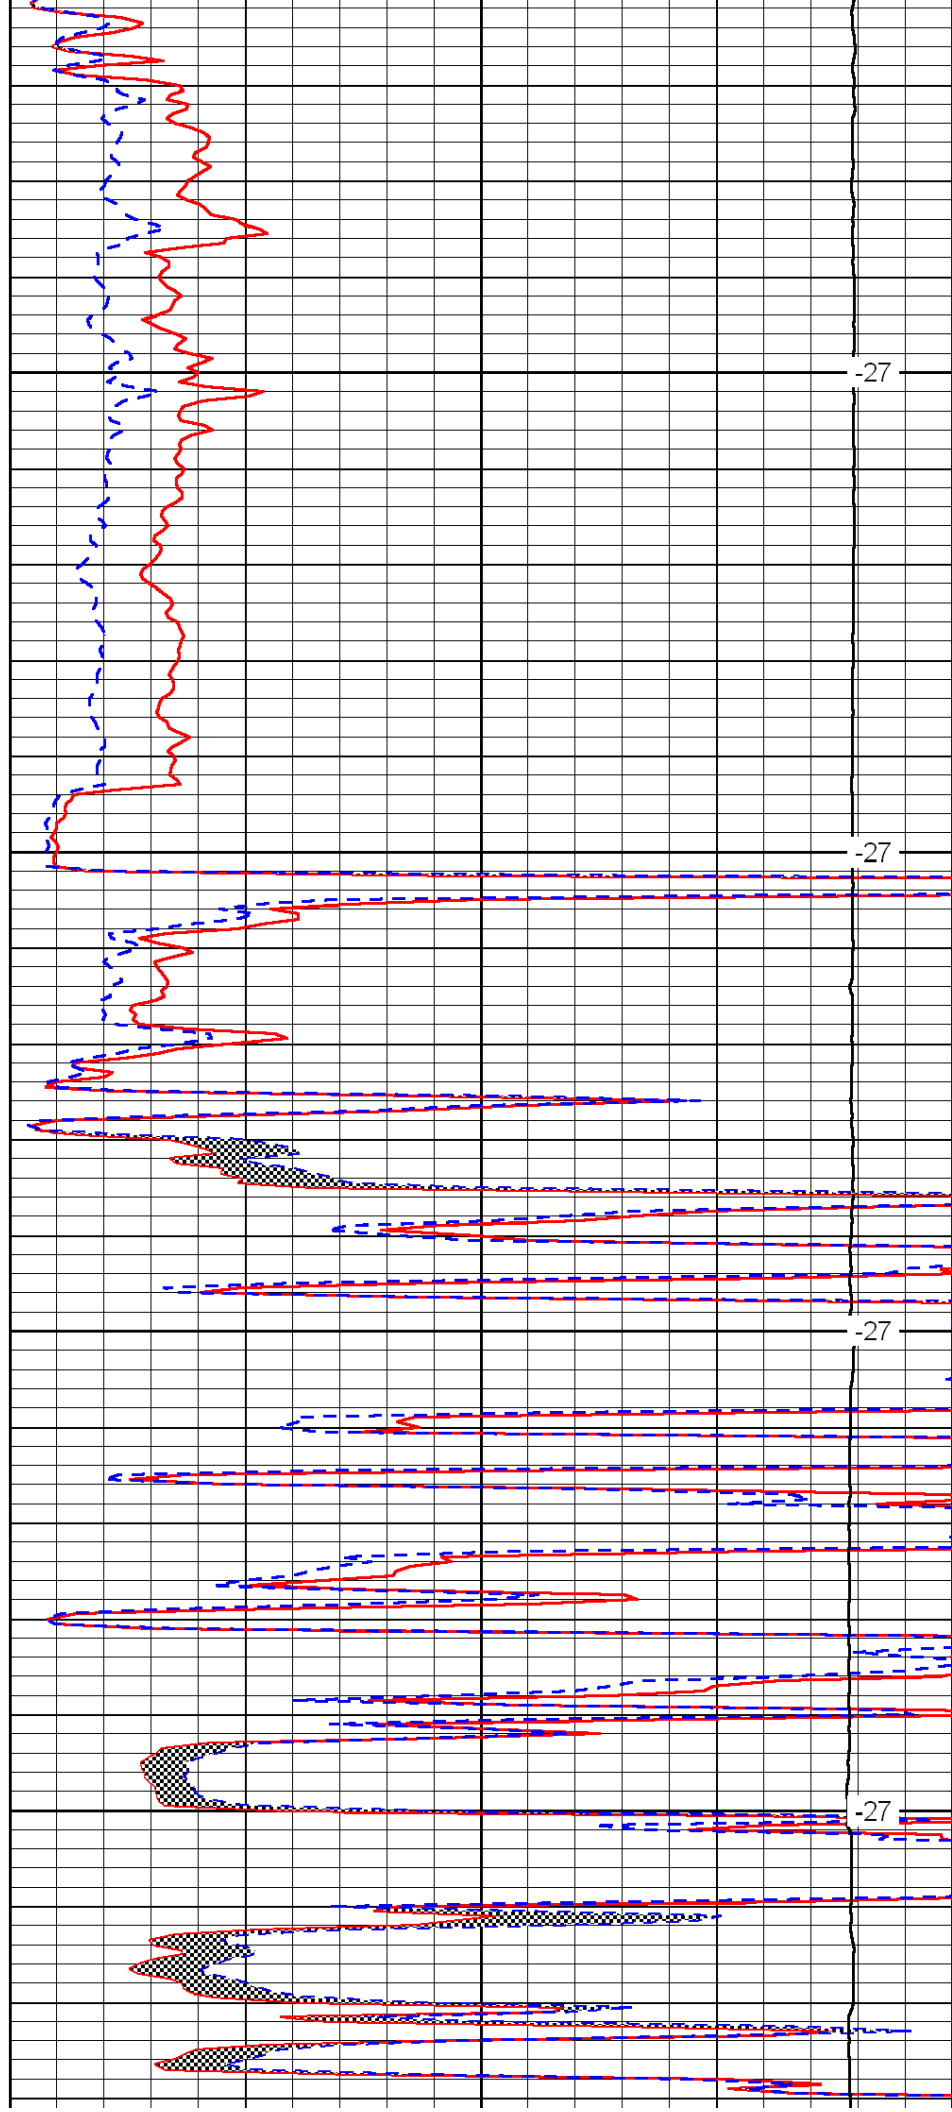


-27

-27

-27

-27

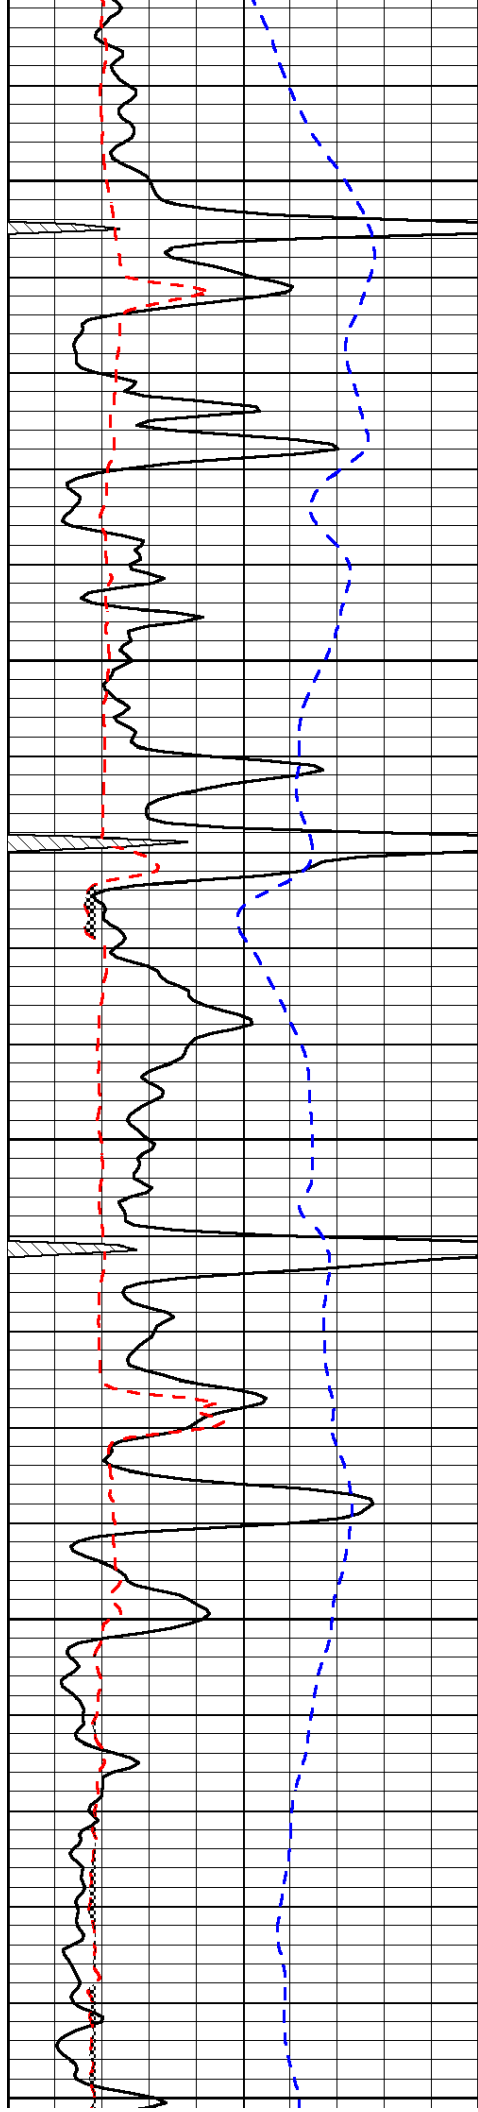


3150

3200

3250

3300

3350

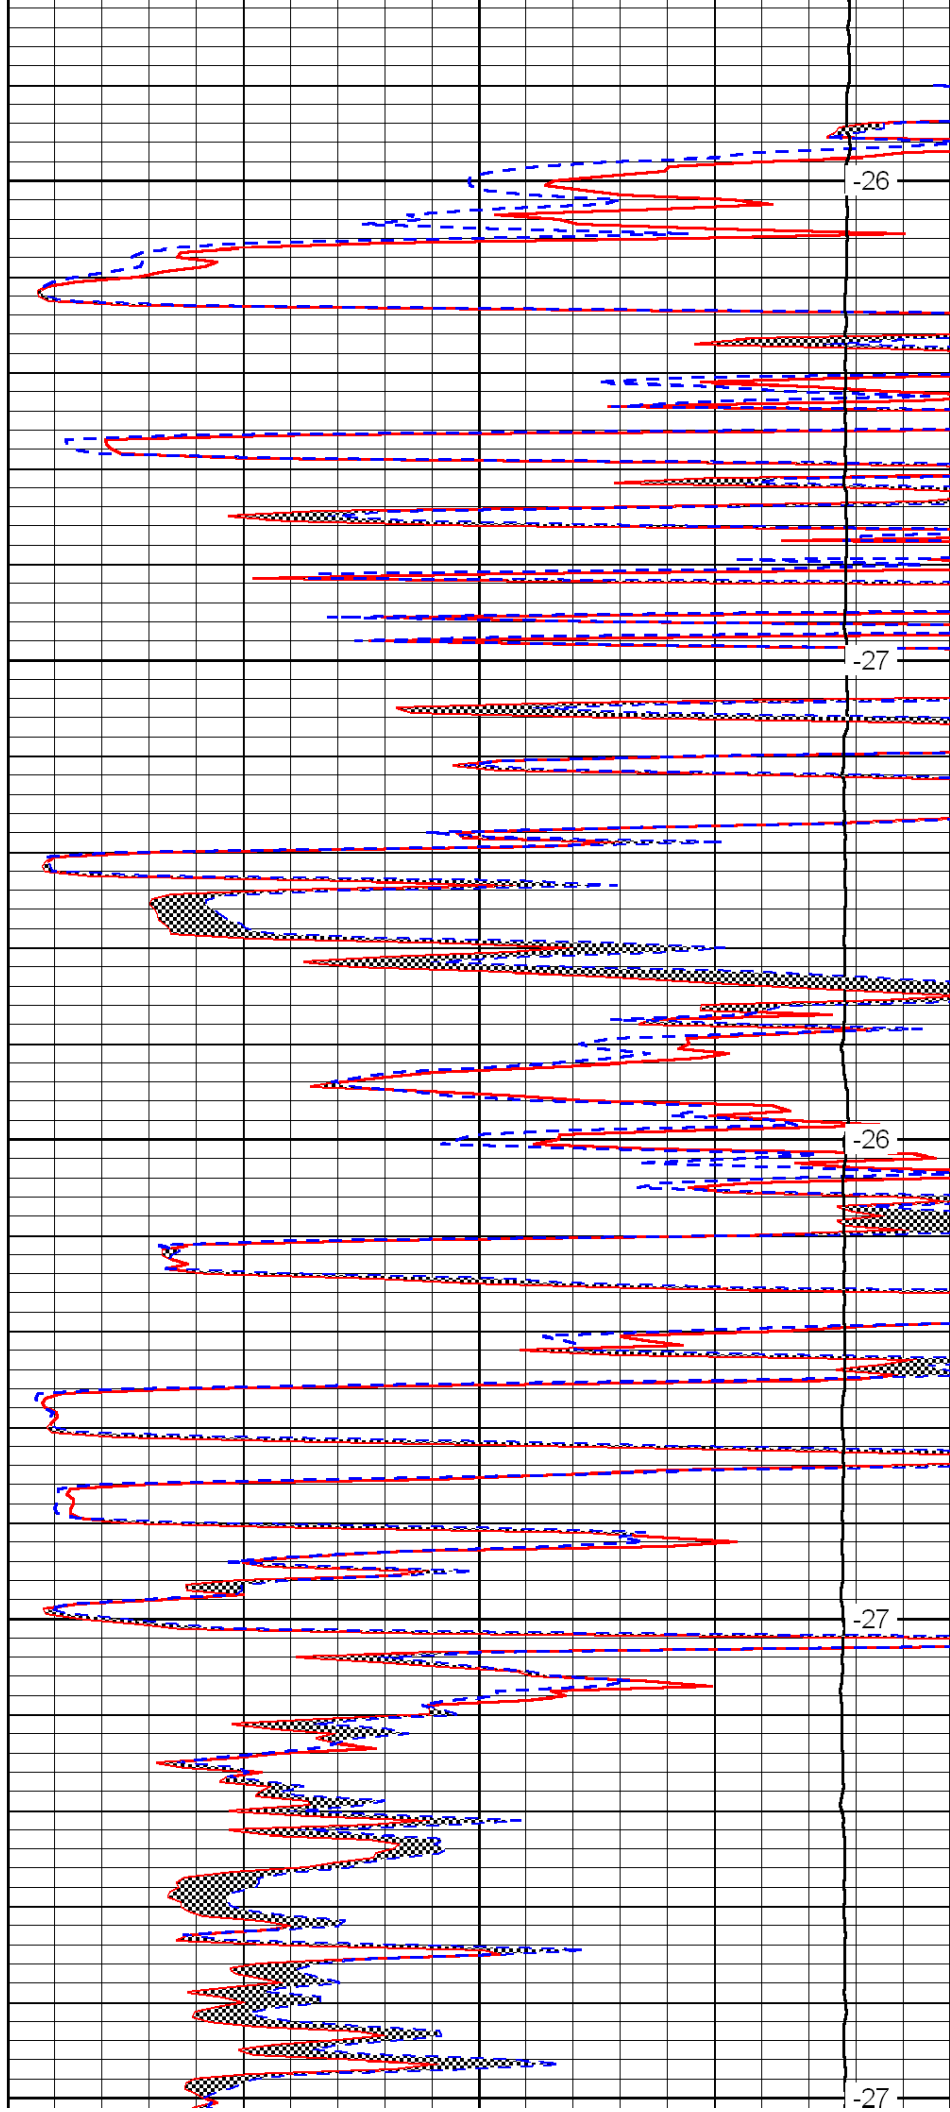


-26

-27


-26

-27

-27

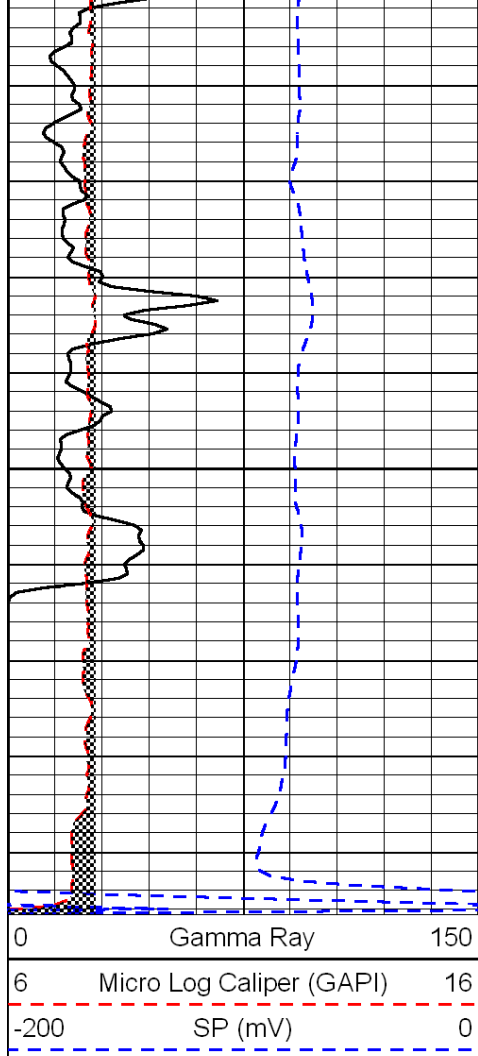

3400

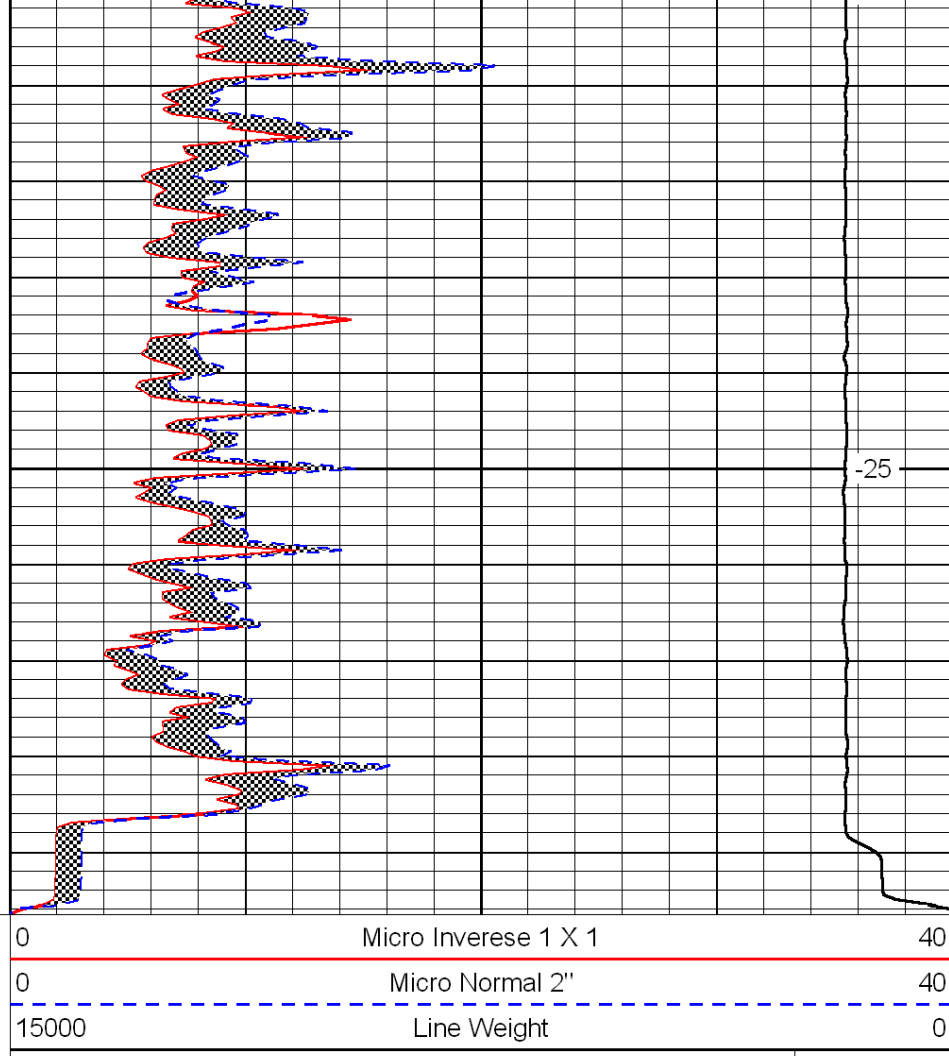

LSPD