



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.		Company Lynn Packard	
15-007-23,813-00-00		Well Packard #1-27	
		Field Nurse Field	
		County Barber	State Kansas
		Location SW NE NW 990' FNL & 1650' FWL	Other Services CNL/CDL DIL
Sec: 27		Twp: 31 S	Rge: 13 W
Permanent Datum	Ground Level	Elevation 1567	
Log Measured From	Kelly Bushing	7 Ft. Above Perm. Datum	
Drilling Measured From	From Kelly Bushing	K.B. 1574 D.F. 1567 G.L. 1567	
Date	1/14/2012		
Run Number	Two		
Depth Driller	4365		
Depth Logger	4369		
Bottom Logged Interval	4368		
Top Log Interval	2550		
Casing Driller	8.625 @ 219		
Casing Logger	217		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	7000		
Density / Viscosity	9.4 41		
pH / Fluid Loss	10.0 10.0		
Source of Sample	Flowline		
Rm @ Meas. Temp	.50 @ 45		
Rmf @ Meas. Temp	.38 @ 45		
Rmc @ Meas. Temp	.68 @ 45		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.19 @ 120		
Operating Rig Time	4 1/2 Hours		
Max Rec. Temp. F	120		
Equipment Number	17		
Location	Hays		
Recorded By	D. Martin	D. Kerr	
Witnessed By	Scott Alberg		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Medicine Lodge, KS
9 W on River Rd., S Into

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

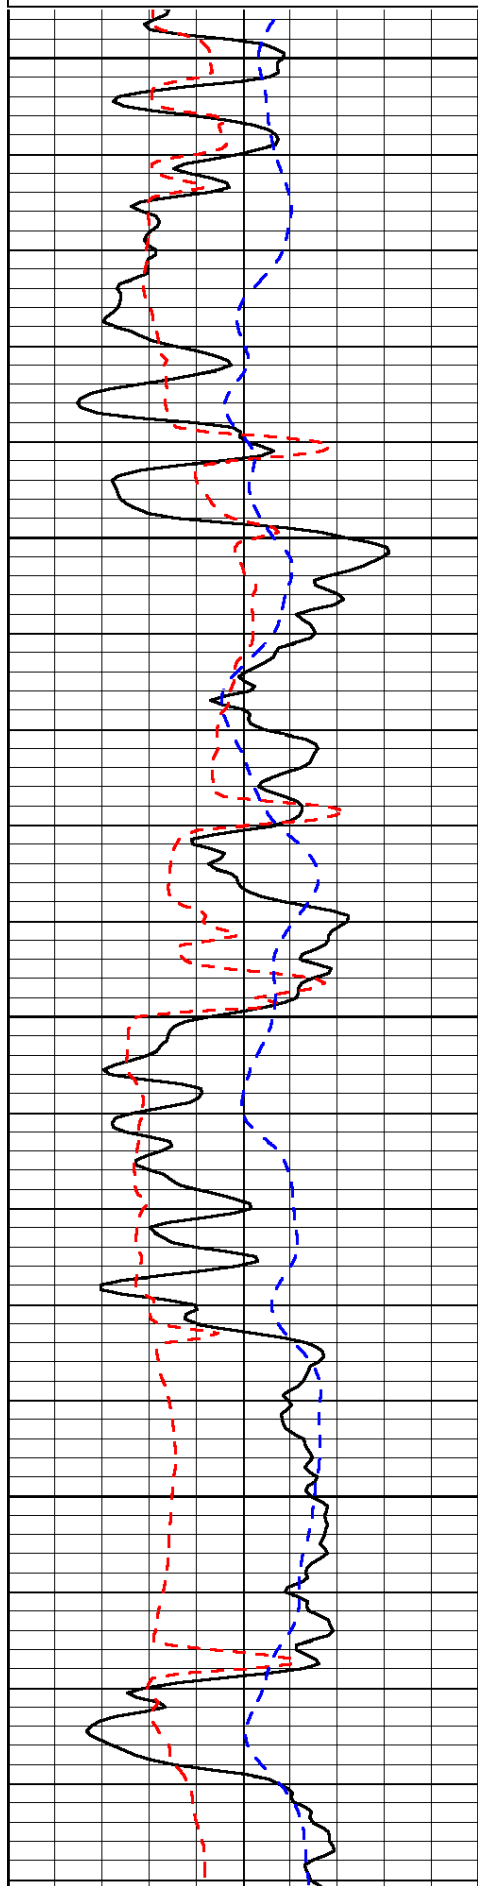


2550

2600

2650

2700

0	Micro Inverse 1 X 1	20
0	Micro Normal 2"	20
10000	Line Weight	0

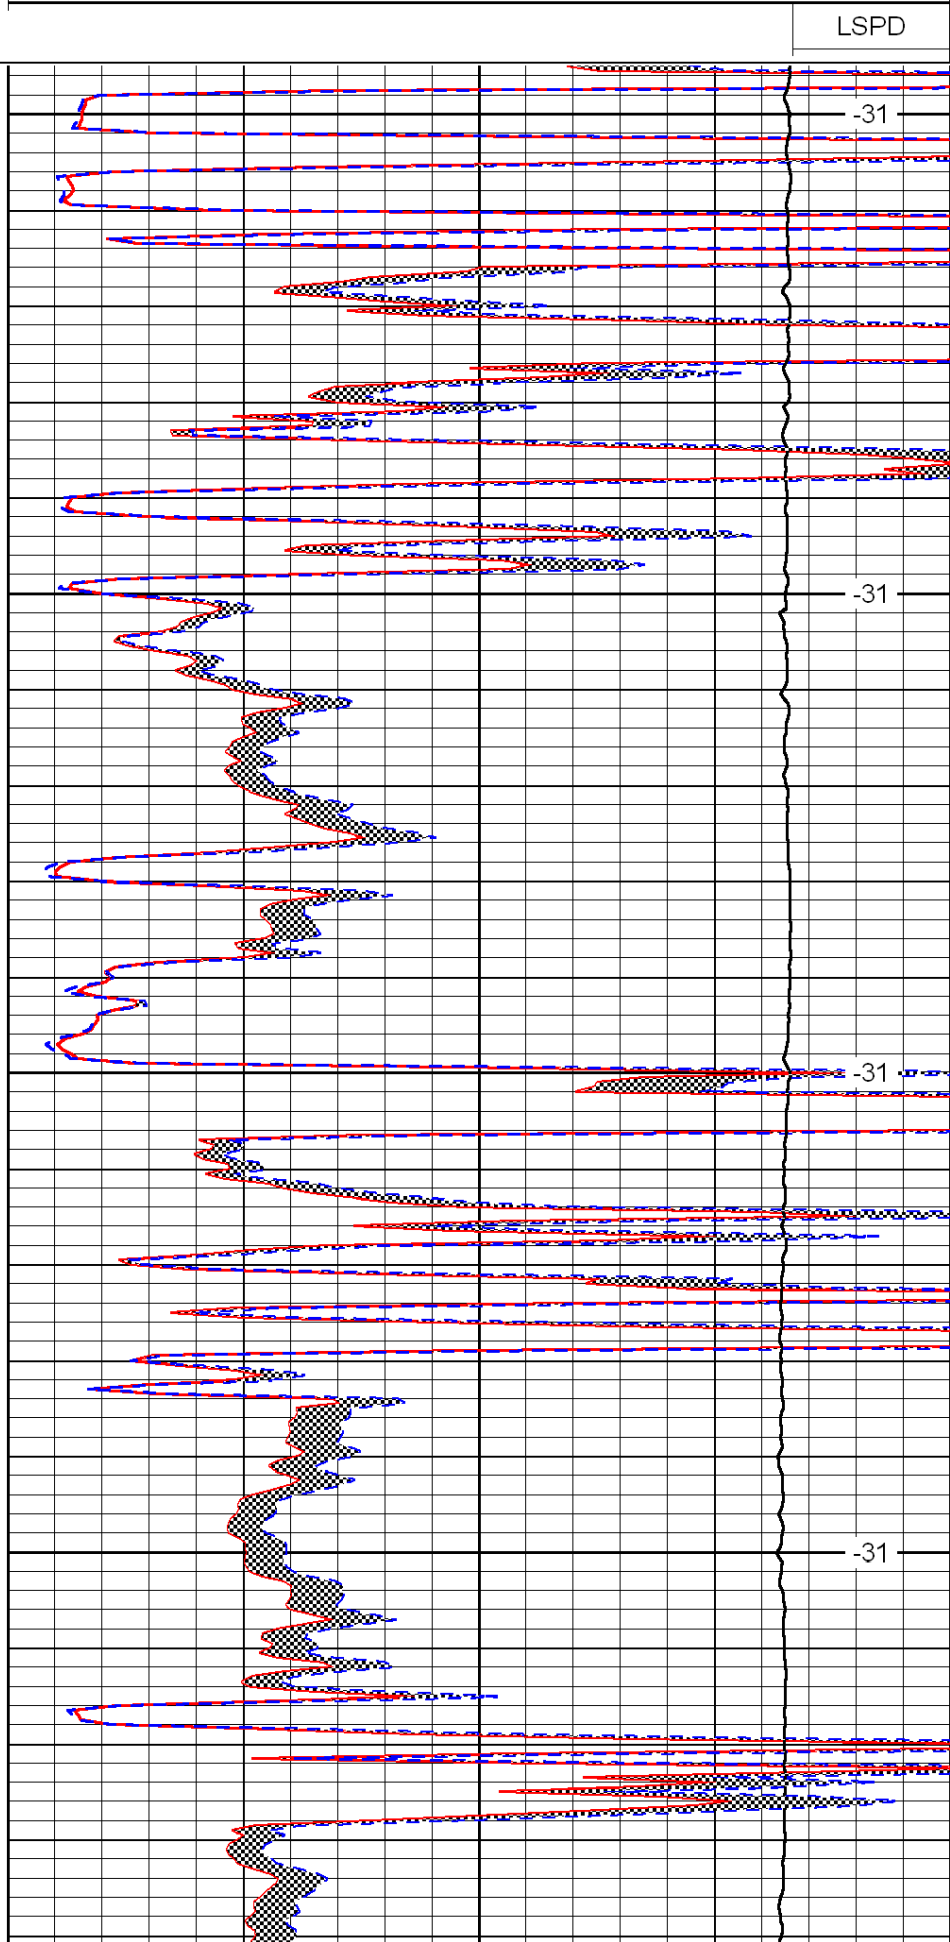


LSPD

-31

-31

-31

-31

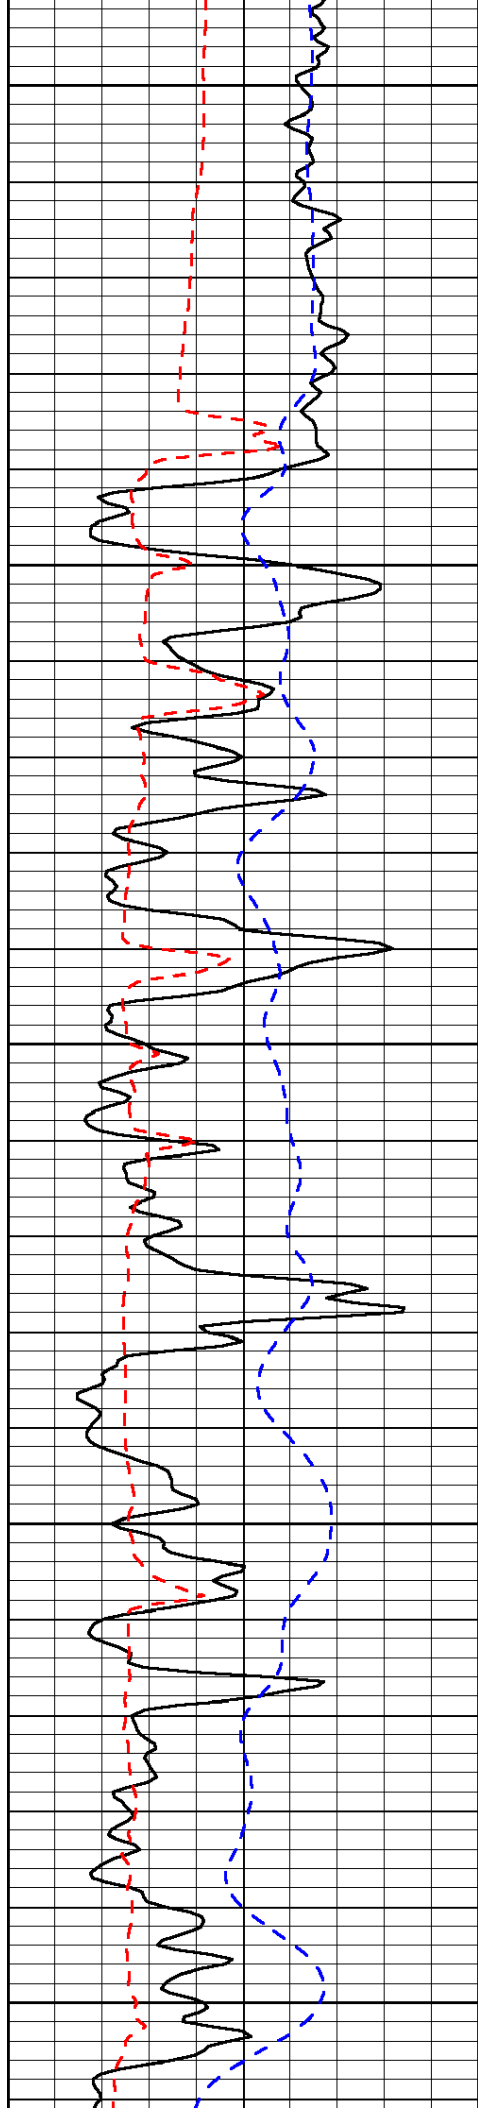


2750

2800

2850

2900

2950

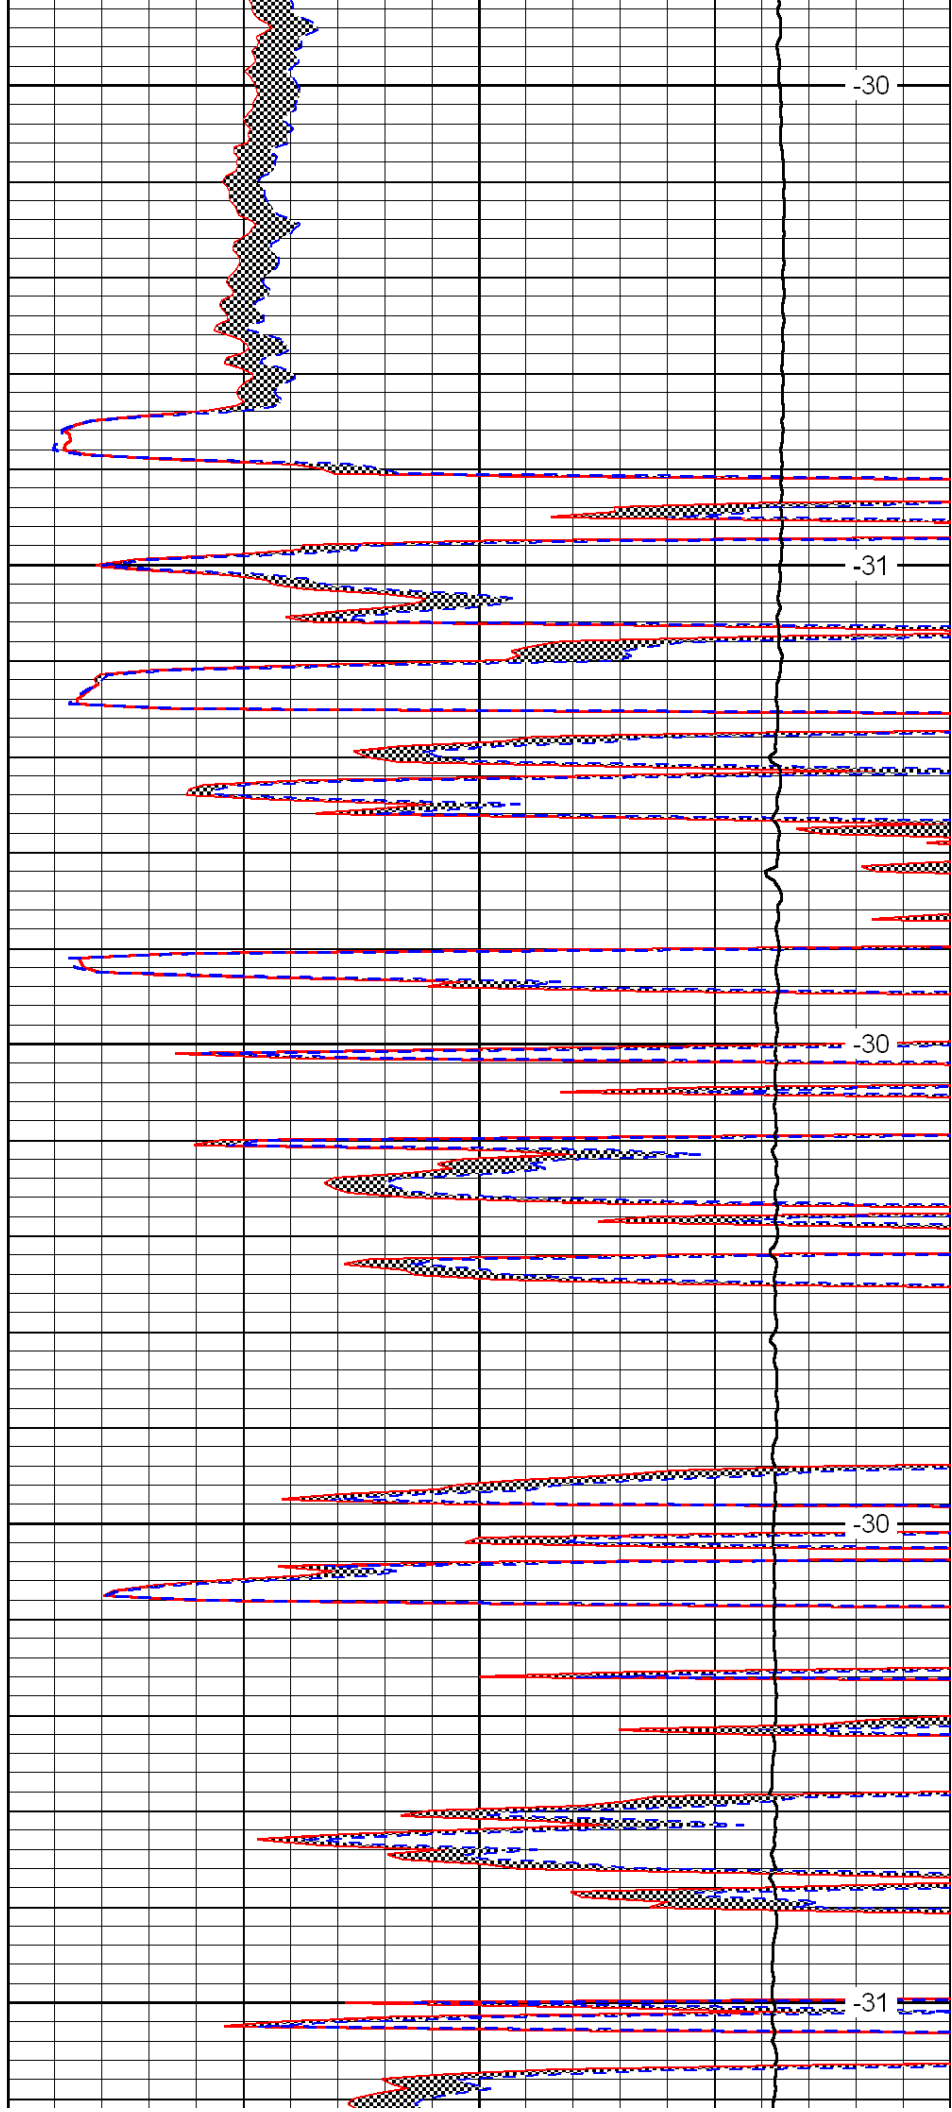


-30

-31

-30

-30

-31

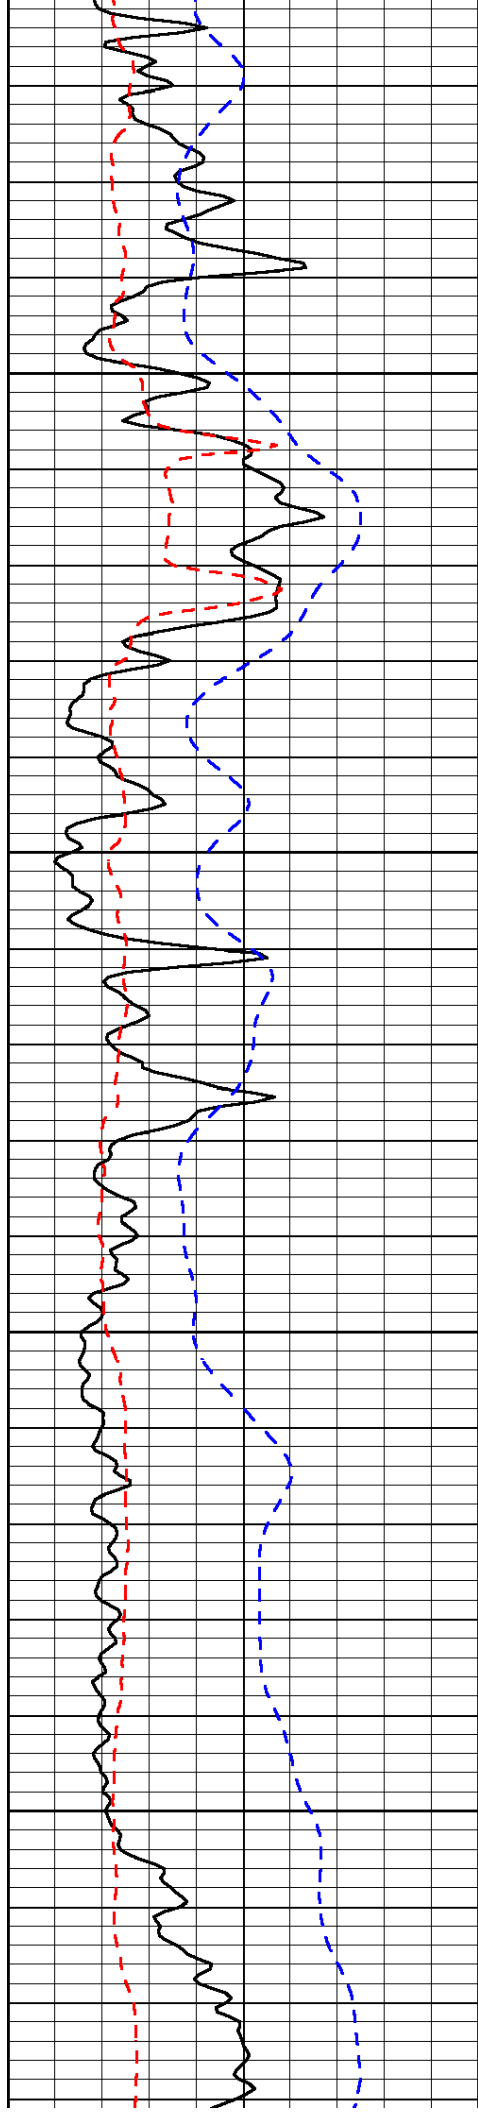


3000

3050

3100

3150

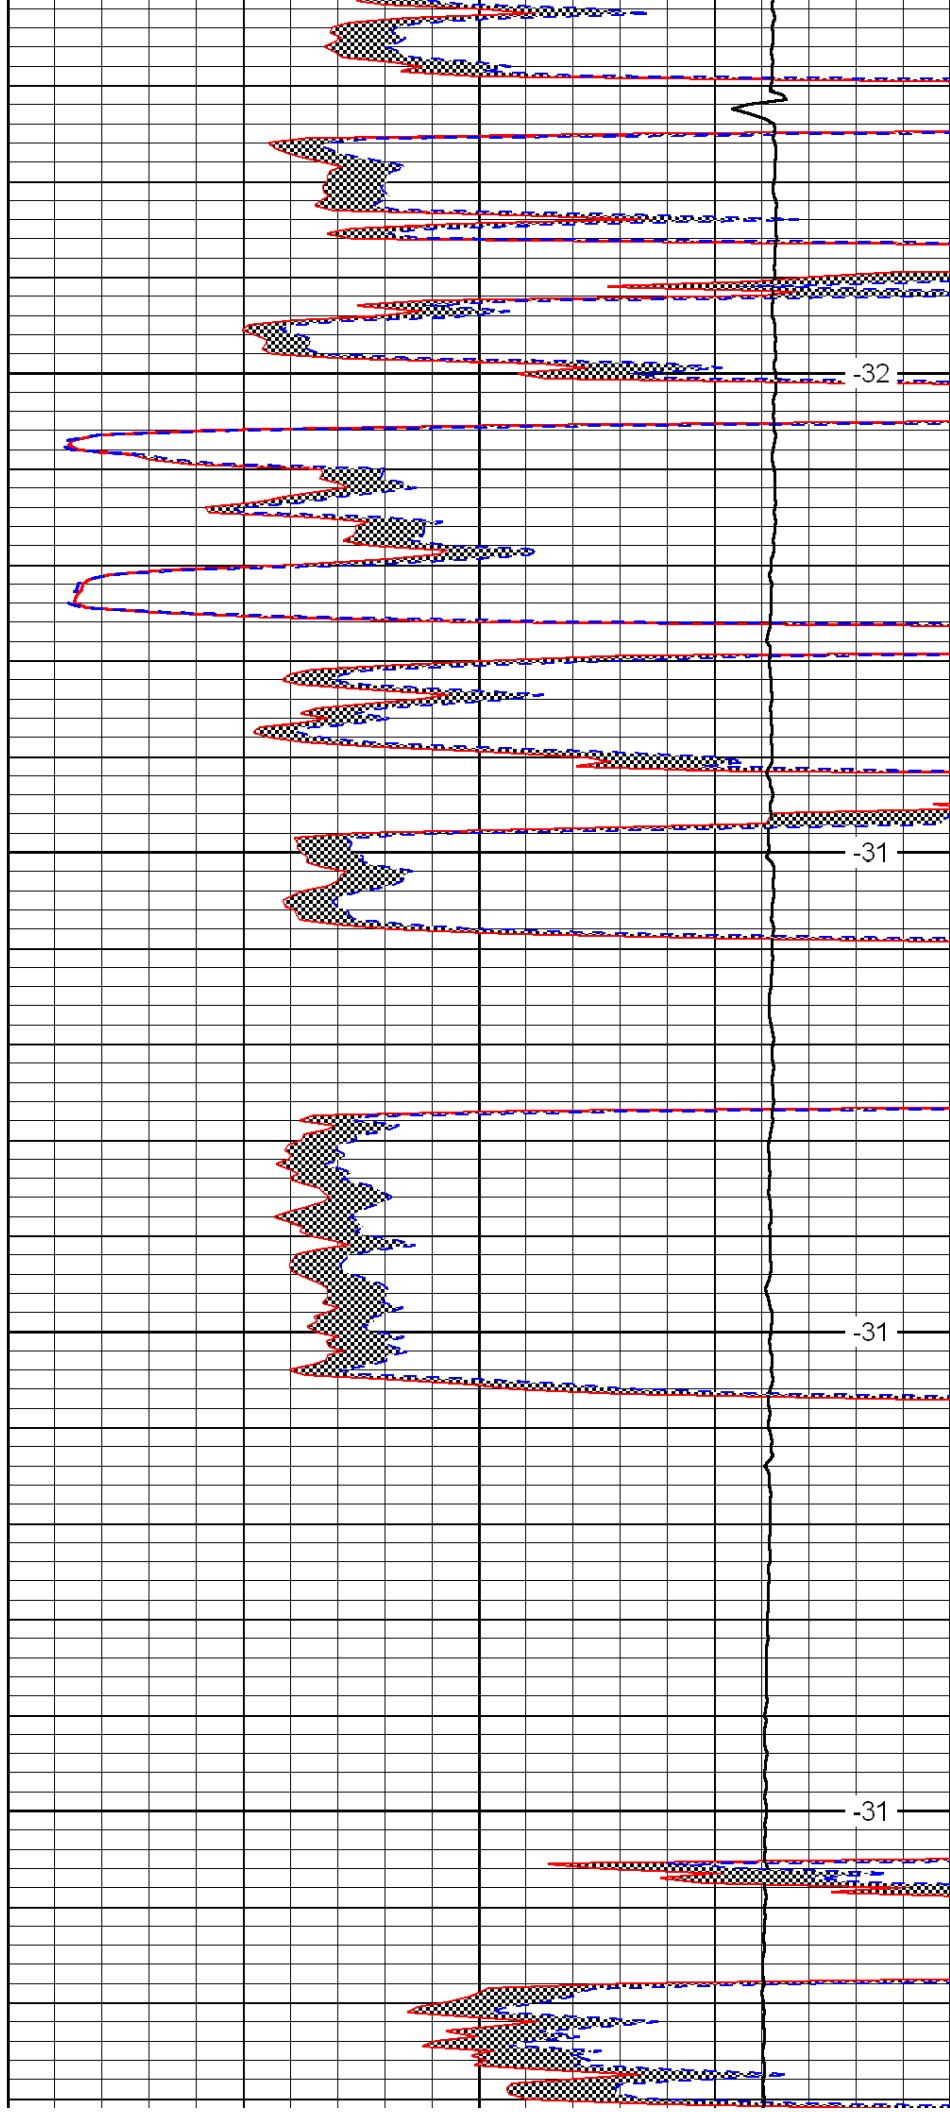


-32

-31

-31

-31

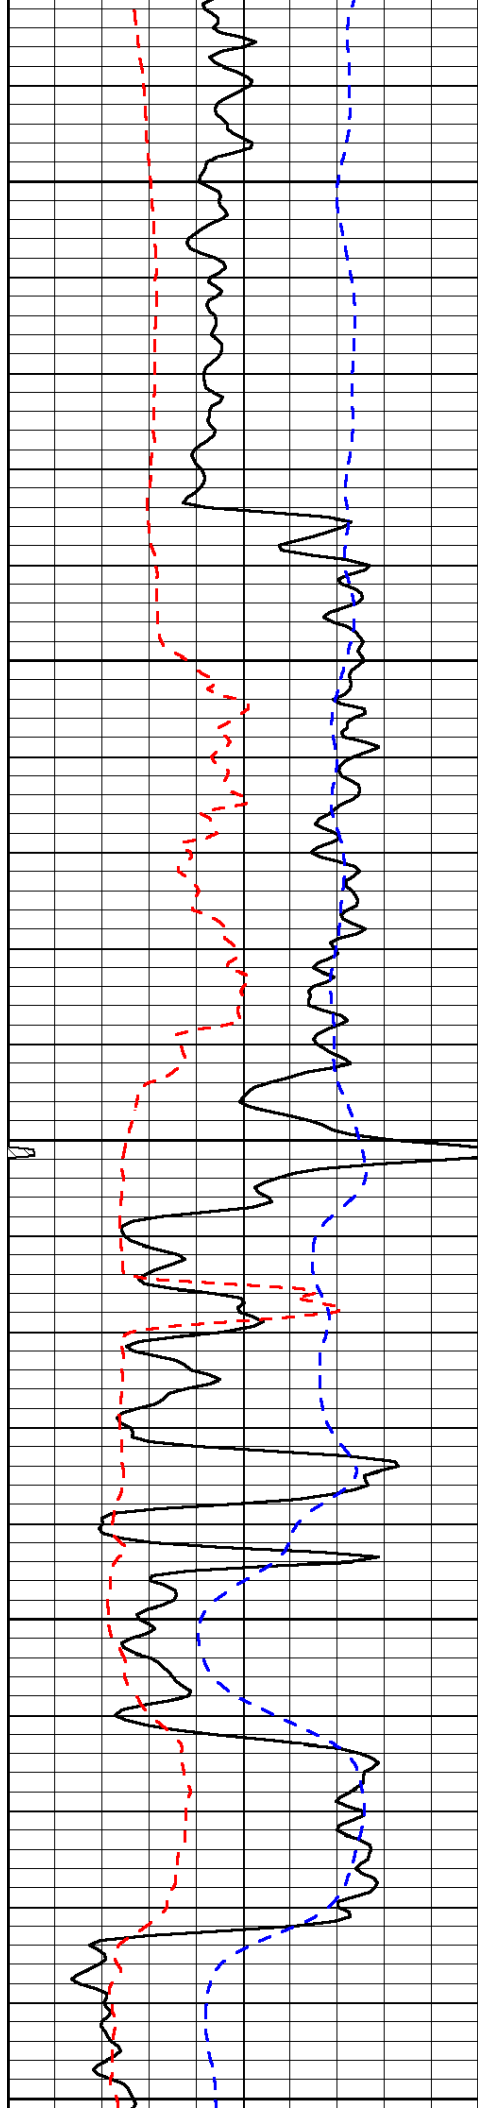


3200

3250

3300

3350

3400

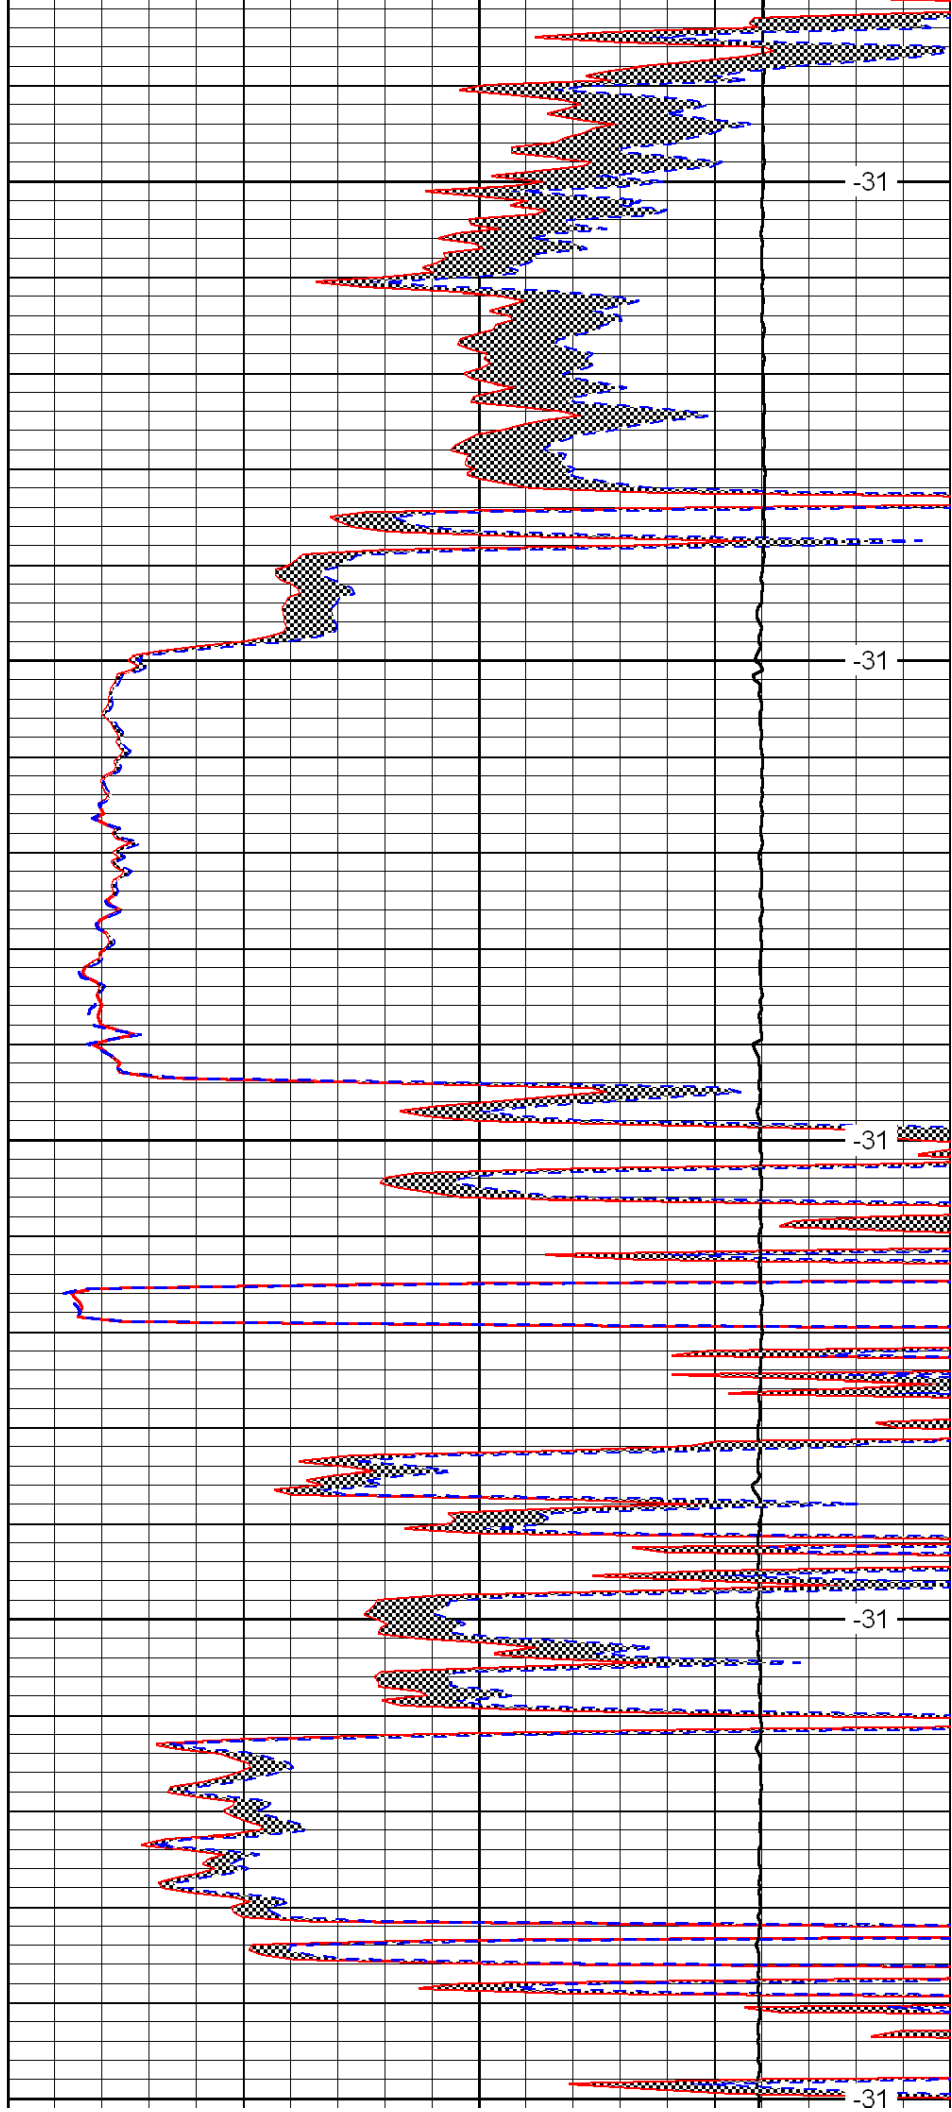


-31

-31

-31

-31

-31

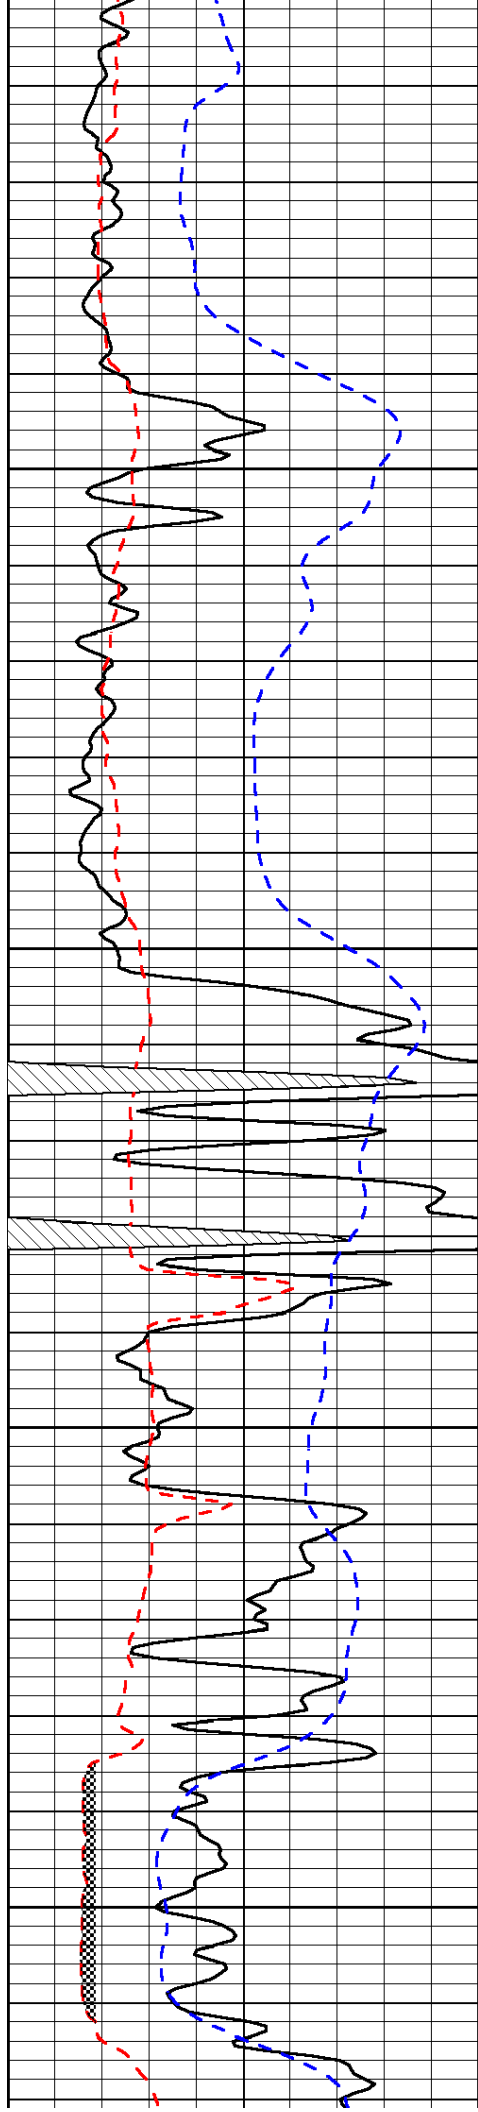



3450

3500

3550

3600

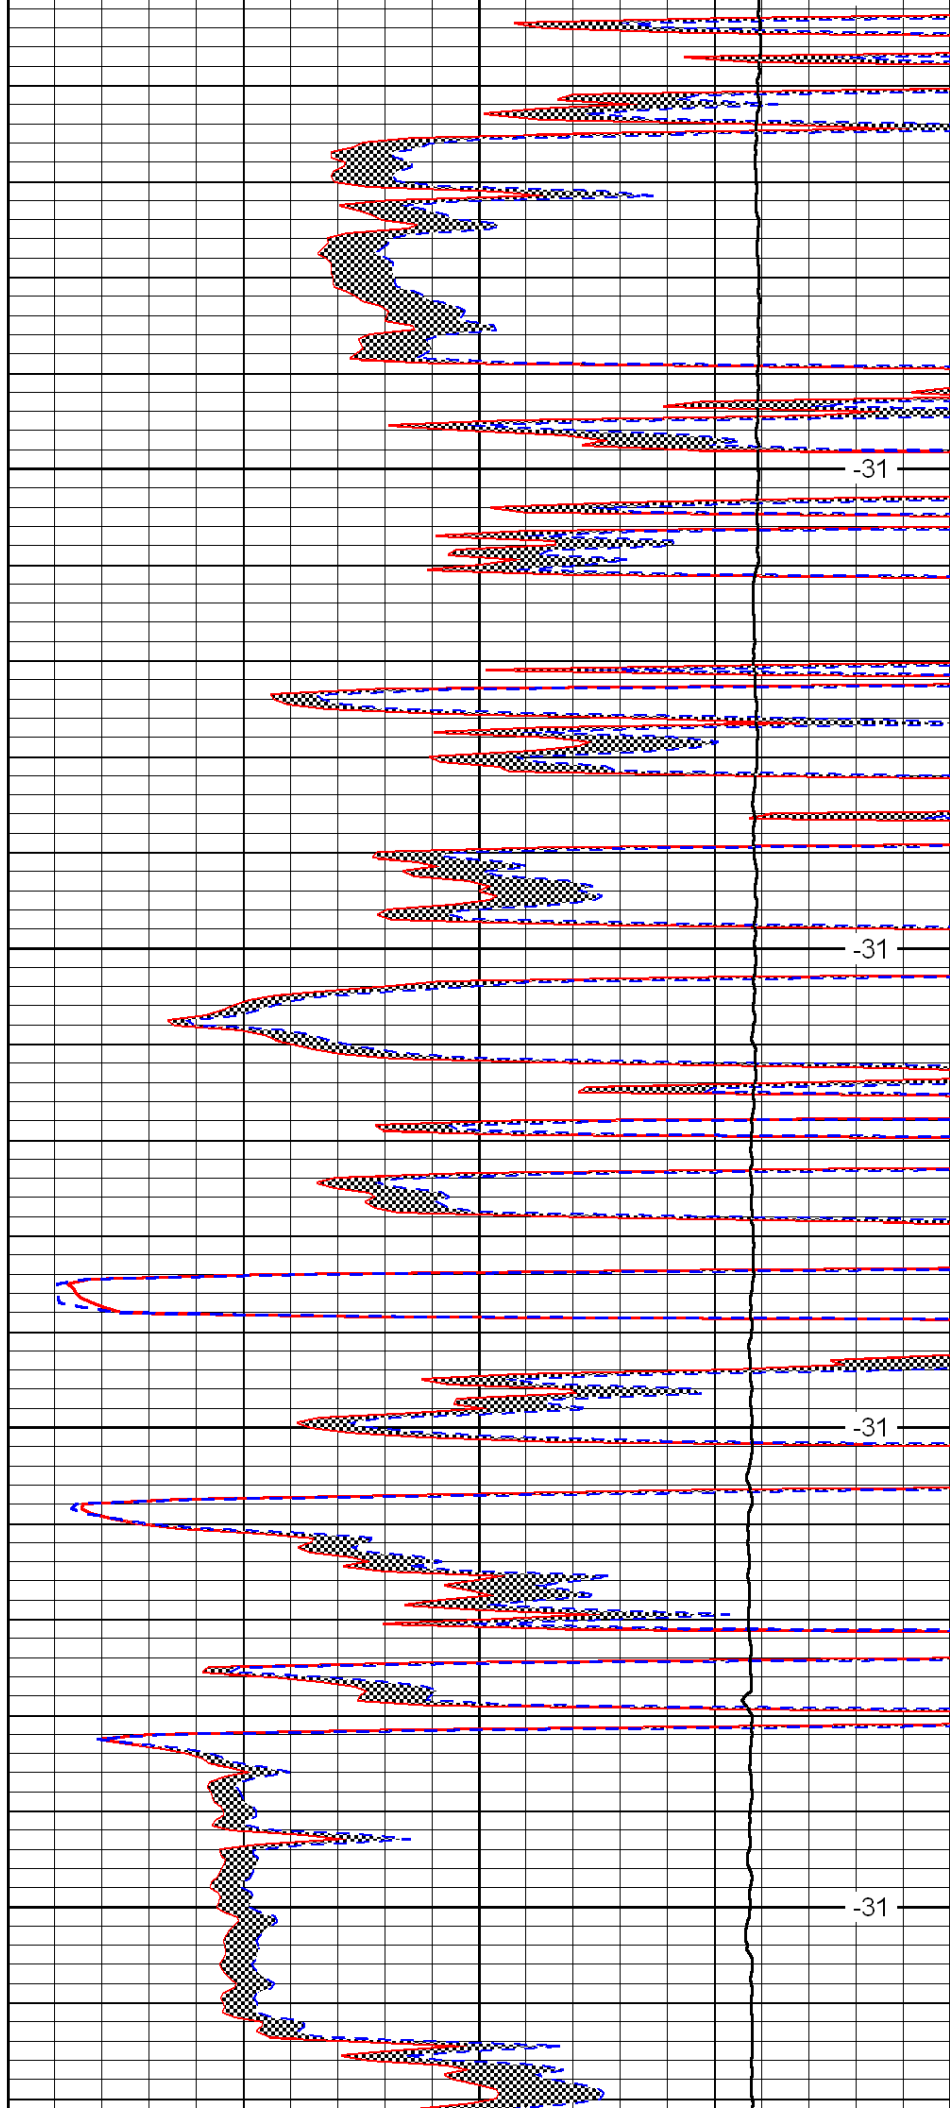

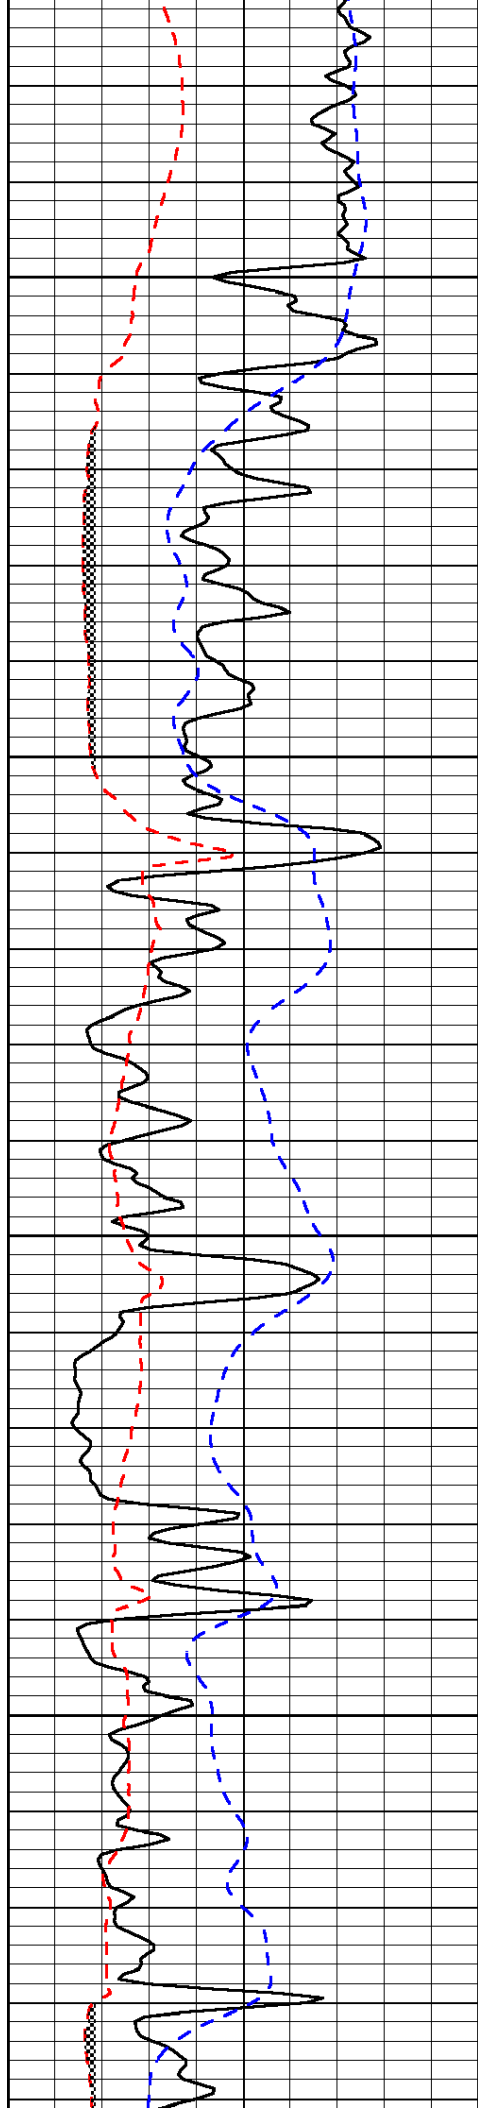



3650

3700

3750

3800

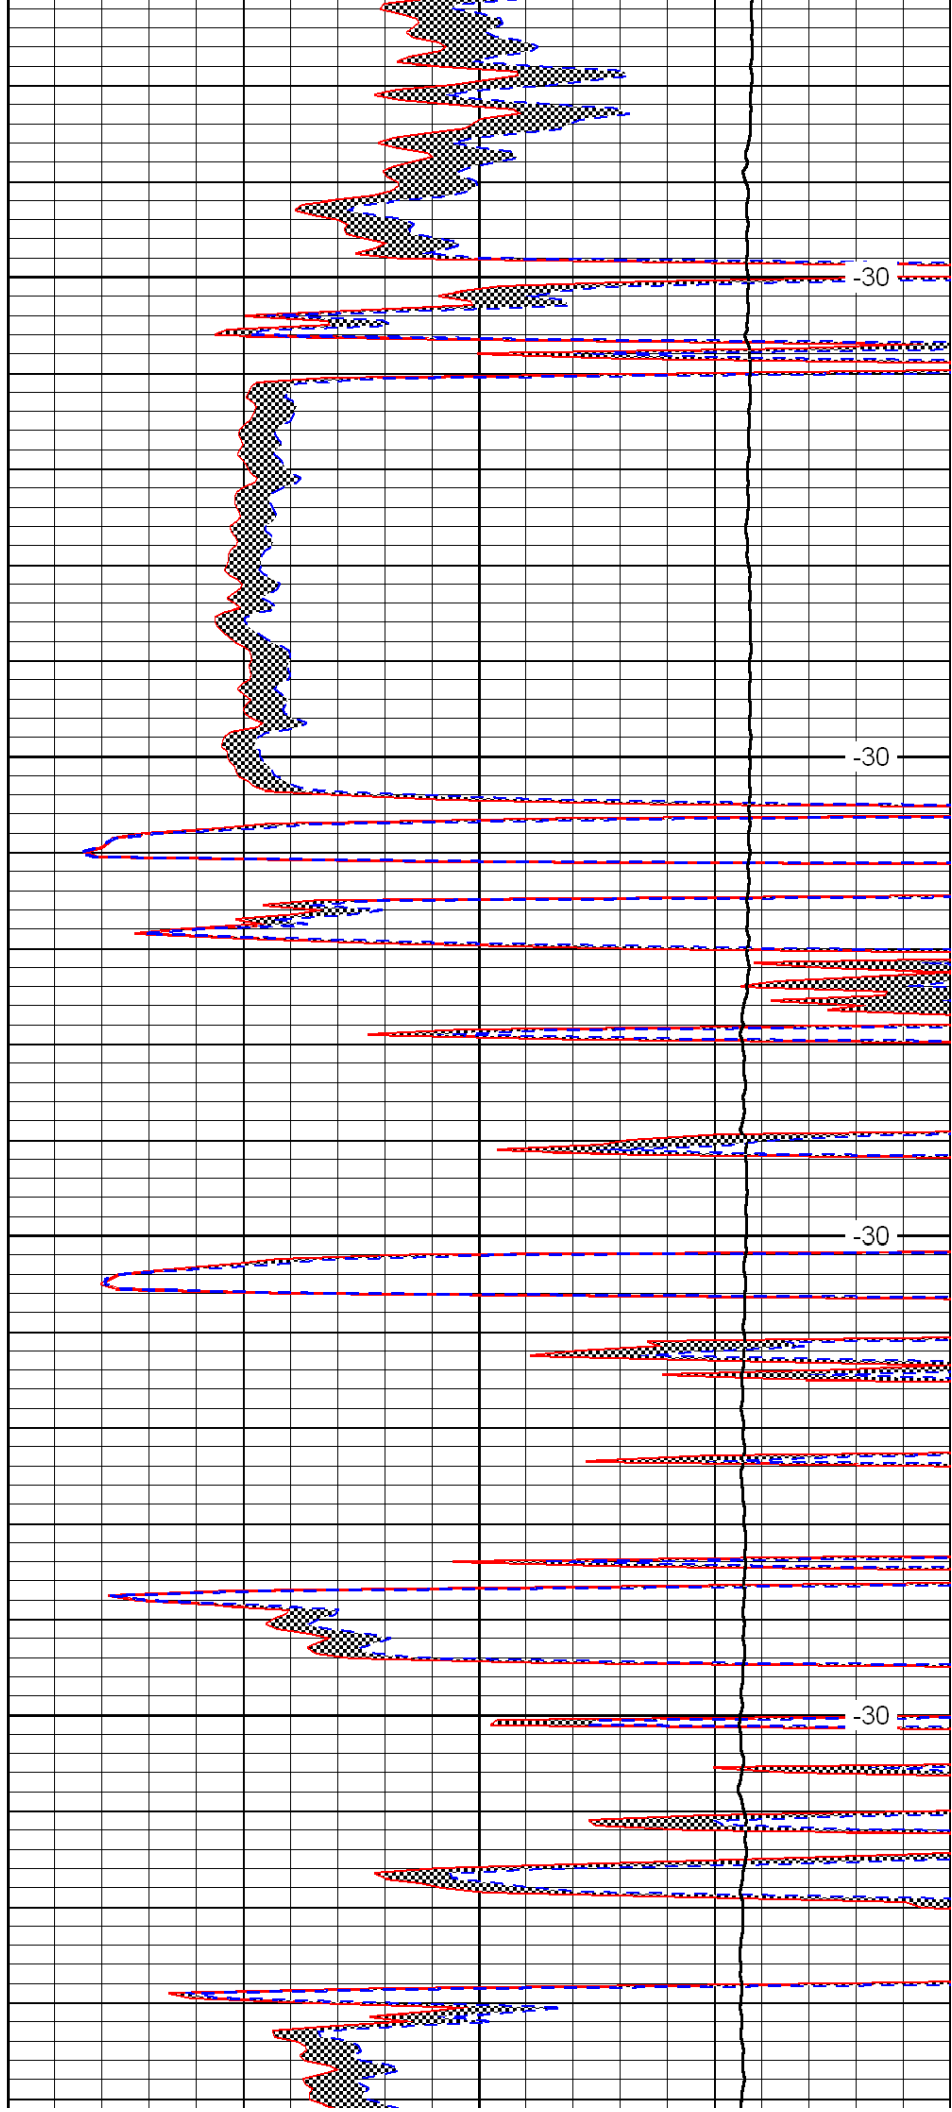

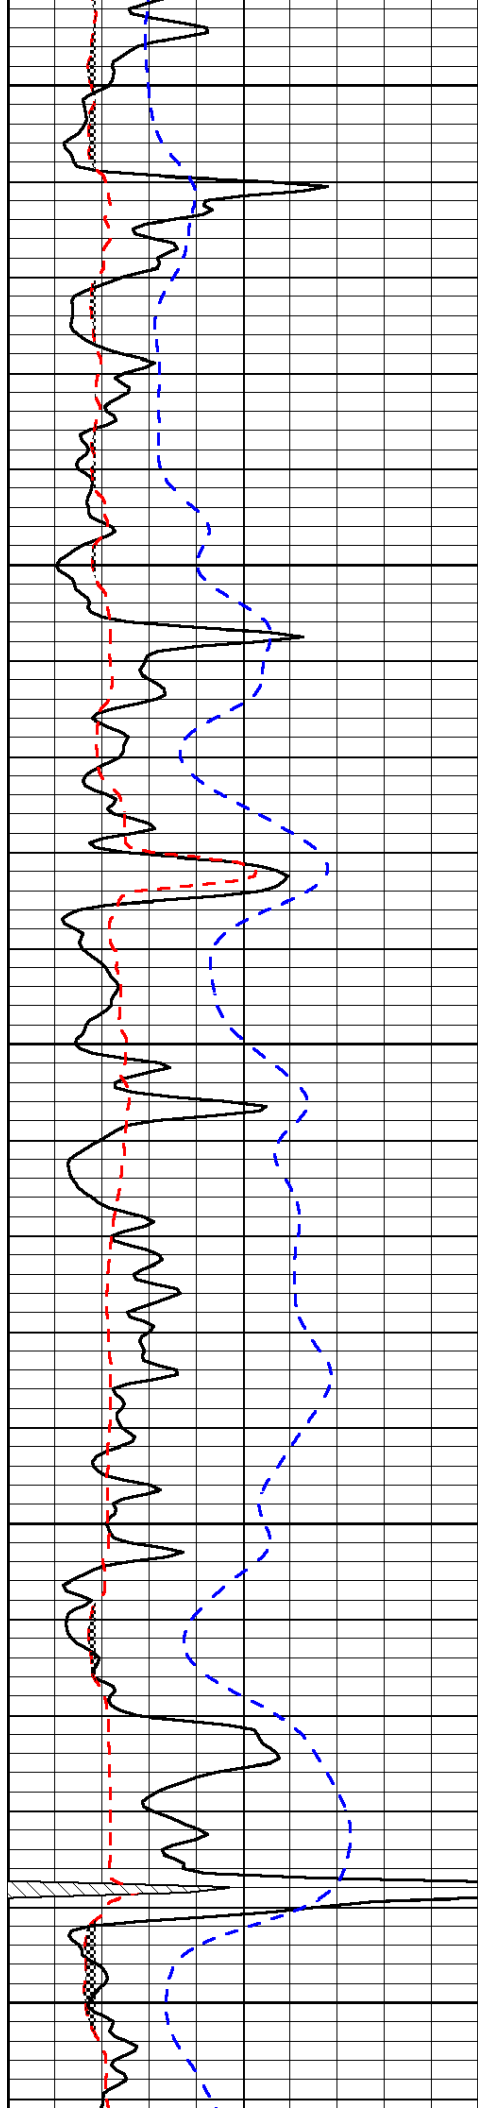


3850

3900

3950

4000

4050

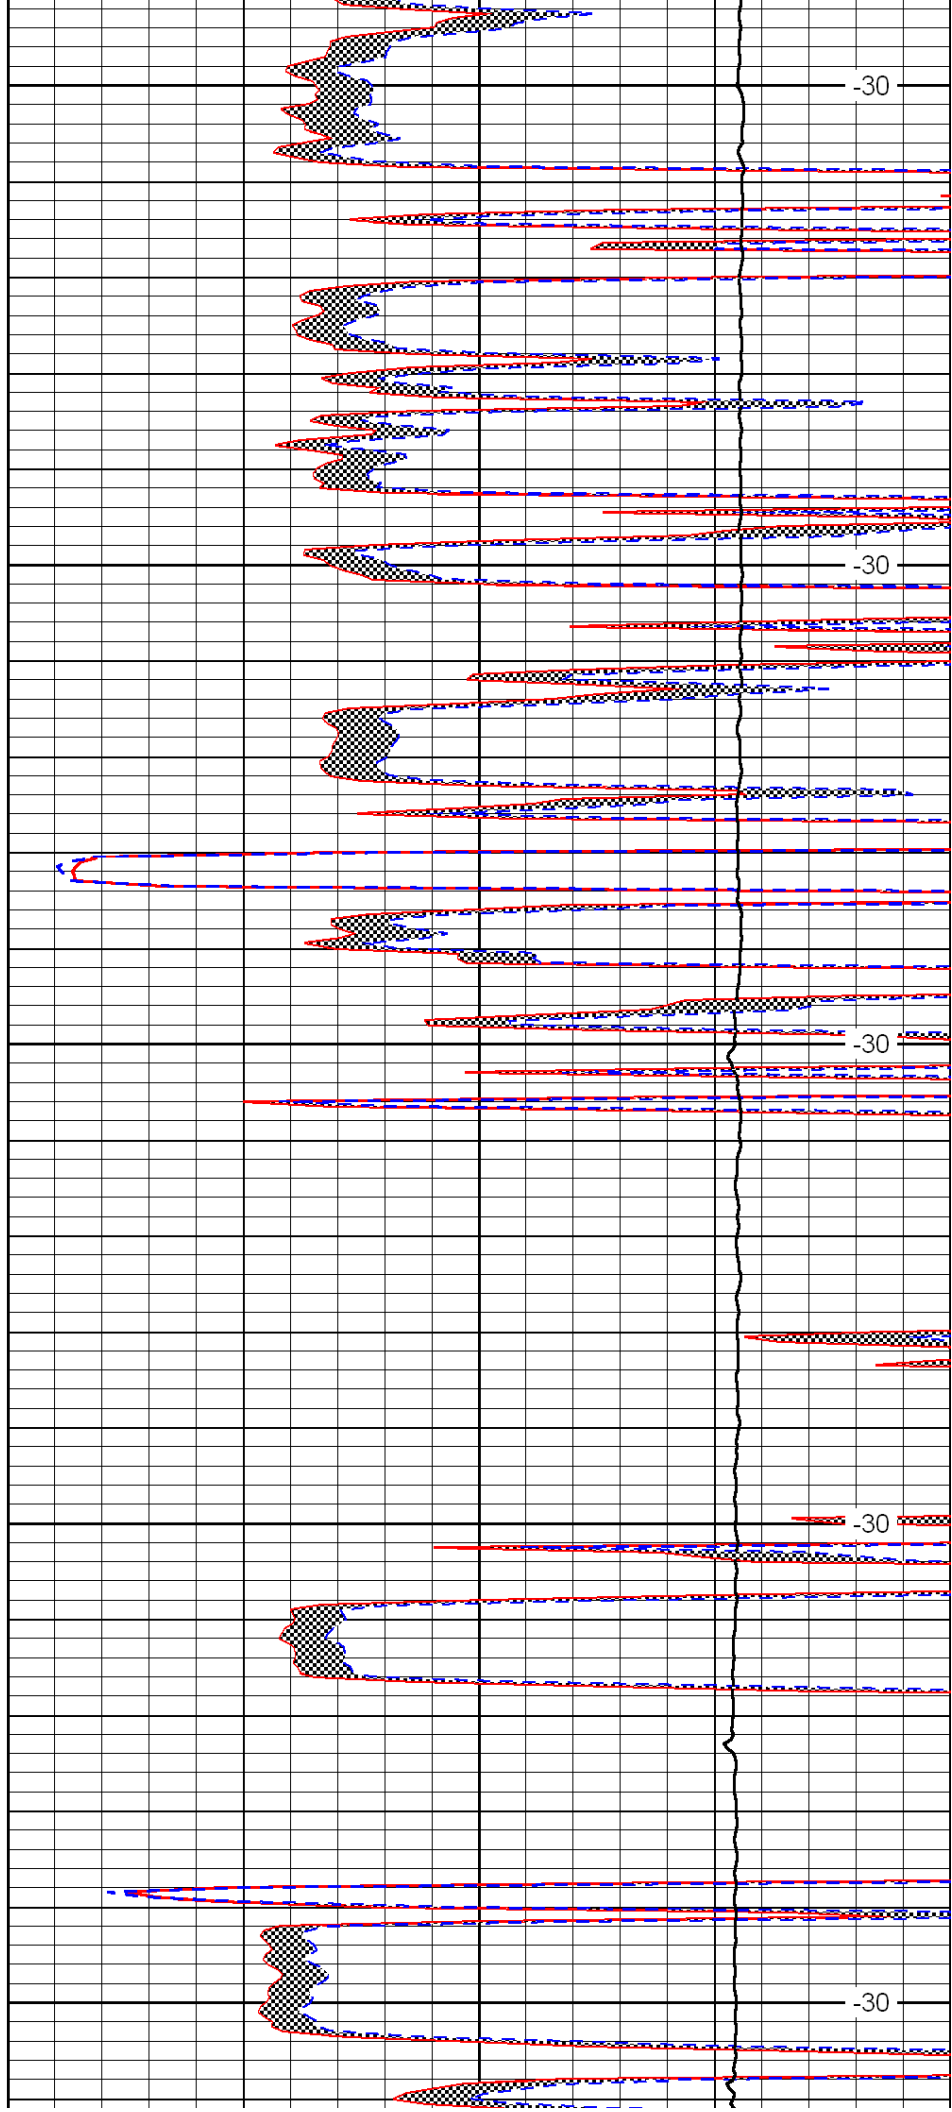


-30

-30

-30

-30

-30

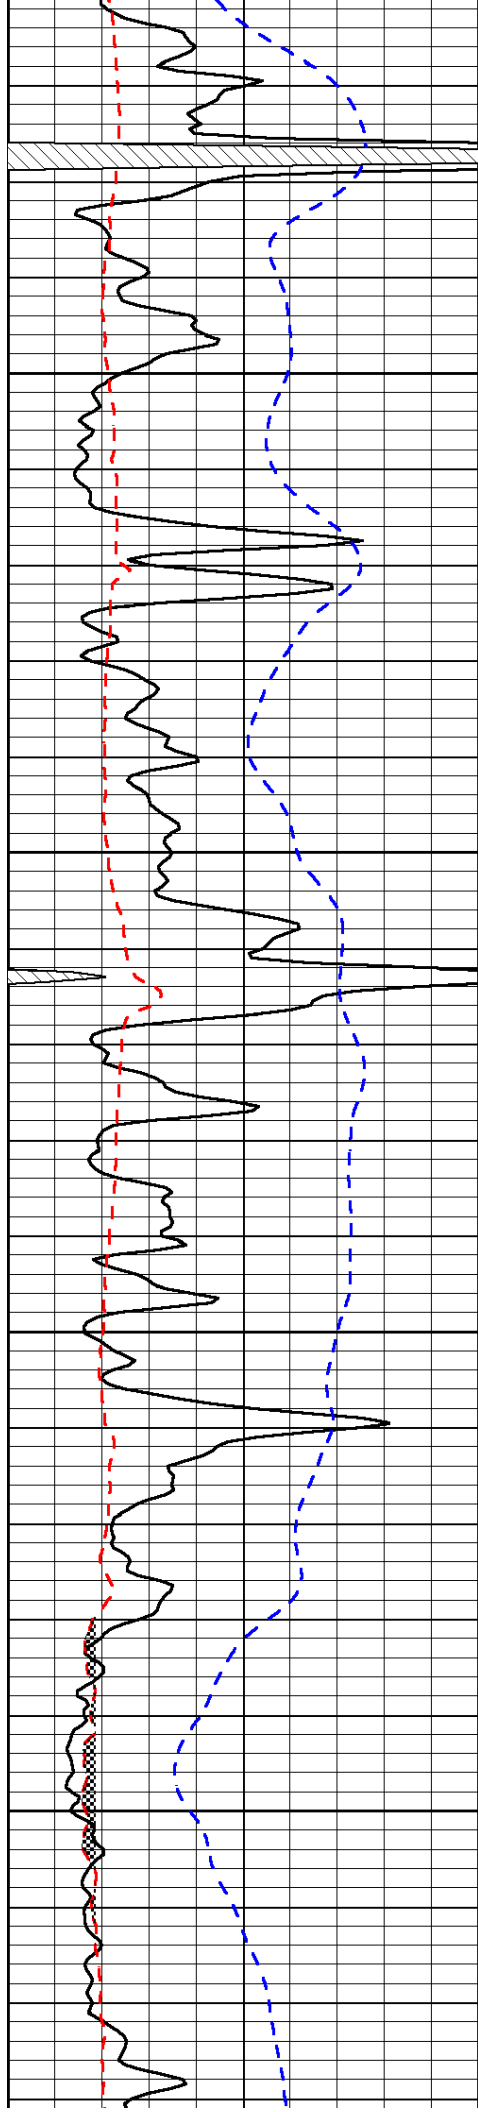


4100

4150

4200

4250

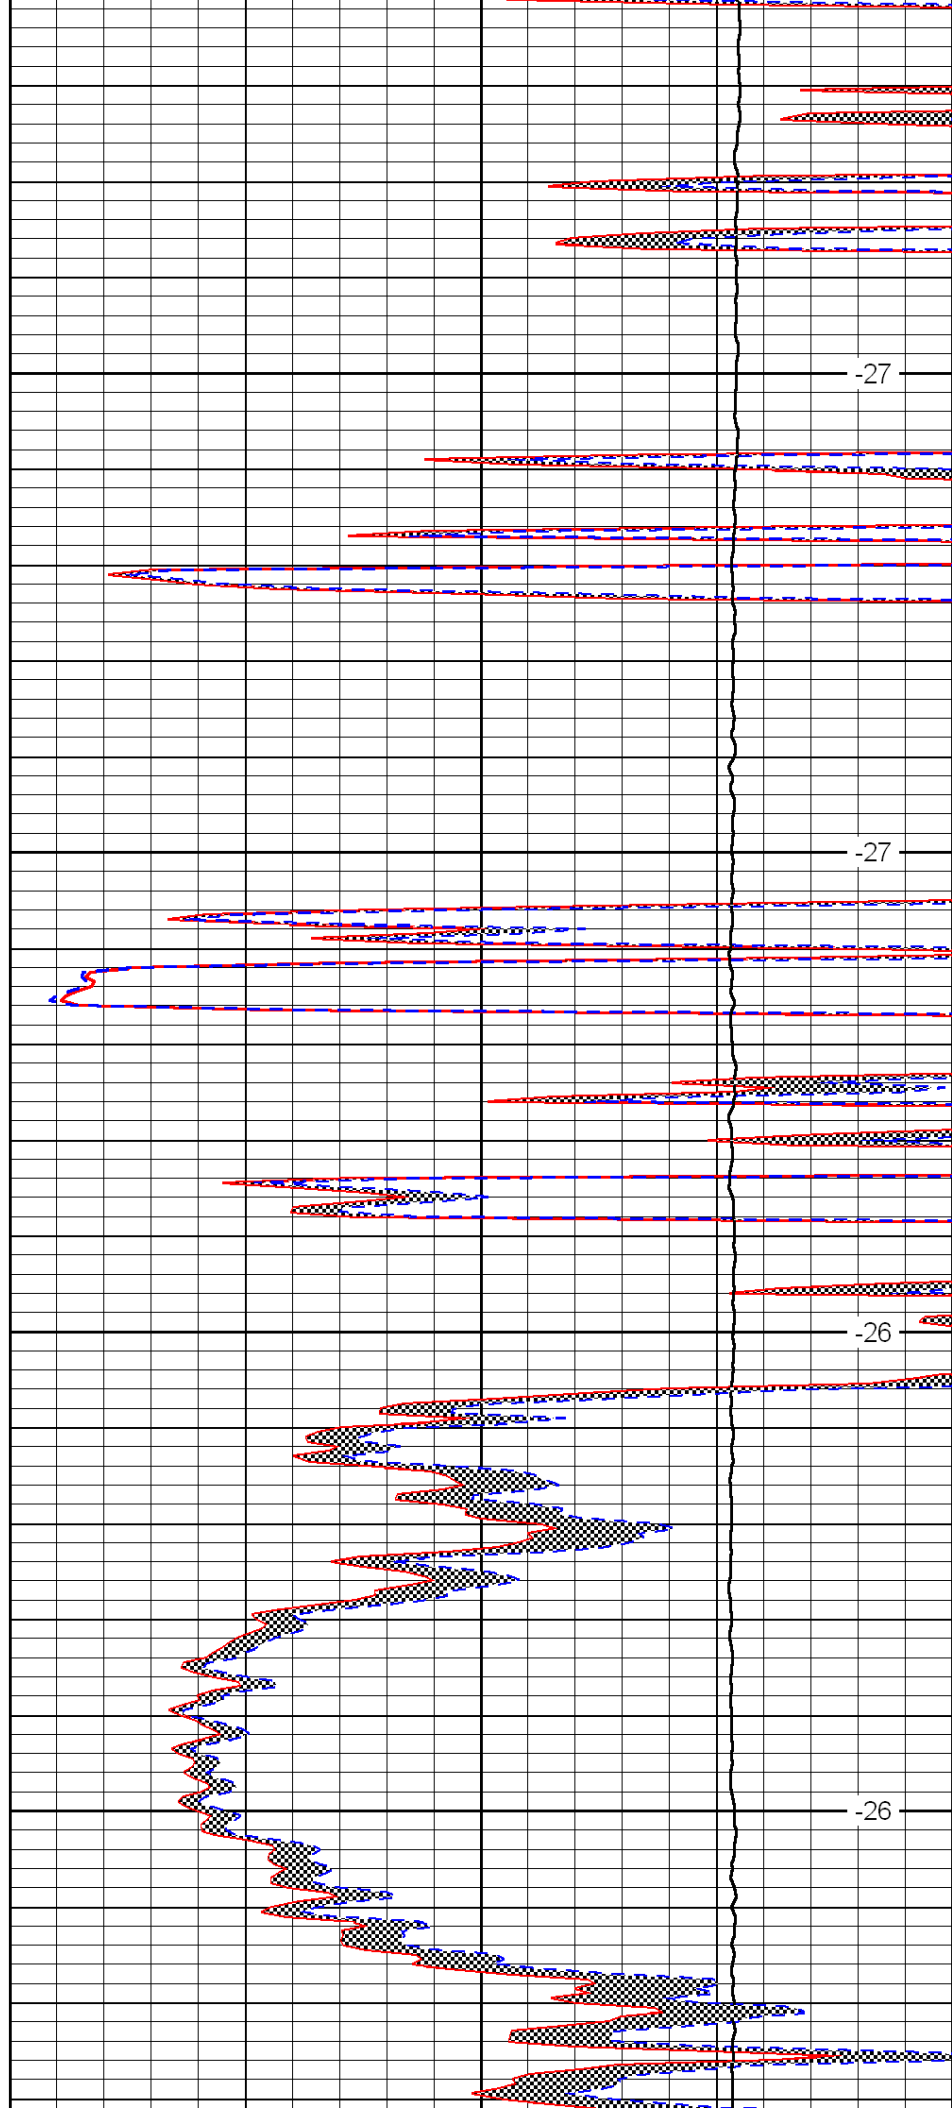


-27

-27

-26


-26

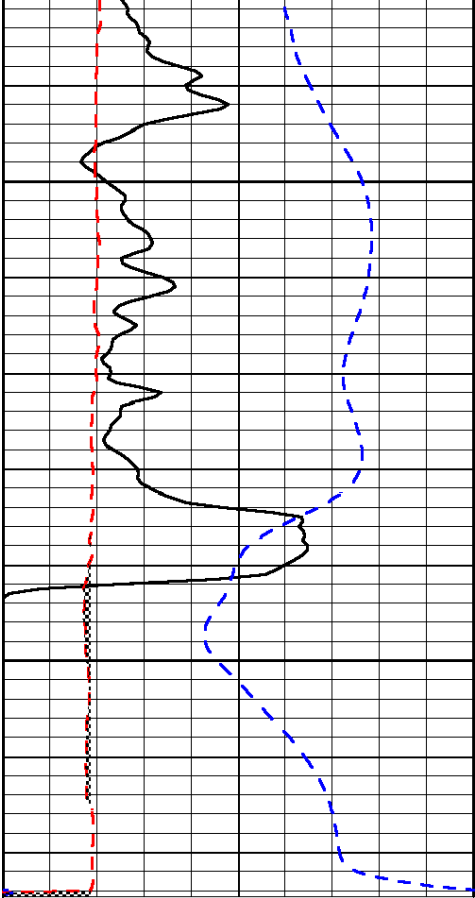

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

4300

4350

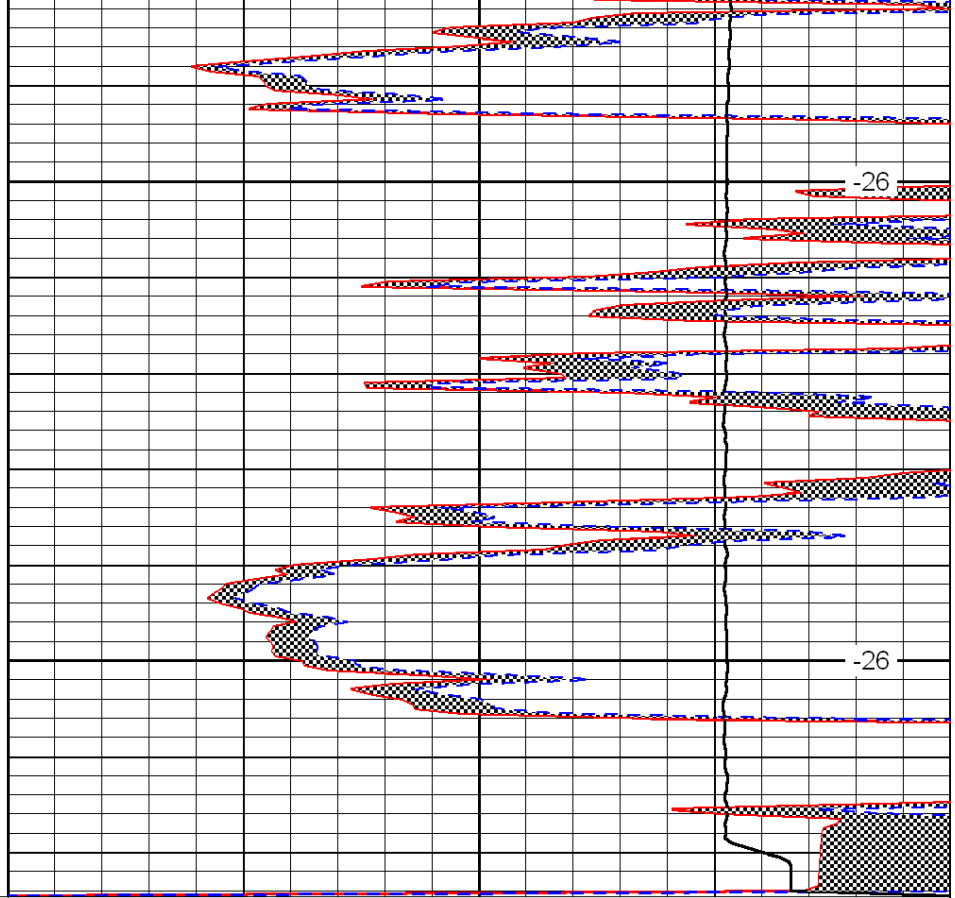

0	Micro Inverse 1 X 1	20
0	Micro Normal 2''	20
10000	Line Weight	0

LSPD