



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company Carrie Exploration and Development		
	Well Kay C #1		
	Field Chase - Silica		
	County Barton	State	Kansas
15-009-25648-00-00	Location	N/2 N/2 SW 2310' FSL & 1320' FWL	
	Sec: 36	Twp: 19S	Rge: 11W
	Other Services CNL/CDL DIL		
Permanent Datum	Ground Level	Elevation 1763	
Log Measured From	Kelly Bushing	10 Ft. Above Perm. Datum	
Drilling Measured From	Kelly Bushing	K.B. 1773 D.F. 1763 G.L. 1763	
Date	1/15/2012		
Run Number	Two		
Depth Driller	3400		
Depth Logger	3399		
Bottom Logged Interval	3398		
Top Log Interval	2500		
Casing Driller	8.625 @ 261		
Casing Logger	260		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	7500		
Density / Viscosity	9.0 50		
pH / Fluid Loss	10.0 9.4		
Source of Sample	Flowline		
Rm @ Meas. Temp	.49 @ 54		
Rmf @ Meas. Temp	0.37 @ 54		
Rmc @ Meas. Temp	0.66 @ 54		
Source of Rmf / Rmc	Charts		
Rm @ BHT	0.24 @ 110		
Operating Rig Time	4 Hours		
Max Rec. Temp. F	110		
Equipment Number	10		
Location	Hays		
Recorded By	D. Schmidt		
Witnessed By	H. Deines		

<<< Fold Here >>>



All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments



Thank you for using Log-Tech, Inc.
(785) 625-3858

Ellinwood,
E to SE 150th Ave, 1/2 N,
E & S into


Database File: c:\warrior\data\carrie_kay c #1\carrie_kayc#1hd.db
Dataset Pathname: dil/carstck
Presentation Format: micro
Dataset Creation: Sun Jan 15 16:46:46 2012
Charted by: Depth in Feet scaled 1:240

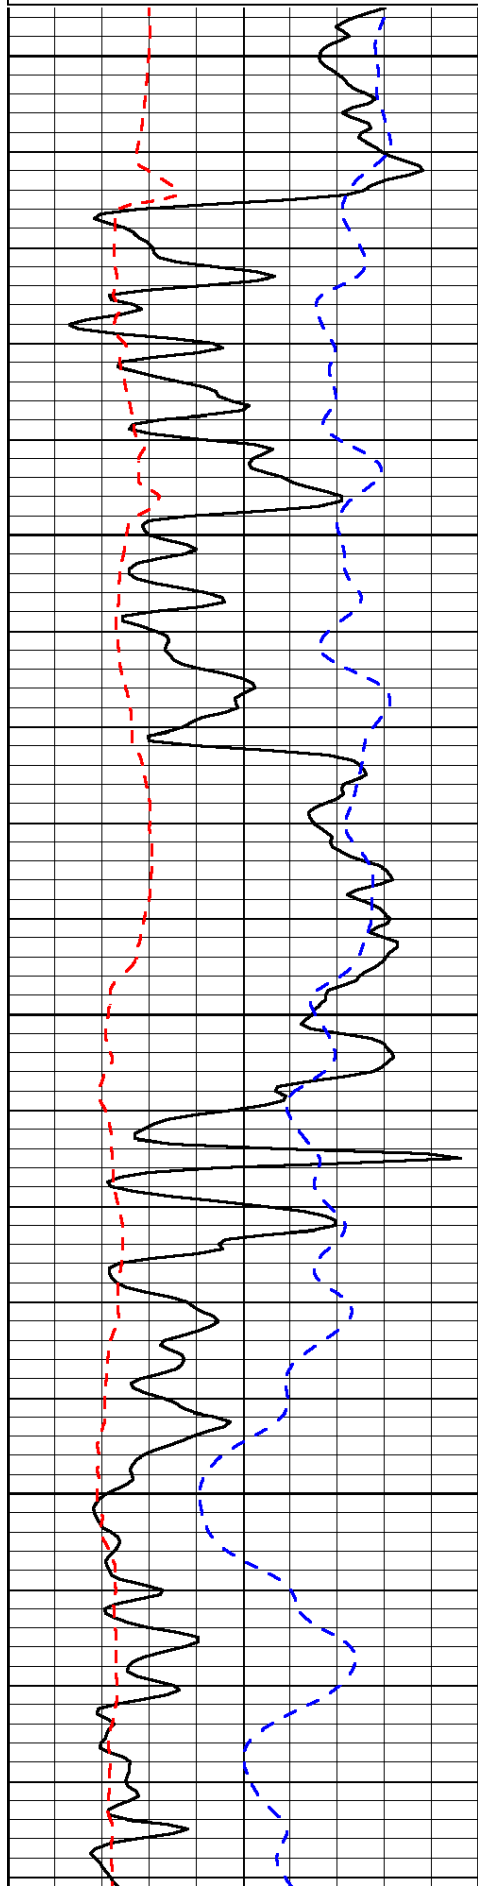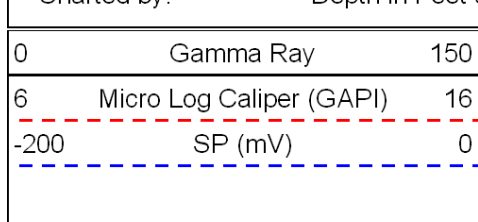

2500
2550
2600
2650

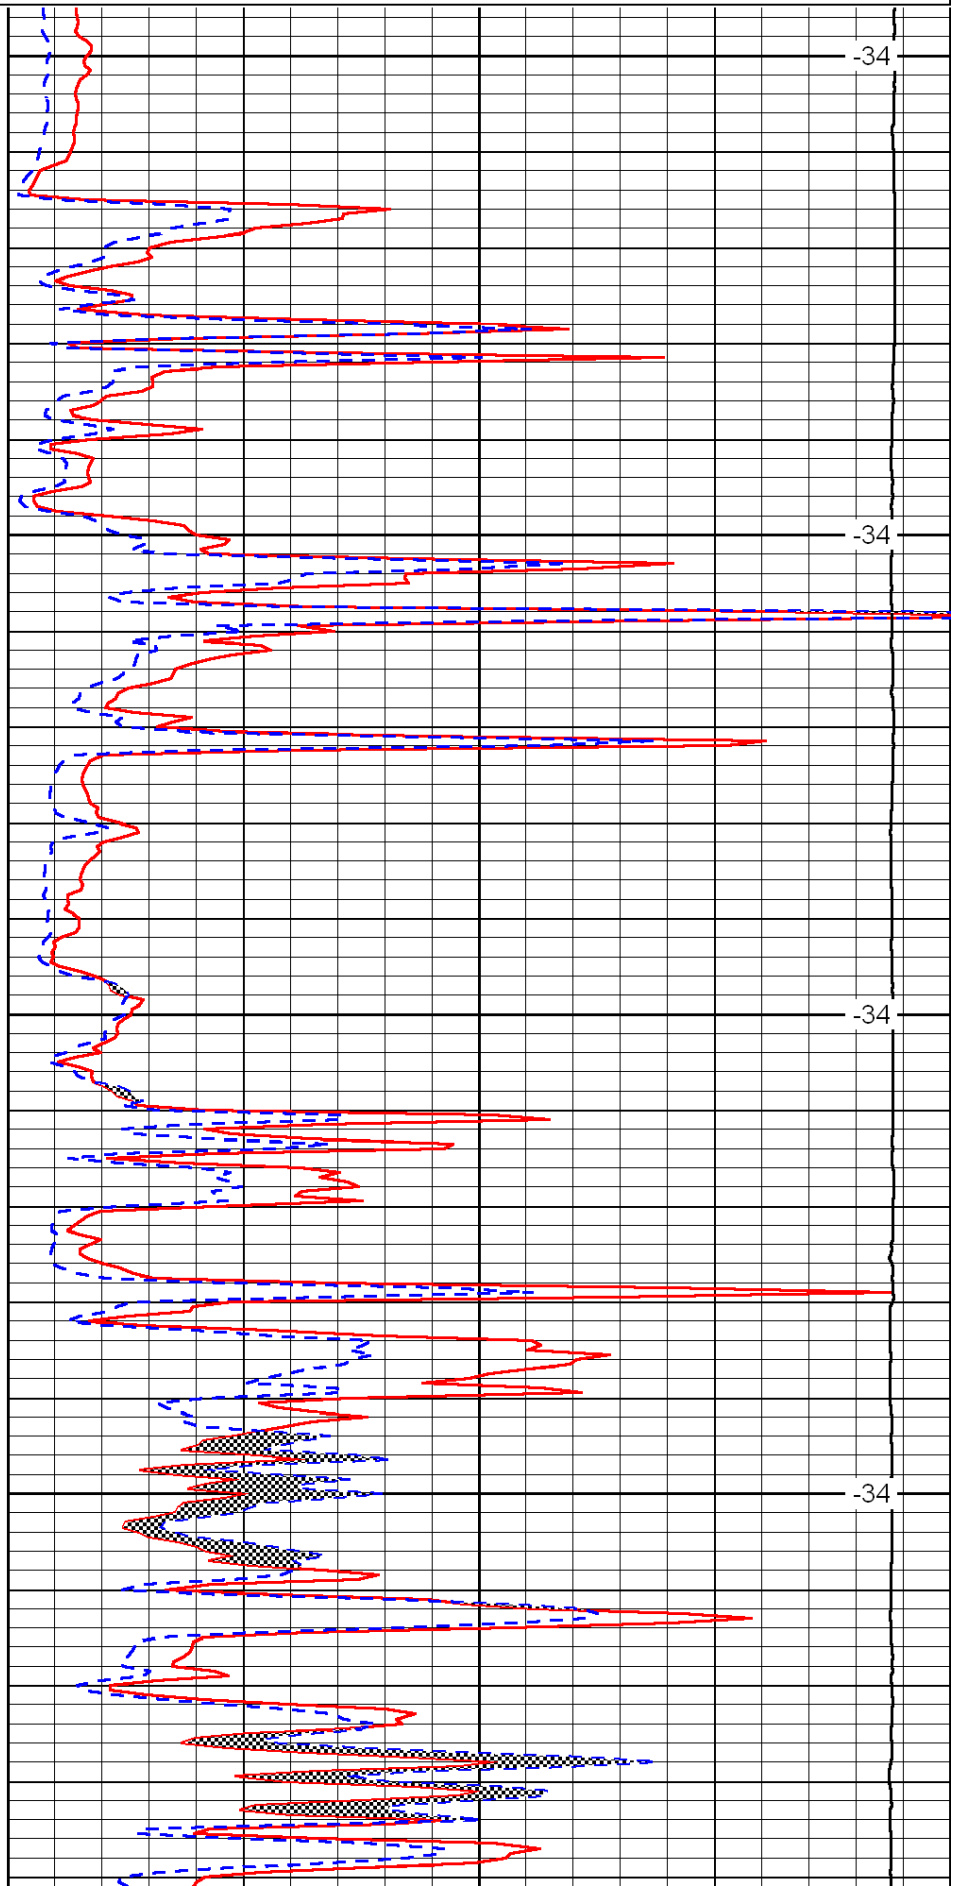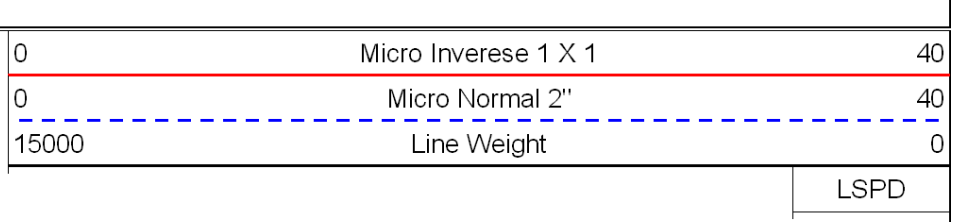

-34
-34
-34
-34

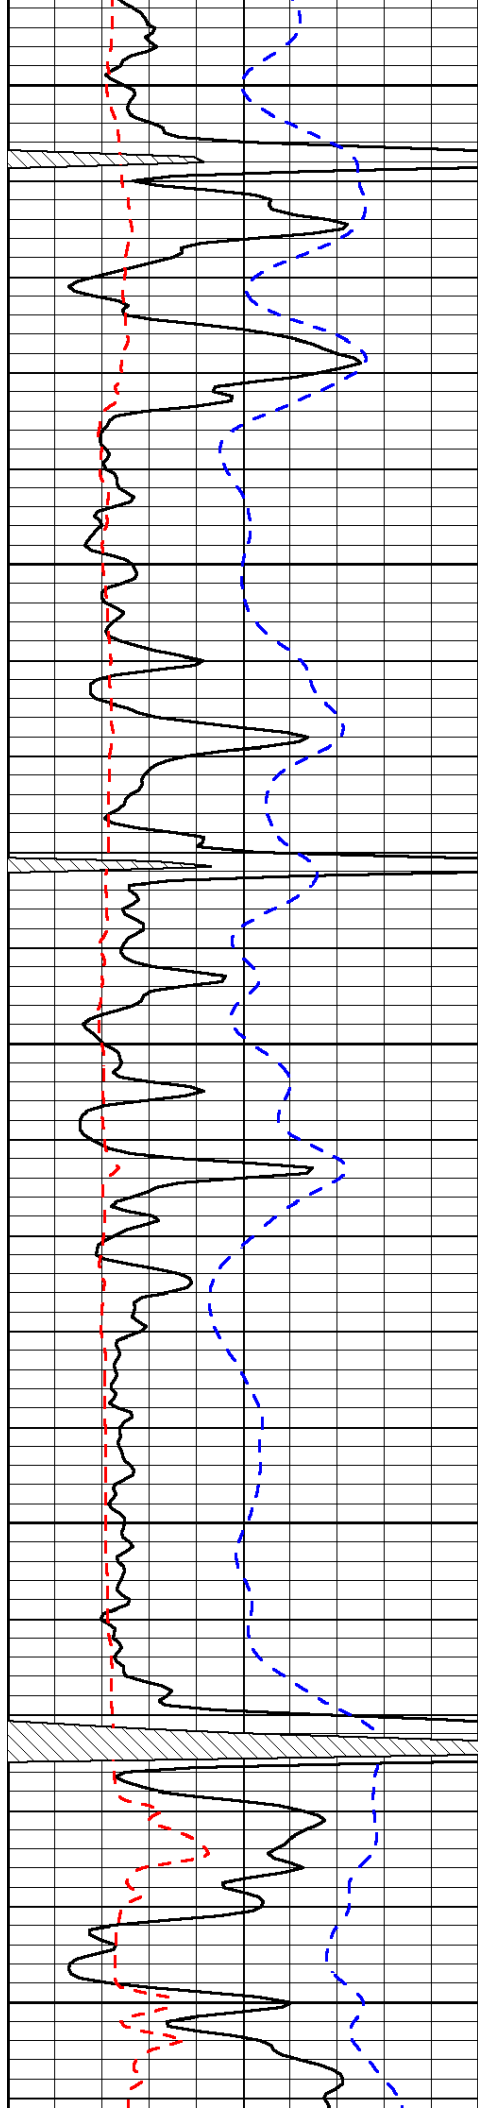


2700

2750

2800

2850

2900

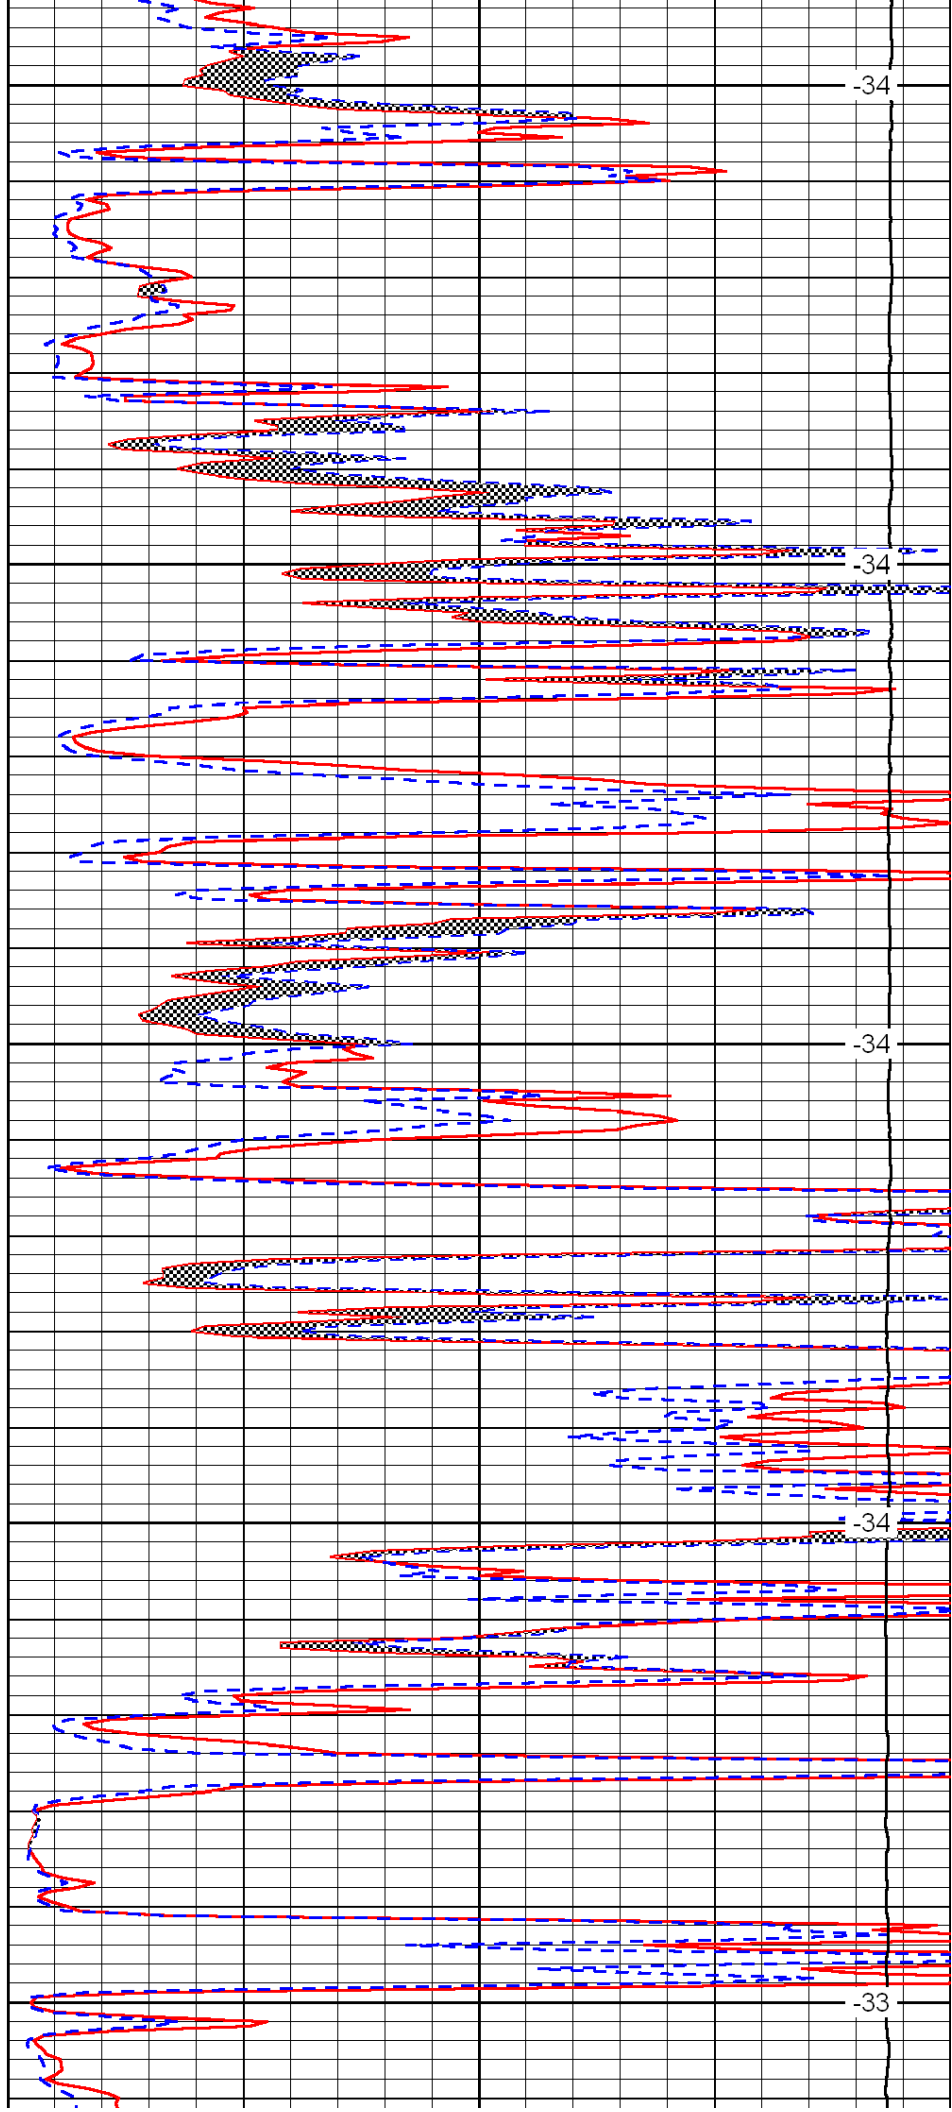


-34

-34

-34

-34

-33

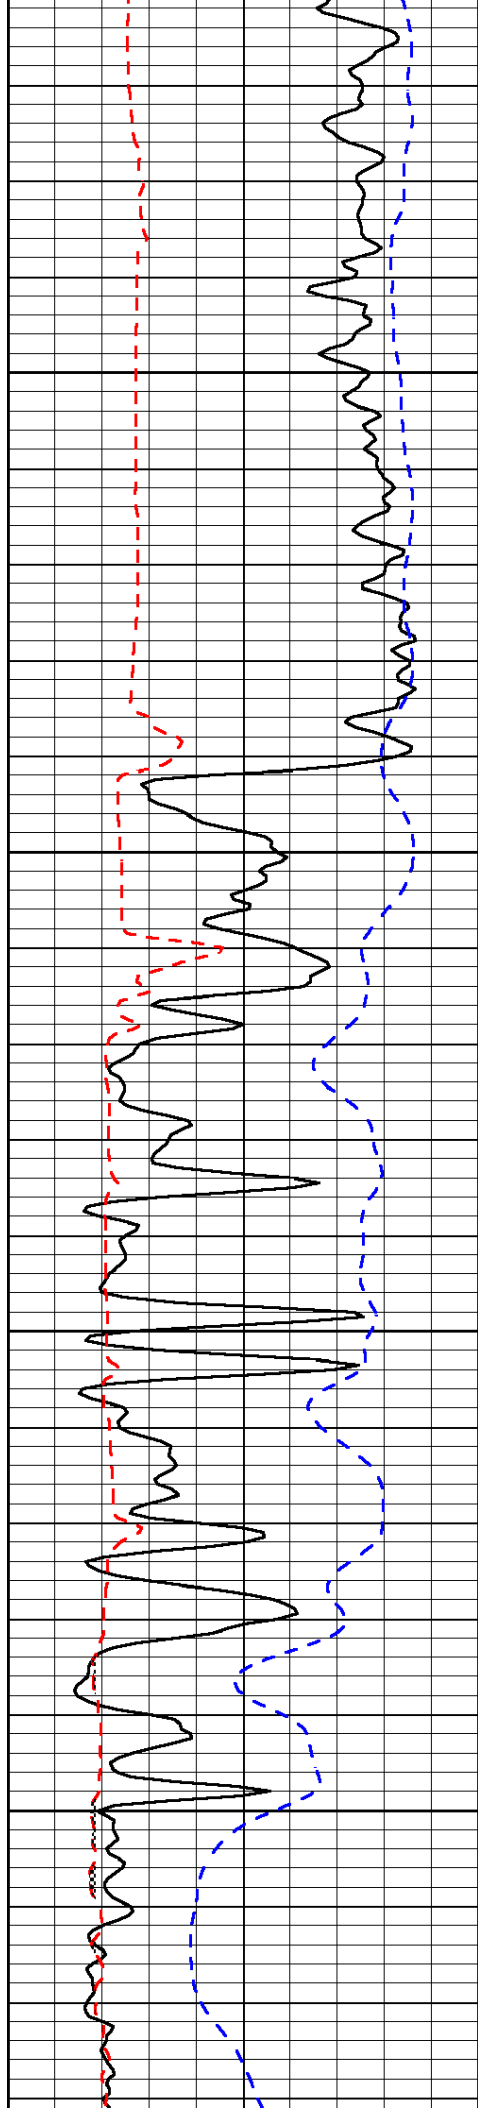


2950

3000

3050

3100

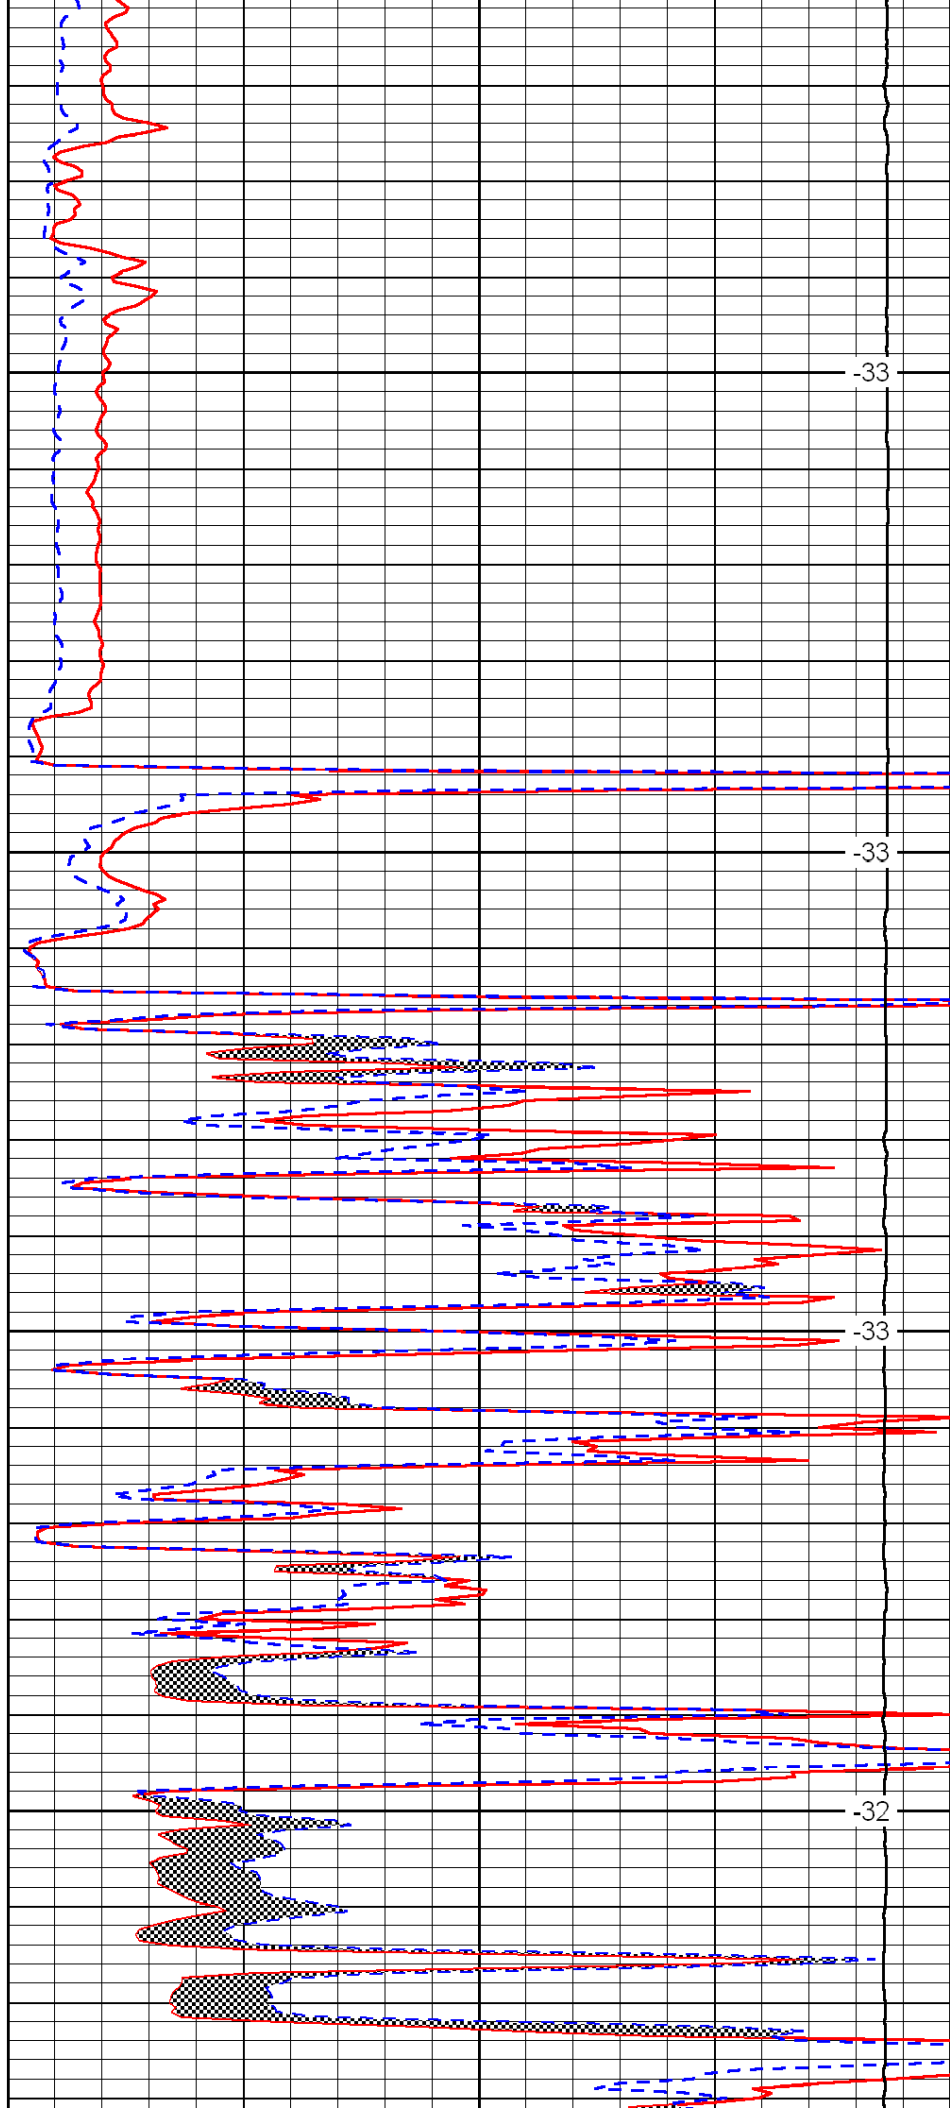


-33

-33

-33

-32

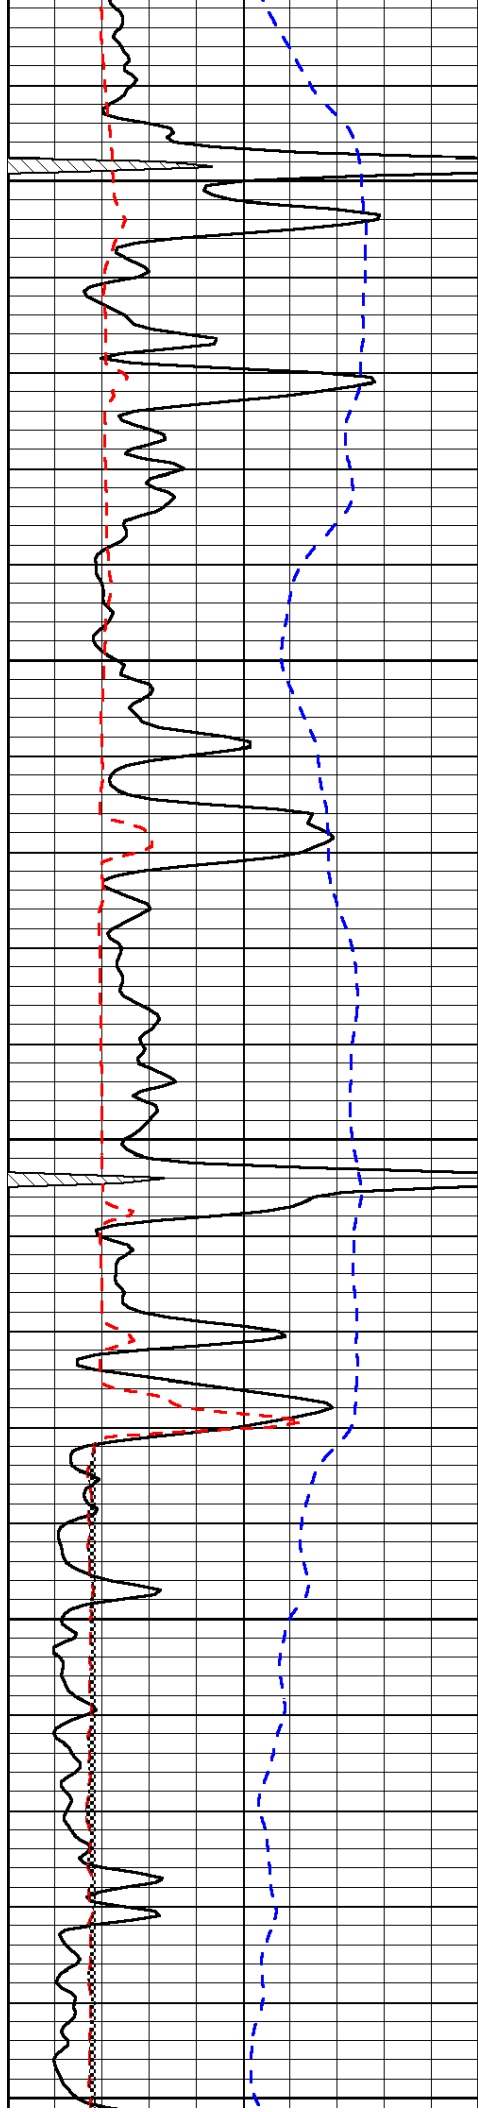


3150

3200

3250

3300

3350

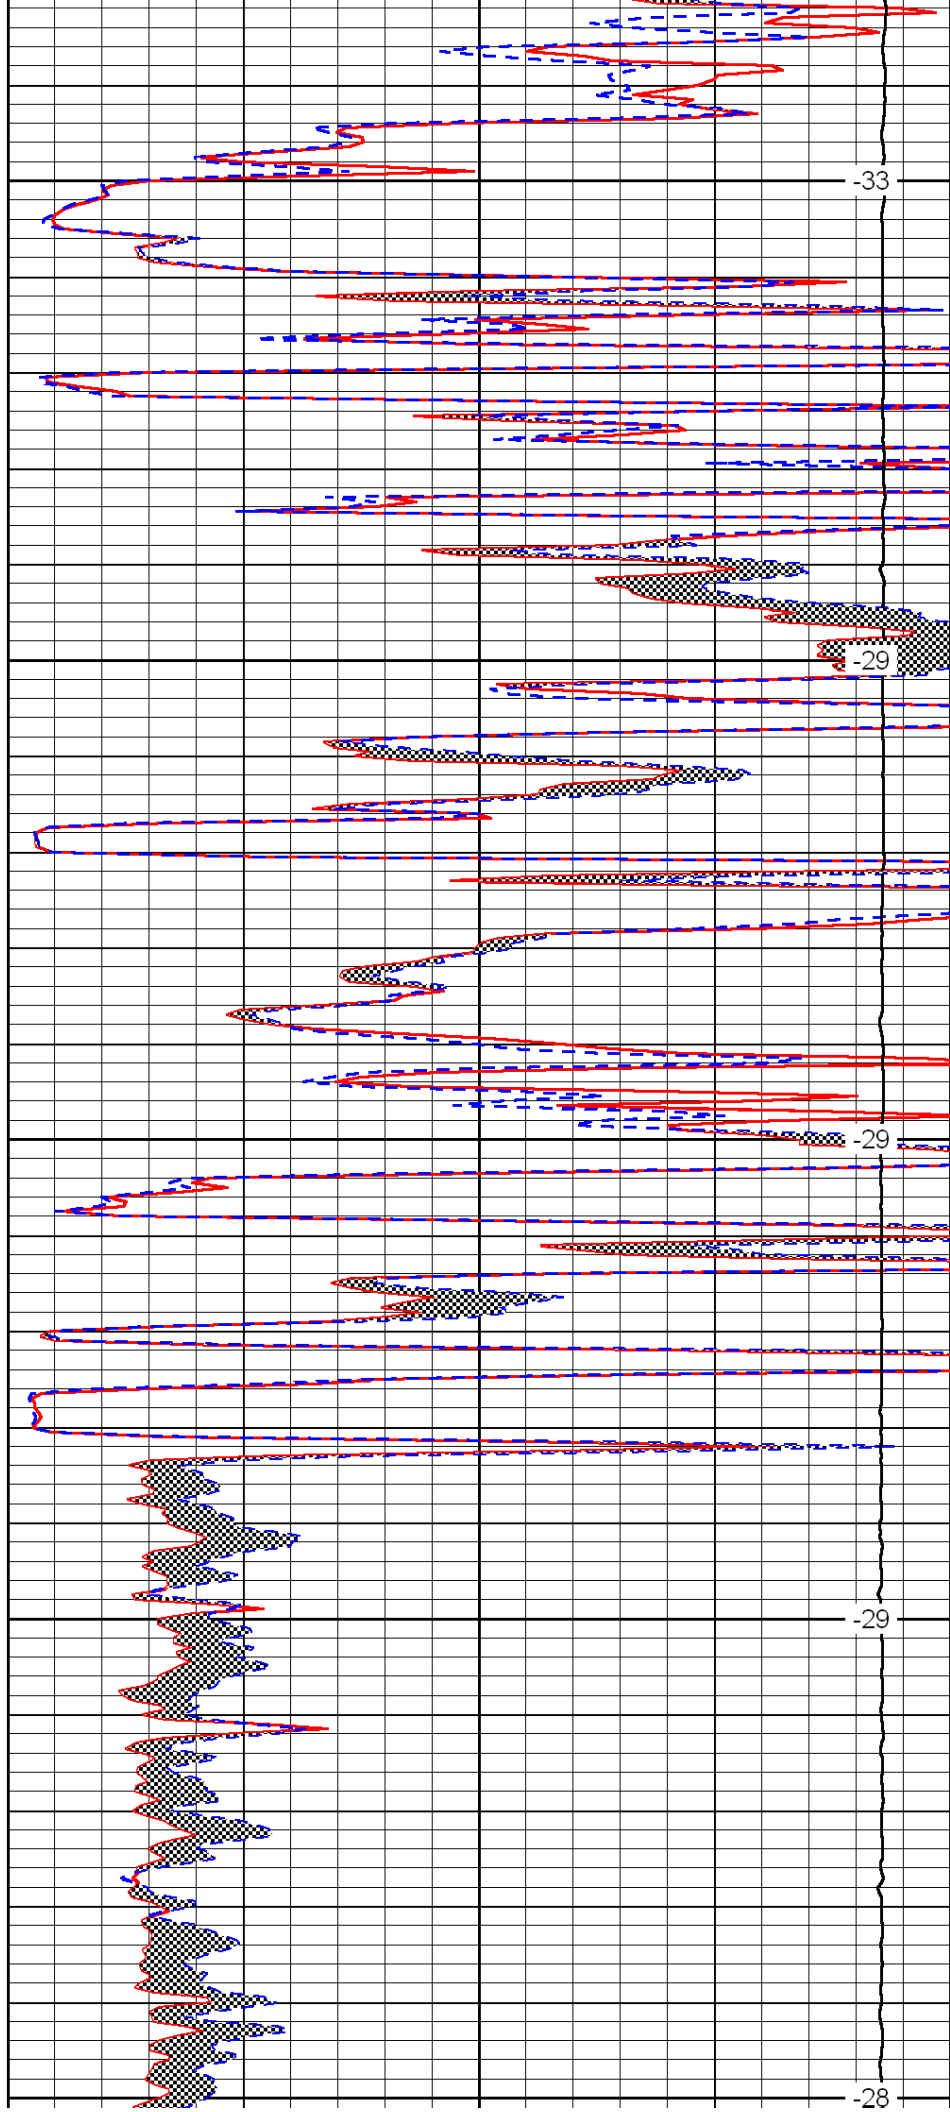


-33

-29


-29

-29

-28

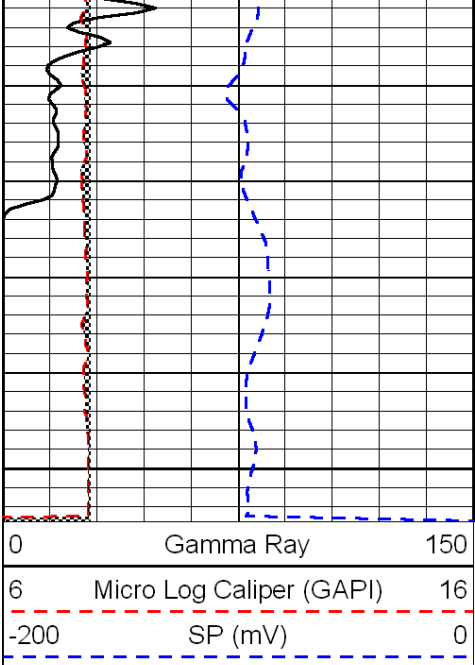

3400

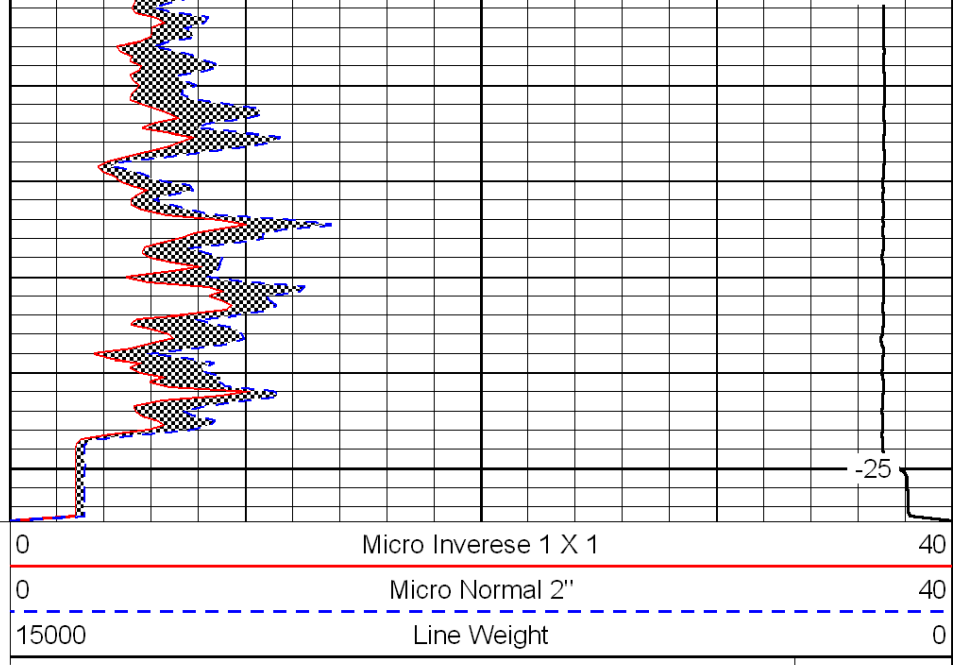

-25

LSPD