LOG-TECH

DIGITAL LOG (785) 625-3858

Microresistivity Log

API No. 15-191-22580-00-00

Company Anstine & Musgrove, Inc.

Well Thiessen No. 5

Field Padgett

County Sumner State Kansas

Location W/2 - NE - SE
1950' FSL & 930' FEL
Sec: 22 Twp: 34 S Rge: 2 E

Other Services
CNL/CDL
DIL

Elevation
K.B. 1229
D.F.
G.L. 1221

Permanent Datum	Ground Level	Elevation 1221
Log Measured From	Kelly Bushing	8 Ft. Above Perm. Datum
Drilling Measured From	Kelly Bushing	

Date	8/8/2010		
Run Number	Two		
Depth Driller	3860		
Depth Logger	3857		
Bottom Logged Interval	3856		
Top Log Interval	2100		
Casing Driller	8.625 @ 282		
Casing Logger	286		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity,ppm CL	1000		
Density / Viscosity	9.1	52	
pH / Fluid Loss	8.0	10.6	
Source of Sample	Flowline		
Rm @ Meas. Temp	2.10 @ 85		
Rmf @ Meas. Temp	1.58 @ 85		
Rmc @ Meas. Temp	2.84 @ 85		
Source of Rmf / Rmc	Charts		
Rm @ BHT	1.66 @ 108		
Operating Rig Time	4 Hours		
Max Rec. Temp. F	108		
Equipment Number	15		
Location	Hays		
Recorded By	B. Becker		
Witnessed By	Garv Anstine	Mike Engelbrecht	

<<< Fold Here >>>

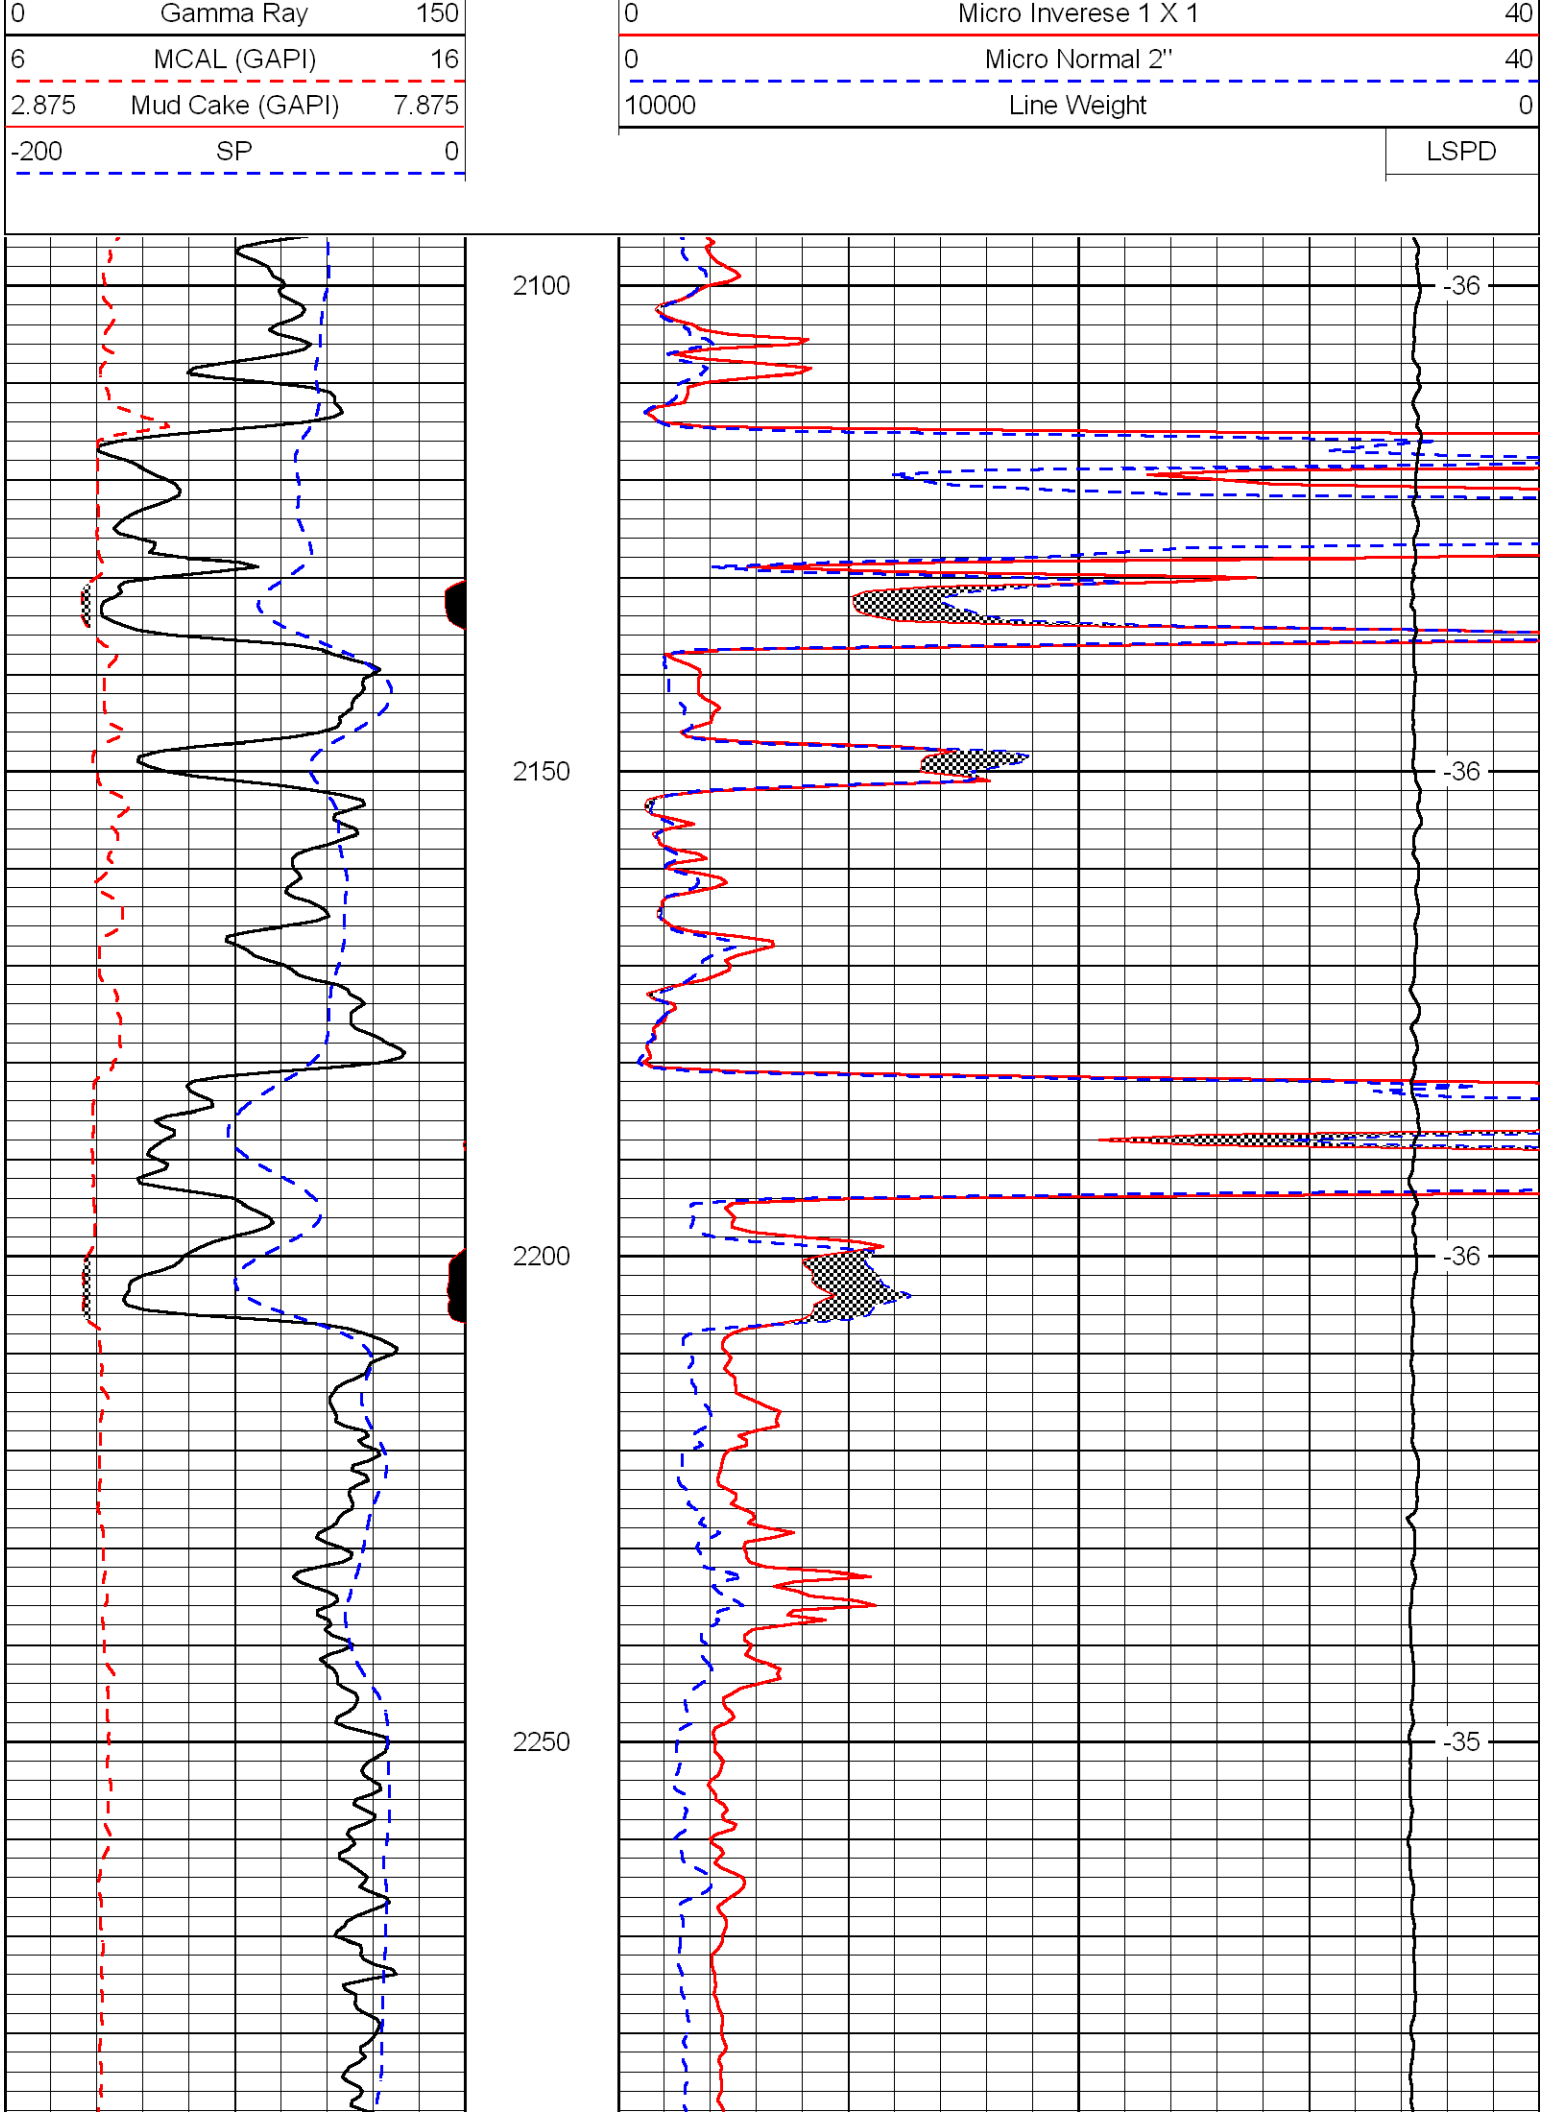
All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

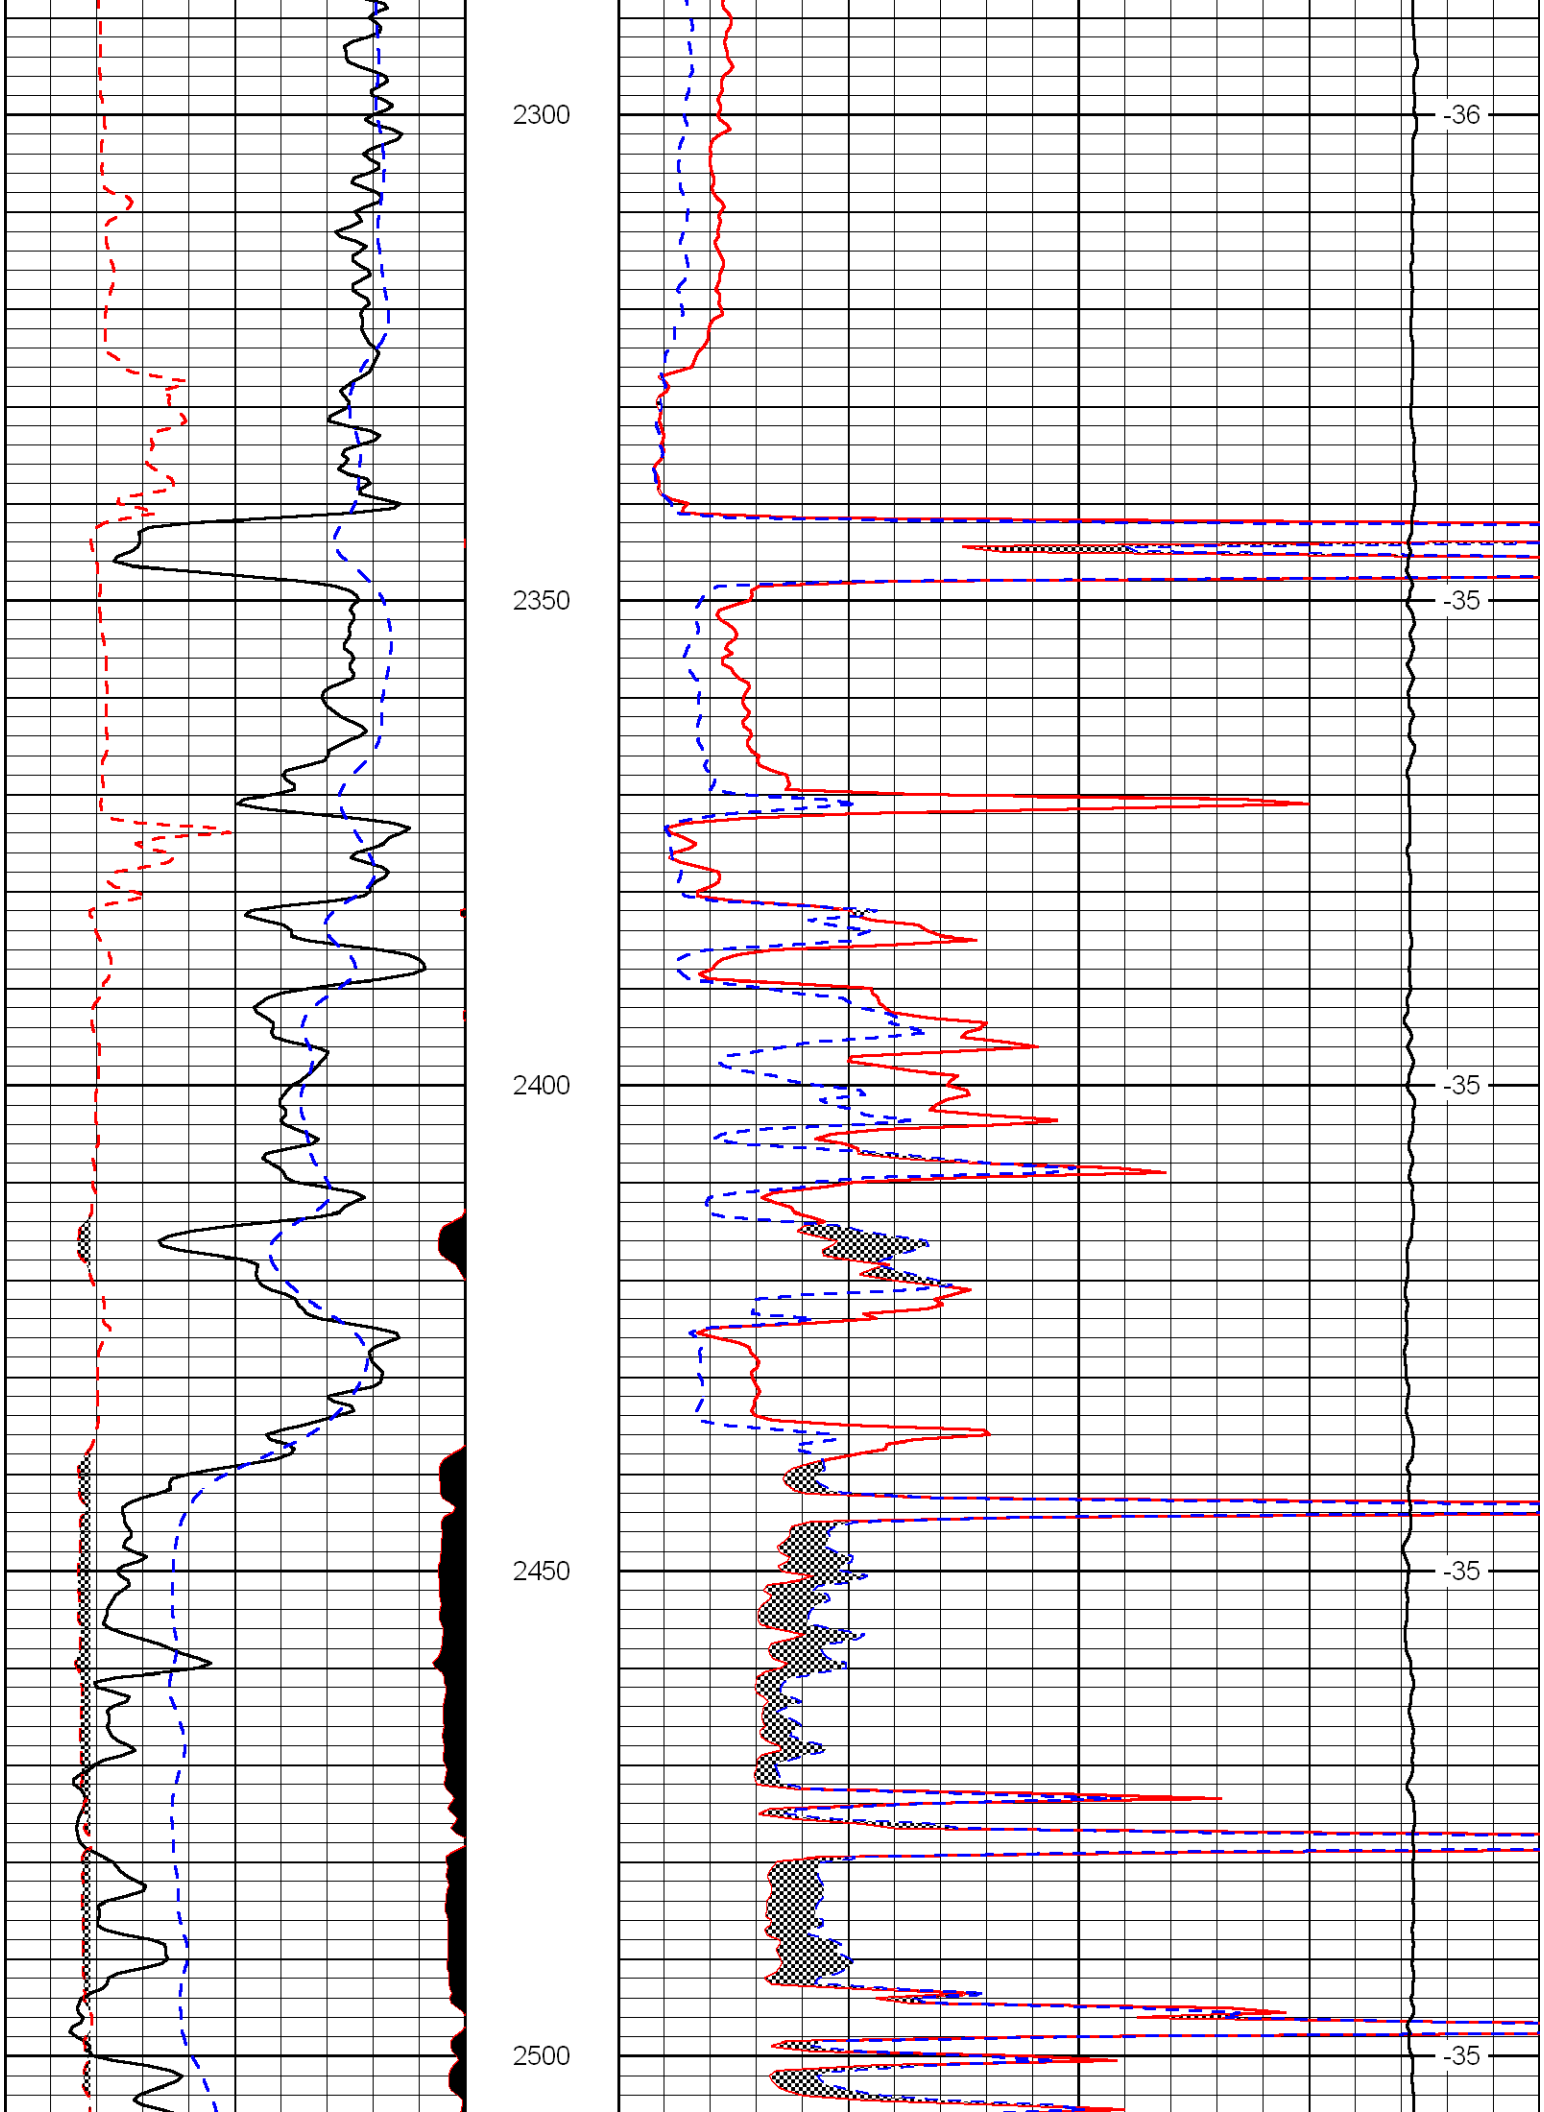
Comments

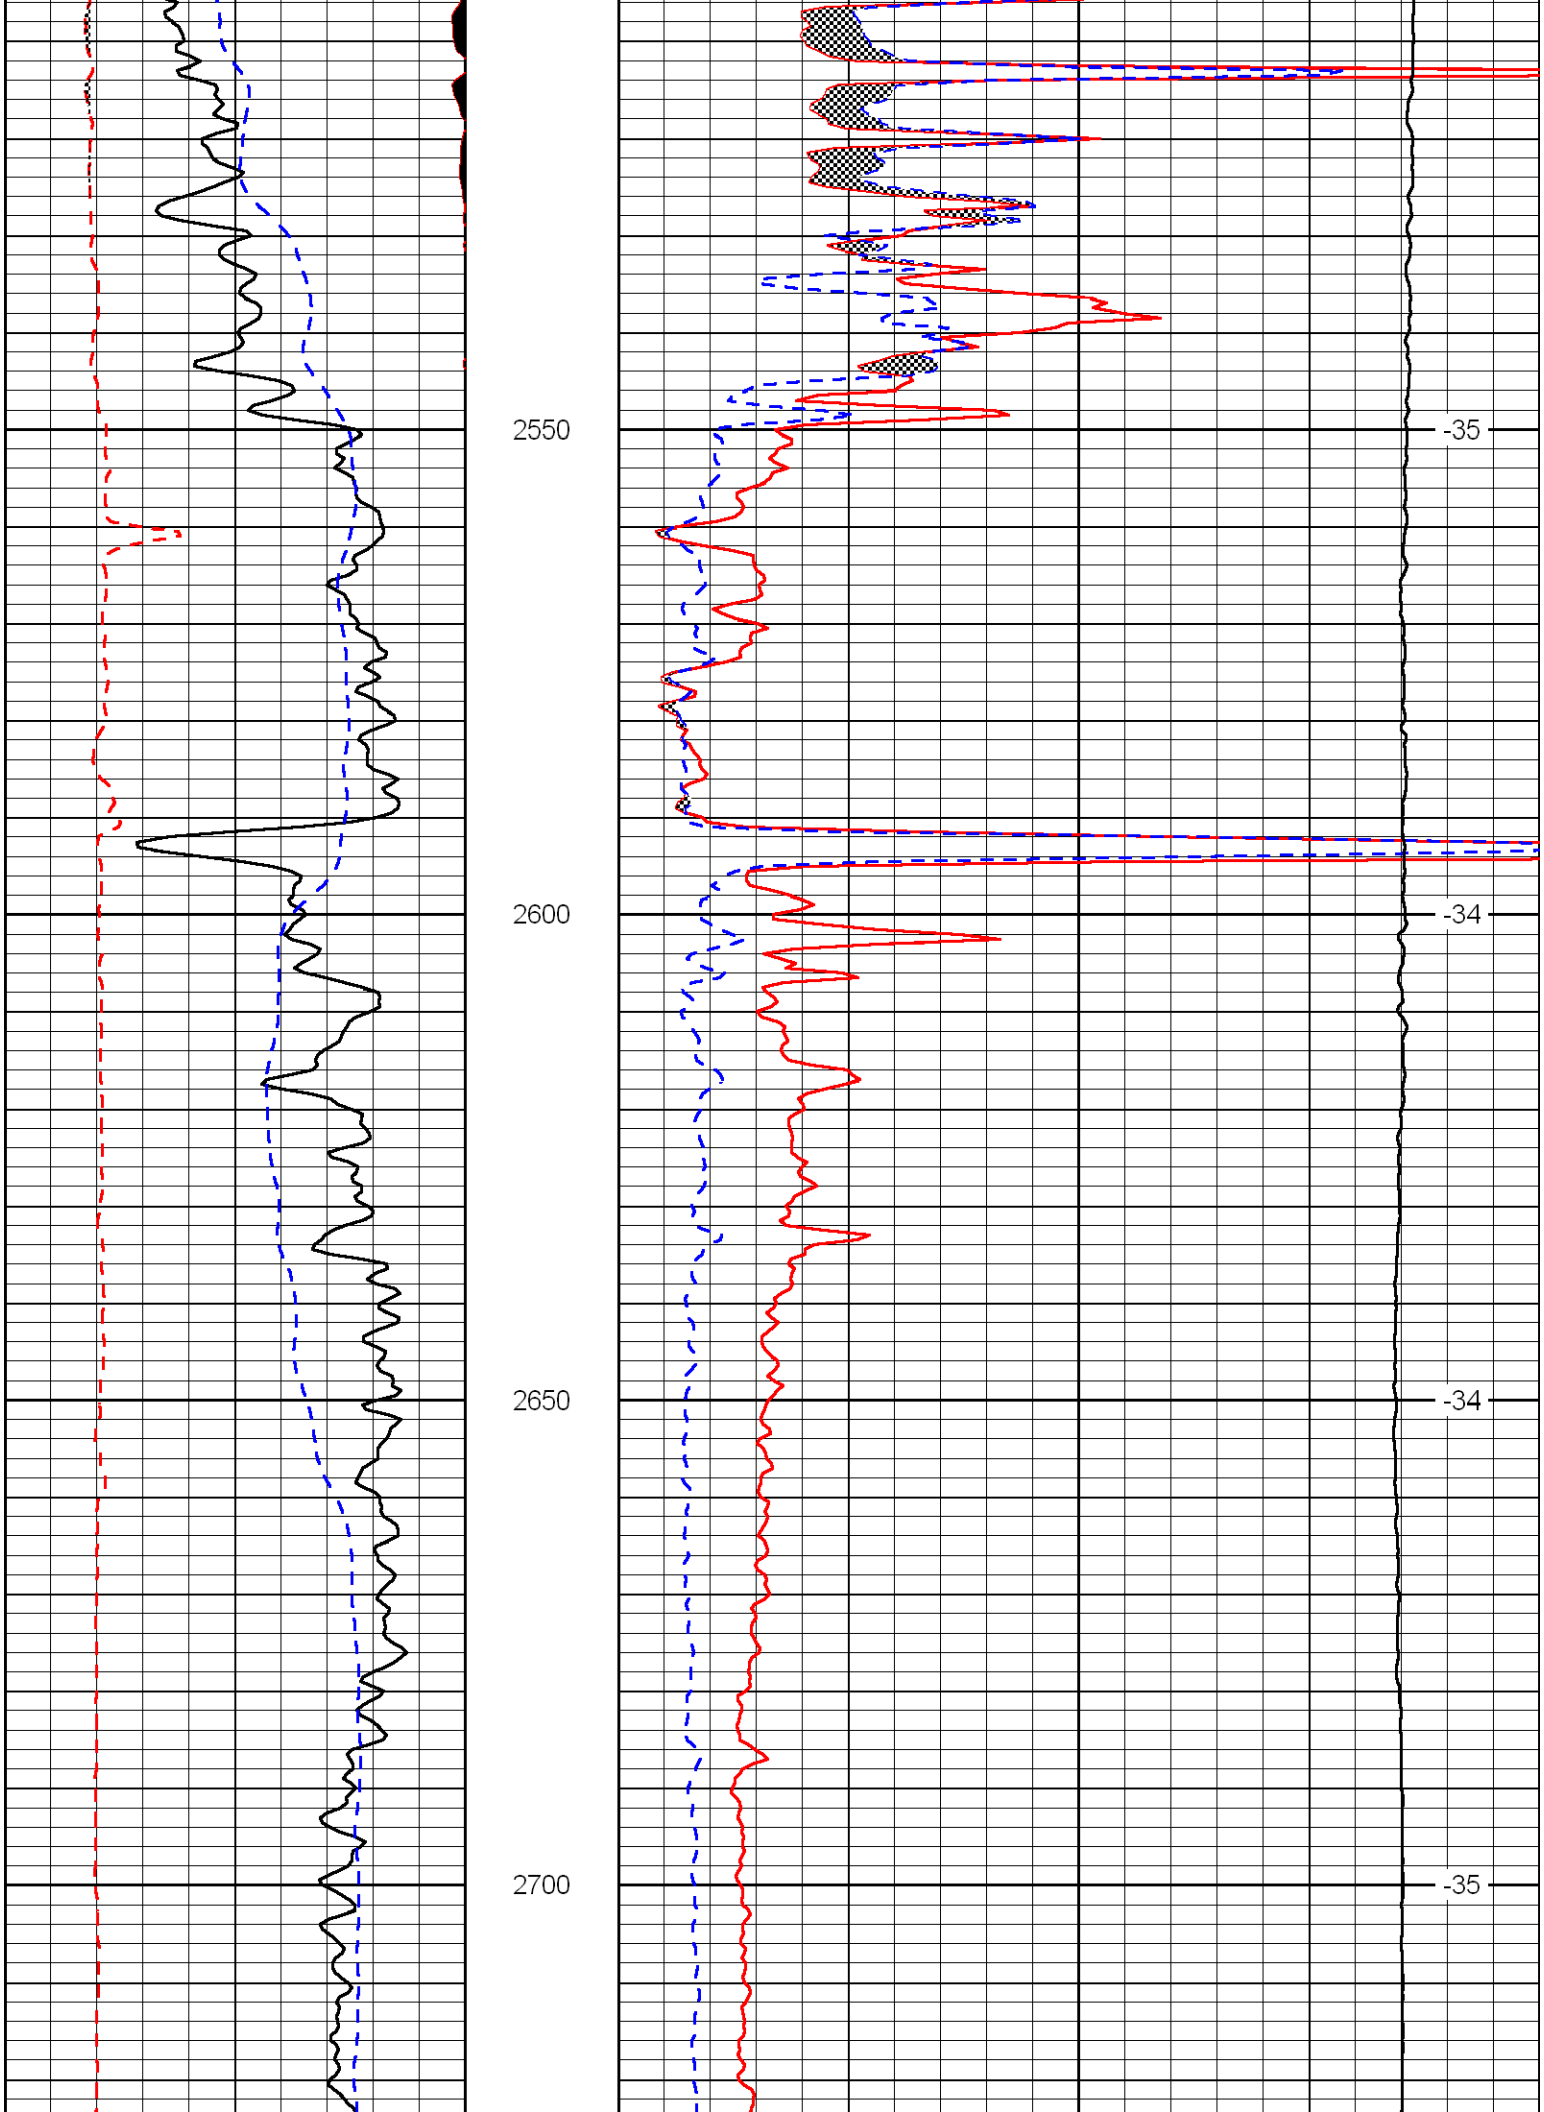
Thank you for using Log-Tech, Inc.
(785) 625-3858

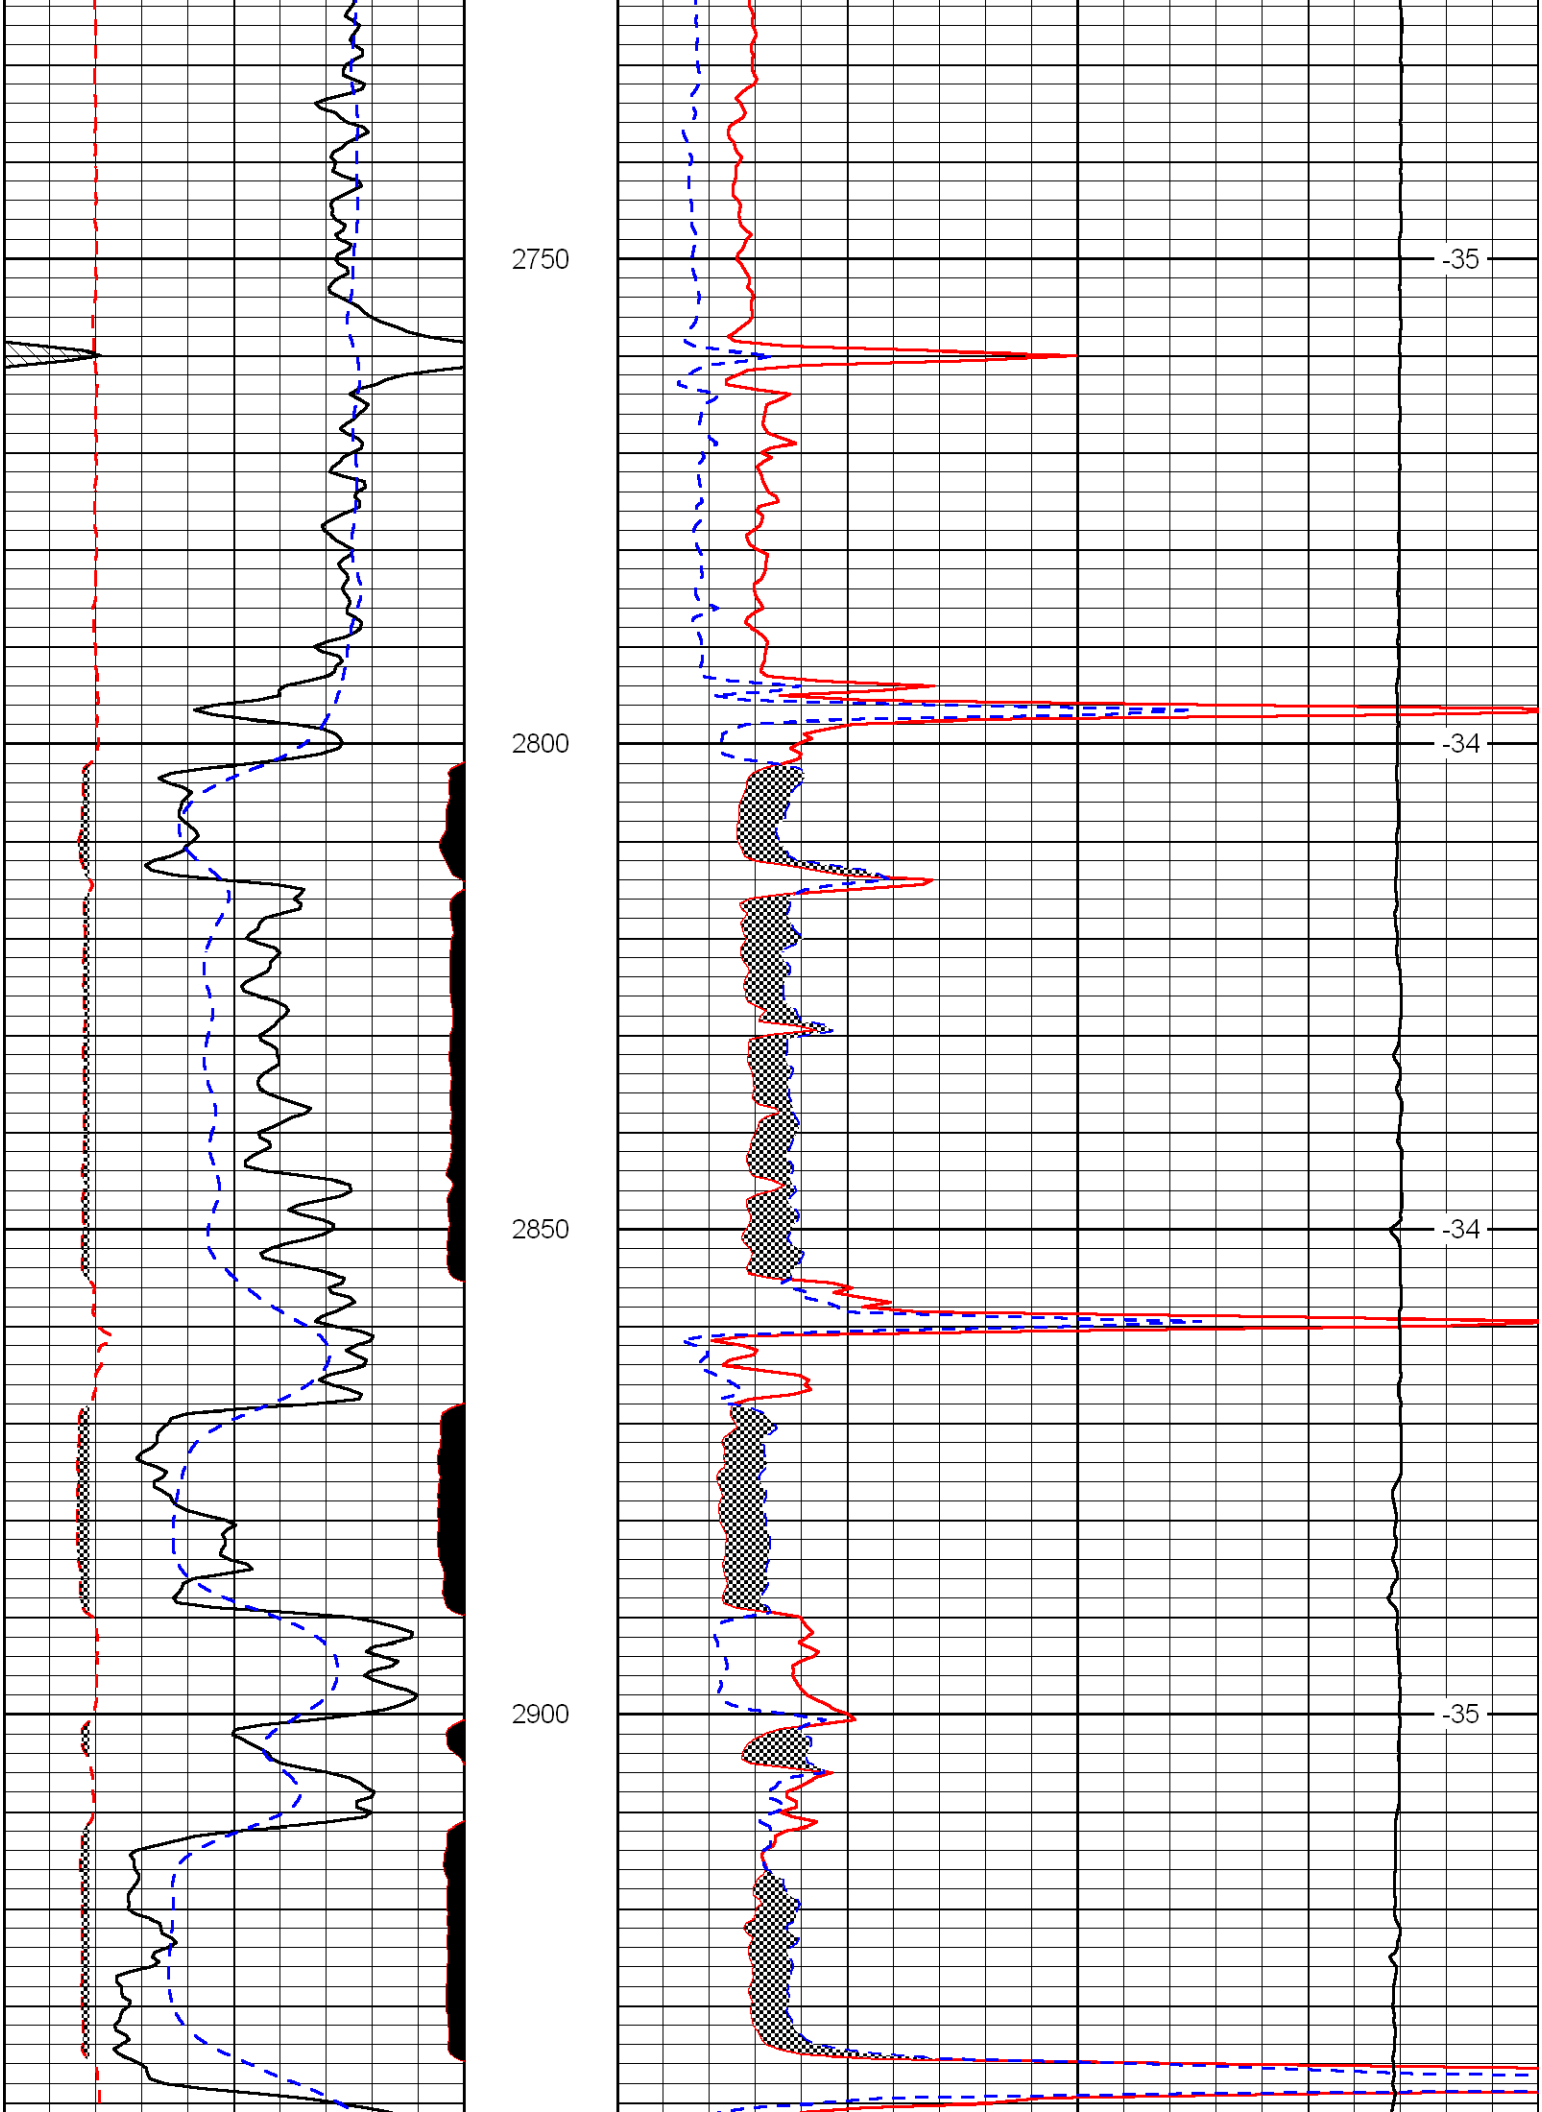
Wichita, Ks;
South on I35 to Exit 4 (Arkansas City)
East to River Rd; 1-1/2 North; West into

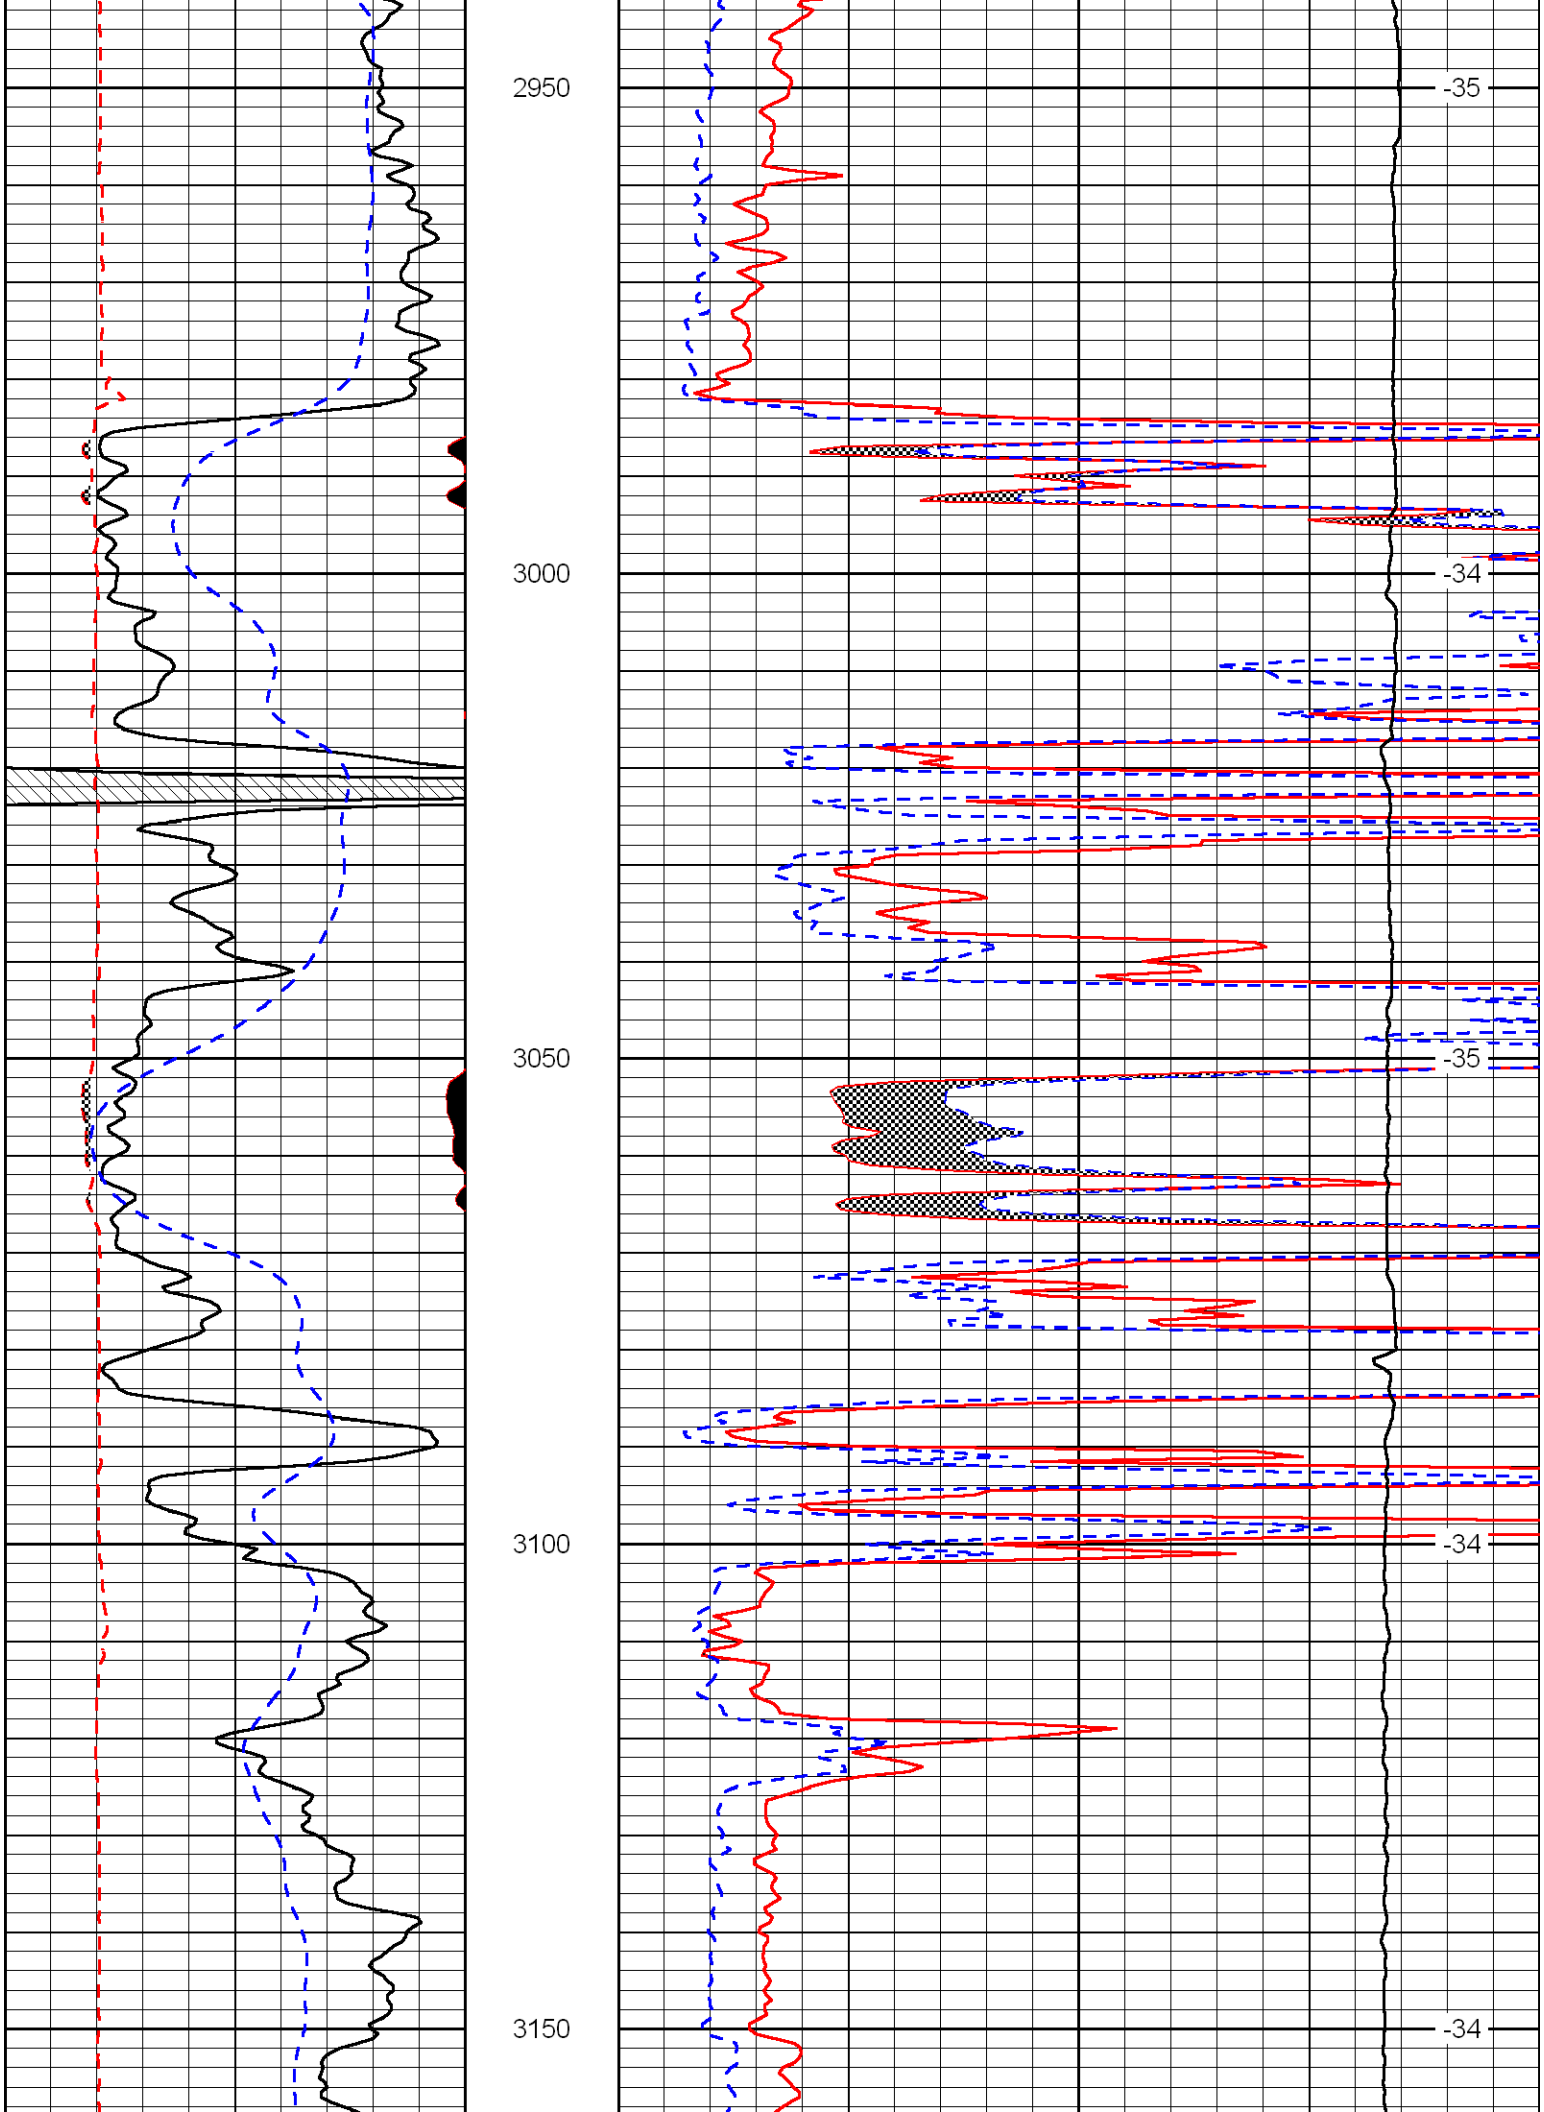
Database File:	c:\warrior\data\anstinemusgrove_thiessen_#5\anstinehd.db
Dataset Pathname:	DIL/anststk
Presentation Format:	micro
Dataset Creation:	Sun Aug 08 20:08:59 2010
Charted by:	Depth in Feet scaled 1:240

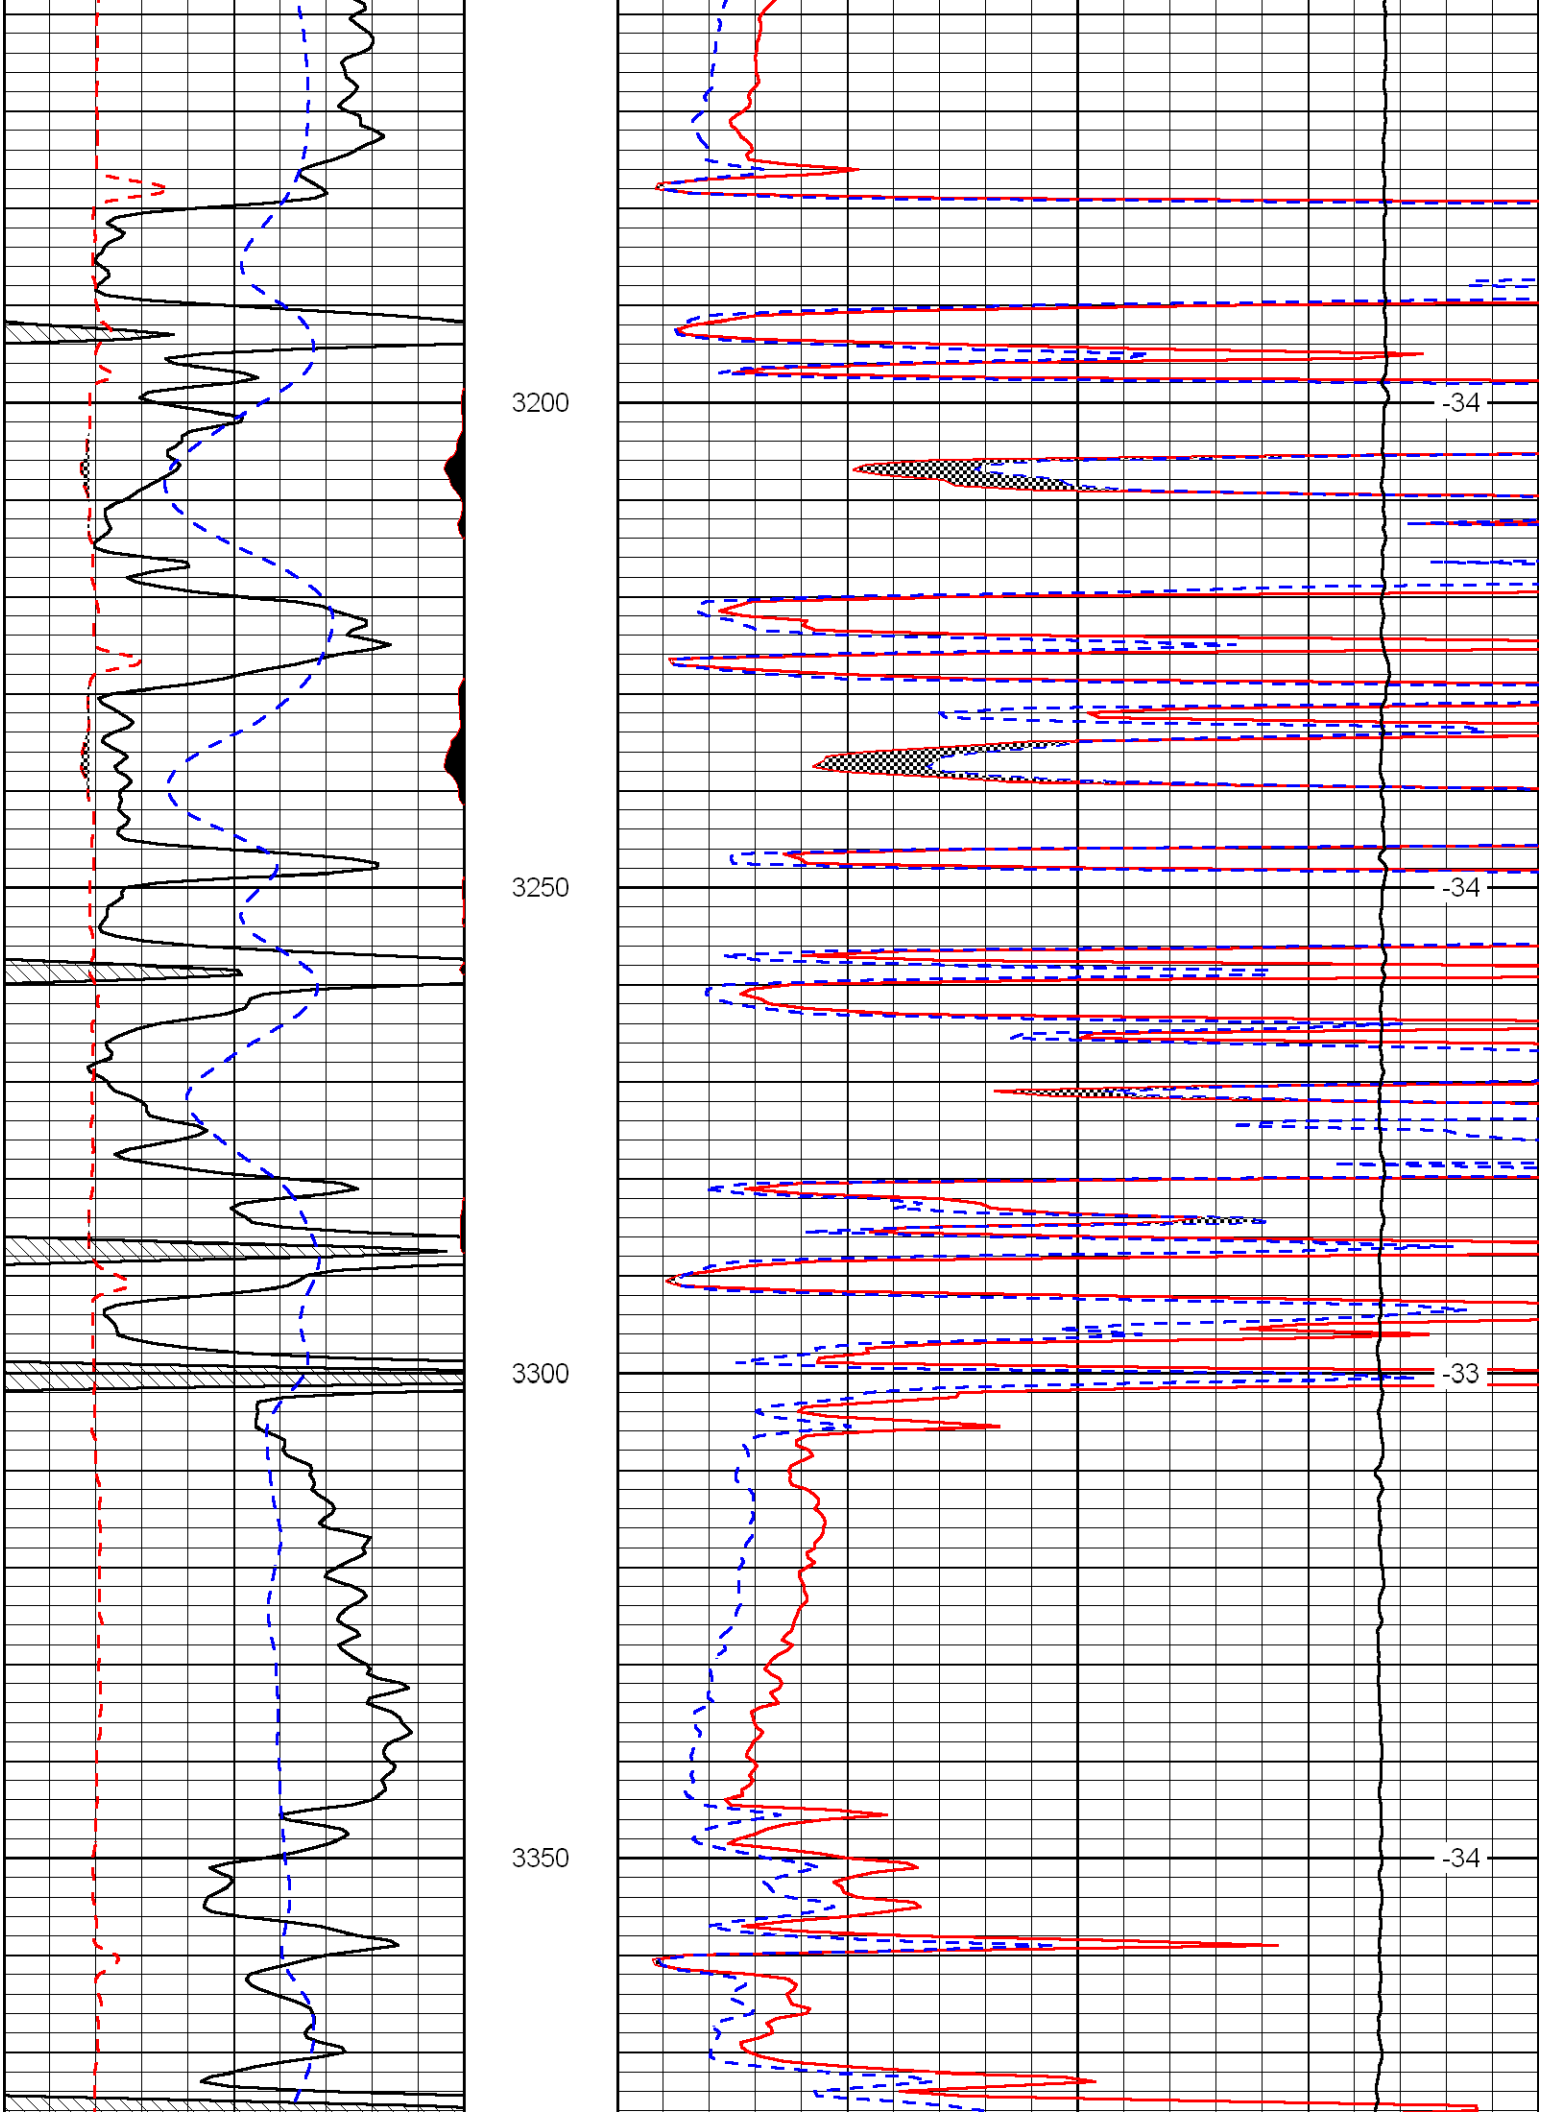

0 Gamma Ray 150
6 MCAL (GAPI) 16
2.875 Mud Cake (GAPI) 7.875
-200 SP 0
0 Micro Inverese 1 X 1 40
0 Micro Normal 2" 40
10000 Line Weight 0
LSPD
2100
2150
2200
2250
-36
-36
-36
-35

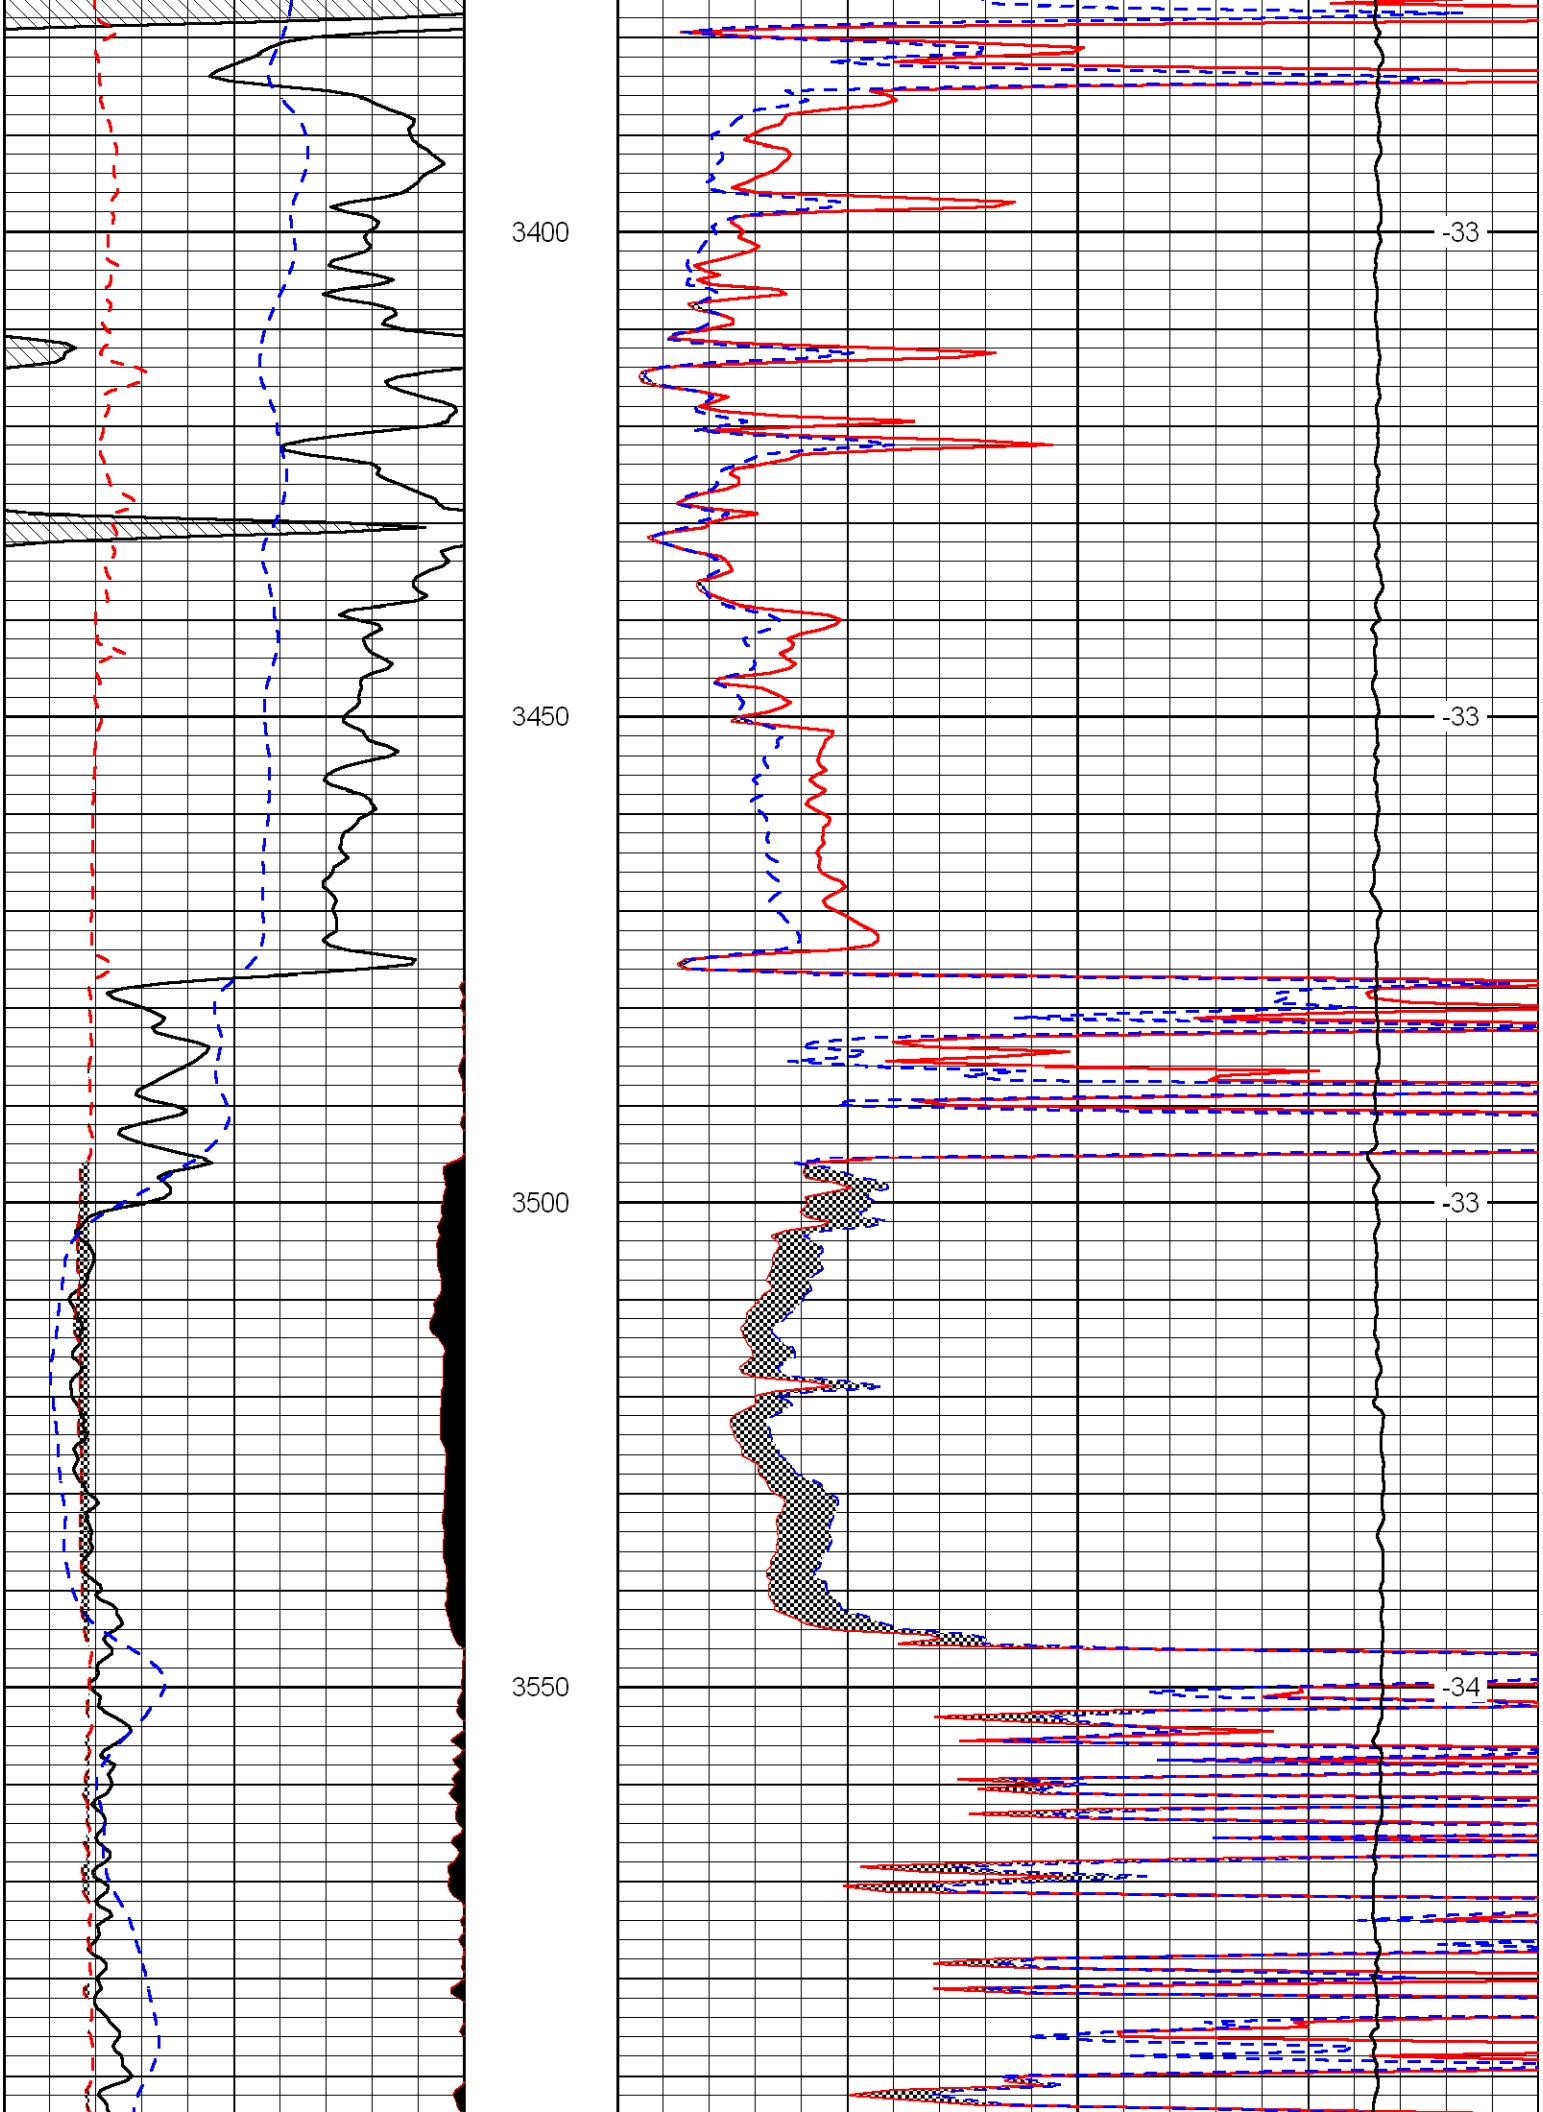

2300
2350
2400
2450
2500
-36
-35
-35
-35
-35

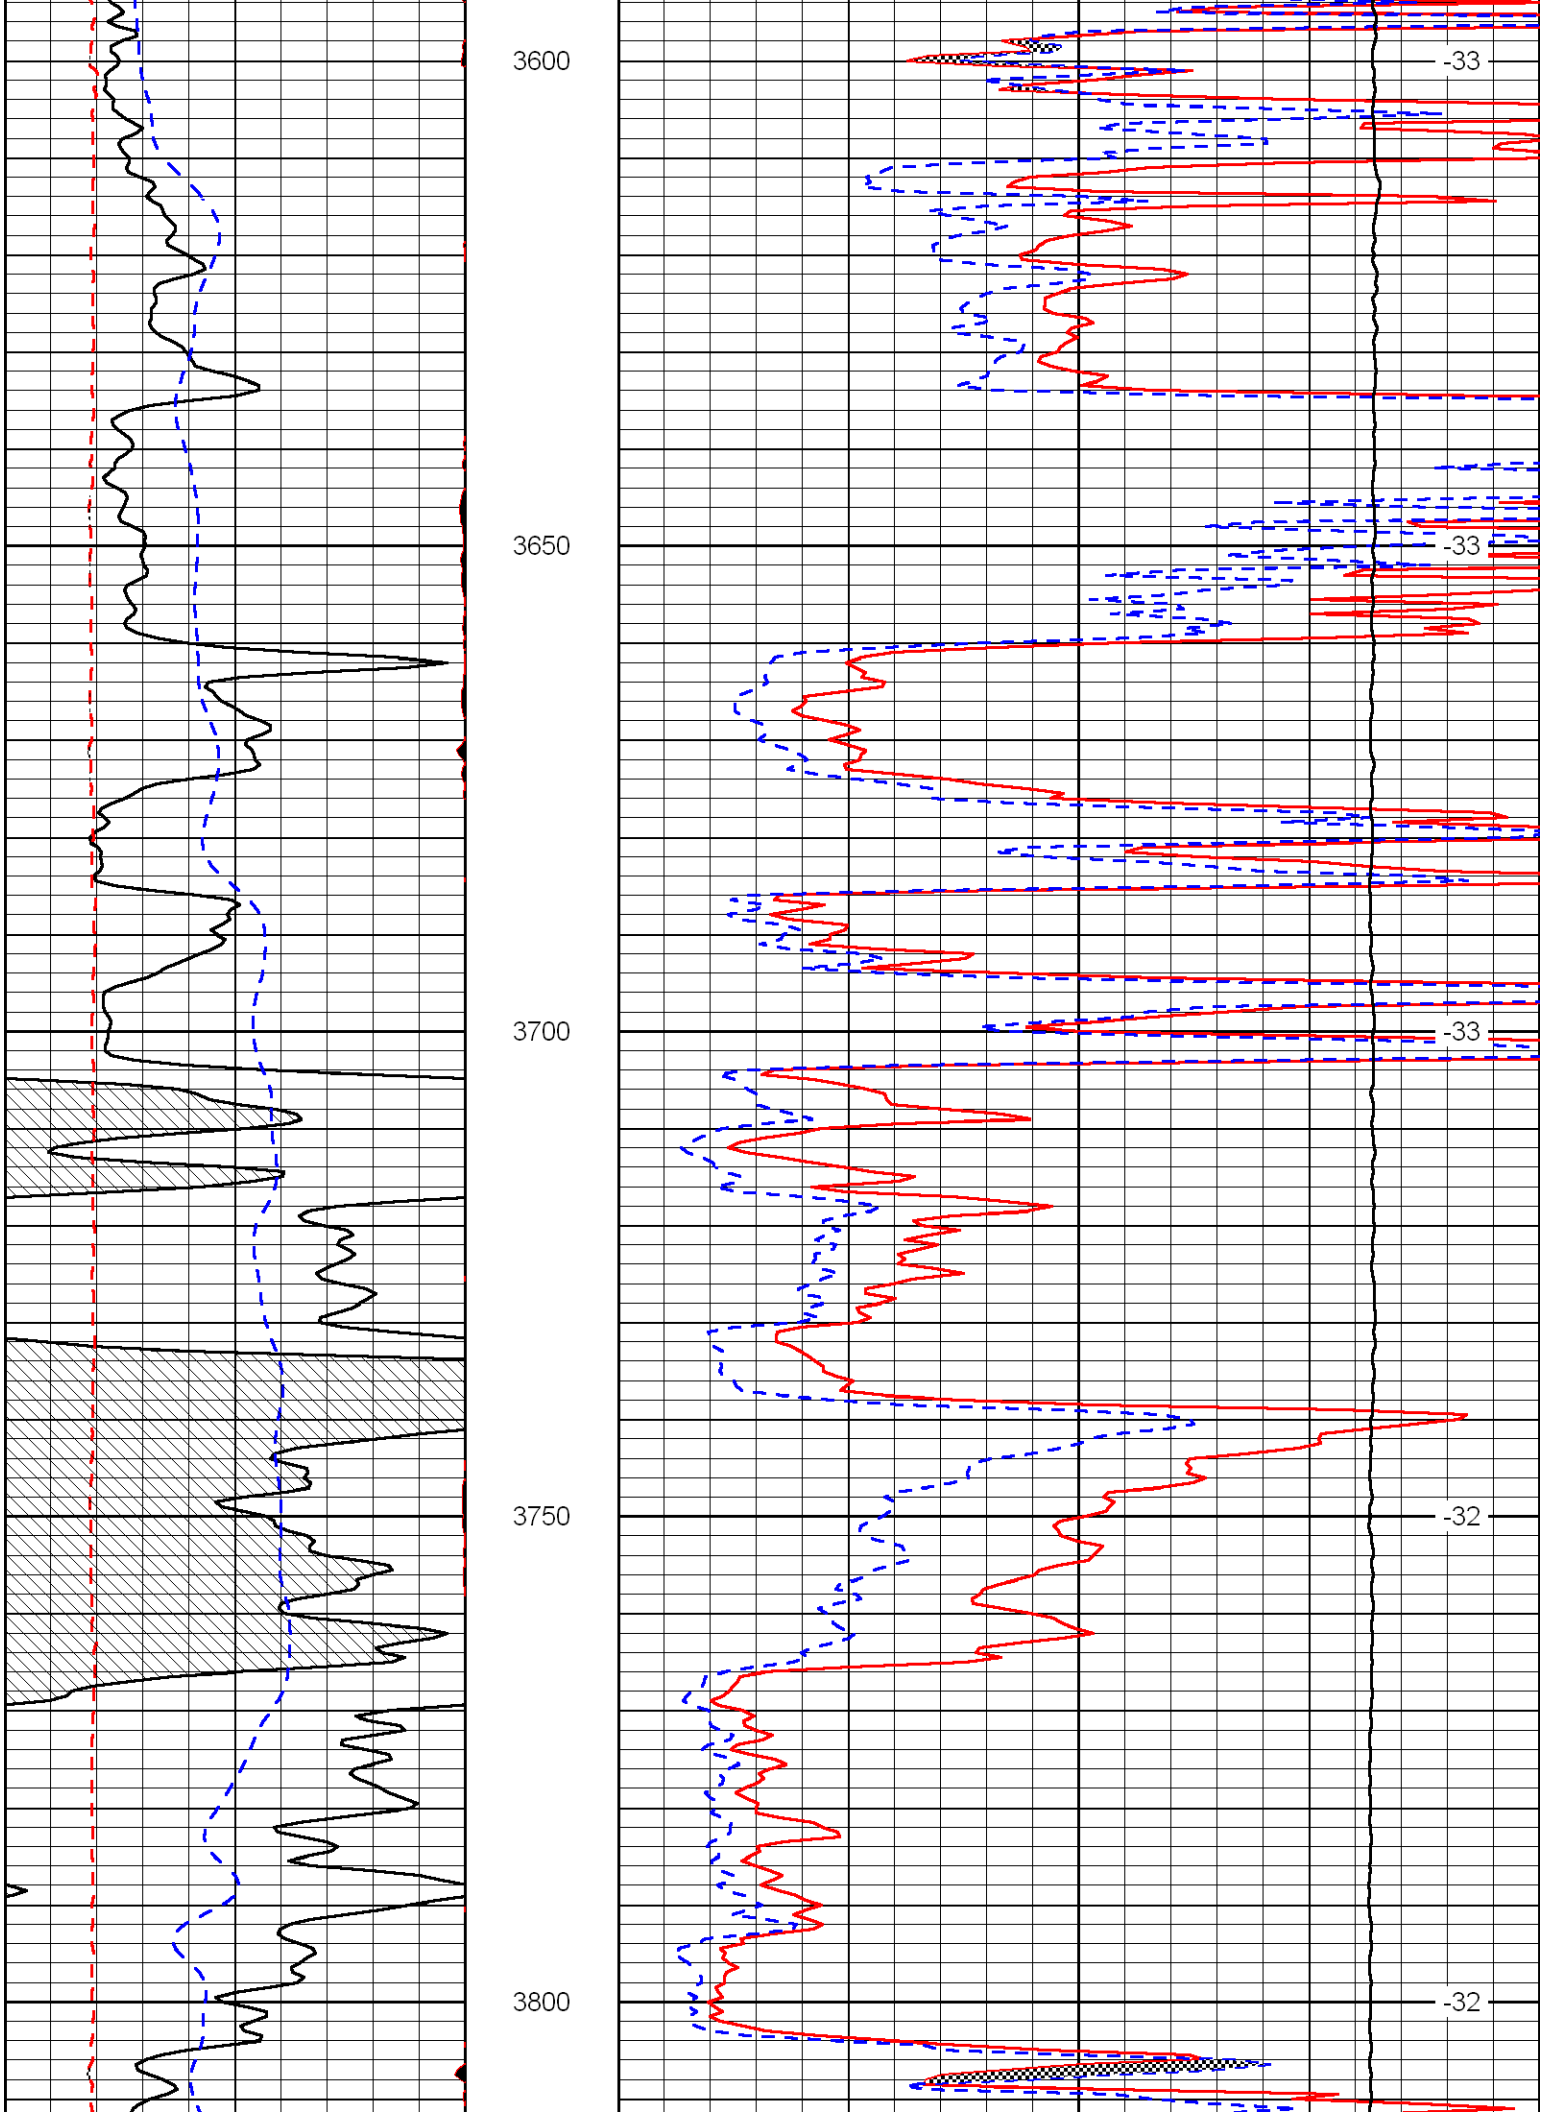

2550
2600
2650
2700
-35
-34
-34
-35

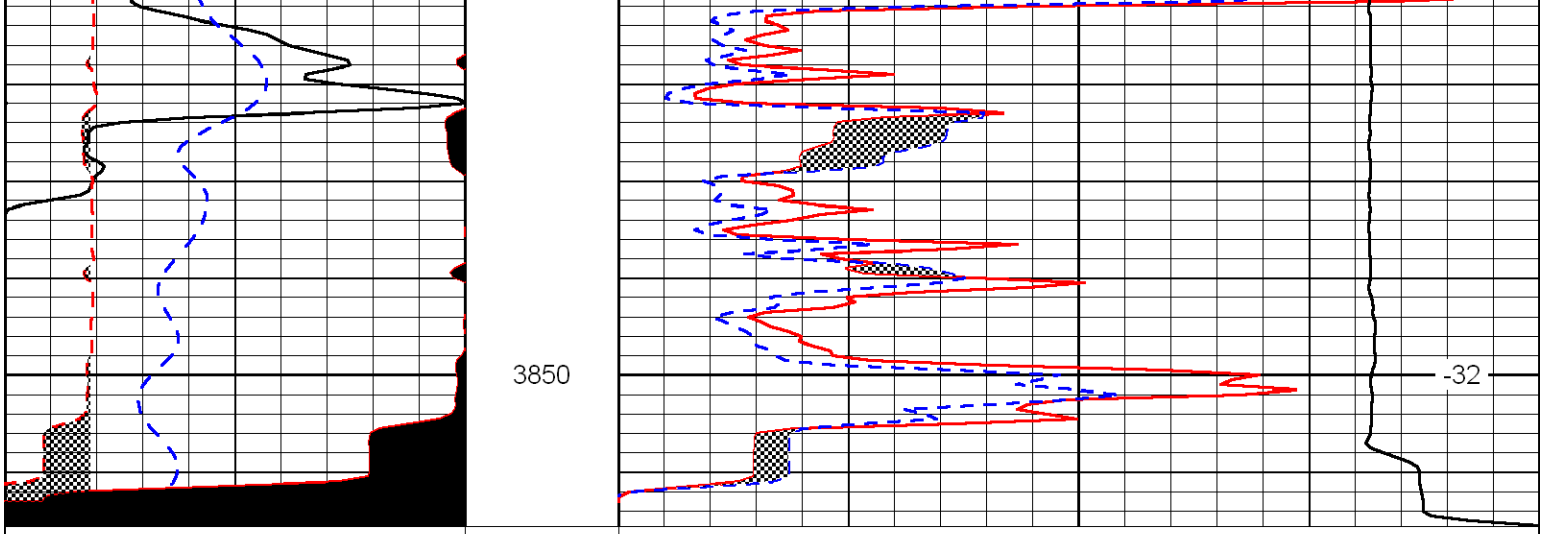

2750
2800
2850
2900
-35
-34
-34
-35


2950
3000
3050
3100
3150
-35
-34
-35
-34
-34


3200
3250
3300
3350
-34
-34
-33
-34


3400
3450
3500
3550
-33
-33
-33
-34


3600
3650
3700
3750
3800
-33
-33
-33
-32
-32



0	Gamma Ray	150
6	MCAL (GAPI)	16
2.875	Mud Cake (GAPI)	7.875
-200	SP	0

0	Micro Inverese 1 X 1	40
0	Micro Normal 2''	40
10000	Line Weight	0

LSPD