



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.		Company		Craig Oil Company	
15-167-23,621-00-00		Well		Schmidt-Mai Unit No. 1	
		Field		Trapp	
		County		Russell	
		State		Kansas	
Location		2500' FSL & 930' FWL		Other Services	
Sec: 23		Twp: 15S		Rge: 14W	
Permanent Datum		Ground Level		Elevation 1890	
Log Measured From		Kelly Bushing		7 Ft. Above Perm. Datum	
Drilling Measured From		Kelly Bushing		K.B. 1897	
				D.F. 1890	
				G.L. 1890	
Date	03/21/2010				
Run Number	Two				
Depth Driller	3365				
Depth Logger	3364				
Bottom Logged Interval	3363				
Top Log Interval	2300				
Casing Driller	8.625 @ 930				
Casing Logger	894				
Bit Size	7.875				
Type Fluid in Hole	Chemical				
Salinity, ppm CL	5.000				
Density / Viscosity	9.4 51				
pH / Fluid Loss	8.5 8.8				
Source of Sample	Flowline				
Rm @ Meas. Temp	.75 @ 65				
Rmf @ Meas. Temp	.56 @ 65				
Rmc @ Meas. Temp	1.01 @ 65				
Source of Rmf / Rmc	Charts				
Rm @ BHT	.44 @ 112				
Operating Rig Time	3 Hours				
Max Rec. Temp. F	112				
Equipment Number	10				
Location	Hays				
Recorded By	Jason Wellbrock				
Witnessed By	Ed Glassman				

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments



Thank you for using Log-Tech, Inc.
(785) 625-3858


Russel 9S, W Into

0	Gamma Ray	150
6	Micro Log Caliper (in)	16
-200	SP (MV)	0

0	Micro Inverse 1 X 1 (Ohm-m)	40
0	Micro Normal 2" (Ohm-m)	40
15000	Line Weight (lb)	0

LSPD
(ft/min)

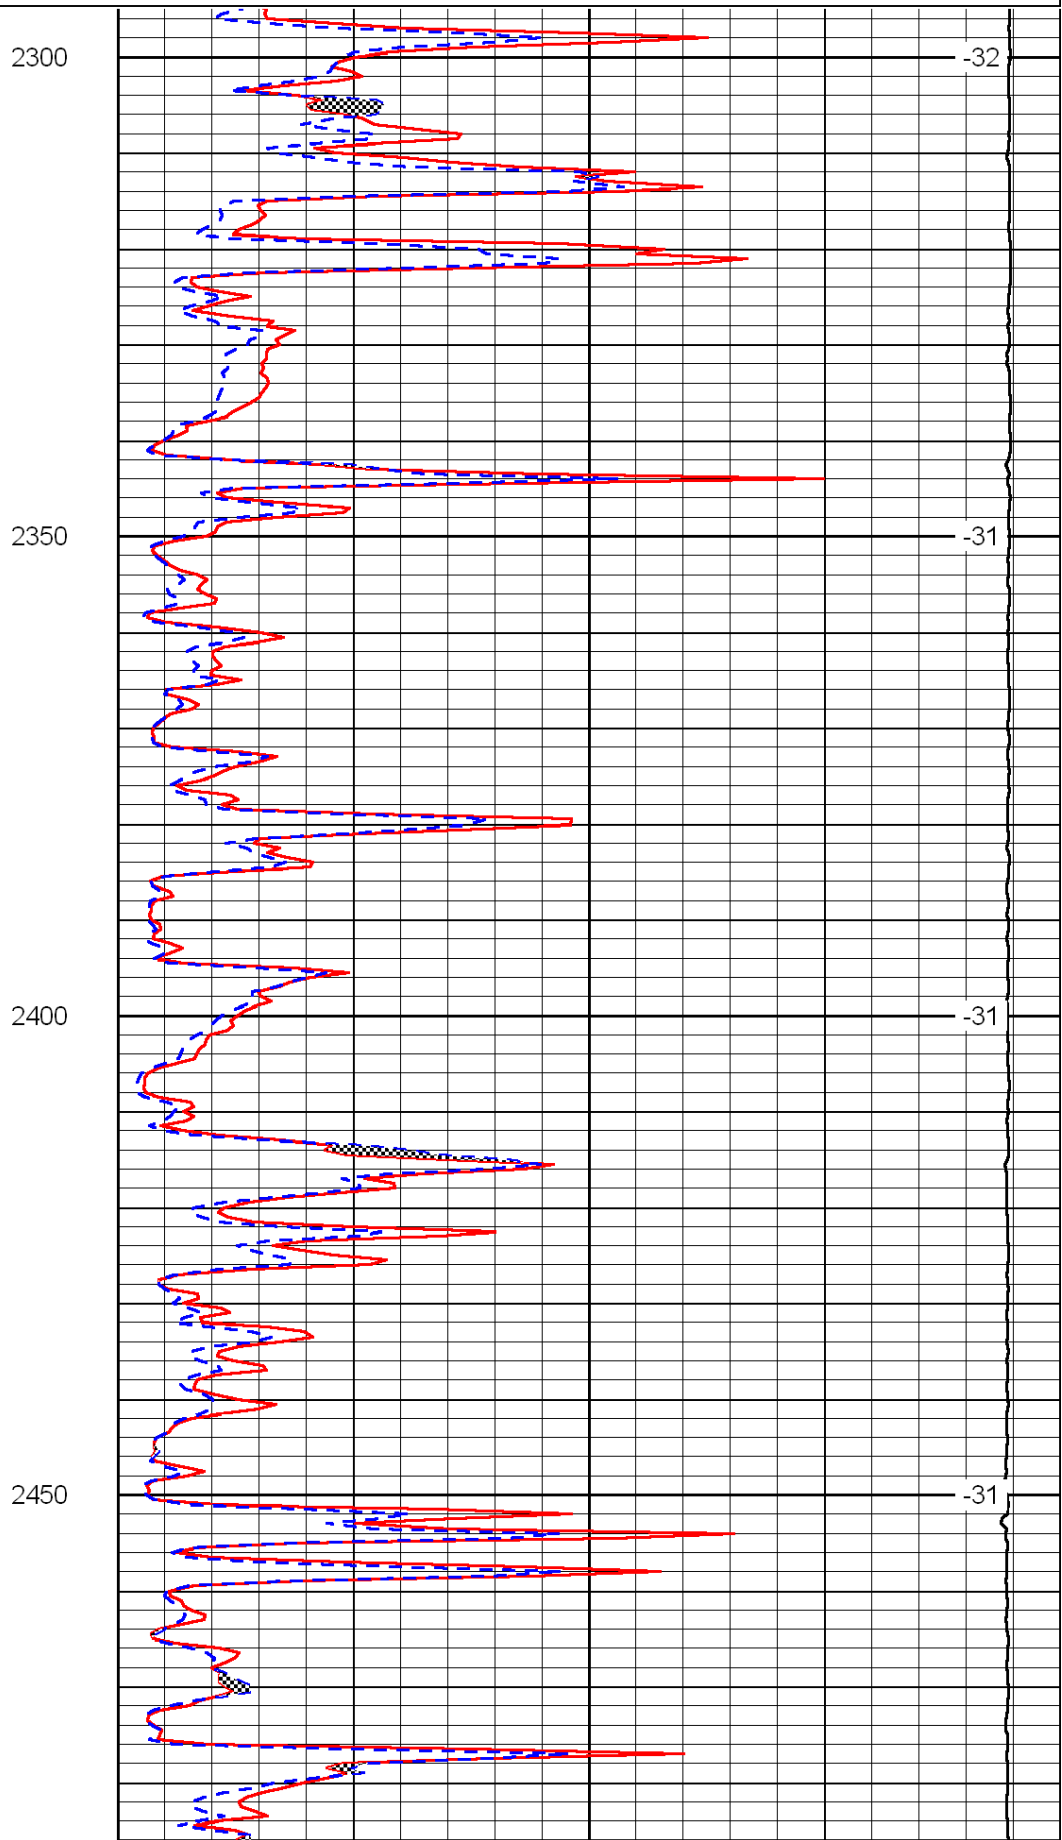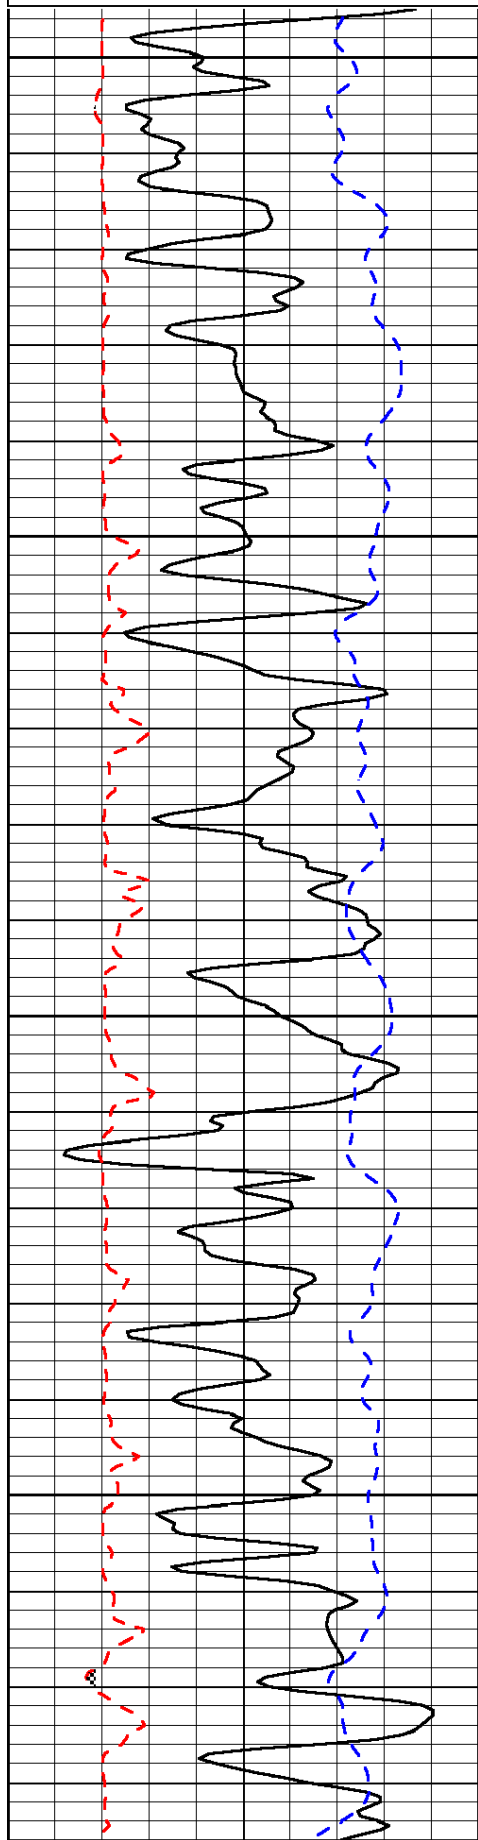

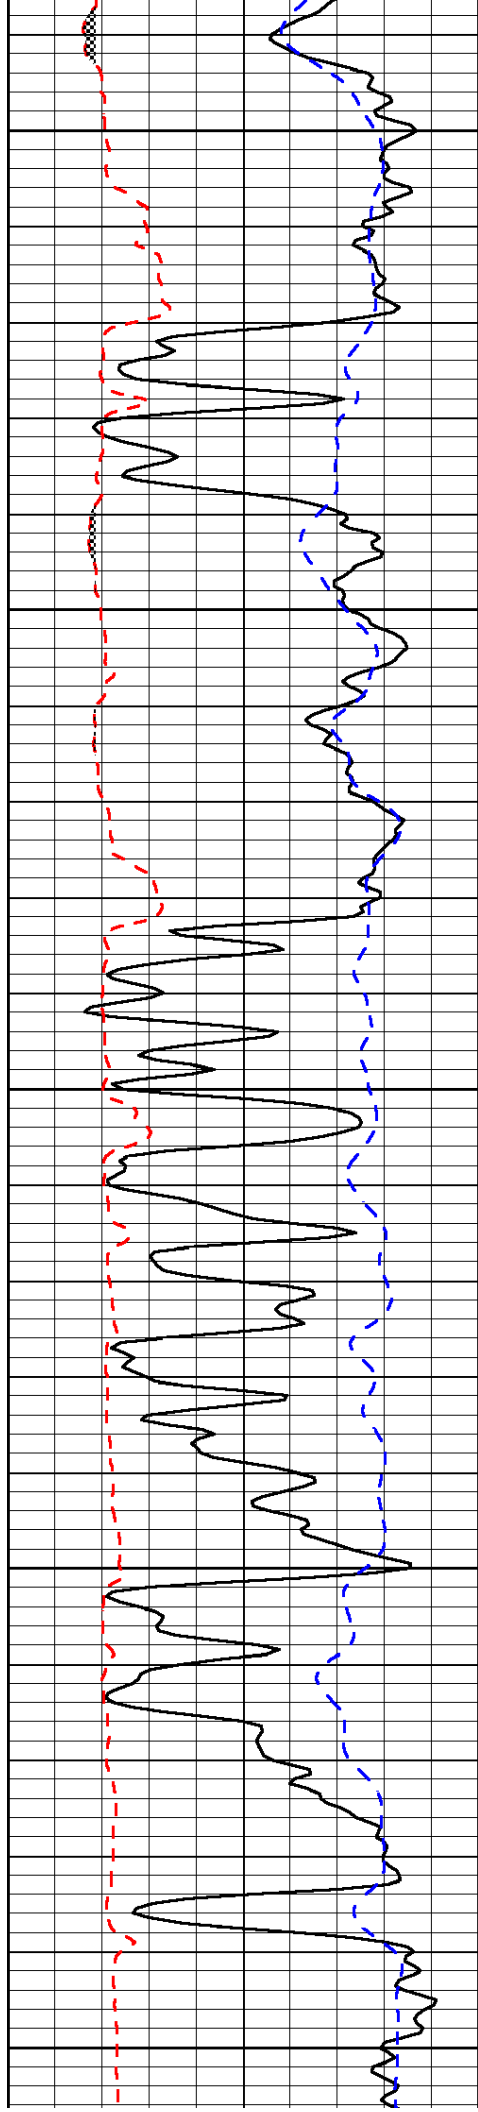


2500

2550

2600

2650

2700

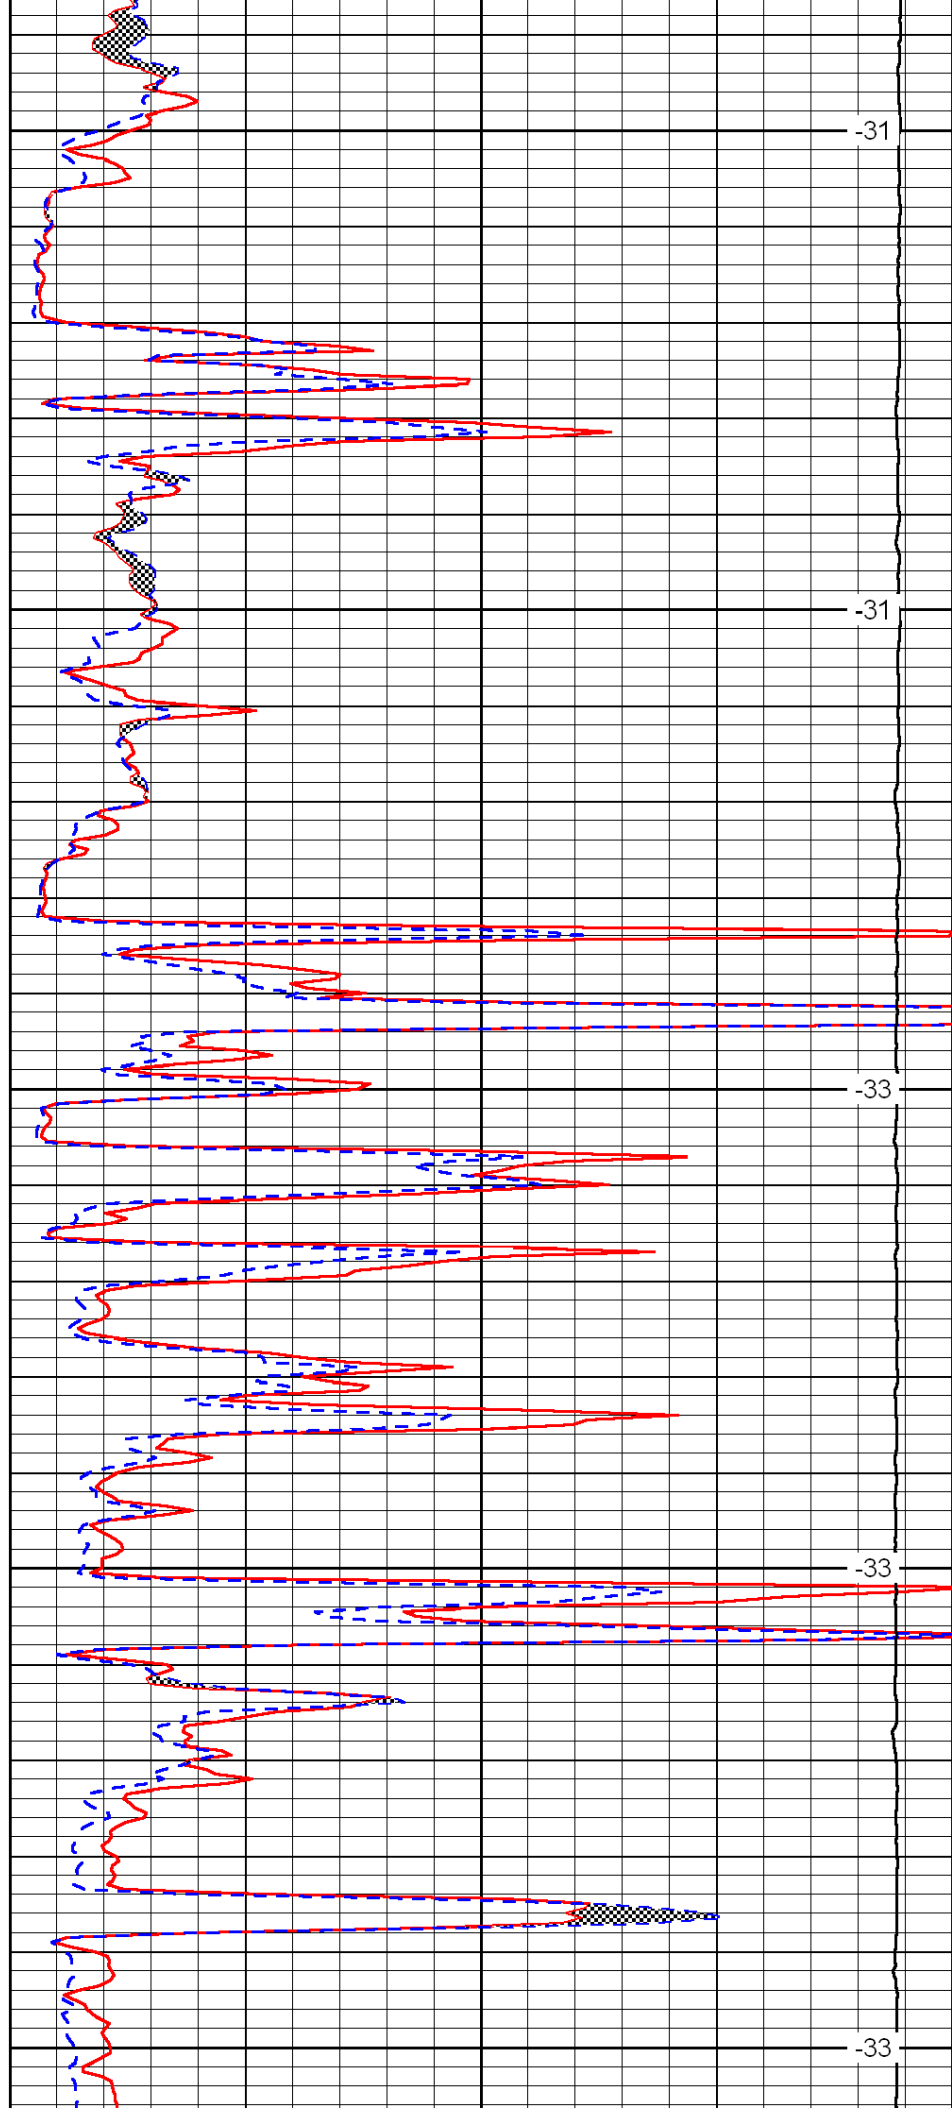



-31


-31

-33

-33

-33

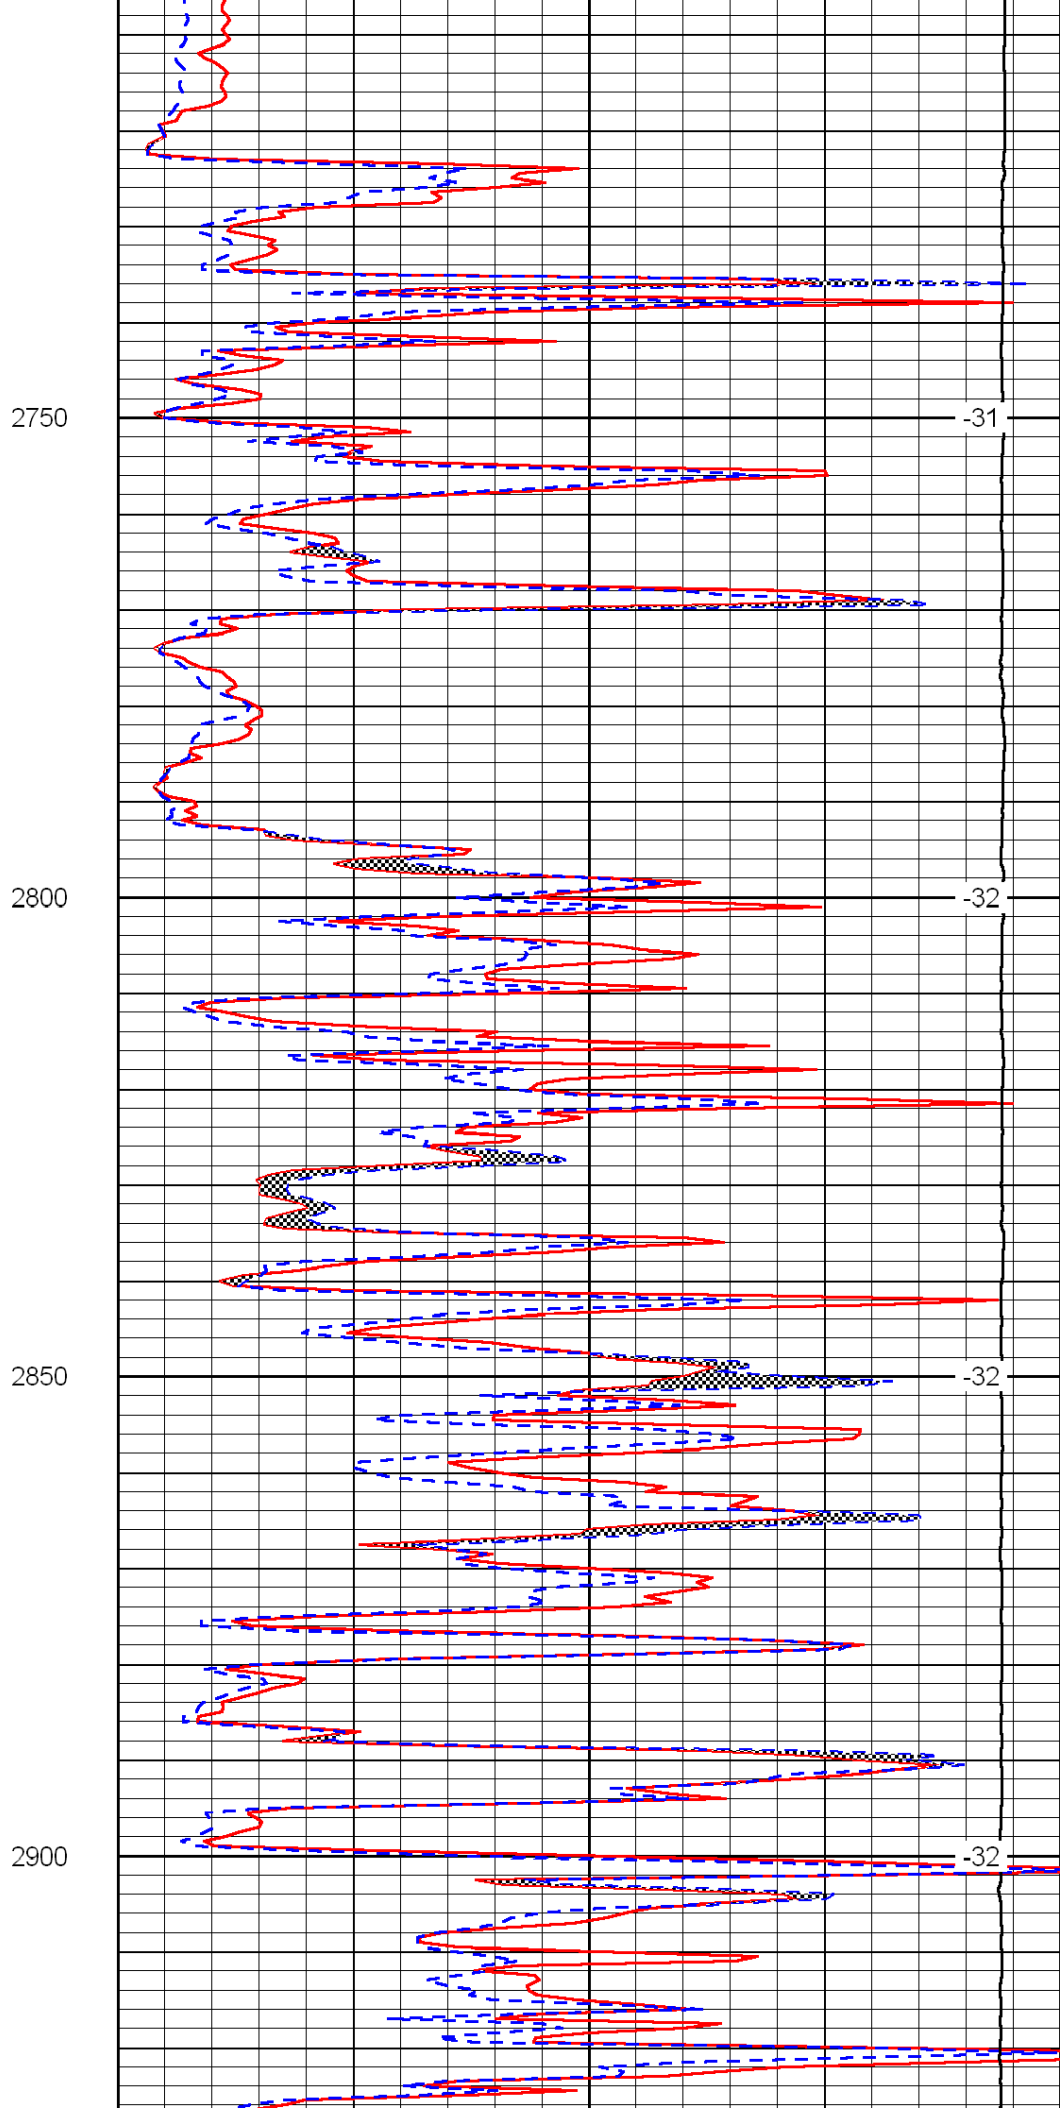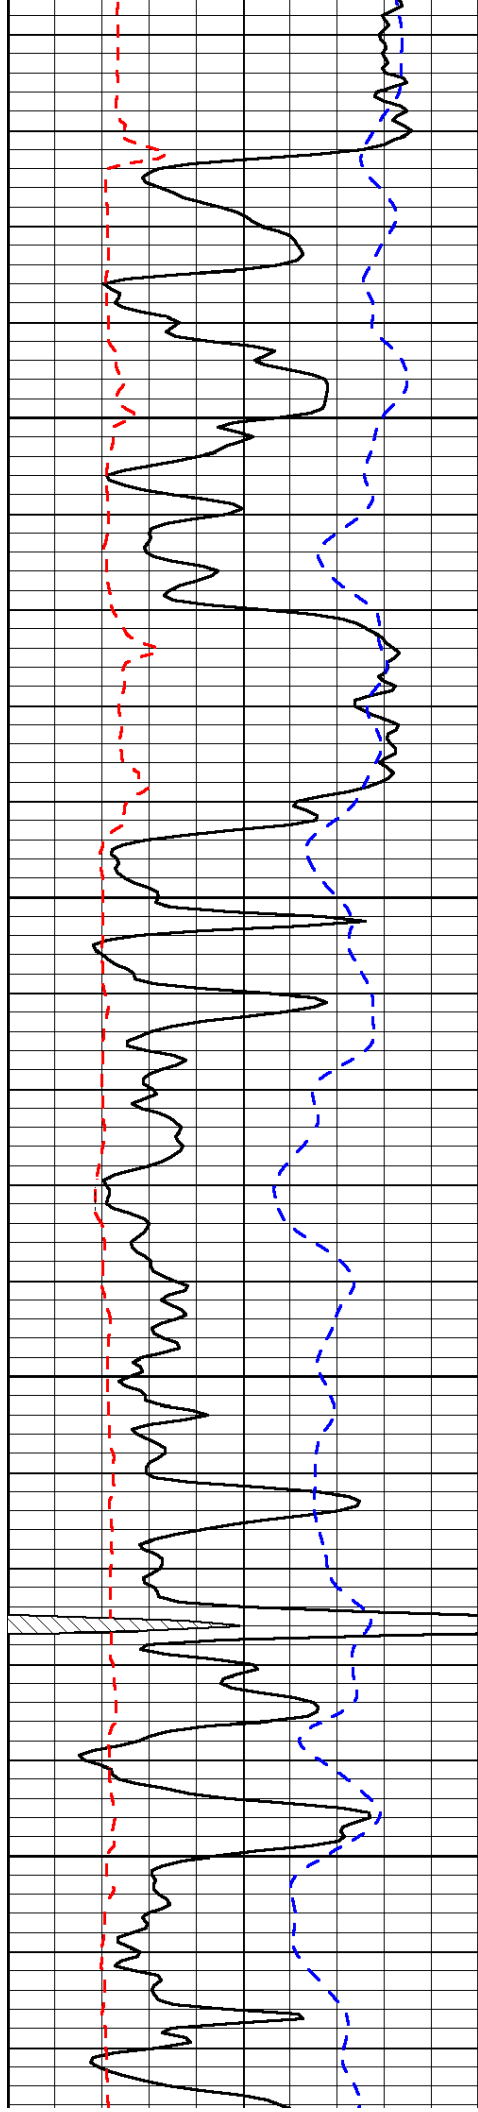

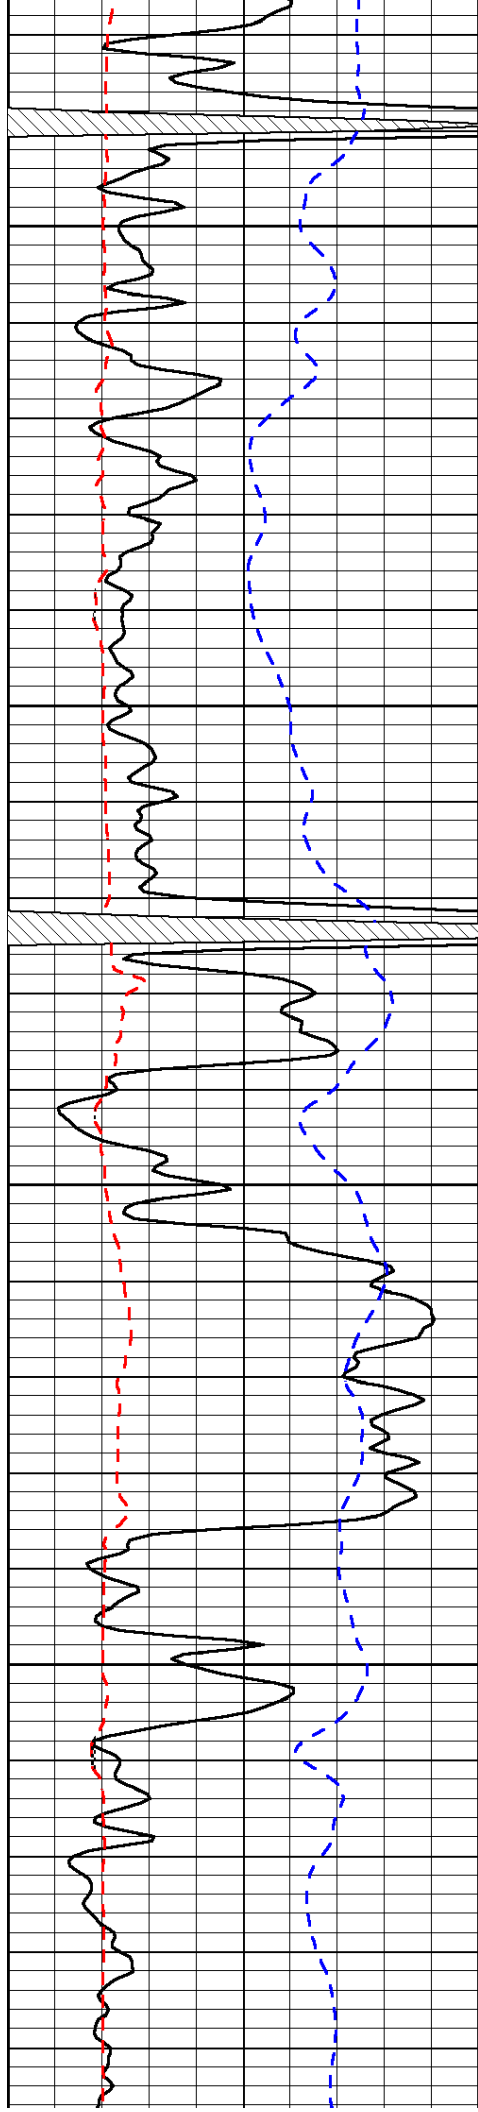



2950

3000

3050

3100

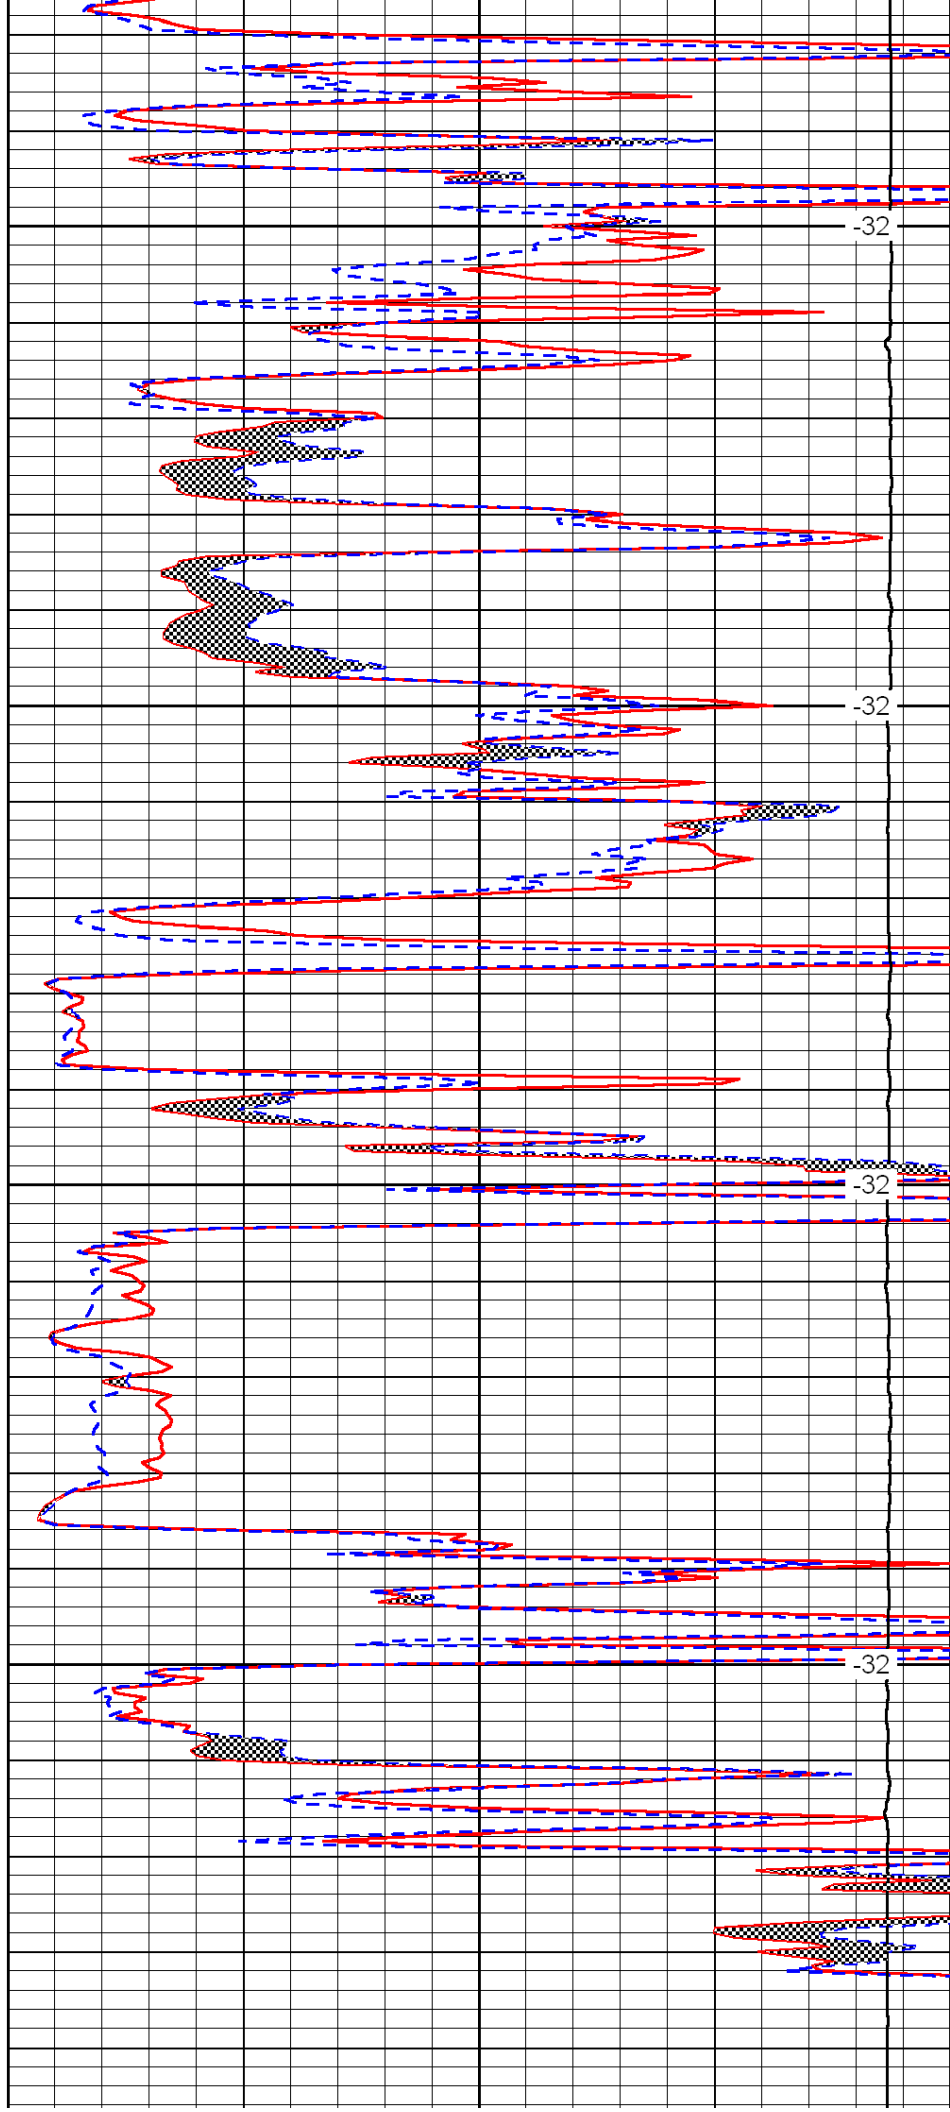

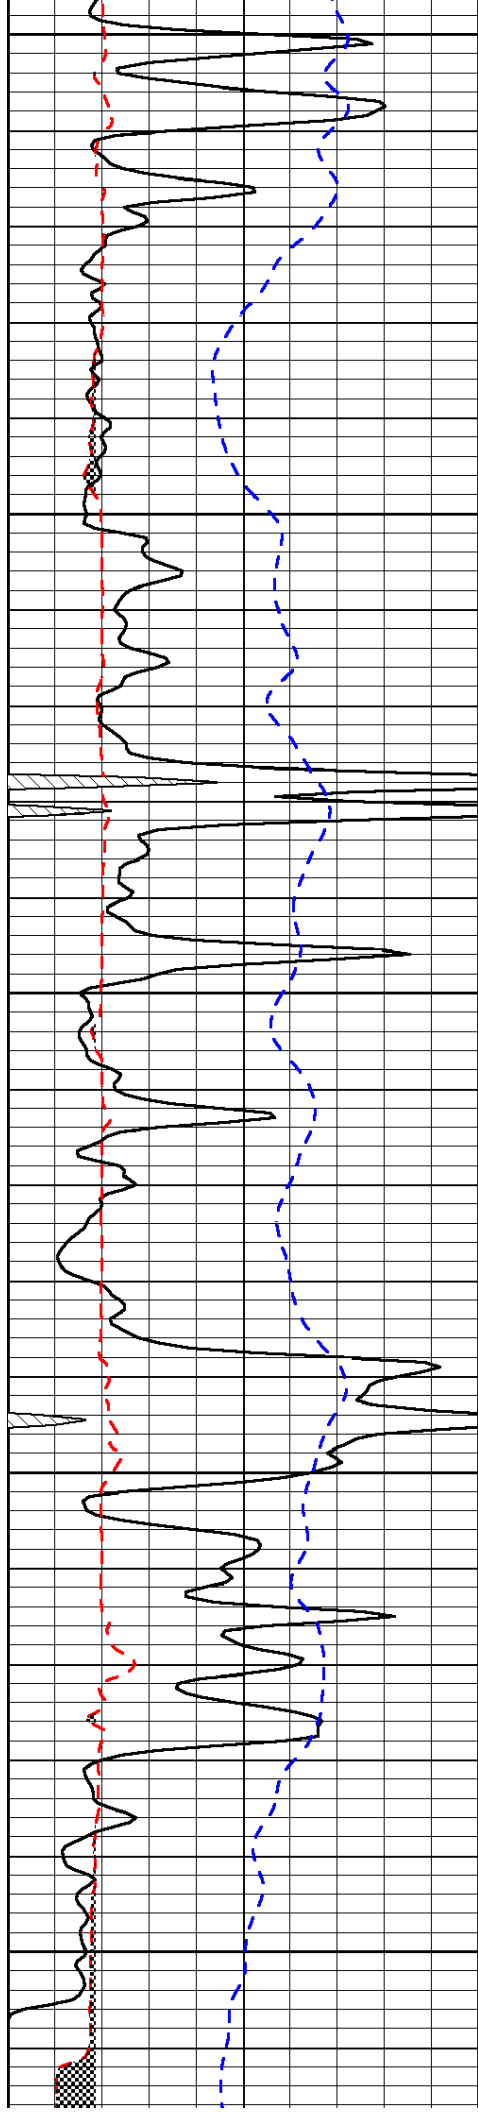


3150

3200

3250

3300

3350

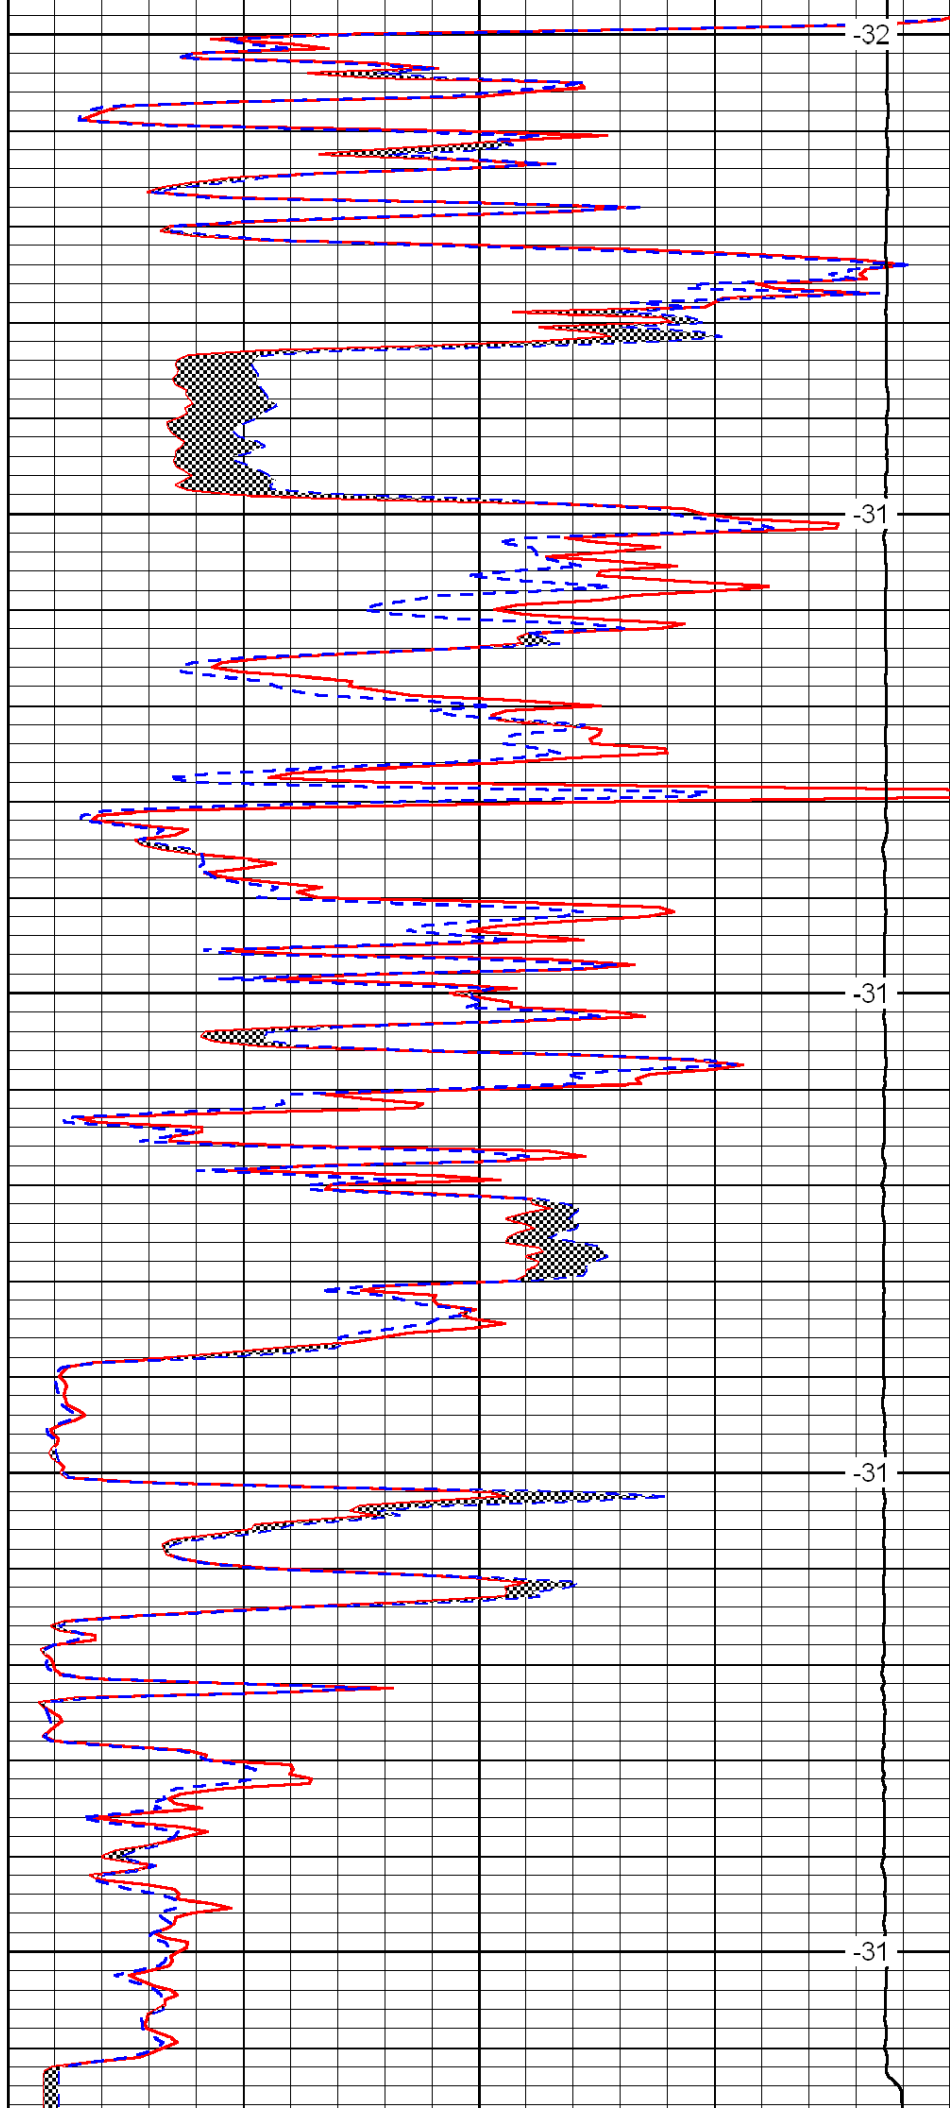

-32

-31

-31

-31

-31

