



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-163-24,053-00-00

Company Anchor Bay Petroleum, LLC.

Well Romine SW No. 5

Field Cooper

County Rocks State

Kansas

Location

NE SW NW SW
1,705' FSL & 4,651' FEL

Other Services
CNL/CDL
DIL

Sec: 19 Twp: 10s Rge: 20W

Permanent Datum Ground Level Elevation 2157
Log Measured From Kelly Bushing 9 Ft. Above Perm. Datum

Drilling Measured From Kelly Bushing

Elevation

K.B. 2166
D.F. 2166
G.L. 2157

Date 7/28/2012

Run Number

Two

Depth Driller

3830

Depth Logger

3832

Bottom Logged Interval

3831

Top Log Interval

3000

Casing Driller

8.625 @ 204

Casing Logger

212

Bit Size

7.875

Type Fluid in Hole

Chemical

Salinity, ppm CL

5000

Density / Viscosity

9.2 45

pH / Fluid Loss

9.0 8.8

Source of Sample

Flowline

Rm @ Meas. Temp

.34 @ 94

Rmf @ Meas. Temp

.26 @ 94

Rmc @ Meas. Temp

.46 @ 94

Source of Rmf / Rmc

Charts

Rm @ BHT

.28 @ 114

Operating Rig Time

4 Hours

Max Rec. Temp. F

114

Equipment Number

108

Location

Hays

Recorded By

J. Long

Witnessed By

Ed Glassman

<<< Fold Here >>>



All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments



Thank you for using Log-Tech, Inc.
(785) 625-3858


Ellis, North to CC Road, 2 West, 1/3 North, East Into

Database File: c:\warrior\data\anchor bay_romine sw no. 5\anchorbay_romine_sw_5hd.db
Dataset Pathname: dil/anchstck
Presentation Format: micro
Dataset Creation: Sat Jul 28 19:46:20 2012
Charted by: Depth in Feet scaled 1:240

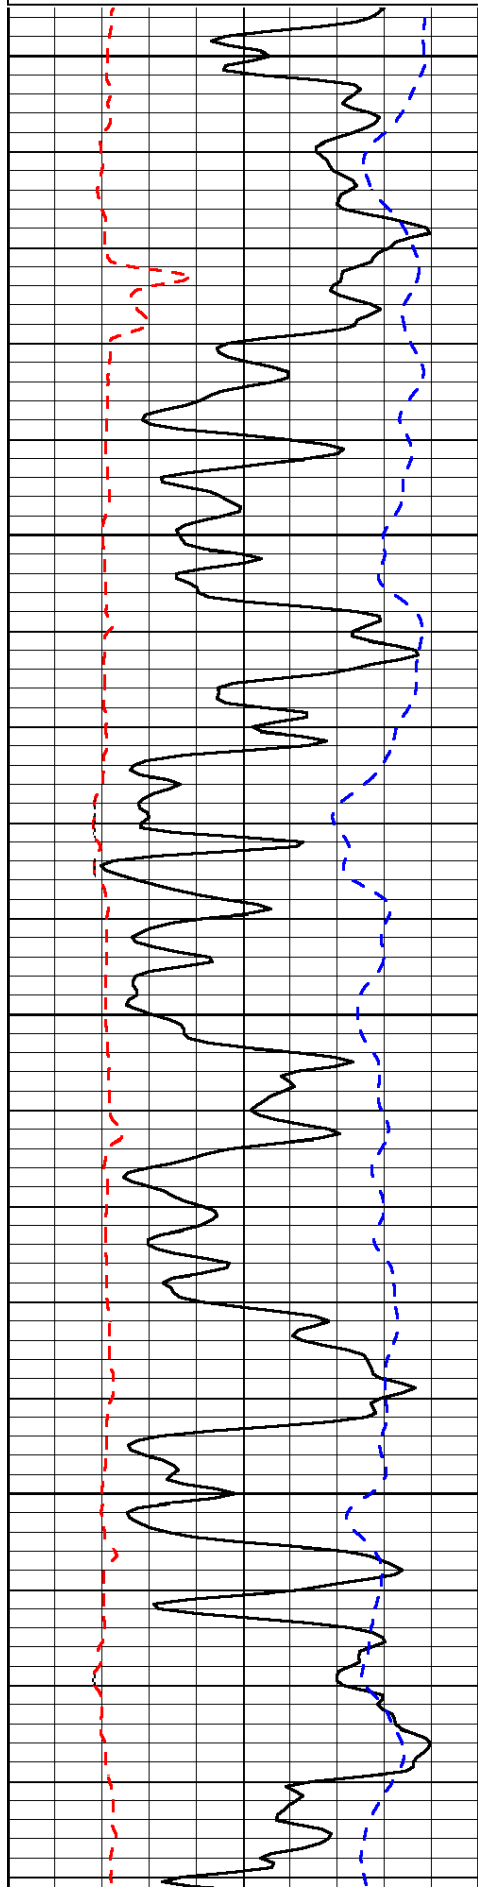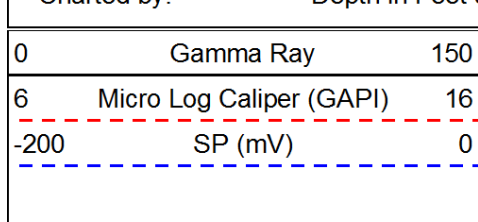

3000
3050
3100
3150

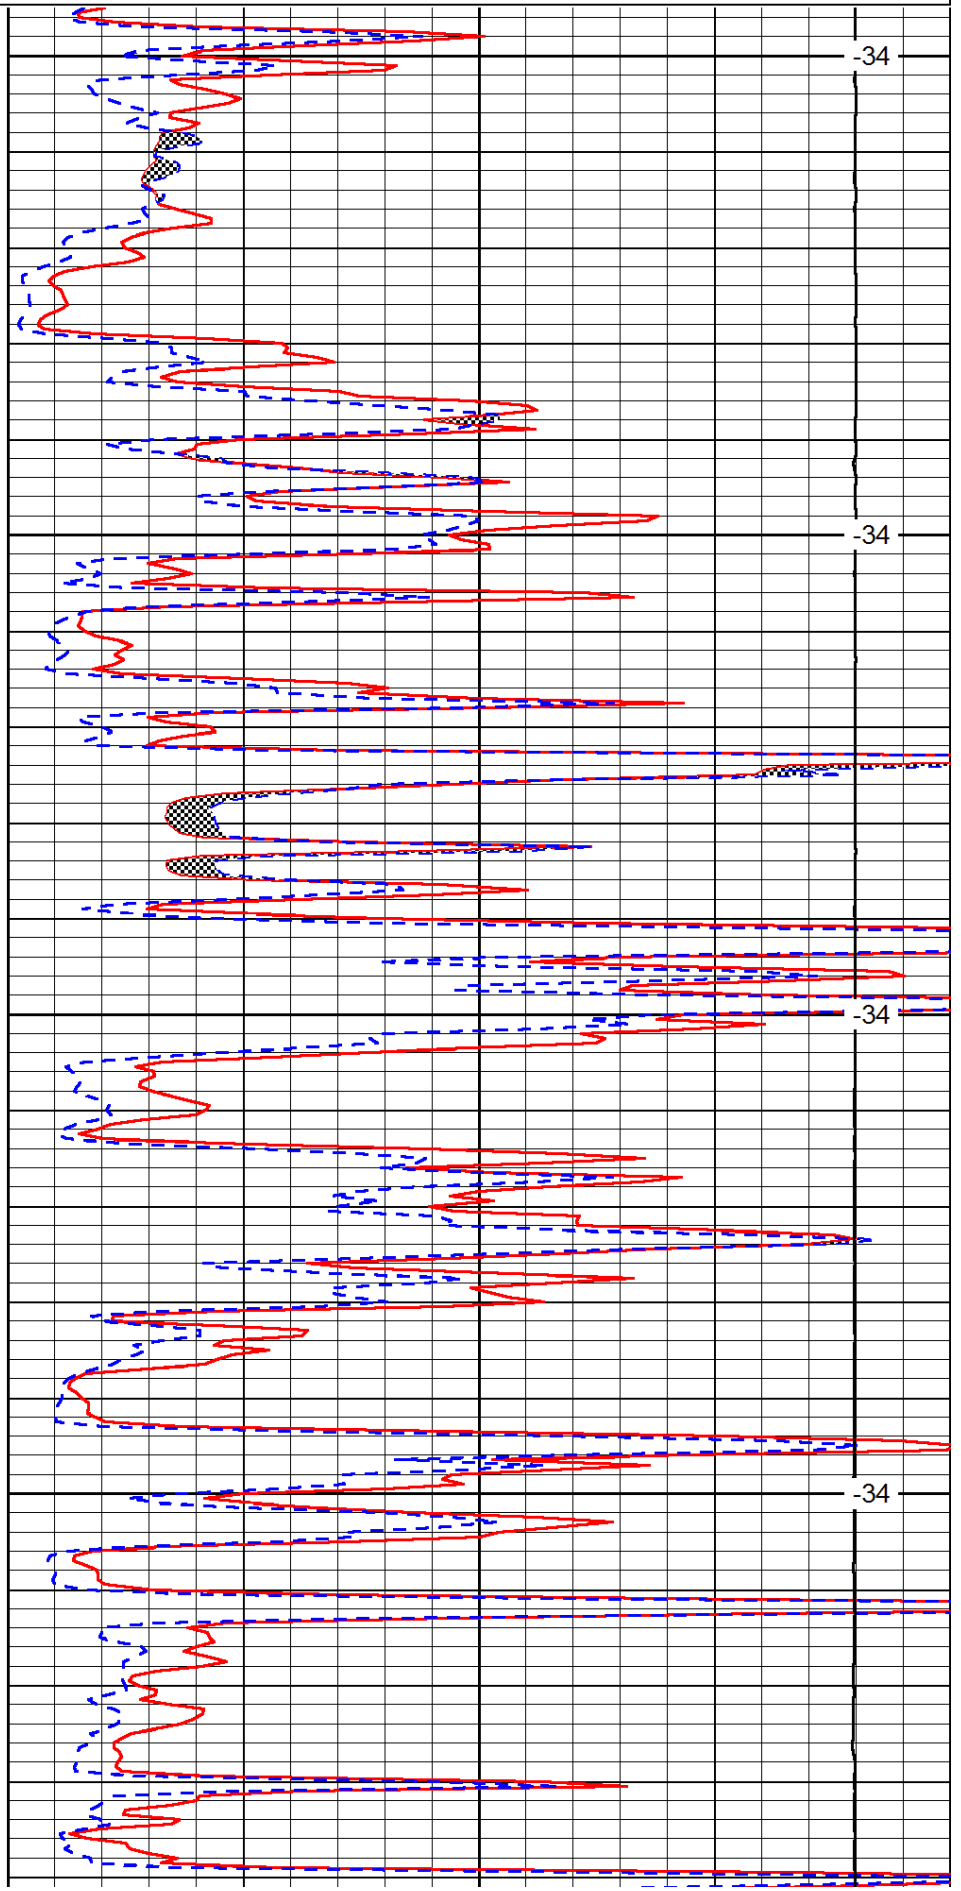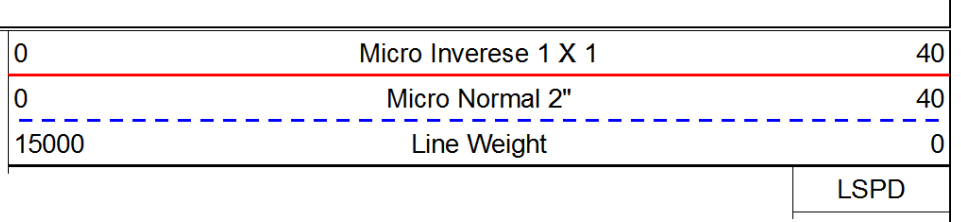

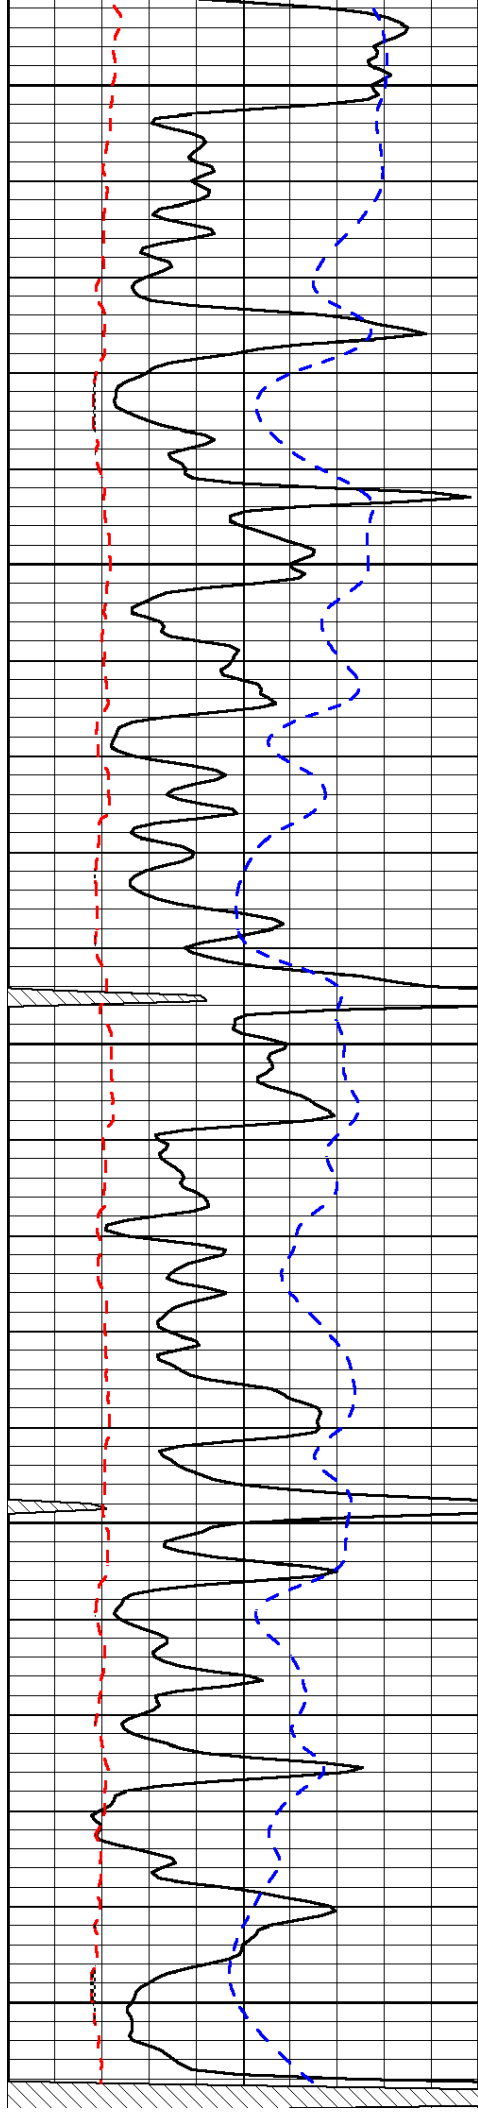


3200

3250

3300

3350

3400

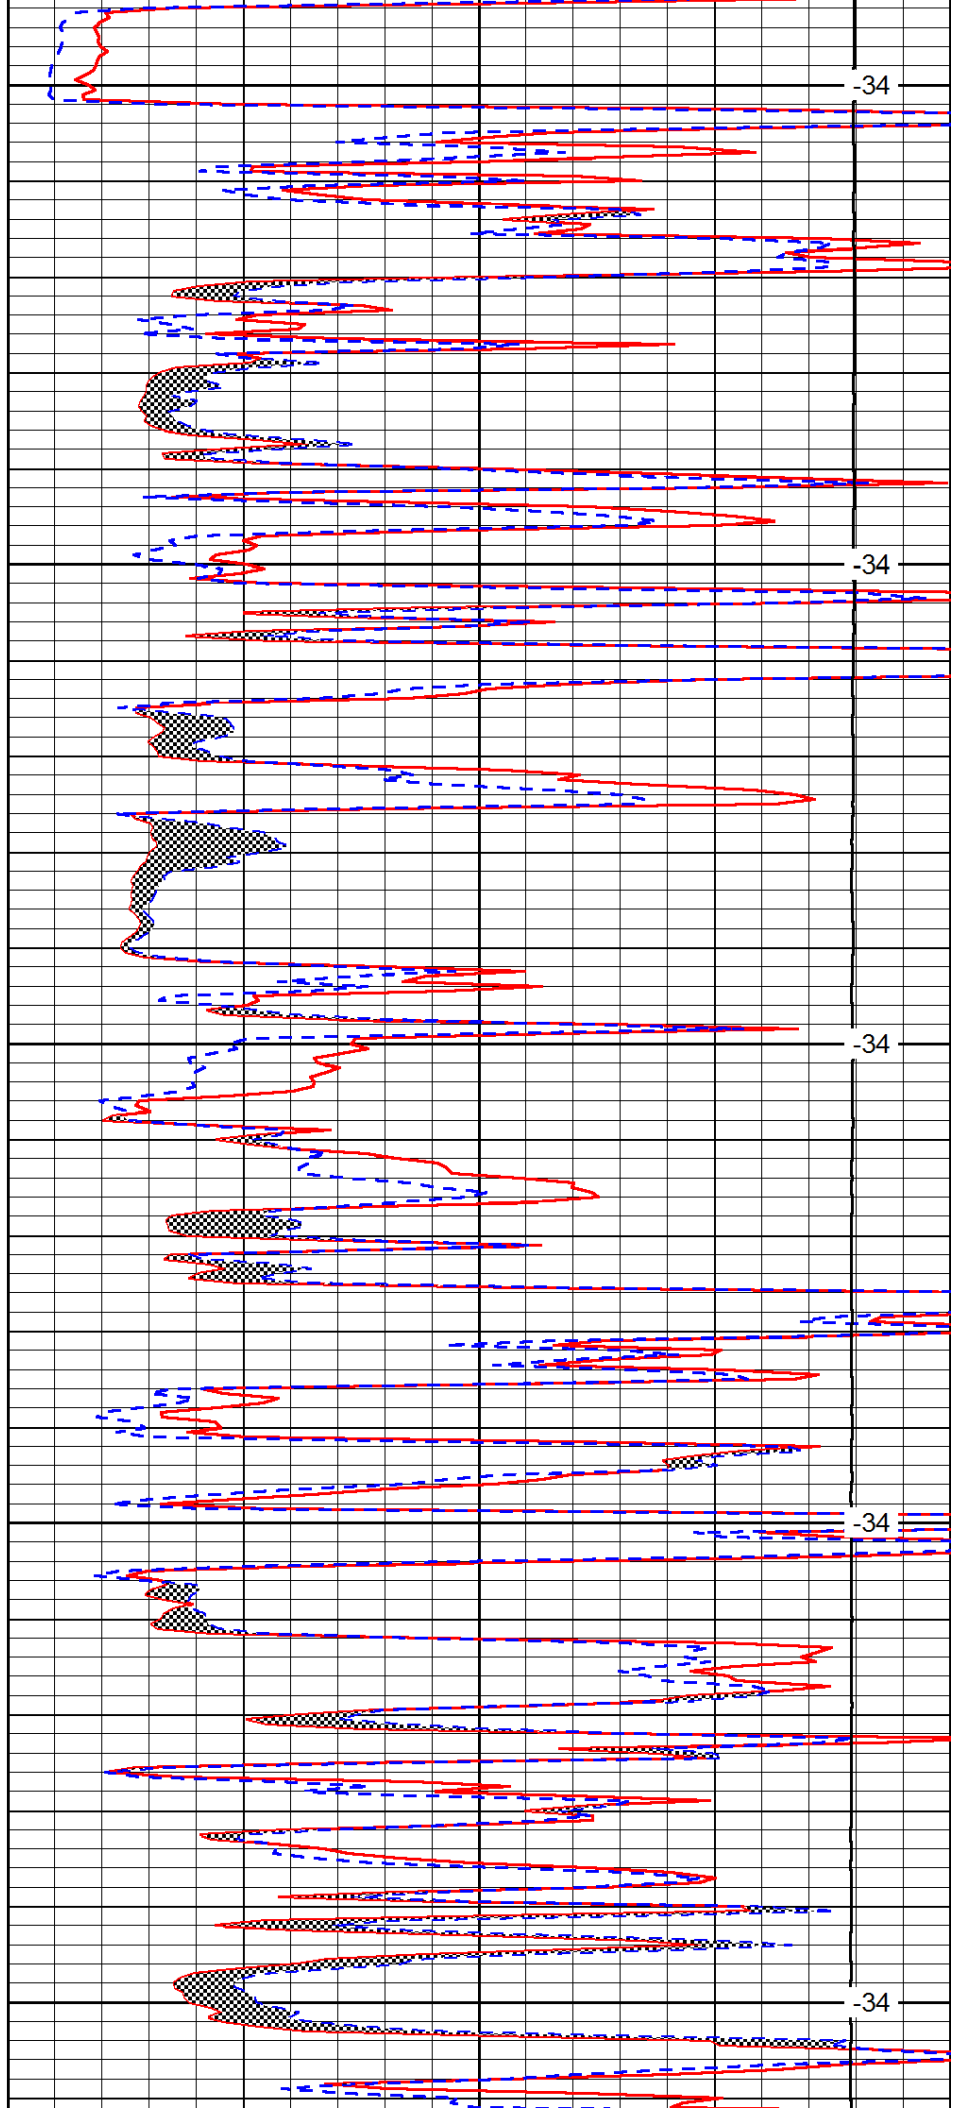


-34

-34

-34

-34

-34

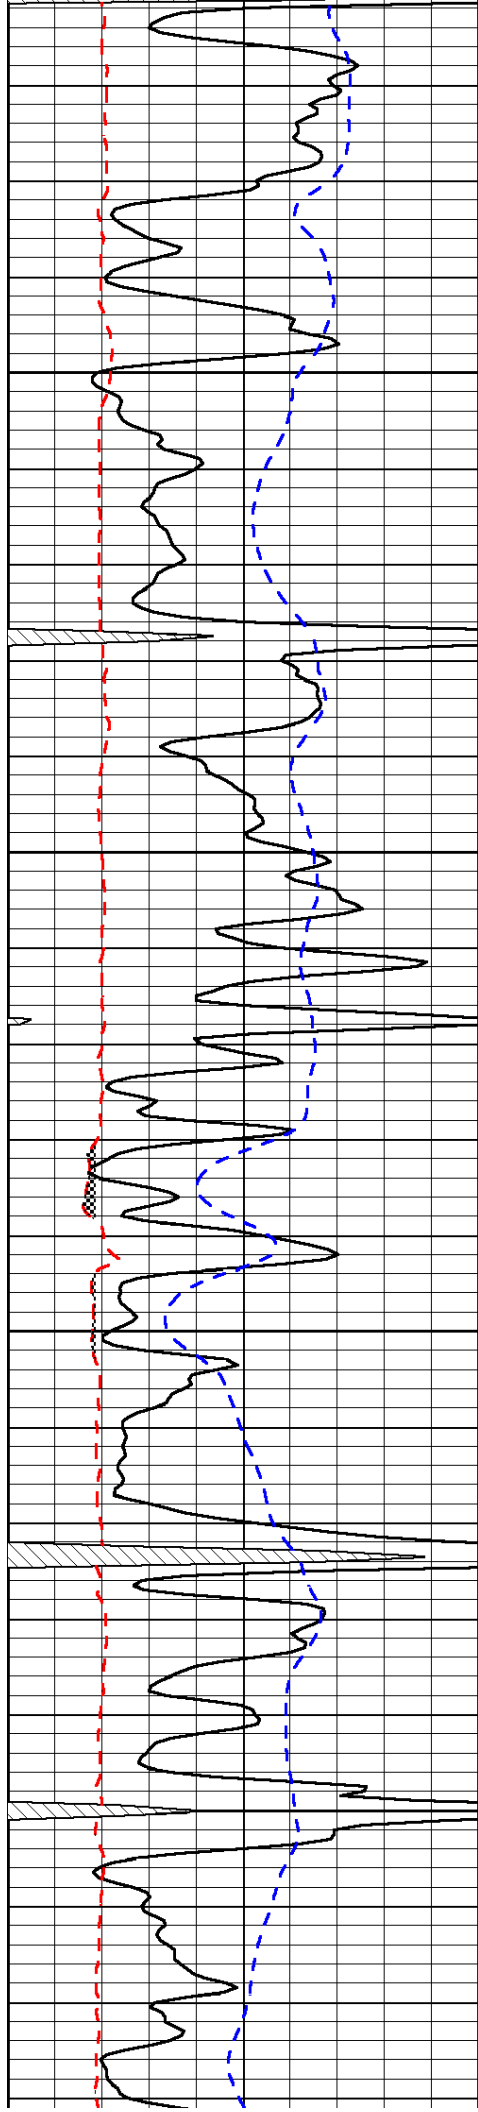


3450

3500

3550

3600

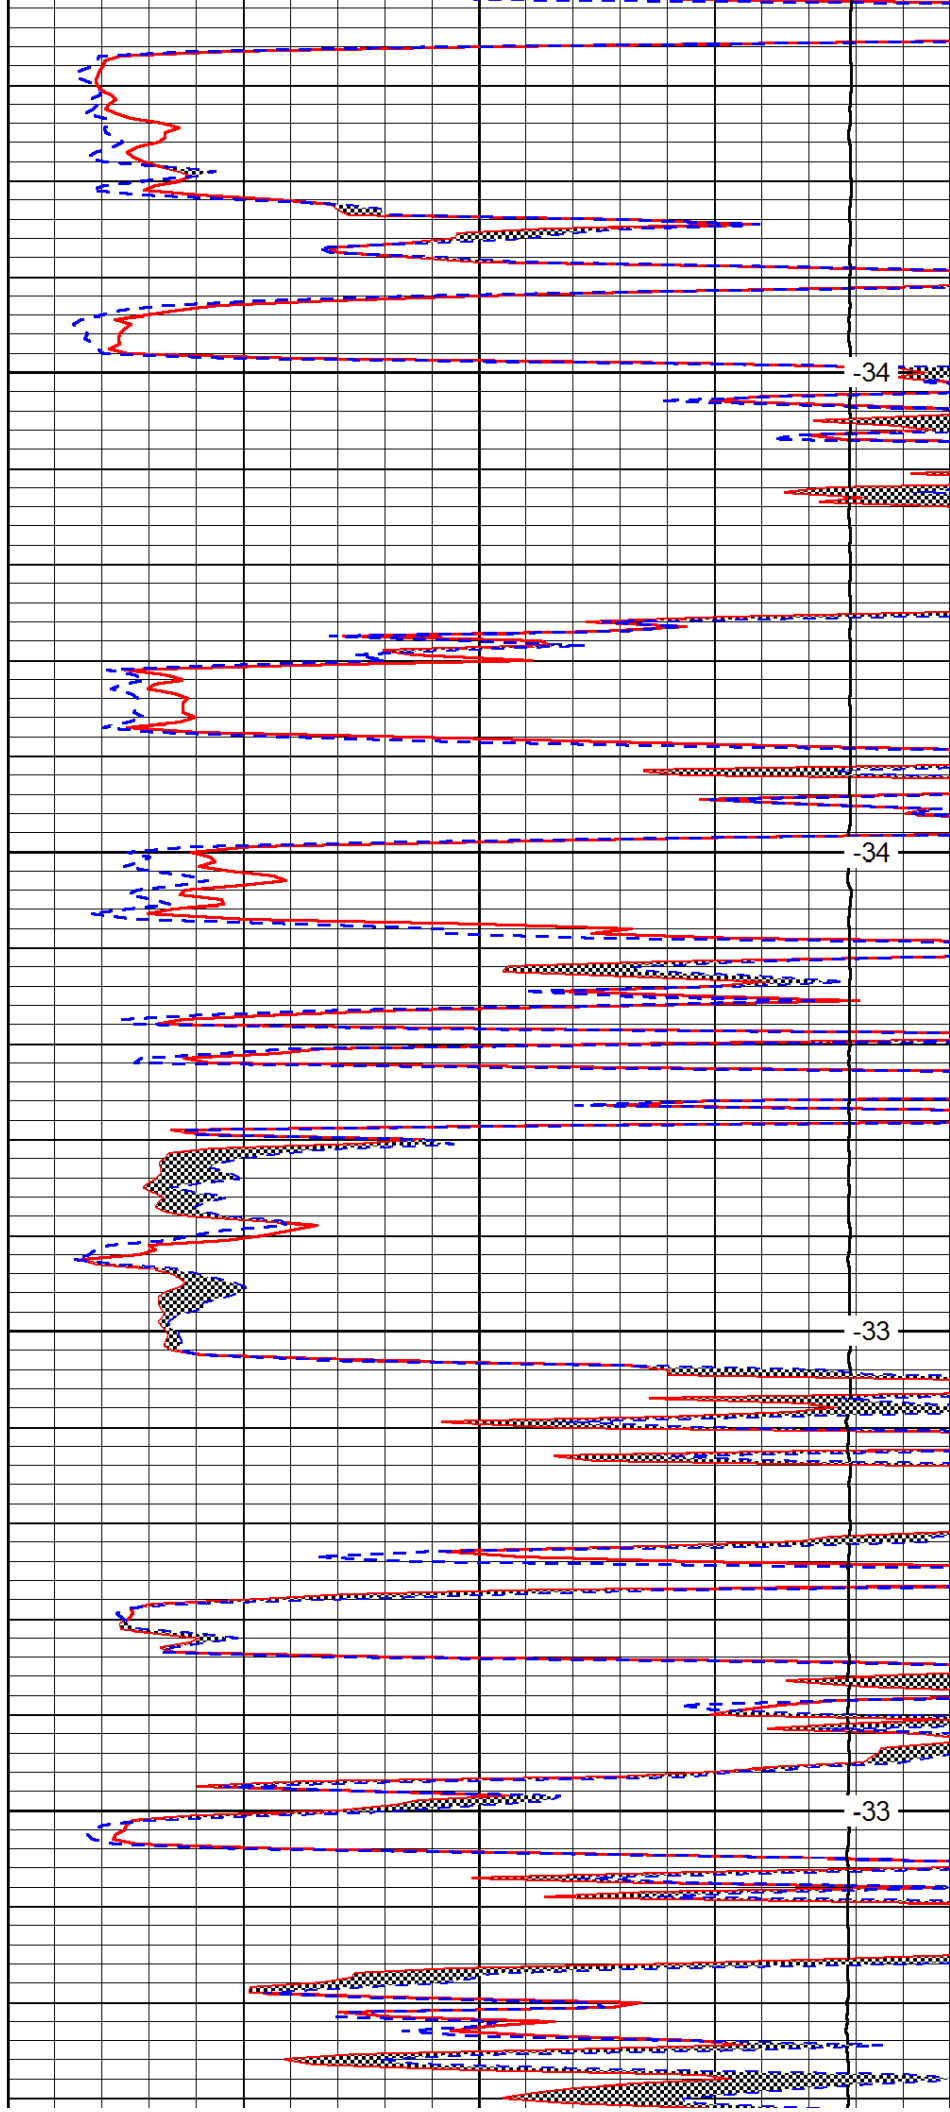


-34

-34

-33

-33

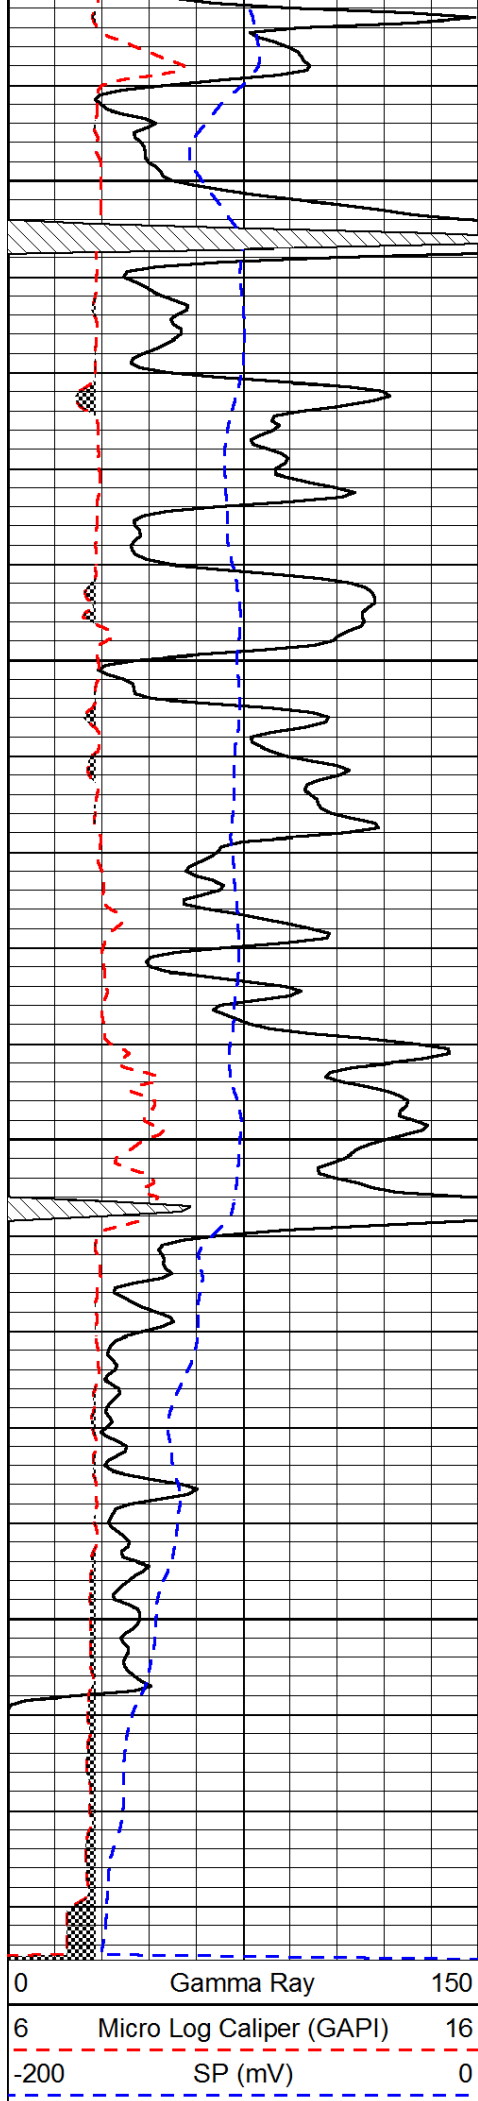


3650

3700

3750

3800

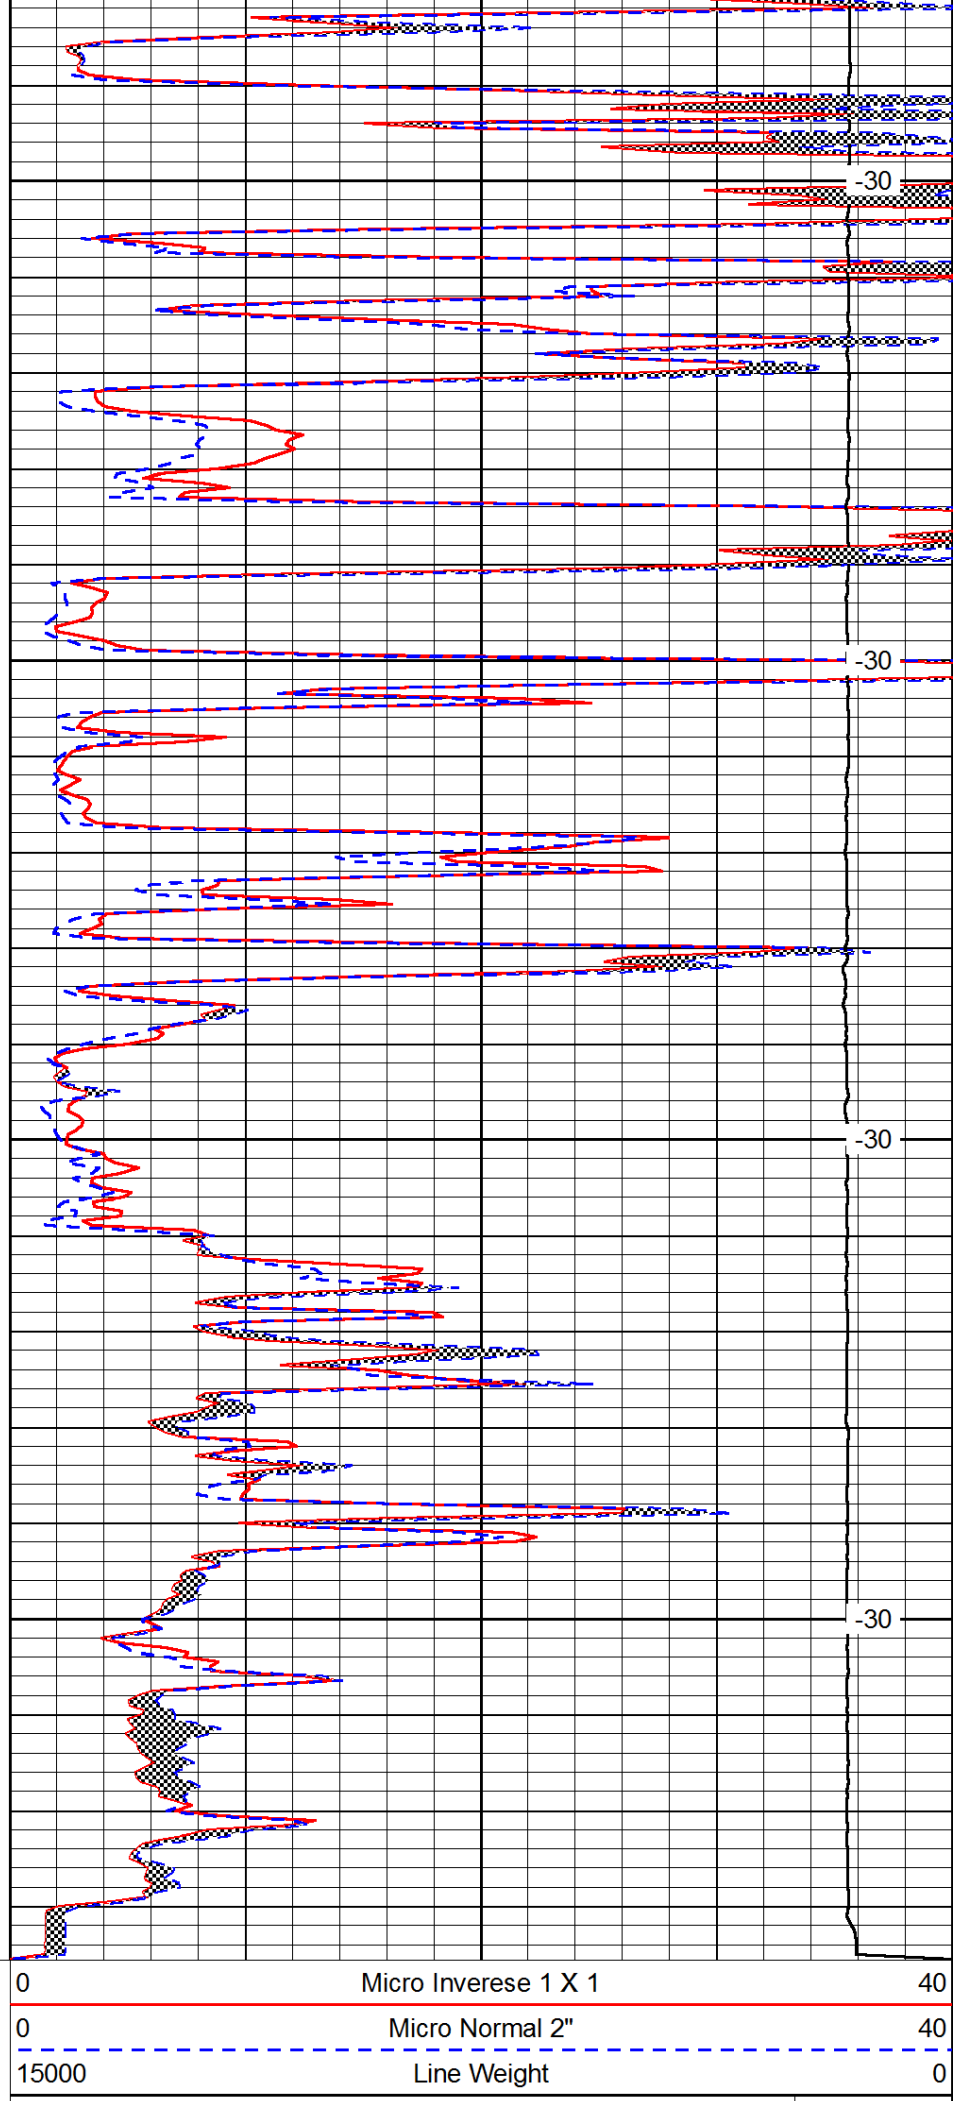

-30

-30

-30

-30

Micro Inverse 1 X 1

Micro Normal 2''

Line Weight

