

15-065-20823-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Graham County, Sec. 36 Twp. 6S Rge. 23W (E) (W)

Location as "NE/CNW&SW" or footage from lines SW SW SE

Lease Owner Strata Search Petroleum Corporation

Lease Name Law Well No. 1

Office Address 1140 N. W. 63rd St. Suite 300, Oklahoma City, Okla

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed April 17 19 76

Application for plugging filed April 17 19 76

Application for plugging approved April 17 19 76


Plugging commenced April 17 19 76

Plugging completed April 17 19 76

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

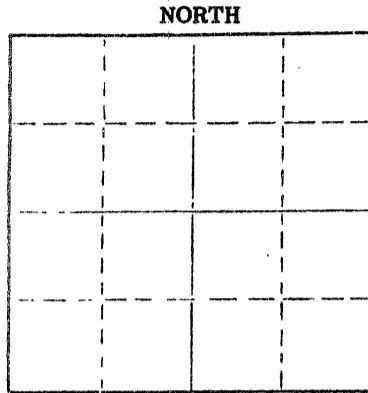

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor

Producing formation Depth to top Bottom Total Depth of Well 3840 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Bottom plug at 1000' w/70 sacks 50/50 Pozmix, 6% Gel
Middle plug at 250' w/20 sacks 50/50 Pozmix, 6% Gel,
Top plug @ 40' w/1/2 sack hulls and 10 sacks 50/50 Pozmix 6% Gel.

RECEIVED
STATE CORPORATION COMMISSION

APR 20 1976

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Duke Drilling Co.

Address Box 823, Great Bend, Kansas

CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS

COUNTY OF BARTON

420-76

Wayne Dobbs (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wayne Dobbs

Box 823, Great Bend, Kansas 67530

Subscribed AND SWORN TO before me this 19th day of April 19 76

My commission expires April 11, 1978

Verity M. Payne
Notary Public.

15-005-20823-00-00

DRILLERS' WELL LOG

DATE COMMENCED: April 11, 1976
DATE COMPLETED: April 17, 1976

Strata Search Petroleum Corporation
"LAW # 1"
SW/4 SW/4 SE/4
Section 36, T6S, R23W
Graham County, Kansas

ELEVATION: 2386 K.B.

0 - 90' Clay, Post Rock
90 - 165' Sand
165 - 860' Shale, Clay, Shells
860 - 1780' Shale w/Sand Streaks
1780 - 2015' Shale
2015 - 2048' Anhydrite
2048 - 3493' Shale and Lime
3493 - 3594' Lime
3594 - 3598' Shale
3598 - 3634' Lime and Shale
3634 - 3826' Lime
3826 - 3840' Lime and Shale
3840' RTD

FORMATION DATA
Anhydrite 2014
Topeka 3493
Heebner 3594
Toronto 3619
Lansing 3634
Base K.C. 3826
RTD 3840

SURFACE PIPE:
Set used 8 5/8", 28# pipe @ 253'
w/170 sacks Common cement,
2% Gel, 3% cc.

A F F I D A V I T

STATE OF KANSAS }
COUNTY OF BARTON } ss.

Wayne Dobbs, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Wayne Dobbs

Subscribed and sworn to before me this 19th day of April, 1976.

Dorothy M. Hague
Notary Public

My Commission Expires: April 11, 1978

APR 20 1976

CLERK OF DISTRICT COURT
Graham County, Kansas