



Green Country Wireline

GAMMA RAY
CEMENT BOND LOG
CCL/VDL

Company JONES & BUCK DEVELOPMENT
Well BALES # JBD 19-4
Field PERU-SEDAN
County CHAUTAUQUA
State KANSAS

Company JONES & BUCK DEVELOPMENT
Well BALES # JBD 19-4
Field PERU-SEDAN
County CHAUTAUQUA State KANSAS
Location: API #: 15-019-27092
SE SW NE NW
4125' FSL & 3485' FEL
SEC 19 TWP 34S RGE 12E
Permanent Datum Elevation 916'
Log Measured From
Drilling Measured From
Other Services
Elevation
K.B.
D.F.
G.L. 916'

Date	1-3-11				
Run Number	1				
Depth Driller	1188'				
Depth Logger	1167'				
Bottom Logged Interval	1166'				
Top Log Interval	SURFACE				
Open Hole Size	---				
Type Fluid	WATER				
Density / Viscosity	---				
Max. Recorded Temp.	---				
Estimated Cement Top	SURFACE				
Time Well Ready	---				
Time Logger on Bottom	---				
Equipment Number	3				
Location	DEWEY				
Recorded By	HERREN				
Witnessed By	MR JONES				
Borehole Record					
Run Number	Bit	From	To	Size	Weight
Tubing Record					
Casing Record	Size	Wgt/Ft	Top	Bottom	
Surface String	8.625"		SURFACE	40'	
Prot. String					
Production String	4.5		SURFACE	10	
Liner					

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments



Green Country Wireline


GAMMA RAY CEMENT BOND


Database File: bales194.db
Dataset Pathname: bales194/run1/pass1
Presentation Format: cbl_dr
Dataset Creation: Tue Jan 03 07:46:28 2012 by Log Std Casedhole 09061
Charted by: Depth in Feet scaled 1:240

9	Collar Locator	-1	-1	Amplitude (mV)	120	200	Variable Density	120
0	Gamma Ray (GAPI) (GAPI)	60	1000	Travel Time (usec)	275			



9	Collar Locator	-1	-1	Amplitude (mV)	120	200	Variable Density	120
0	Gamma Ray (GAPI) (GAPI)	60	1000	Travel Time (usec)	275			

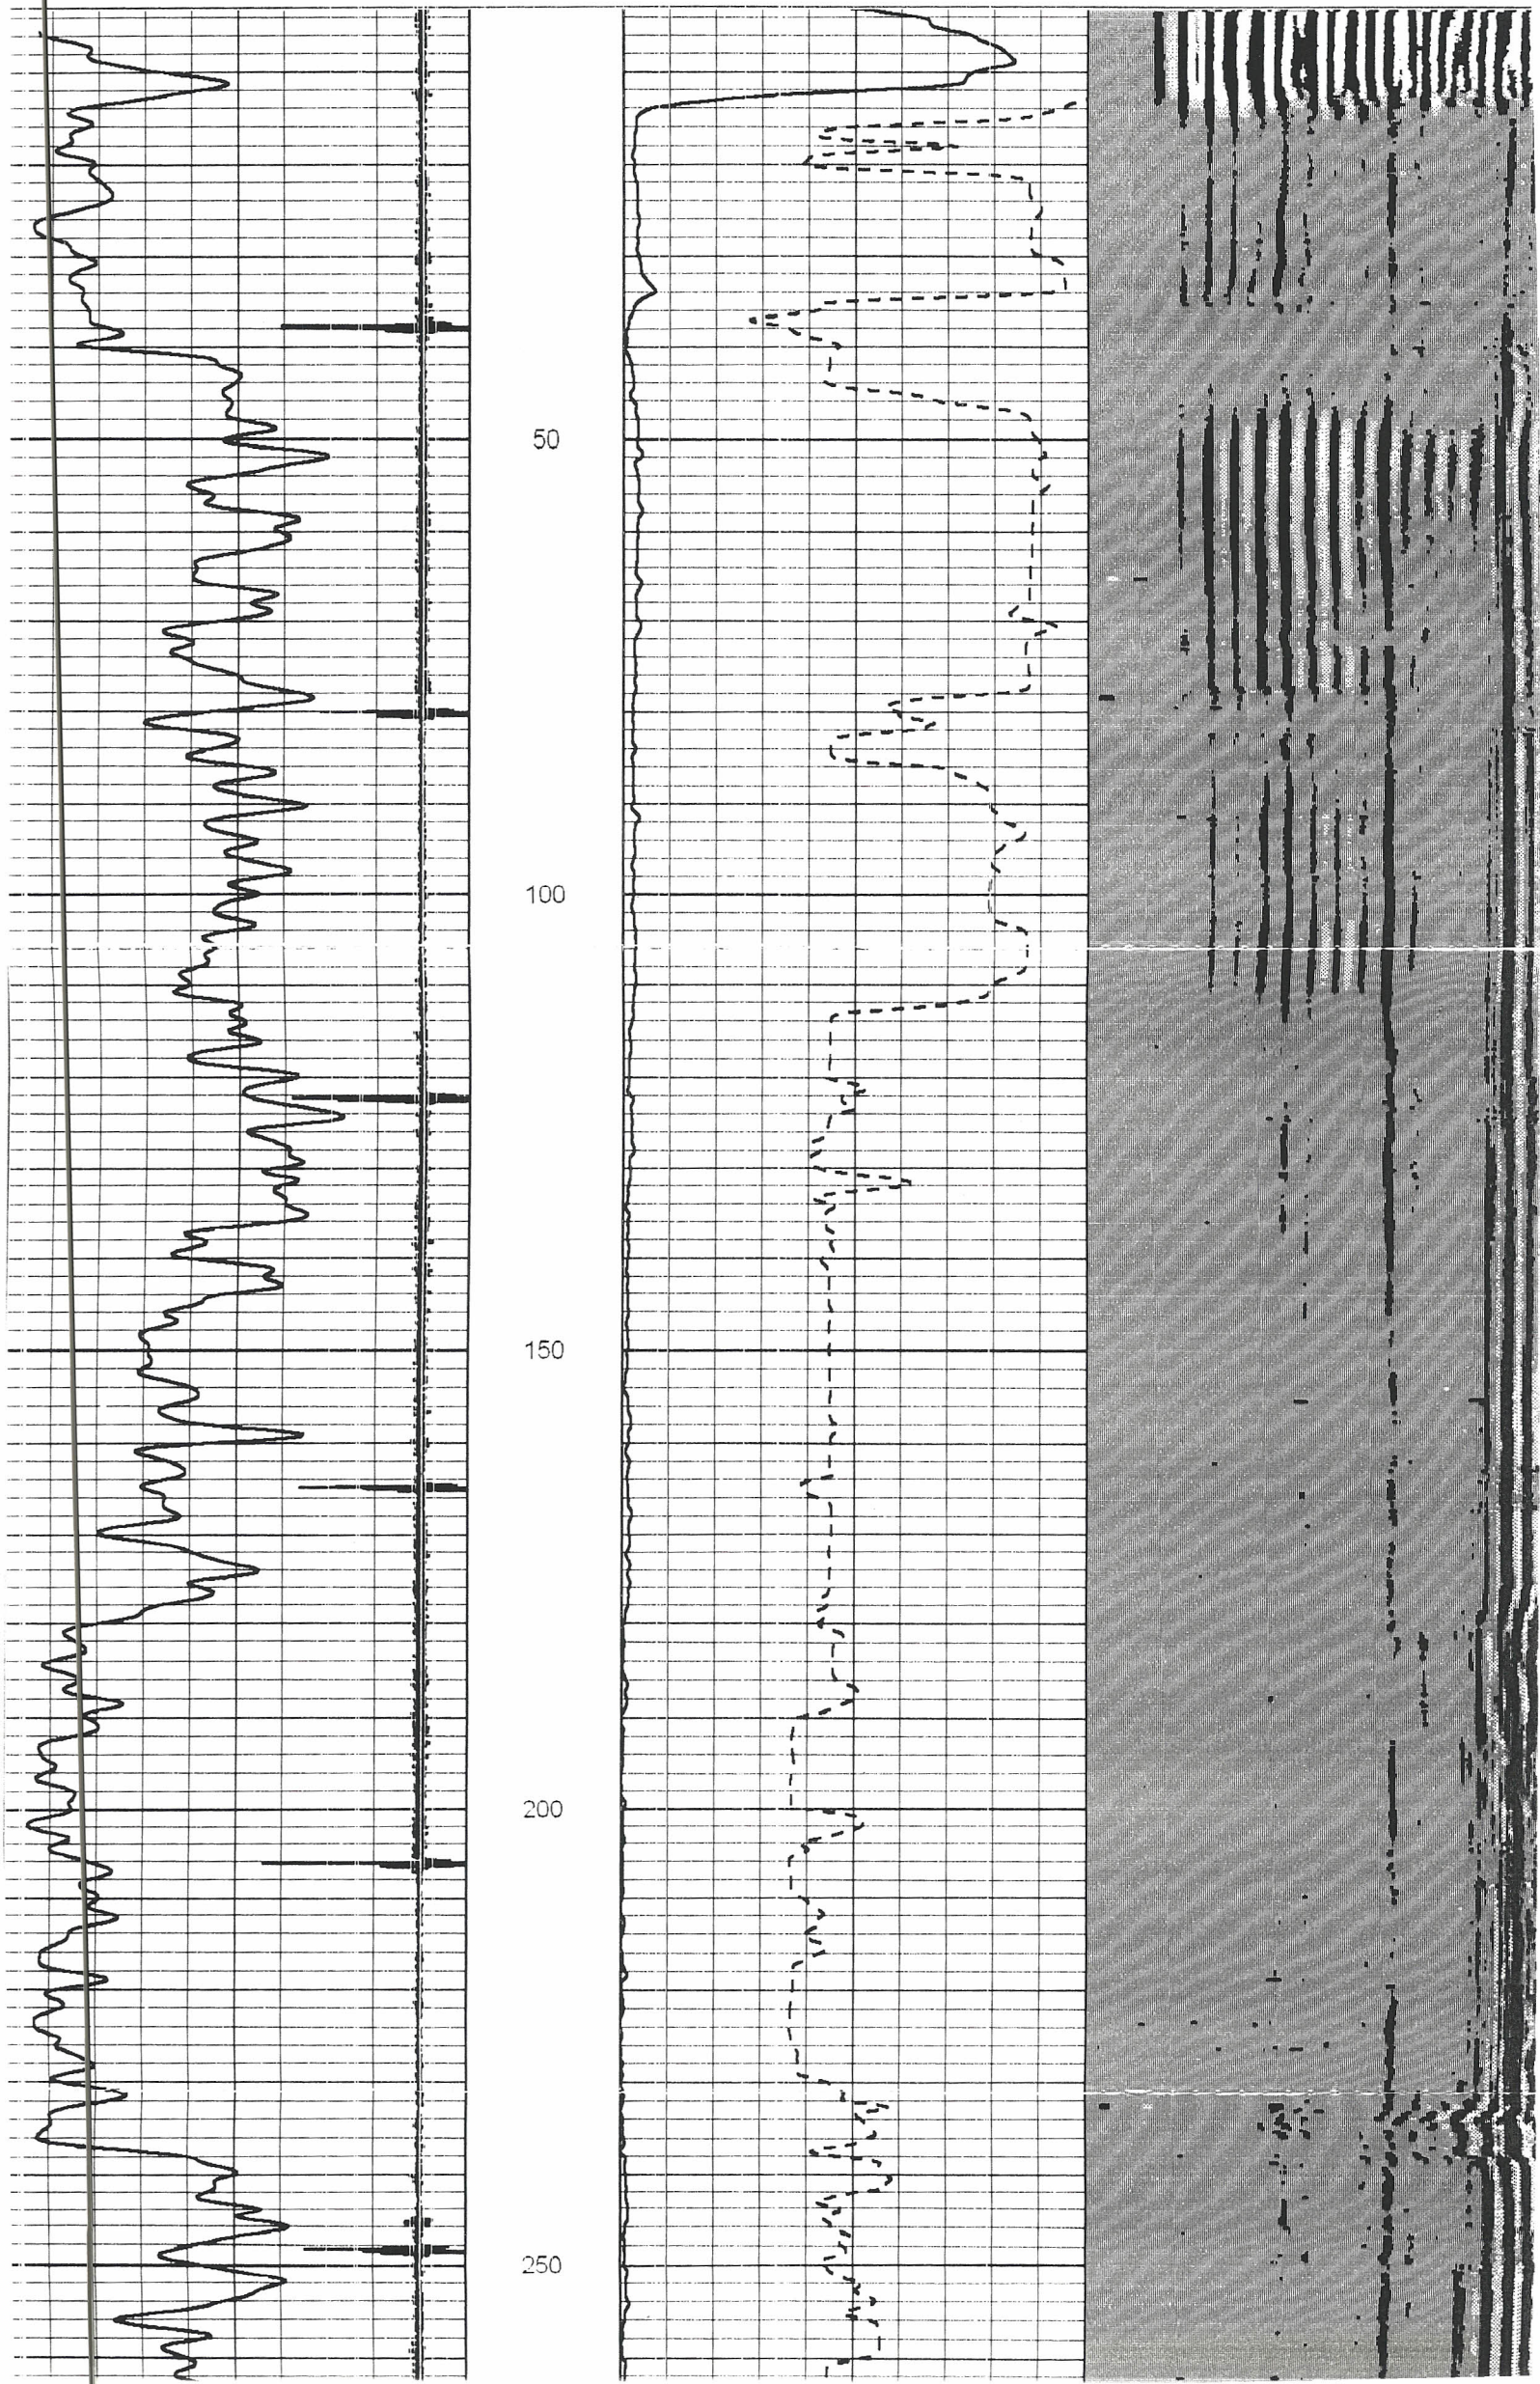

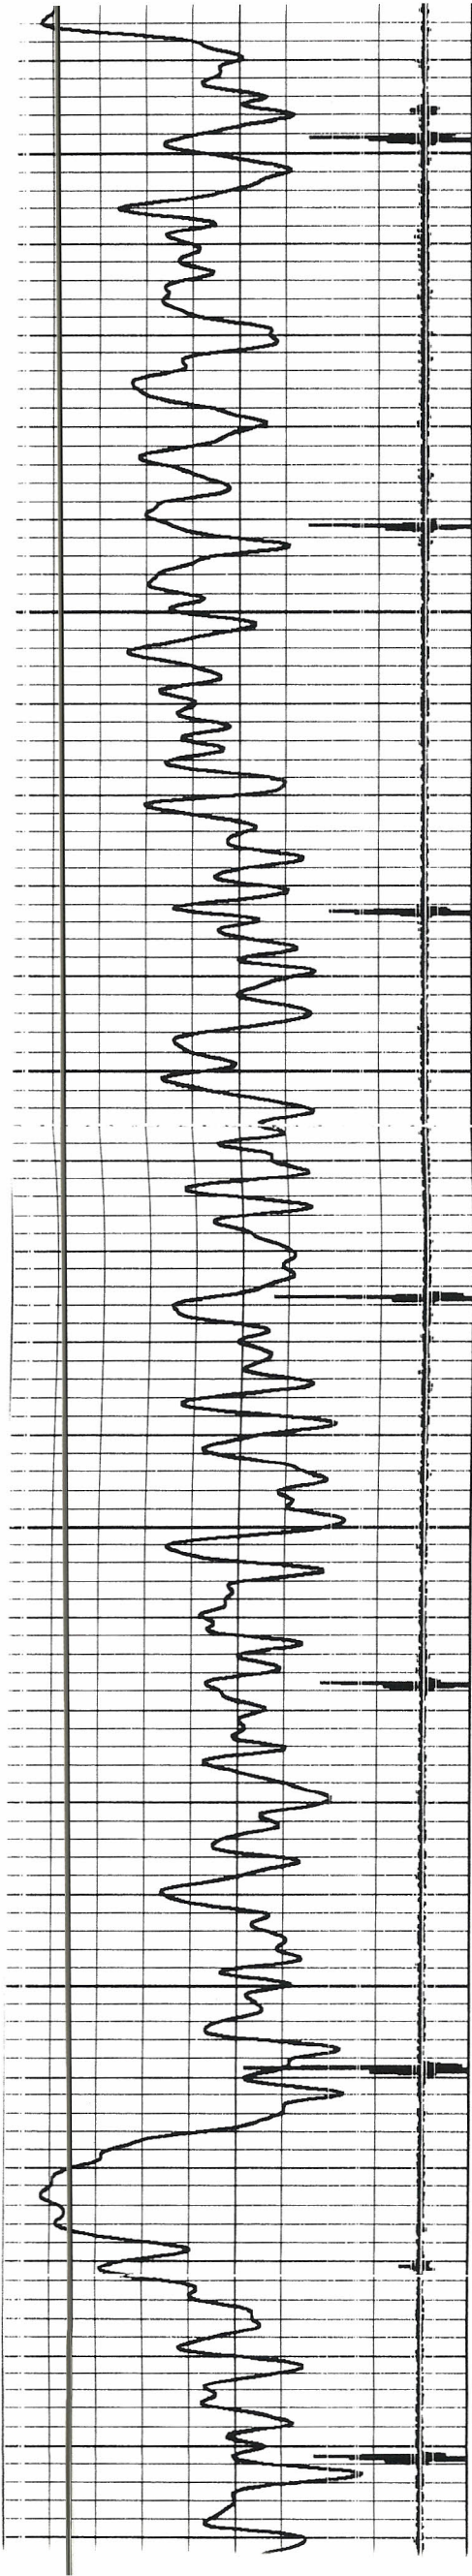

250



300


350

400

450

500

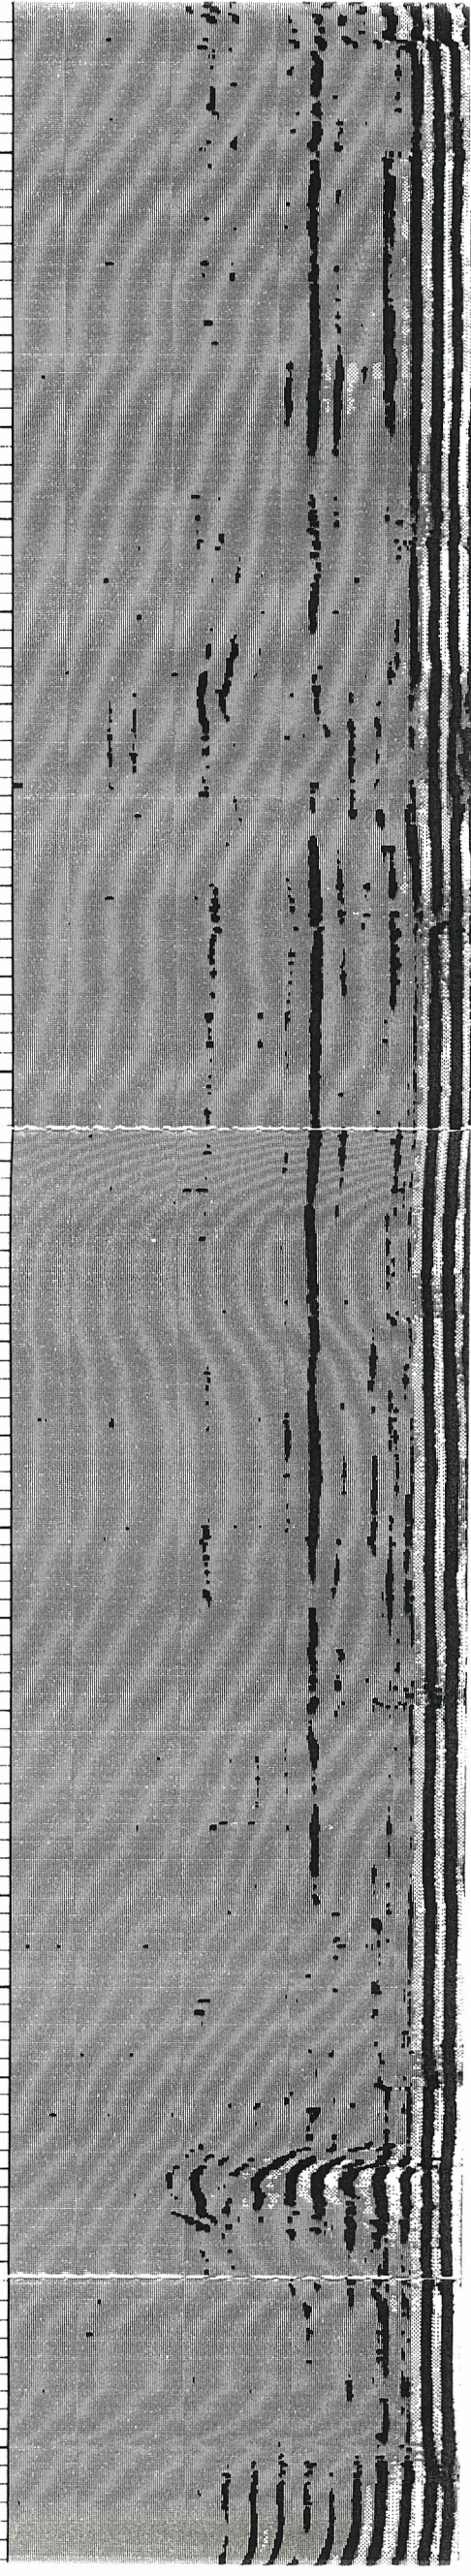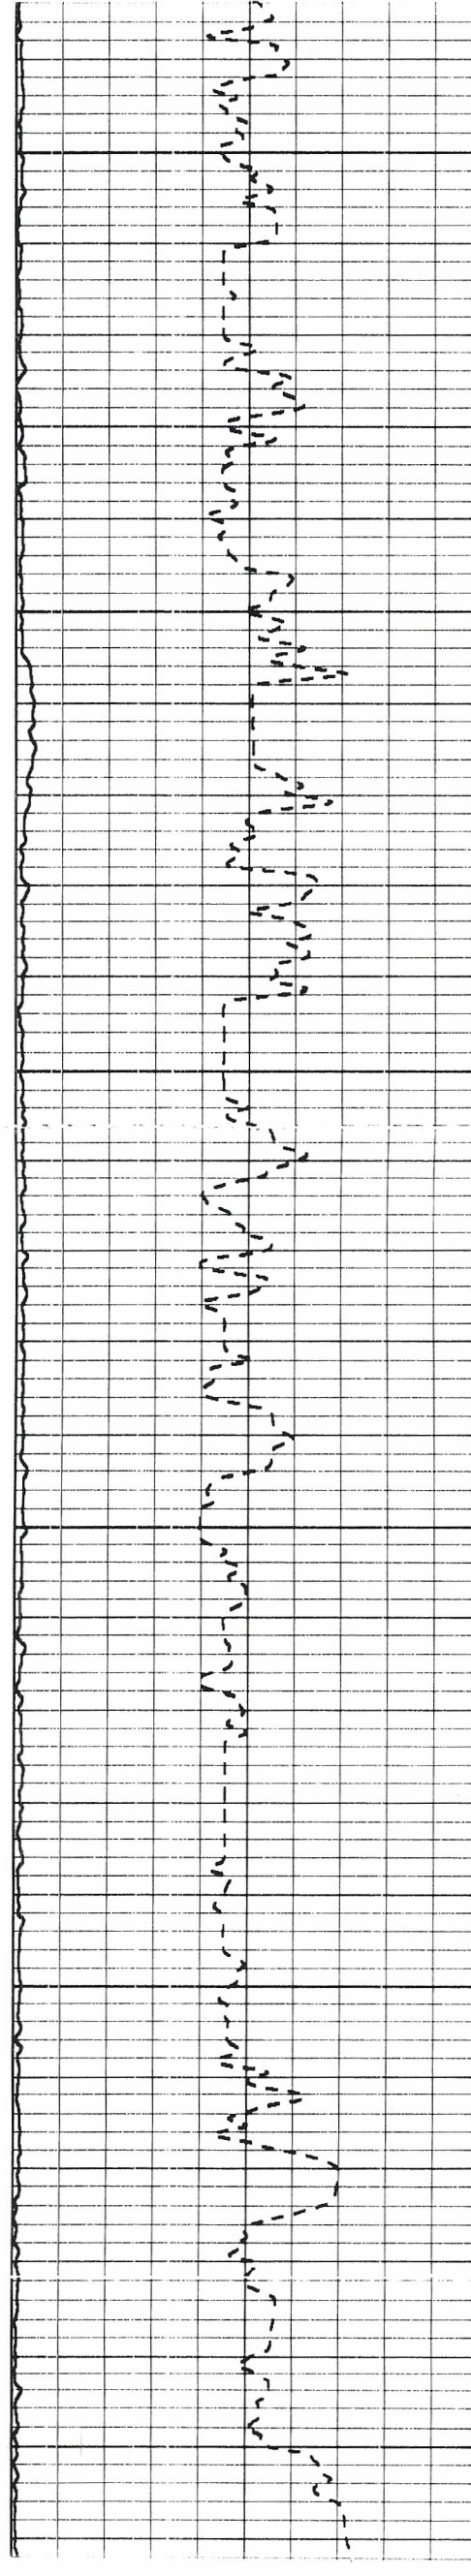

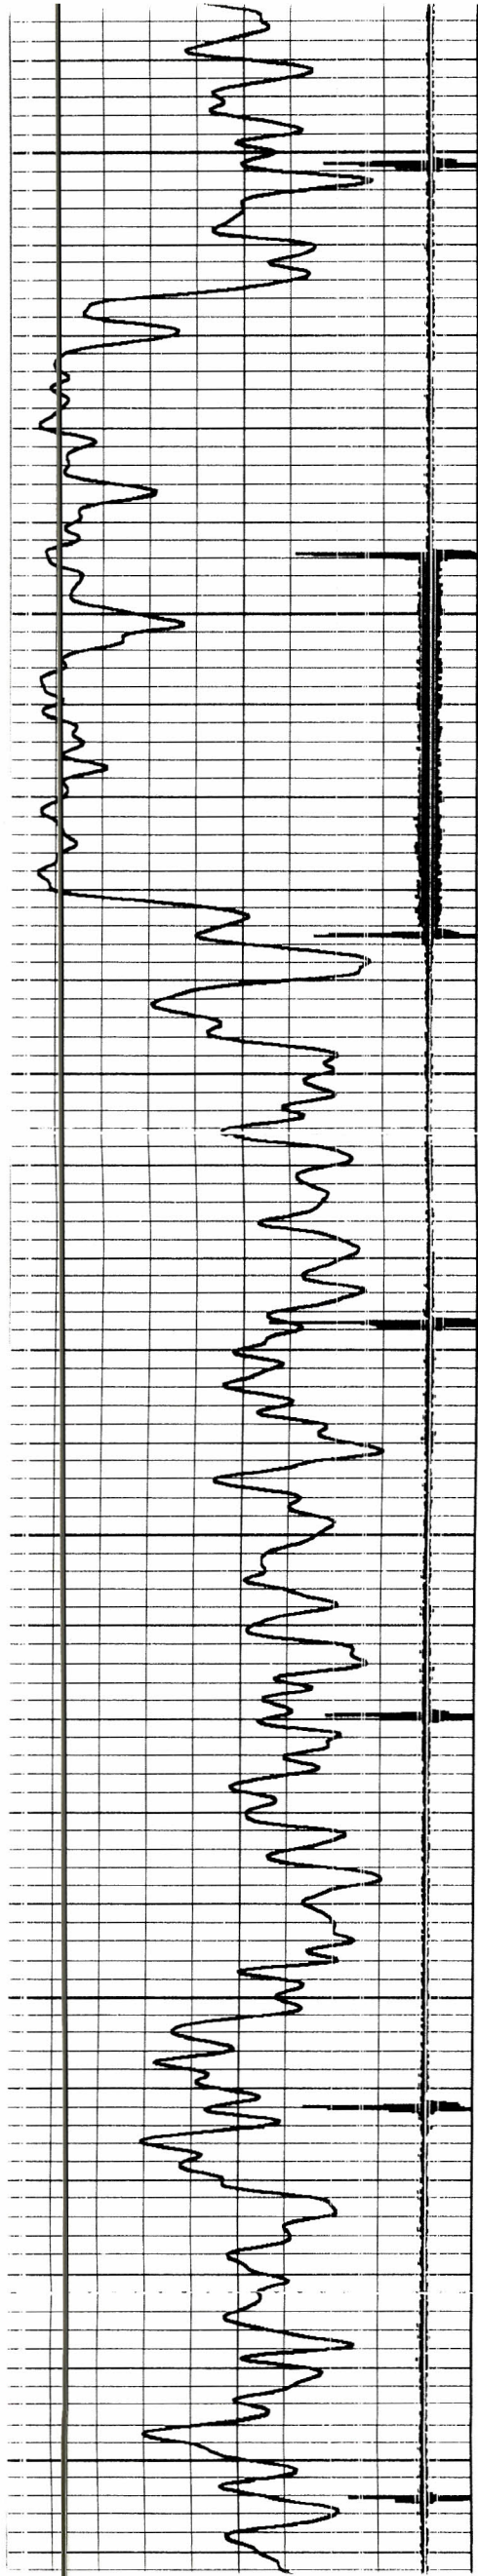

500



550


600

650

700

750

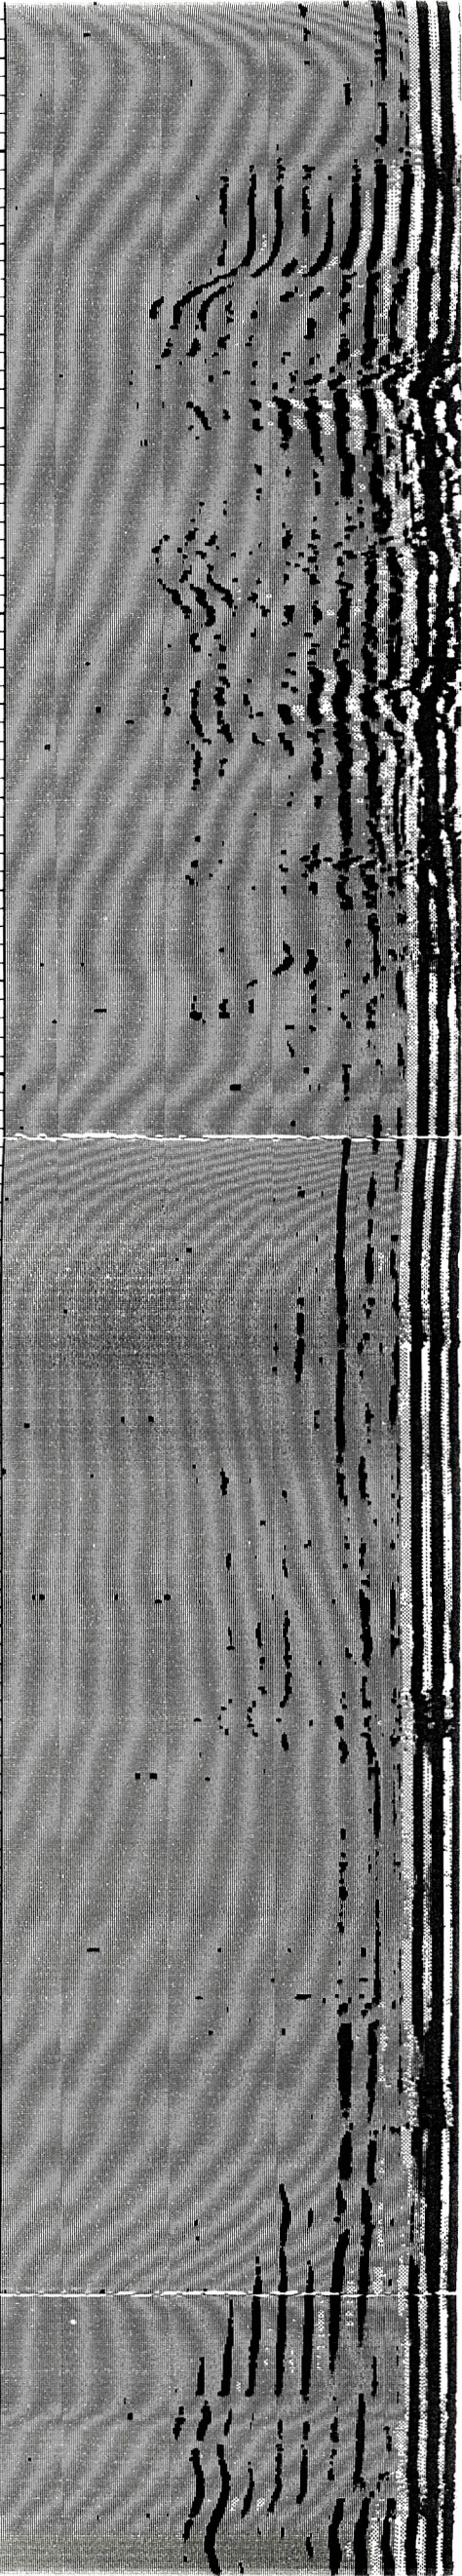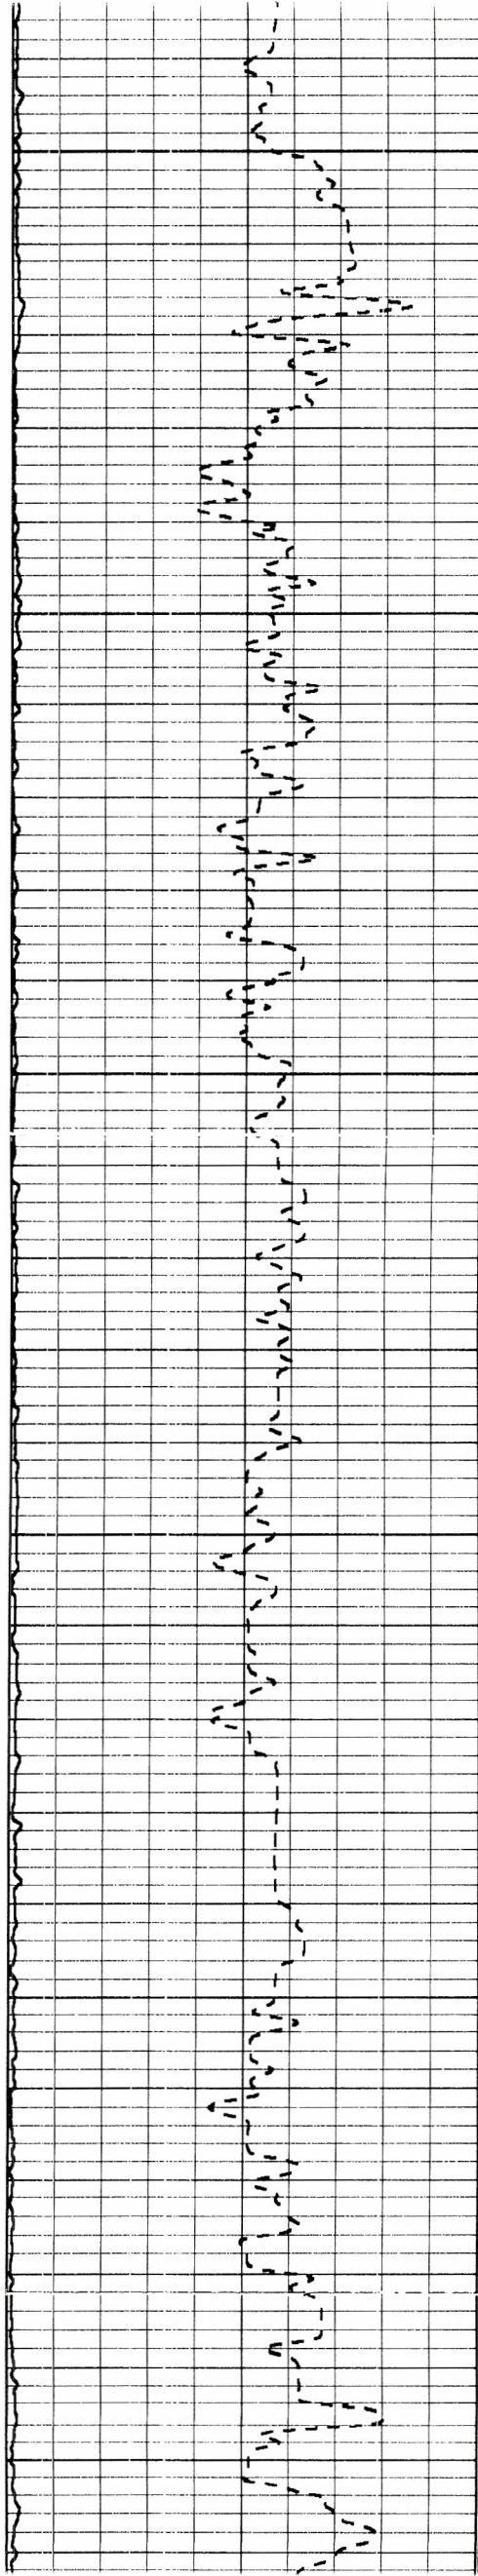

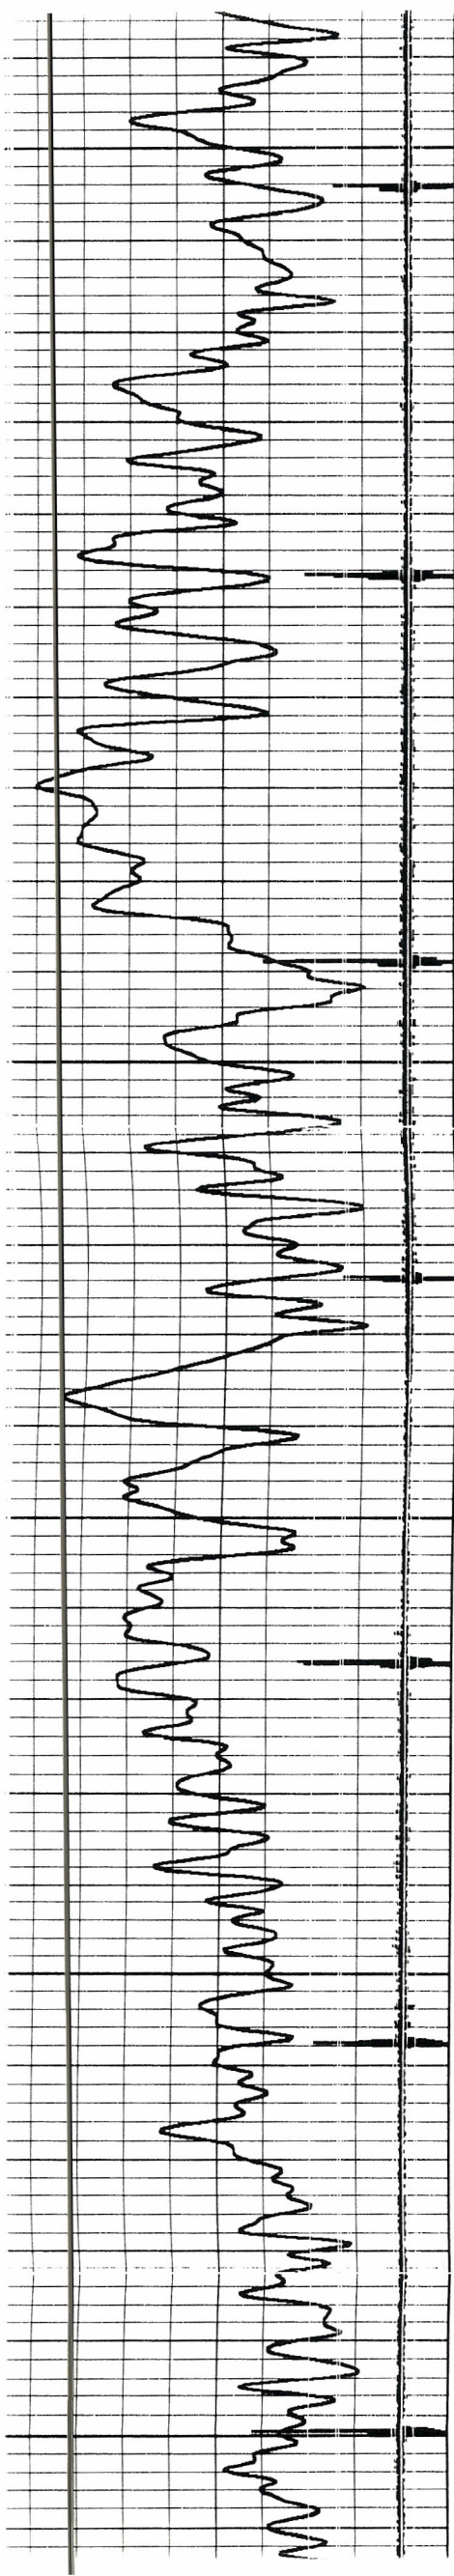

750

800

850

900

950

1000

