



Green Country Wireline

GAMMA RAY
CEMENT BOND LOG
CCL/VDL

Company JONES & BUCK DEVELOPMENT
Well BALES # JBD 19-11
Field PERU-SEDAN
County CHAUTAUQUA
State KANSAS

Company JONES & BUCK DEVELOPMENT
Well BALES # JBD 19-11
Field PERU-SEDAN
County CHAUTAUQUA State KANSAS

Location: API #: 15-019-27148
SE SE NW NW
4125 FSL & 4125 FEL
SEC 19 TWP 34S RGE 12E

Other Services

Elevation 934'

Elevation

Permanent Datum
Log Measured From
Drilling Measured From

K.B.
D.F.
G.L. 934'

Date	4-17-12		
Run Number	1		
Depth Driller	1238'		
Depth Logger	1177'		
Bottom Logged Interval	1176'		
Top Log Interval	SURFACE		
Open Hole Size			
Type Fluid	WATER		
Density / Viscosity			
Max. Recorded Temp.			
Estimated Cement Top	SURFACE		
Time Well Ready			
Time Logger on Bottom			
Equipment Number	3		
Location	DEWEY		
Recorded By	HERRIN		
Witnessed By	MR JONES		

Borehole Record

Tubing Record

Run Number	Bit	From	To	Size	Weight	From	To
Casing Record				Size	Wgt/Ft	Top	Bottom
Surface String				8.625"		SURFACE	40'
Prot. String							
Production String				4.5"		SURFACE	TD
Liner							

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments





Green Country Wireline


GAMMA RAY CEMENT BOND


Database File: bales19-11.db
Dataset Pathname: bales19-1/r.un1/pass1
Presentation Format: cbl_dr
Dataset Creation: Tue Apr 17 08:03:29 2012 by Log Std Casedhole 09061
Charted by: Depth in Feet scaled 1:240

9	Collar Locator	-1	-1	Amplitude (mV)	90	200	Variable Density	120
0	Gamma Ray (GAPI) (GAPI)	60	1000	Travel Time (usec)	250			



9	Collar Locator	-1	-1	Amplitude (mV)	90	200	Variable Density	1200
0	Gamma Ray (GAPI) (GAPI)	60	1000	Travel Time (usec)	250			

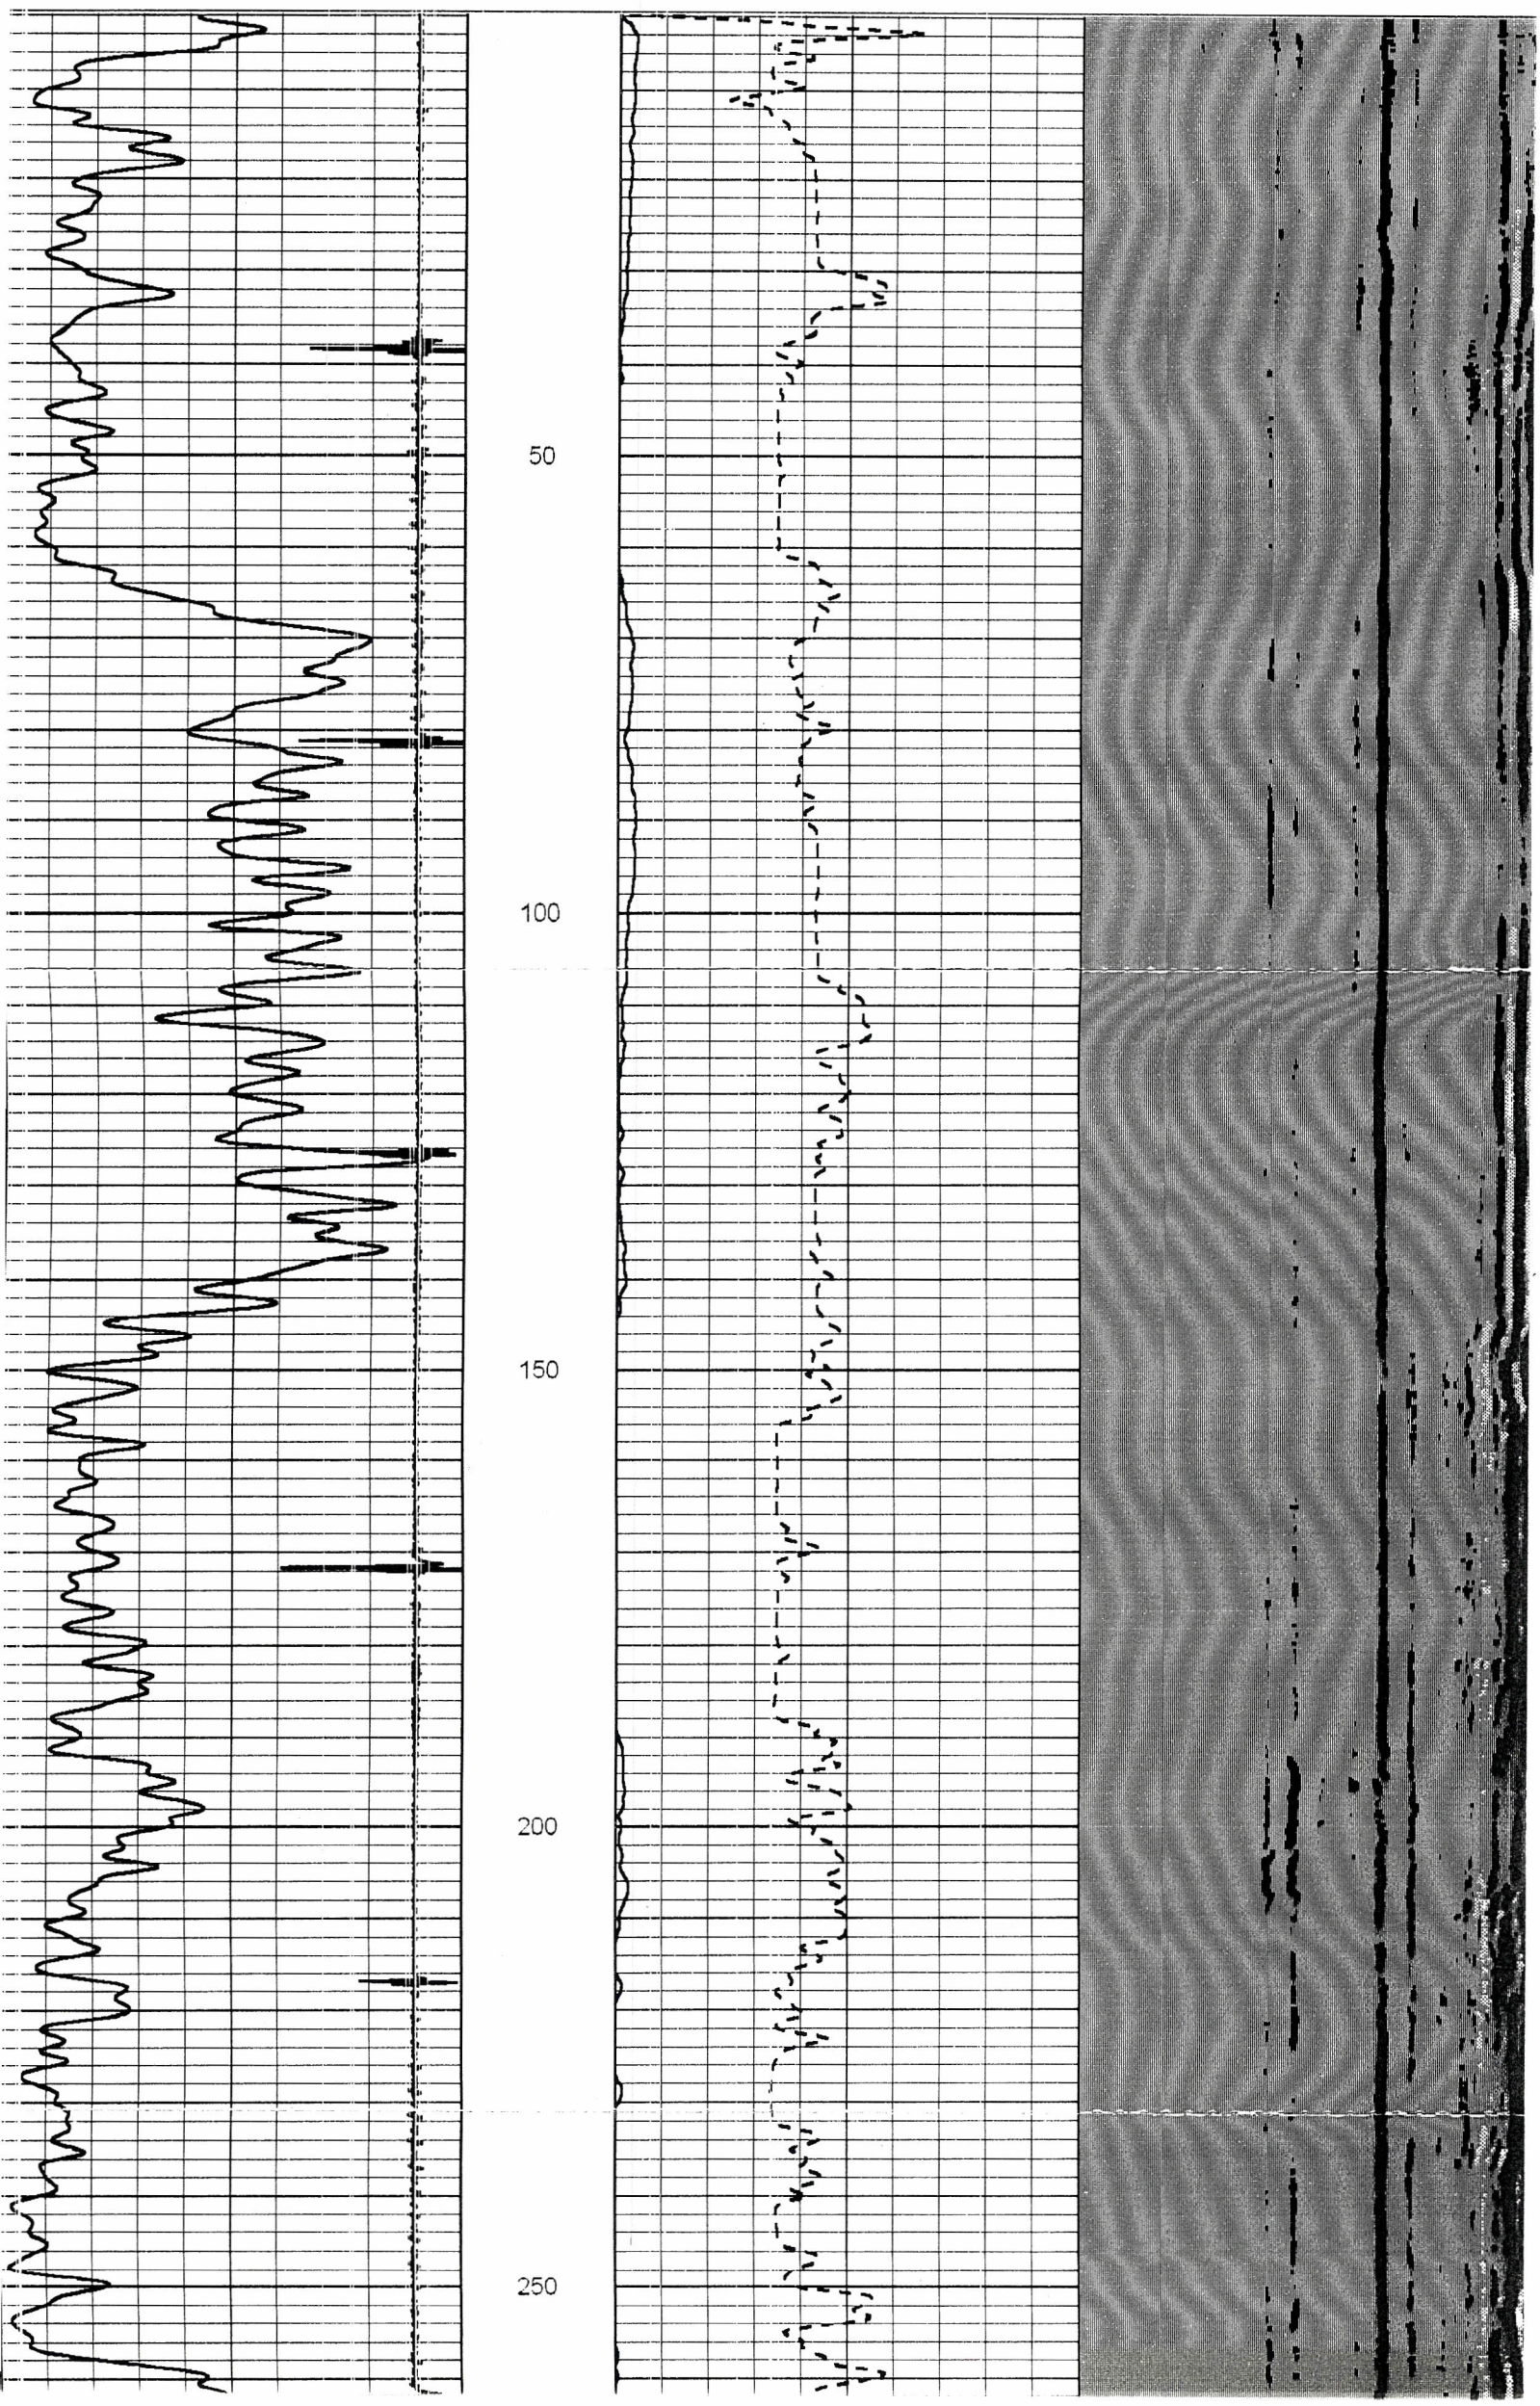

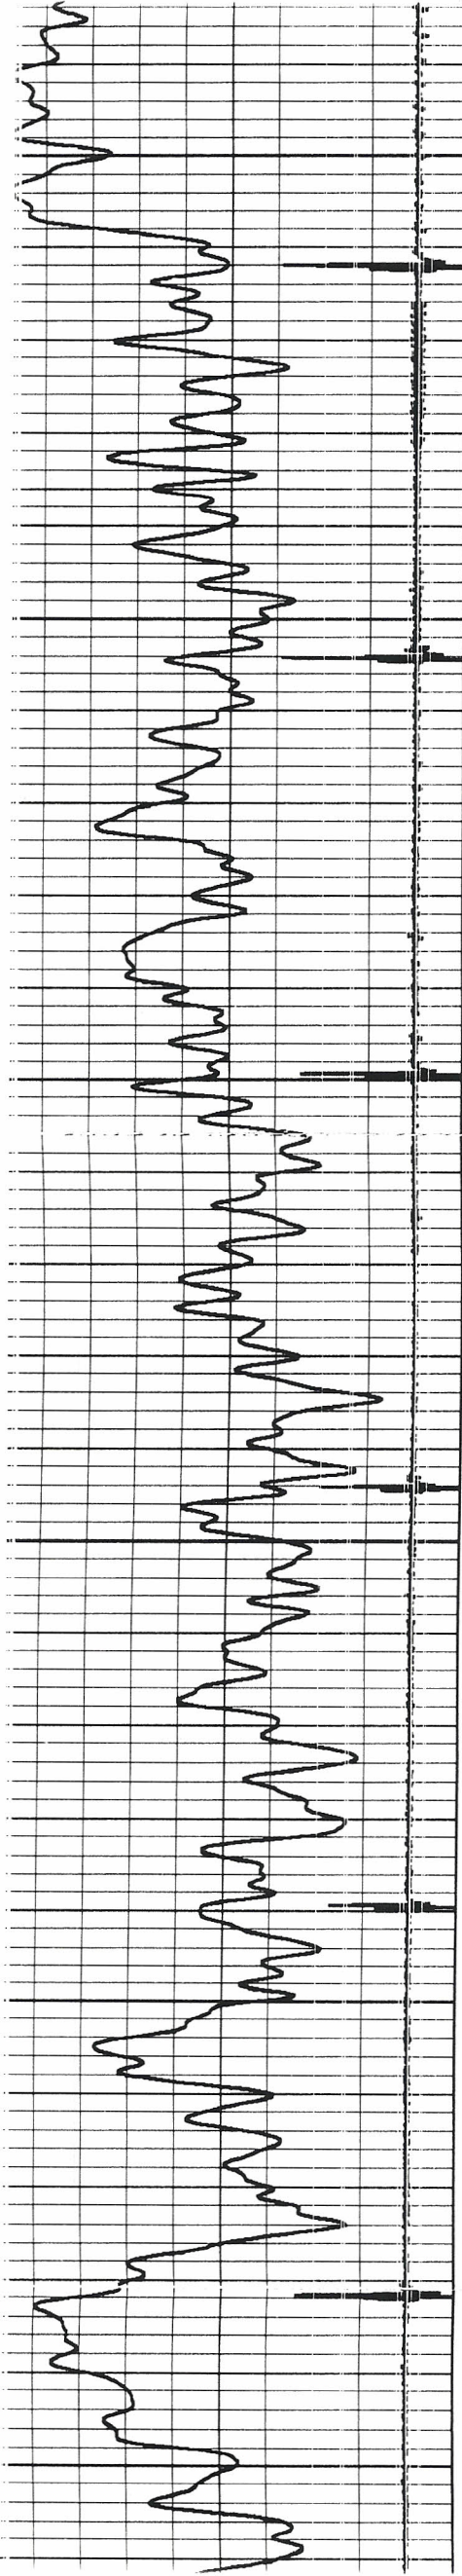

250



300


350

400

450

500

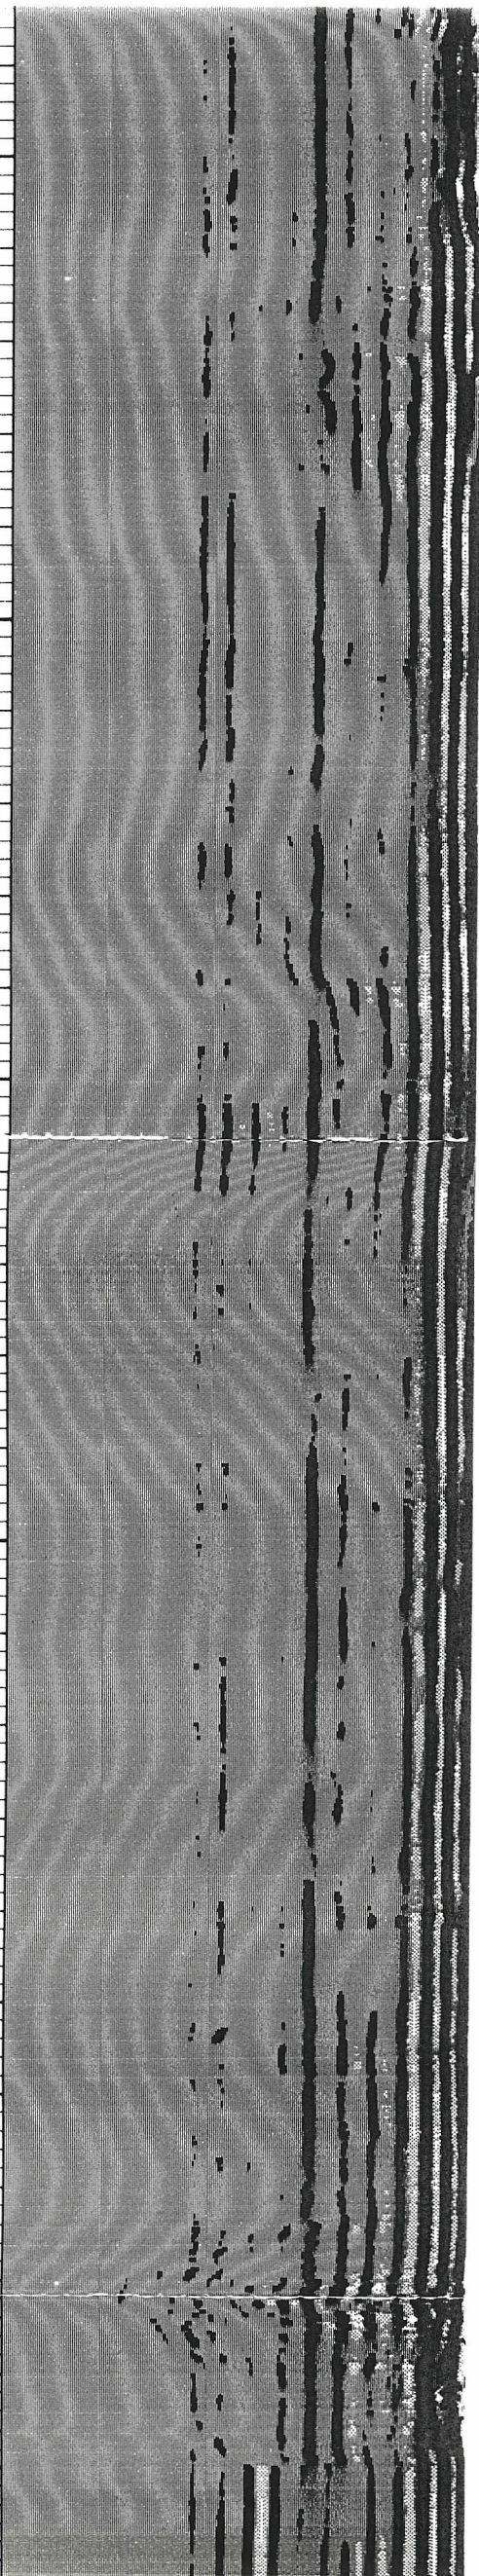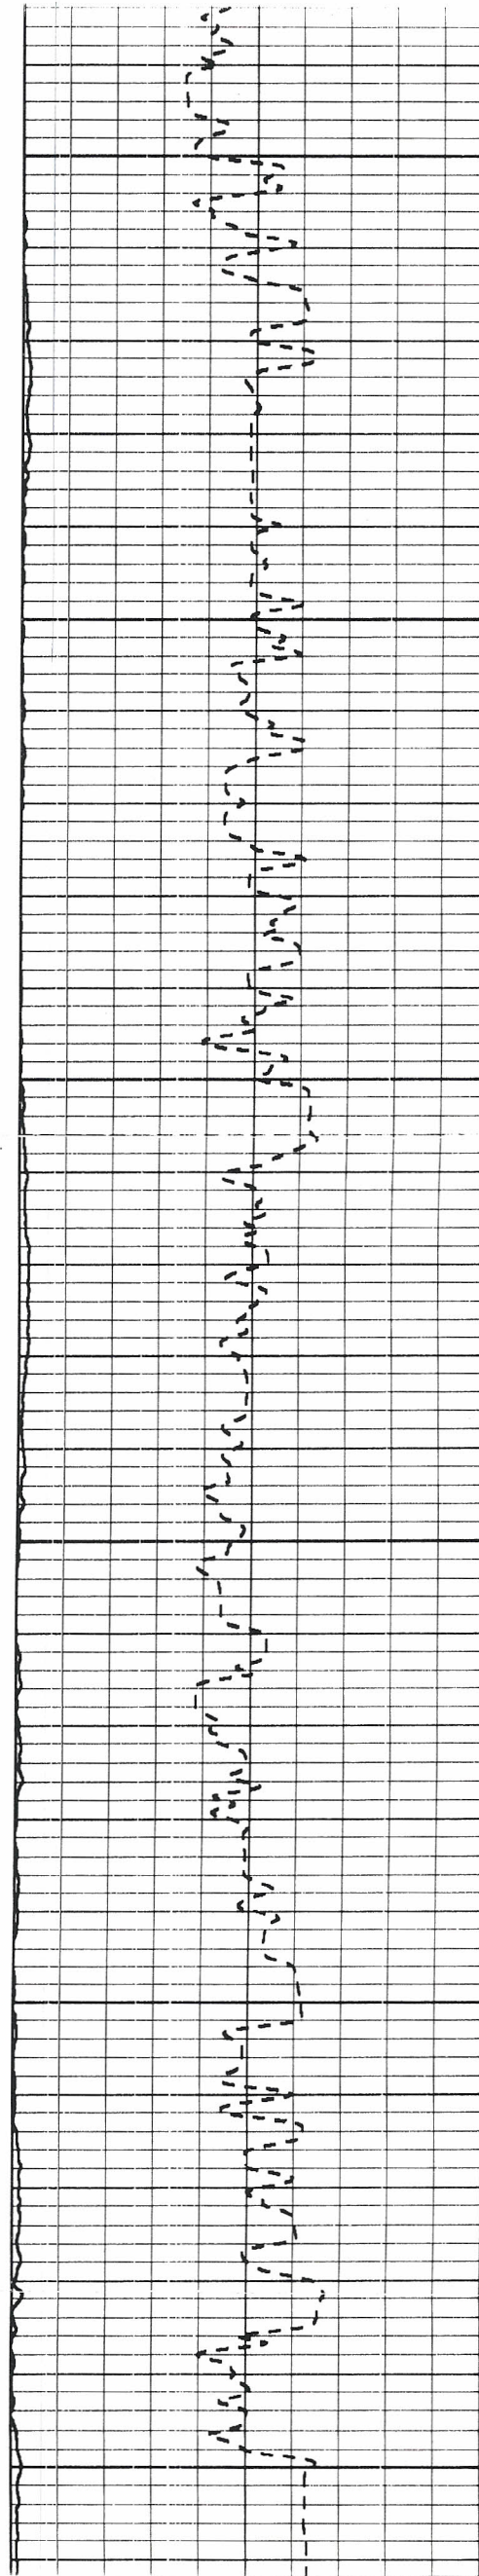

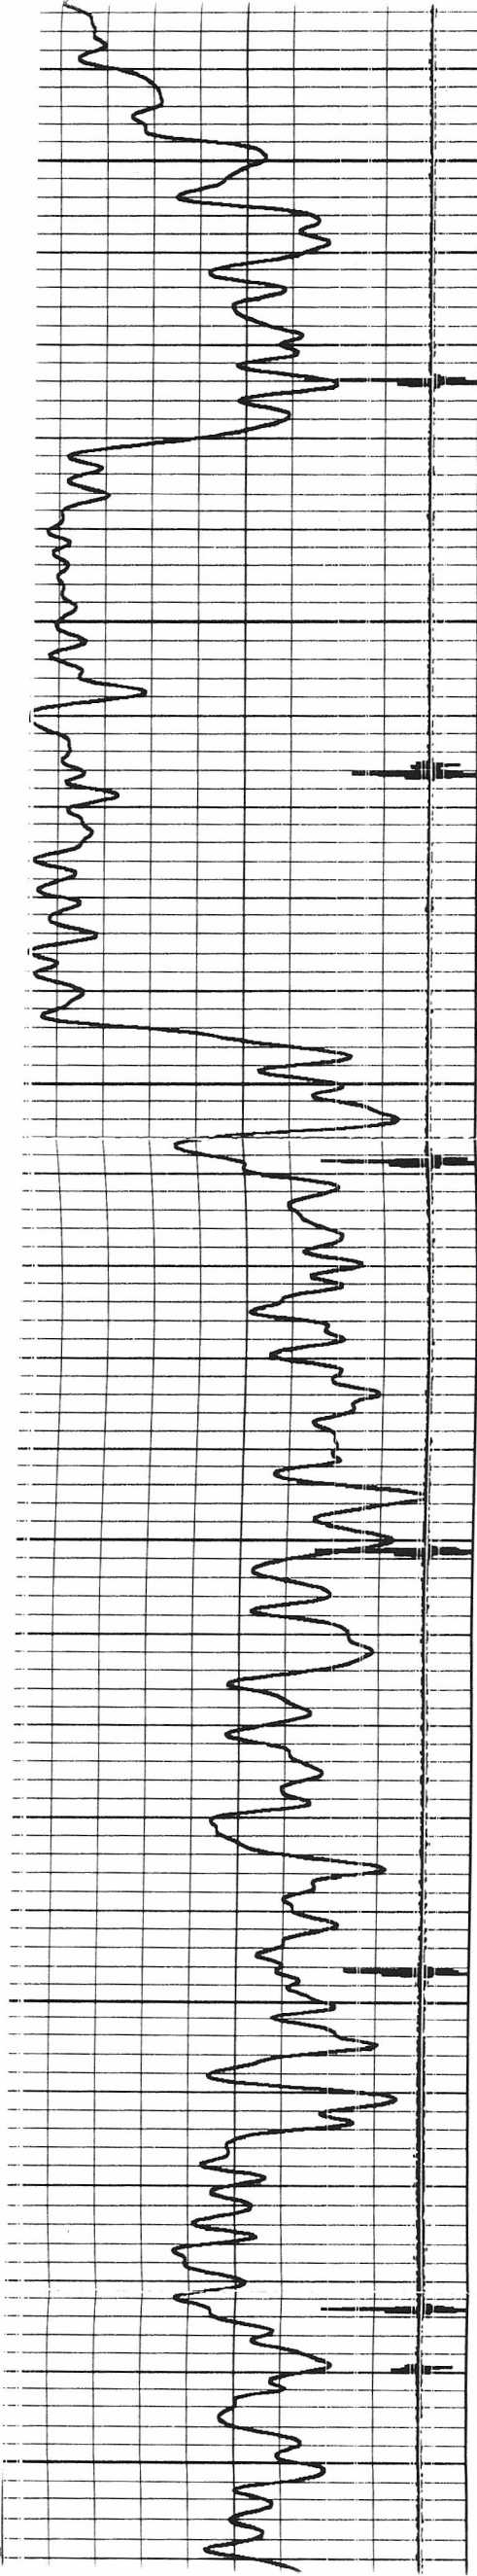

500



550


600

650

700

750

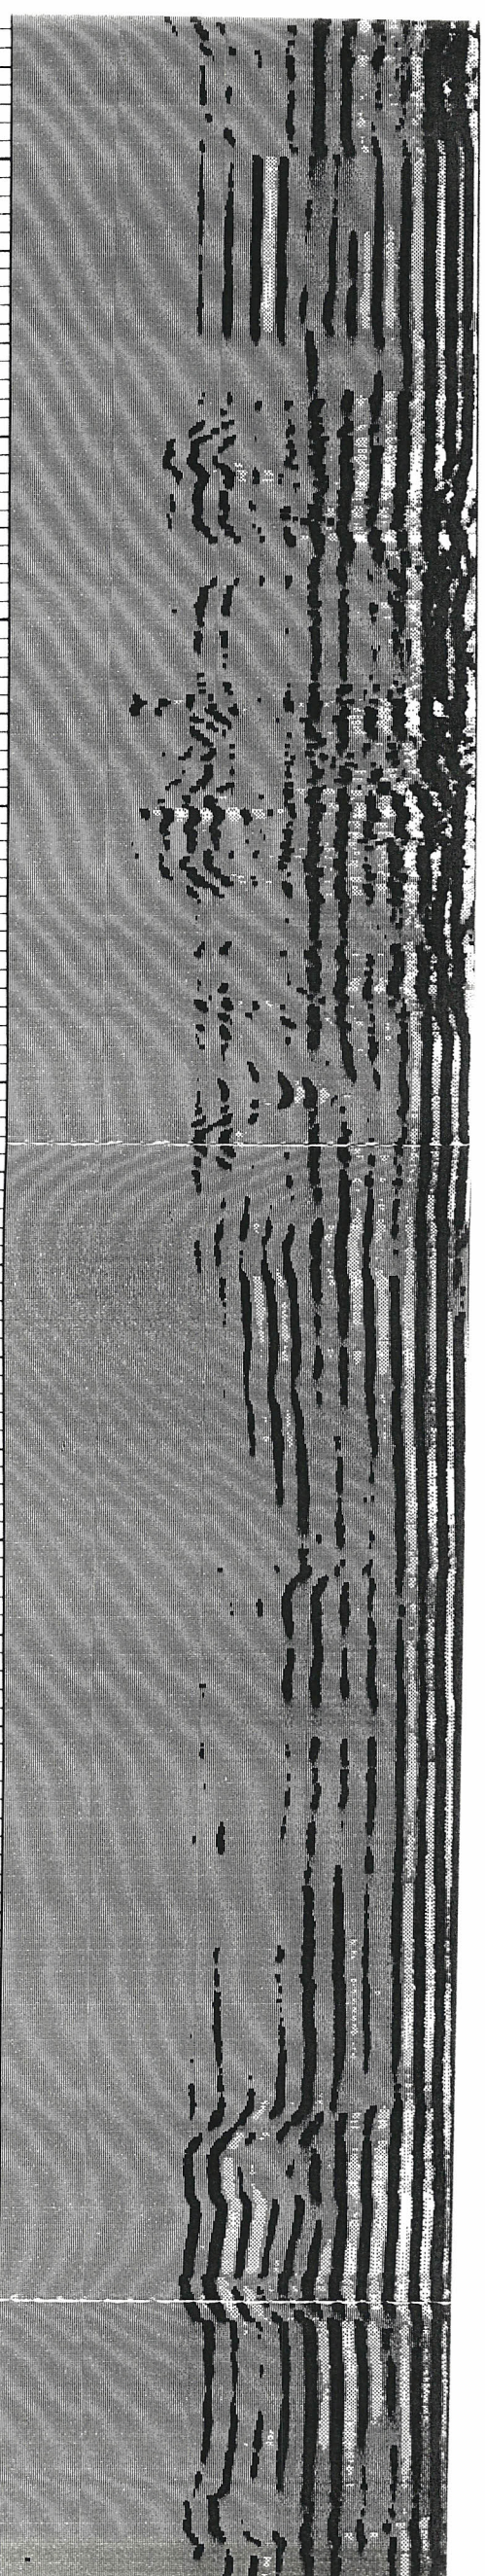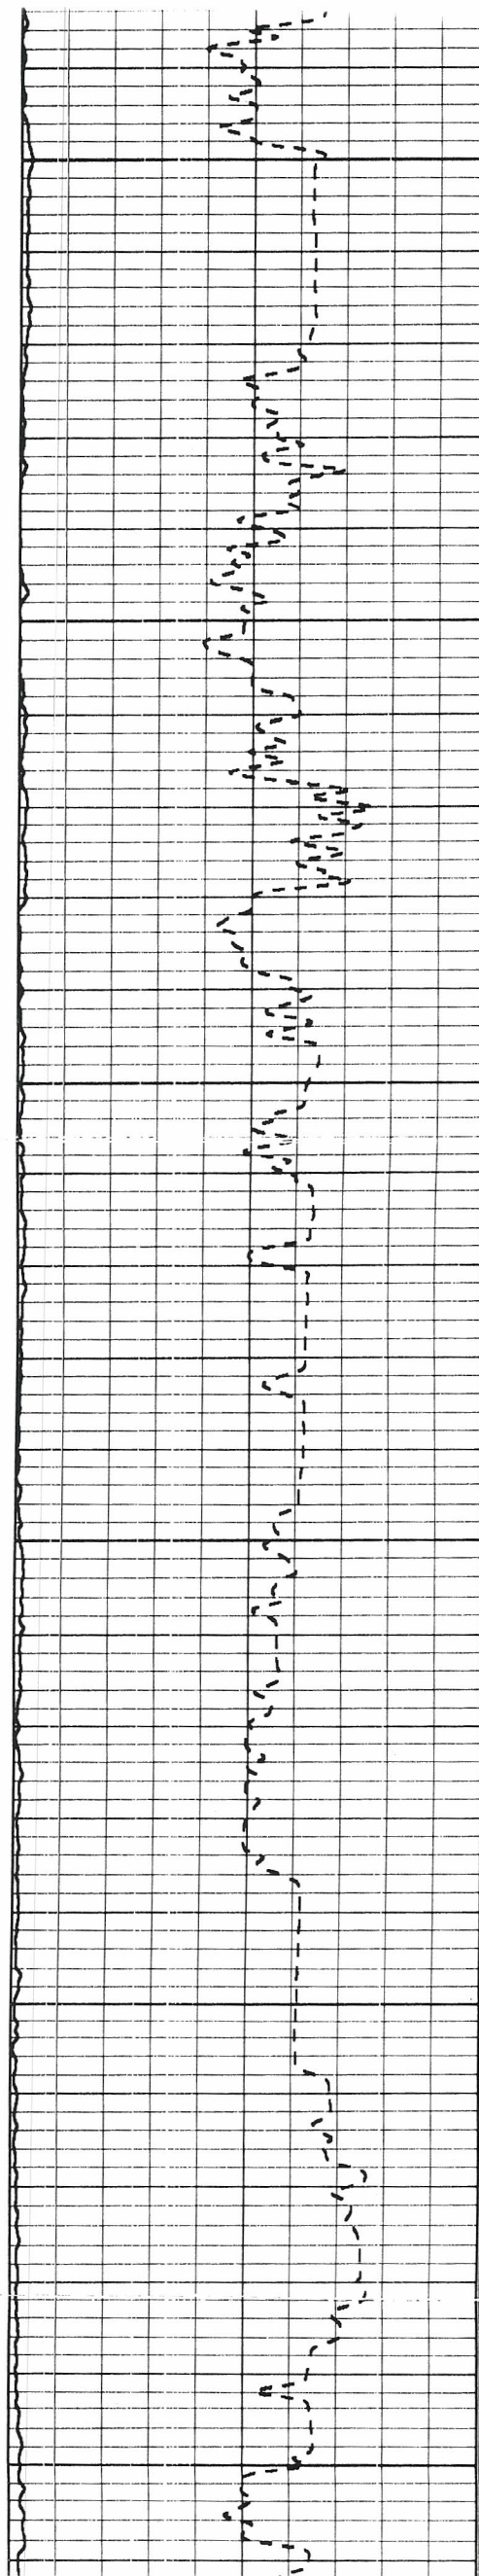

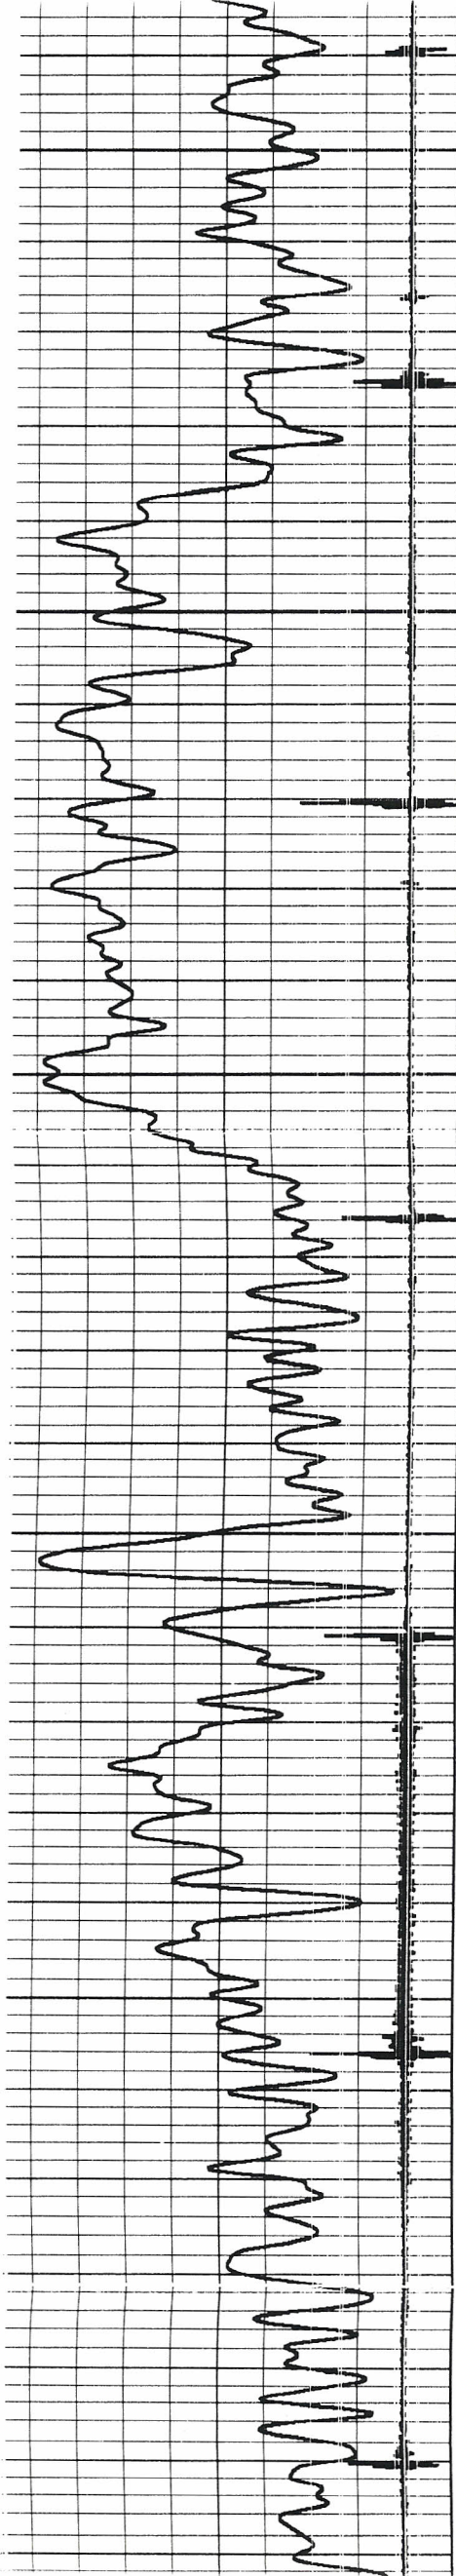

750

800

850

900

950

1000

