


15-179-20511-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Sheridan County. Sec. 24 Twp. 6 Rge. 26 E/W  
Location as "NE/CNW/SW" or footage from lines 200' SE of NW SW SE  
Lease Owner Baird Oil Co., Inc.  
Lease Name Marx #1 Well No. \_\_\_\_\_  
Office Address Logan, Kansas 67646  
Character of Well (Completed as Oil, Gas or Dry Hole) \_\_\_\_\_

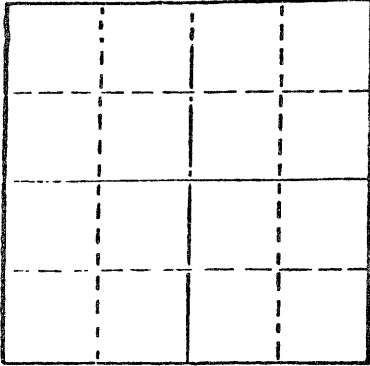

Locate well correctly on above  
Section Plat

Date Well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging approved \_\_\_\_\_ 19\_\_\_\_  
Plugging commenced 9/19/79 \_\_\_\_\_ 19\_\_\_\_  
Plugging completed 9/23/79 \_\_\_\_\_ 19\_\_\_\_  
Reason for abandonment of well or producing formation  
depleted.  
If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Balthazor  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3851  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				<u>8-5/8</u>	<u>330</u>	<u>none</u>
				<u>4 1/2"</u>	<u>3919</u>	<u>1029'</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Pushed plug to 3700' and ran 25' sand and 4 sacks cement. Shot pipe at 3103', 2487', 2187', 1909', 1500', 1208', 1021', worked pipe loose and pulled 30 joints. Pumped 2 sacks hulls, 70 sacks cement, 25 sacks gel, 2 sacks hulls, released plug and pumped 70 sacks cement.

PLUGGING COMPLETE.

STATE RECEIVED  
CORPORATION COMMISSION

OCT - 1 1979

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KELSO CASING PULLING  
CHASE, KANSAS

10-1-79

STATE OF KANSAS COUNTY OF RICE, ss.  
R. DARRILL KELSO (employee of owner) or (owner, or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso  
CHASE, KANSAS  
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of \_\_\_\_\_, 1979

Margaret Melcher  
Notary Public.

My commission expires \_\_\_\_\_

