


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

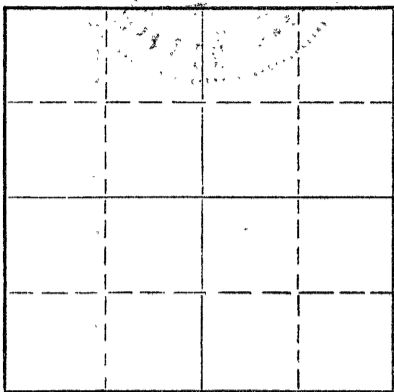

Locate well correctly on above Section Plat

Sheridan County, Sec. 24 Twp. 6 Rge. 26 (E) (W) x
Location as "NE/CNW/SW" or footage from lines NW SW SE
Lease Owner A. L. Abercrombie Inc.
Lease Name Marx Well No. #1
Office Address 801 Union Center Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 10-30-67 19____
Plugging completed 11-2-67 19____
Reason for abandonment of well or producing formation _____
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

Name of Conservation Agent who supervised plugging of this well W. L. Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3939' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	3938'	1132.56'
				7"	318'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Made bottom hole plug back with sand to 3820', Mixed and 4an 3 sacks cement thru dump bailer.
Squeezed hole with 7 sacks gel and 5 sacks hulls then 65 sacks cement. Cement from 1125' to 800', then 7 sacks gel. Gel from 800' to 325'. Then 15 sacks cement. Cement from 325' to 250', then 3 sacks gel. Gel from 250' to 30'. Displaced with 5 sacks cement. Cement from 30' to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

NOV 6 1967

CONSERVATION DIVISION
WICHITA, KANSAS

11-6-67

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co., Inc.
Address Box 364, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

Southwest Casing Pulling Co., Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.
Box 364, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 3 day of November, 1967

My commission expires October 1968

Sidney D. Miller
Notary Public.

