



Dual Induction Log

DIGITAL LOG (785) 625-3858

API No.		Company Larson Engineering, Inc.	
15-101-22,335-00-00		Well SS No. 1-10	
Field Wildcat		County Lane State Kansas	
Location		SE SE SE 330' FSL & 330' FEL	
Sec: 10 Twp: 19S Rge: 29W		Other Services CNL/CDL MEL	
Permanent Datum Ground Level		Elevation 2816	
Log Measured From Kelly Bushing		7 Ft. Above Perm. Datum	
Drilling Measured From Kelly Bushing		K.B. 2823 D.F. 2816 G.L. 2816	
Date	1/24/2012		
Run Number	One		
Depth Driller	4660		
Depth Logger	4659		
Bottom Logged Interval	4658		
Top Log Interval	250		
Casing Driller	8.625 @ 262		
Casing Logger	261		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity,ppm CL	2000		
Density / Viscosity	9.1 48		
pH / Fluid Loss	9.0 7.2		
Source of Sample	Flowline		
Rm @ Meas. Temp	.78 @ 48		
Rmf @ Meas. Temp	.59 @ 48		
Rmc @ Meas. Temp	1.05 @ 48		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.31 @ 123		
Operating Rig Time	4 Hours		
Max Rec. Temp. F	123		
Equipment Number	10		
Location	Hays		
Recorded By	J. Long		
Witnessed By	Bob Lewellyn		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments



Thank you for using Log-Tech, Inc.
(785) 625-3858



Dighton, 2 South to 130 Road, 2 West to Jagger Road, 3 South, West Into



0	Gamma Ray	150
-200	SP (mV)	0



0	Shallow Resistivity	50
0	Deep Resistivity	50
1000	Conductivity	0
15000	Line Tension	0
50	Shallow Resistivity	500
50	Deep Resistivity	500



LSPD
0
0

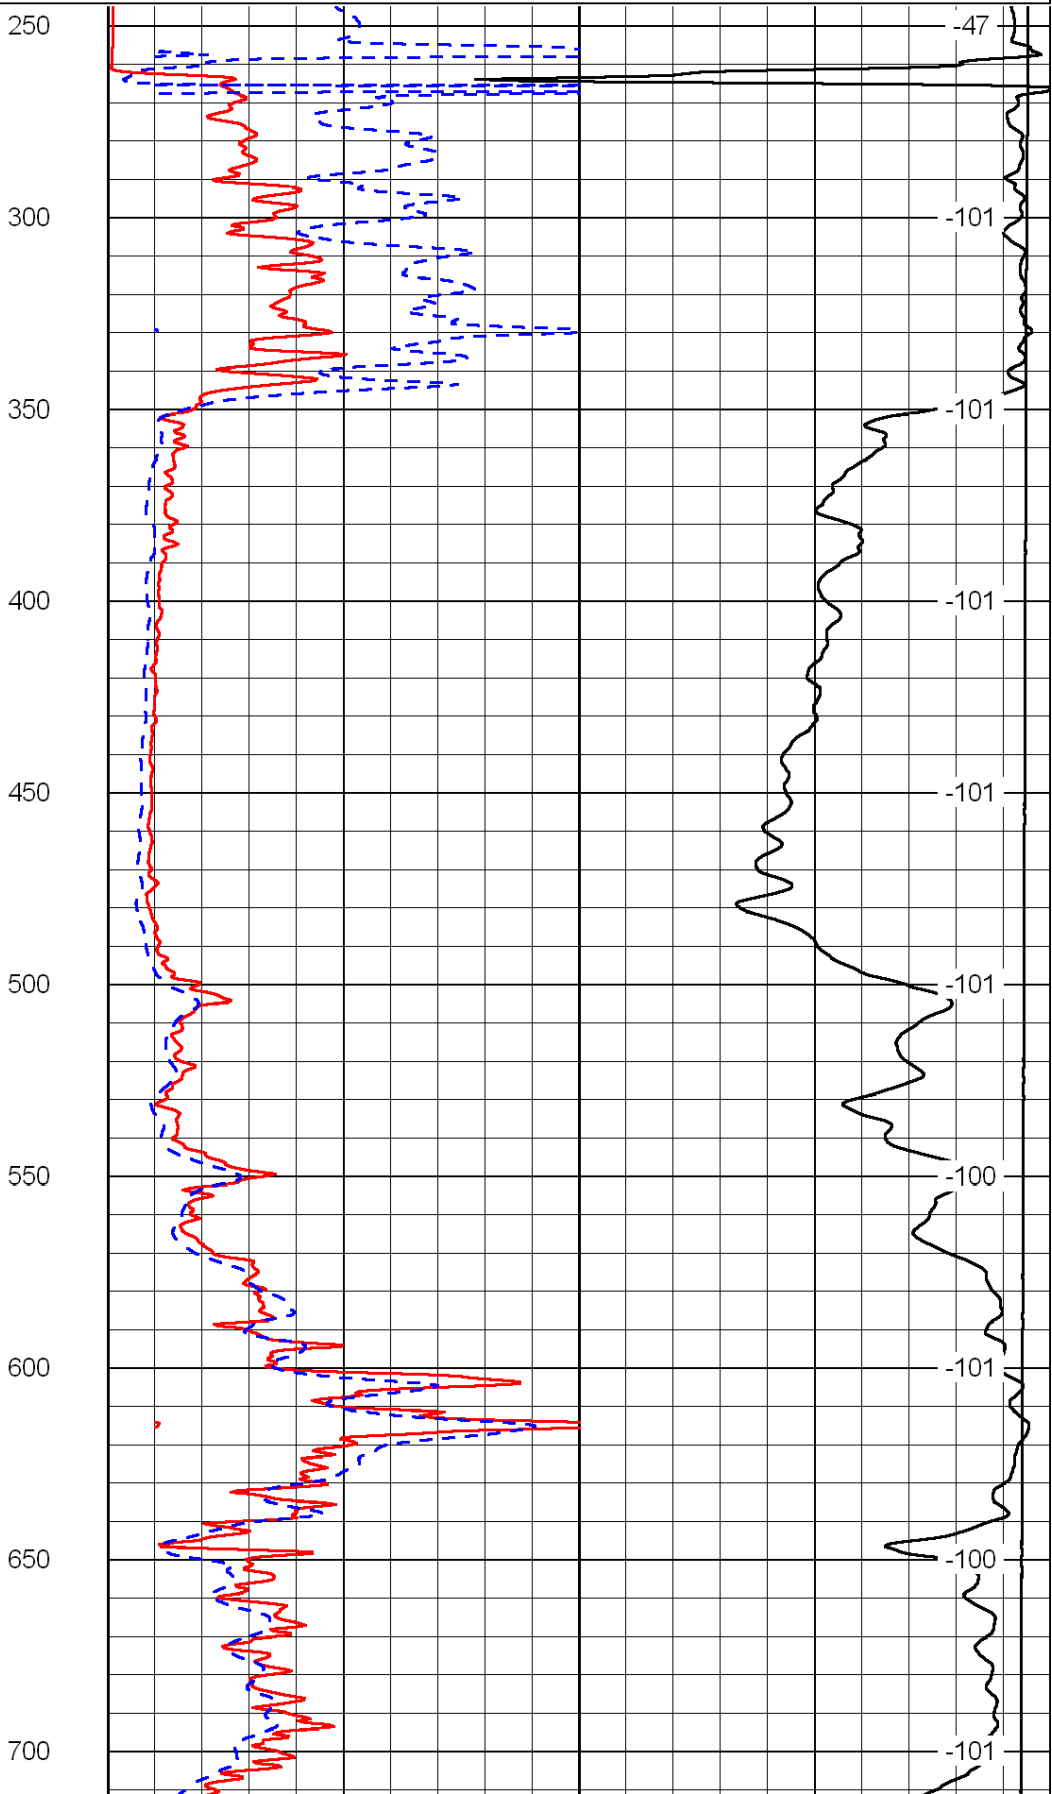
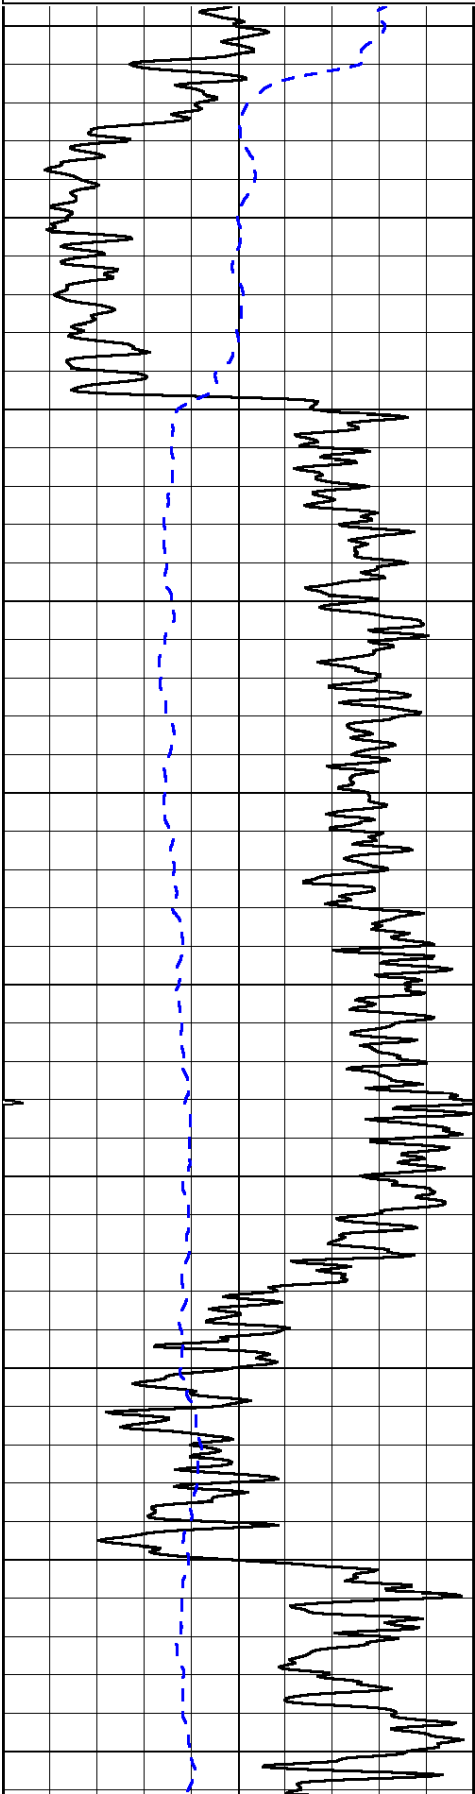



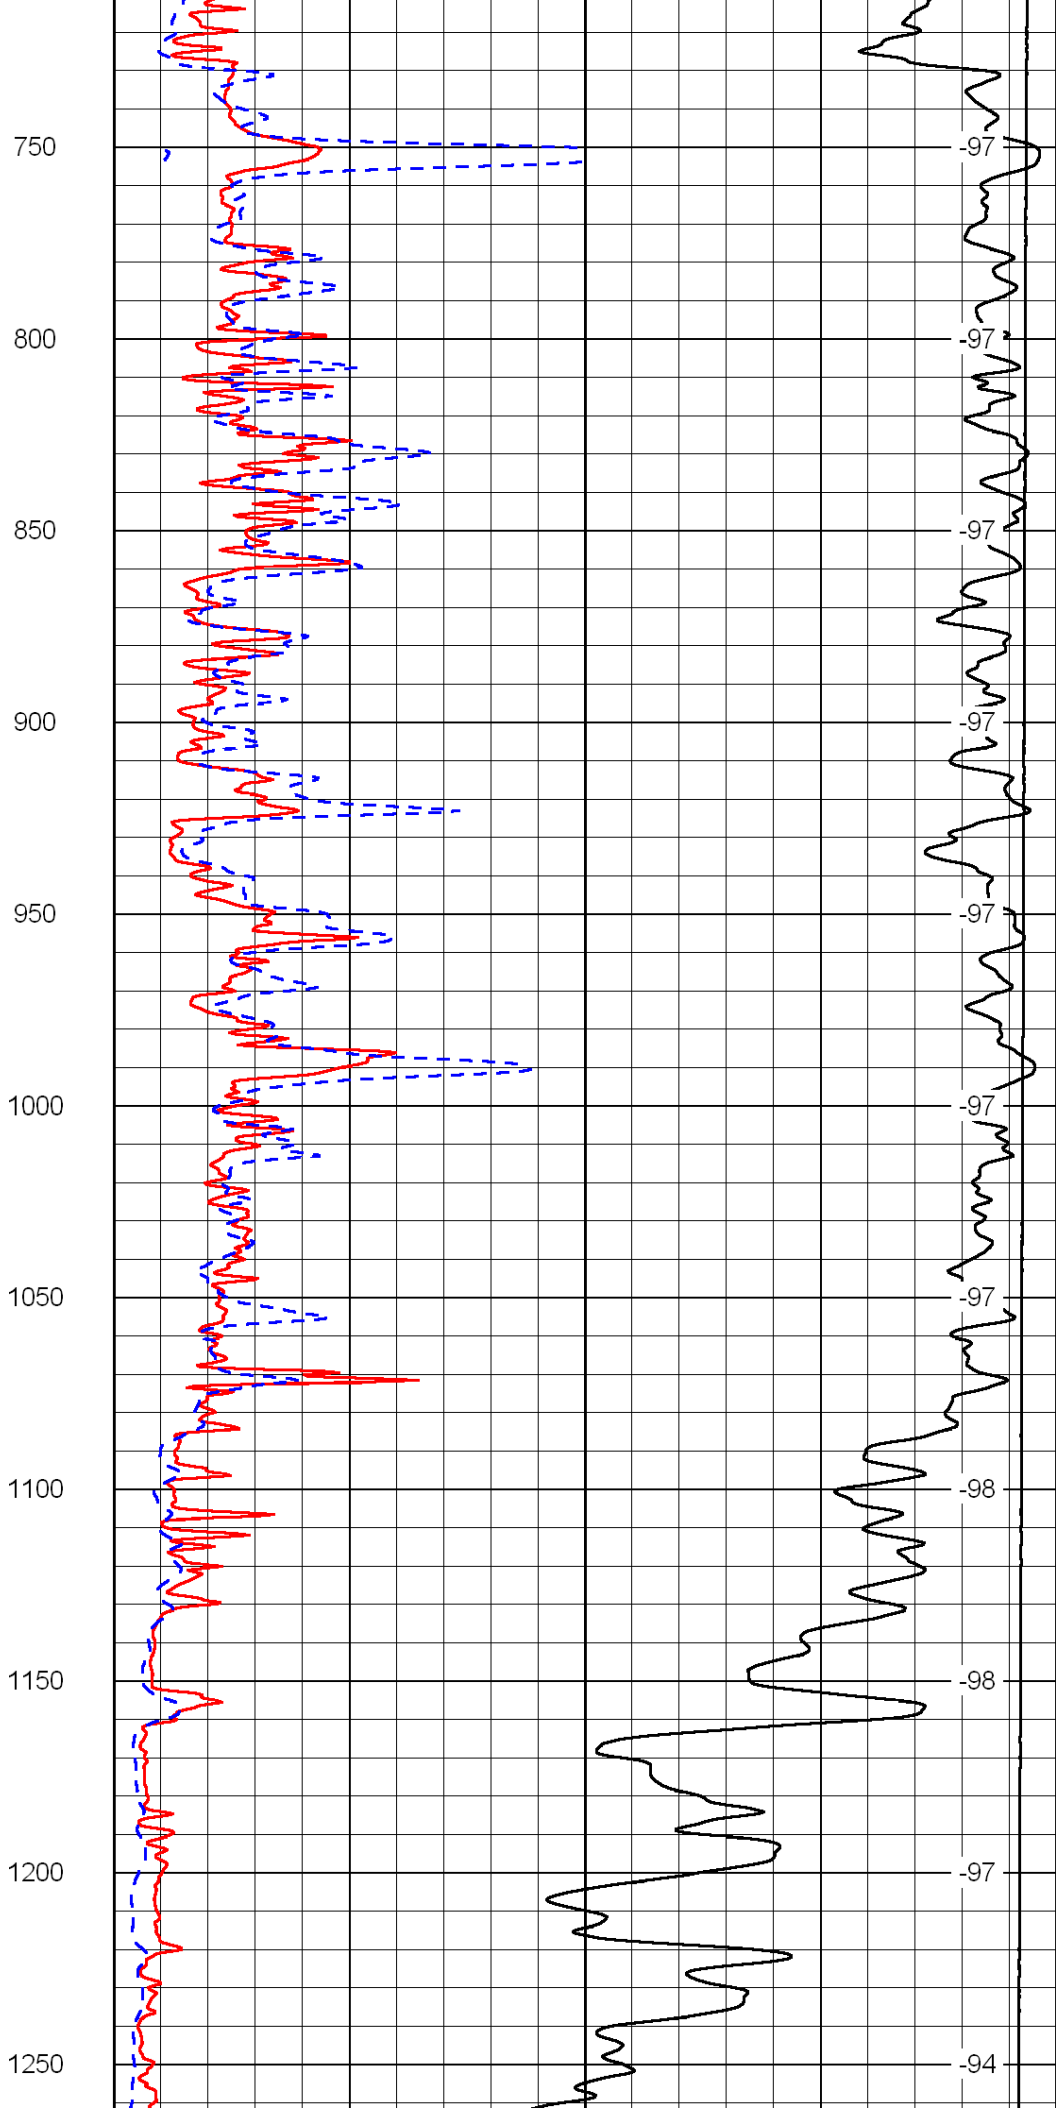
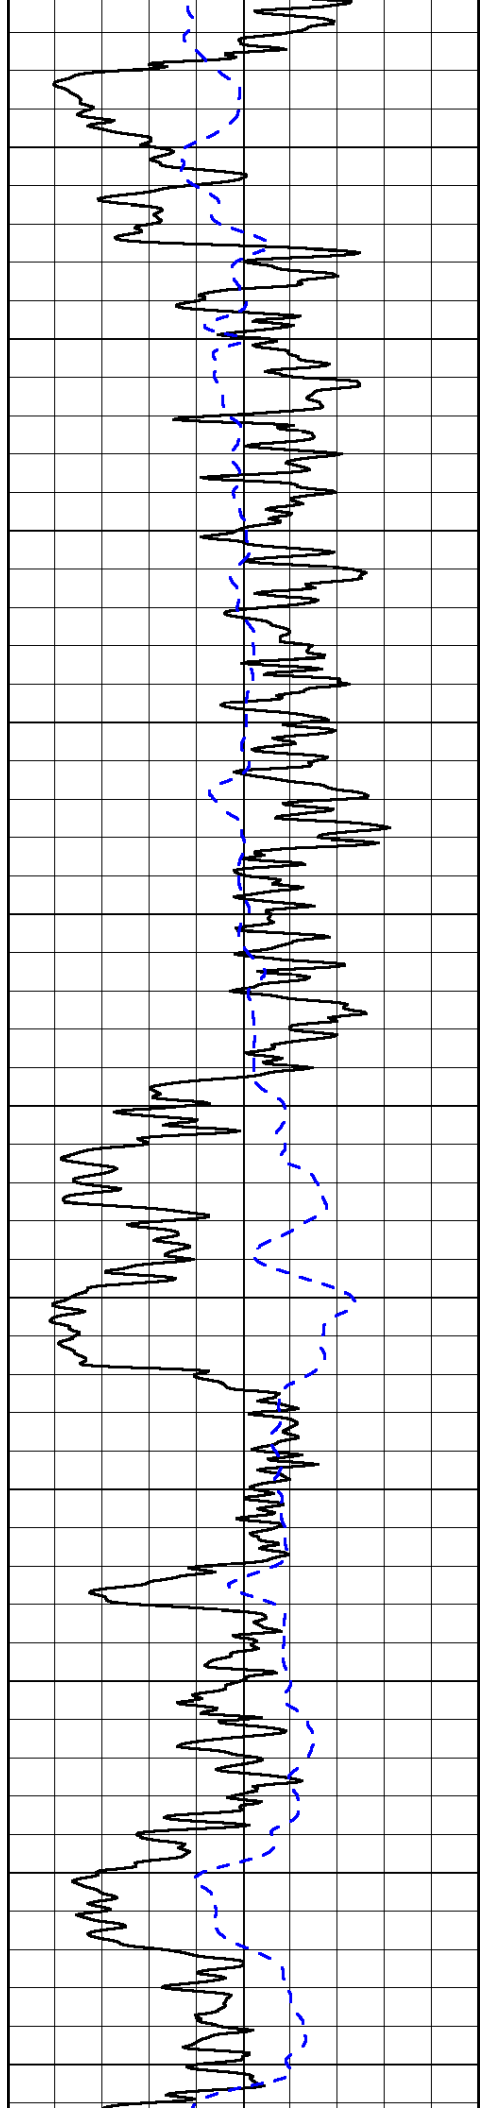



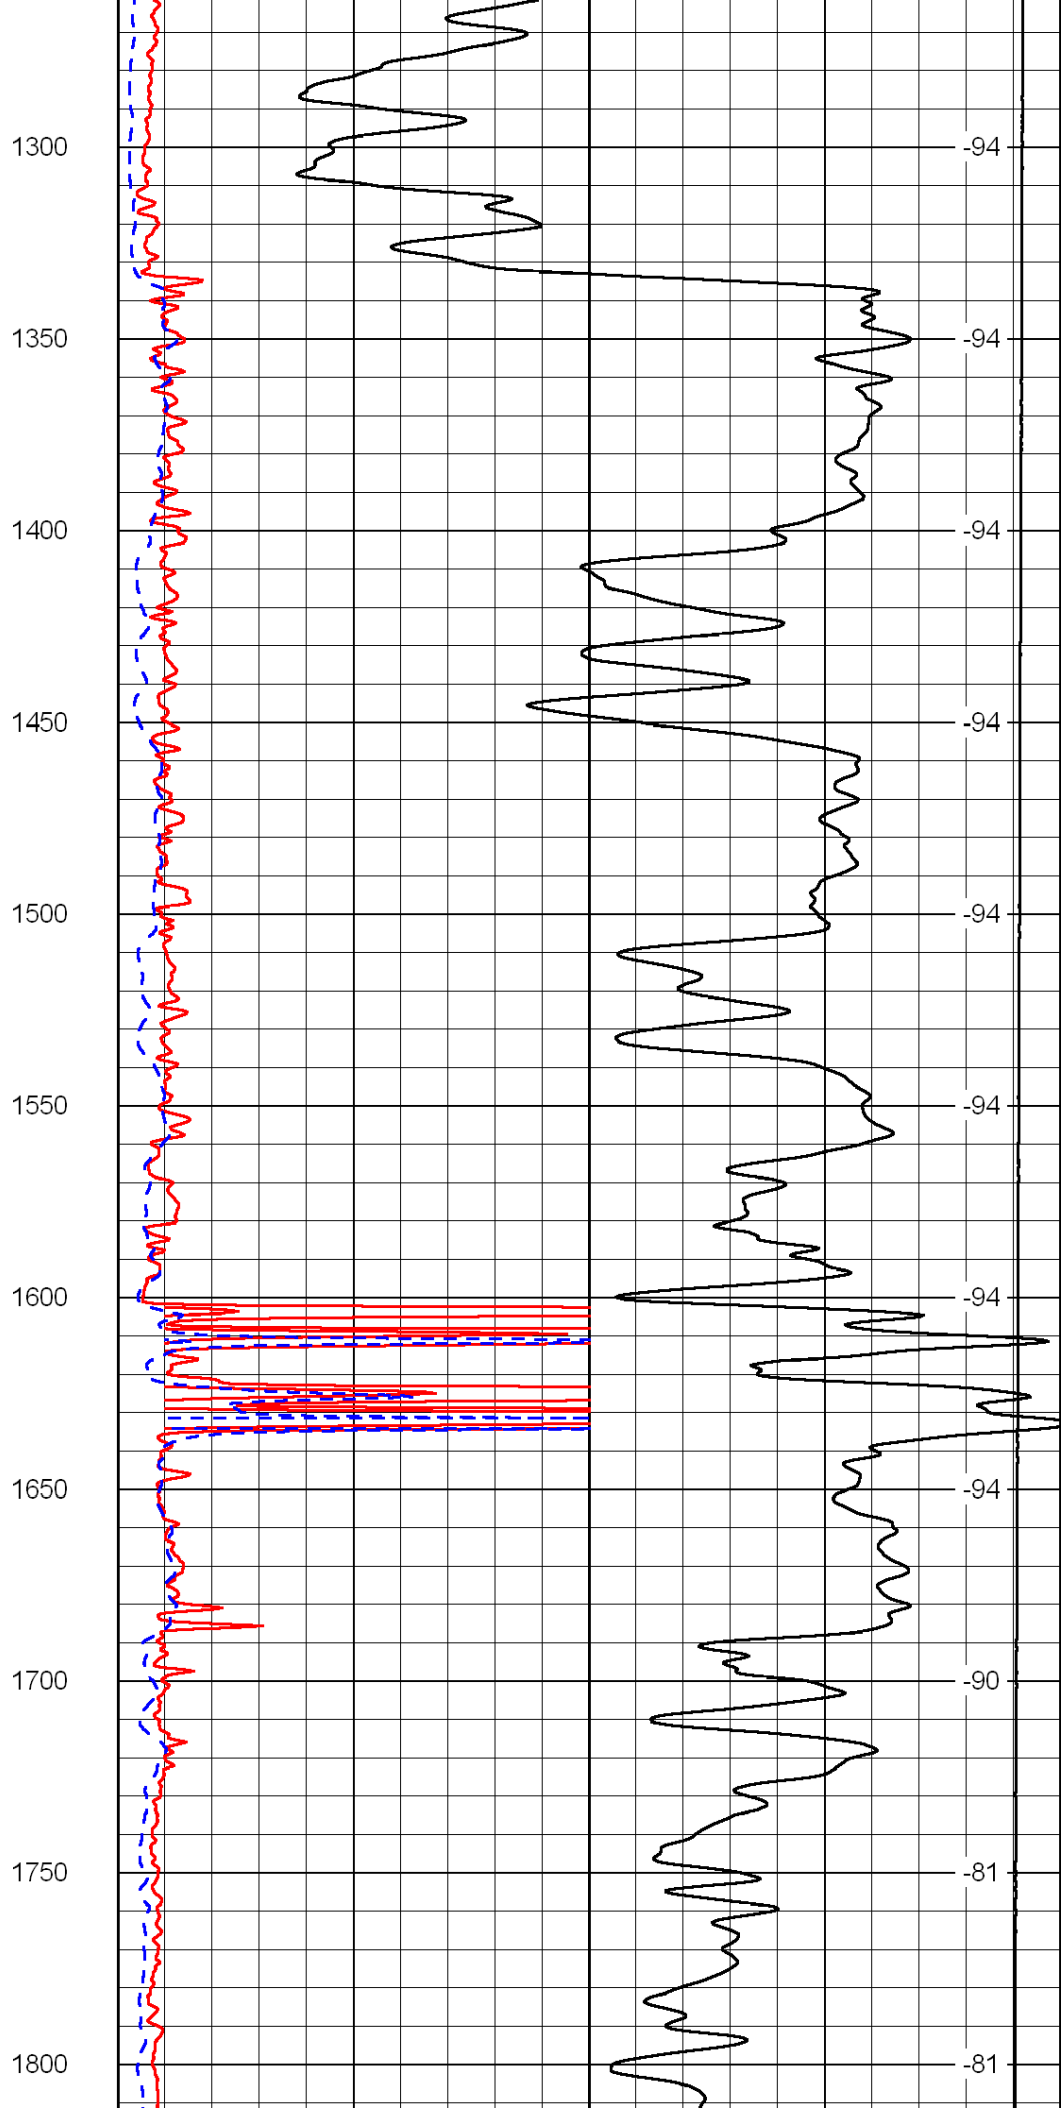
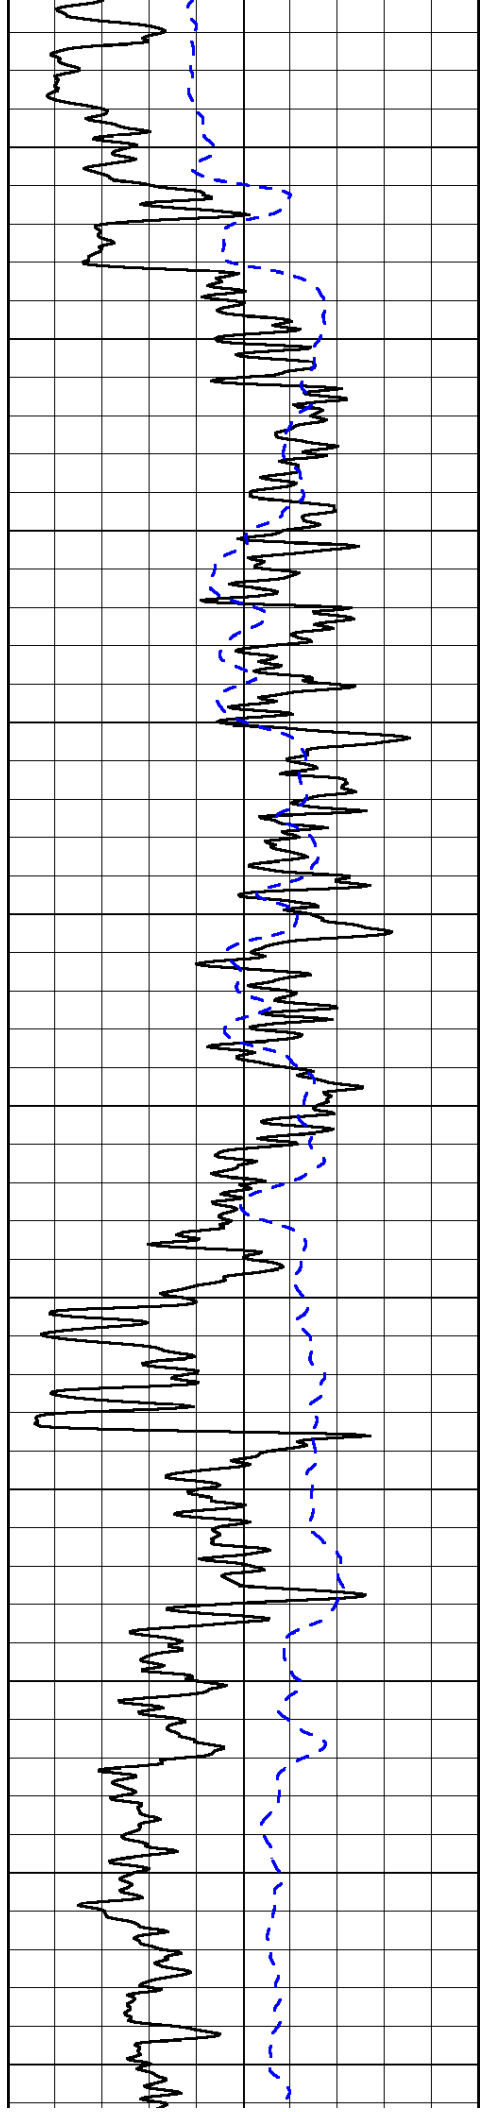



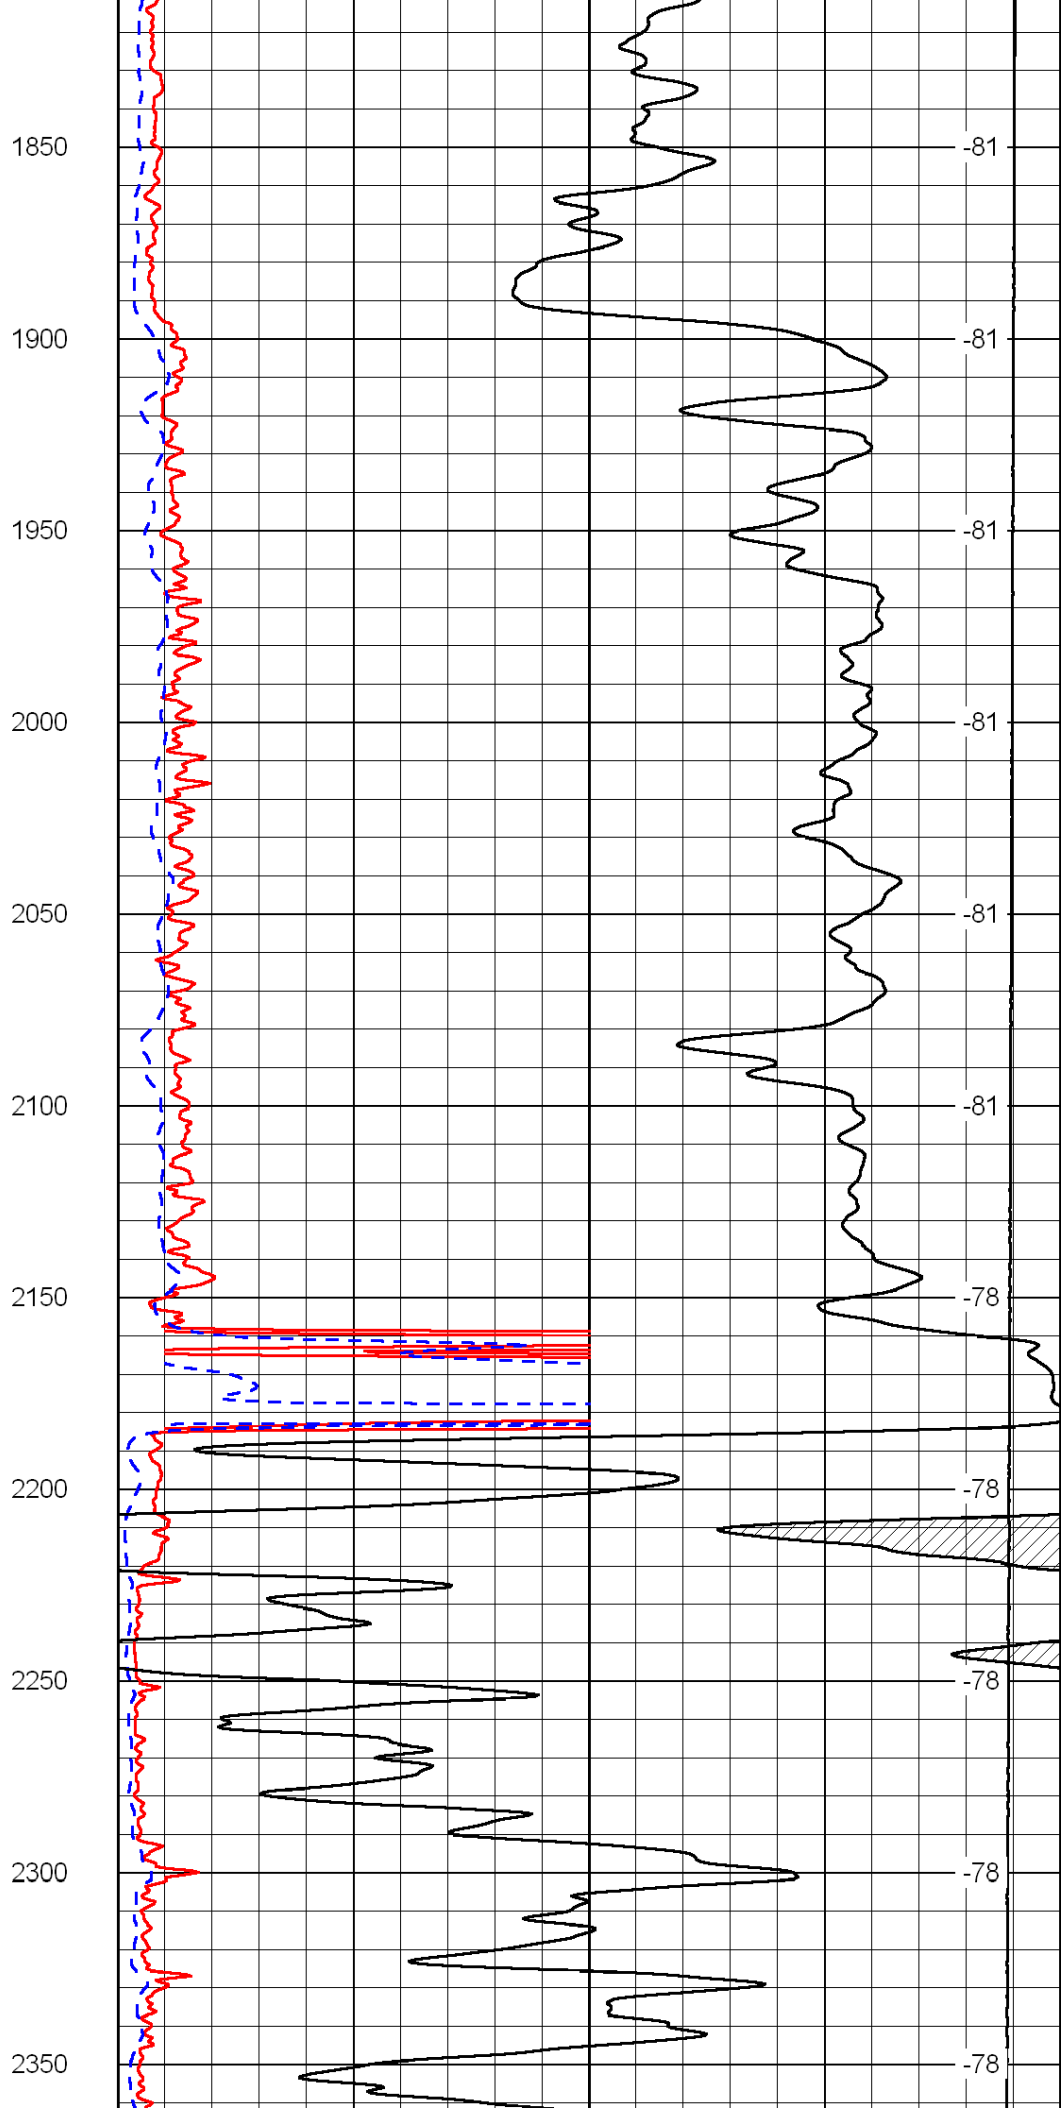
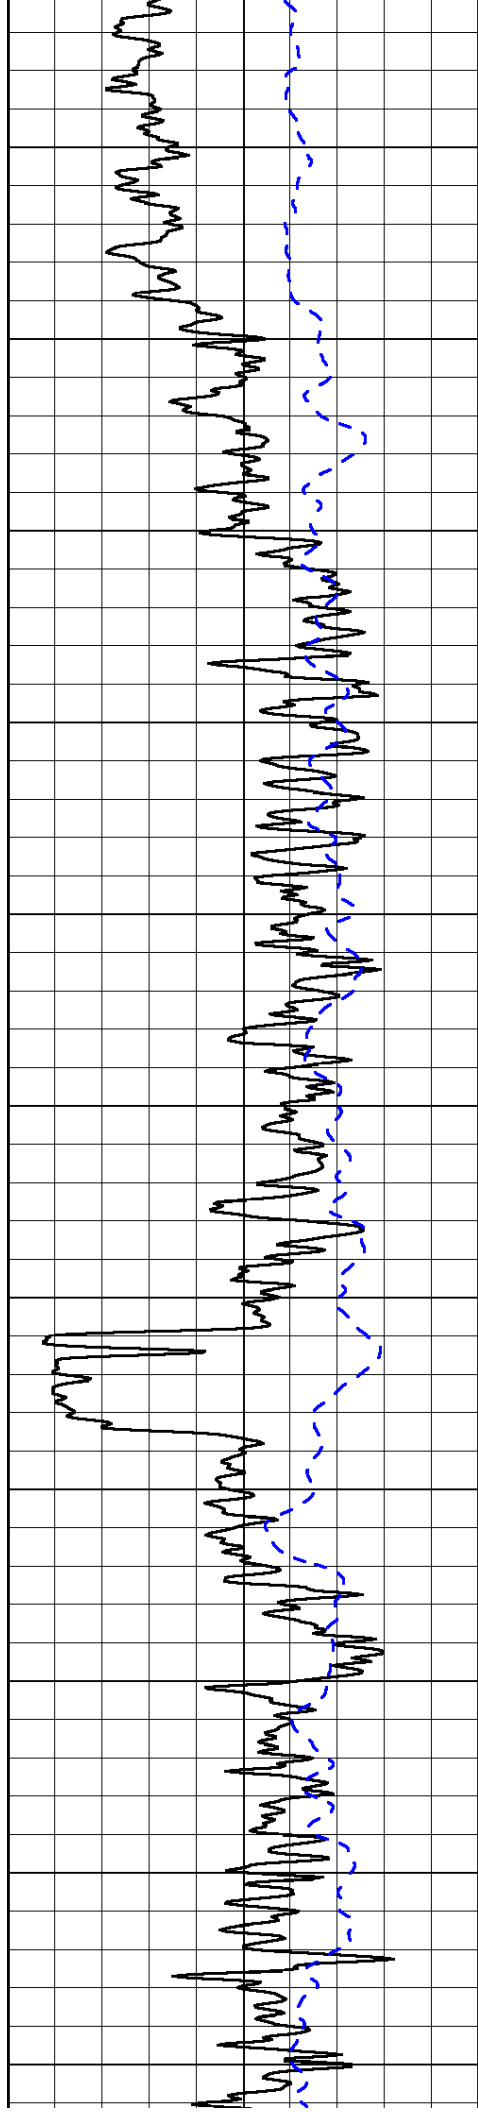


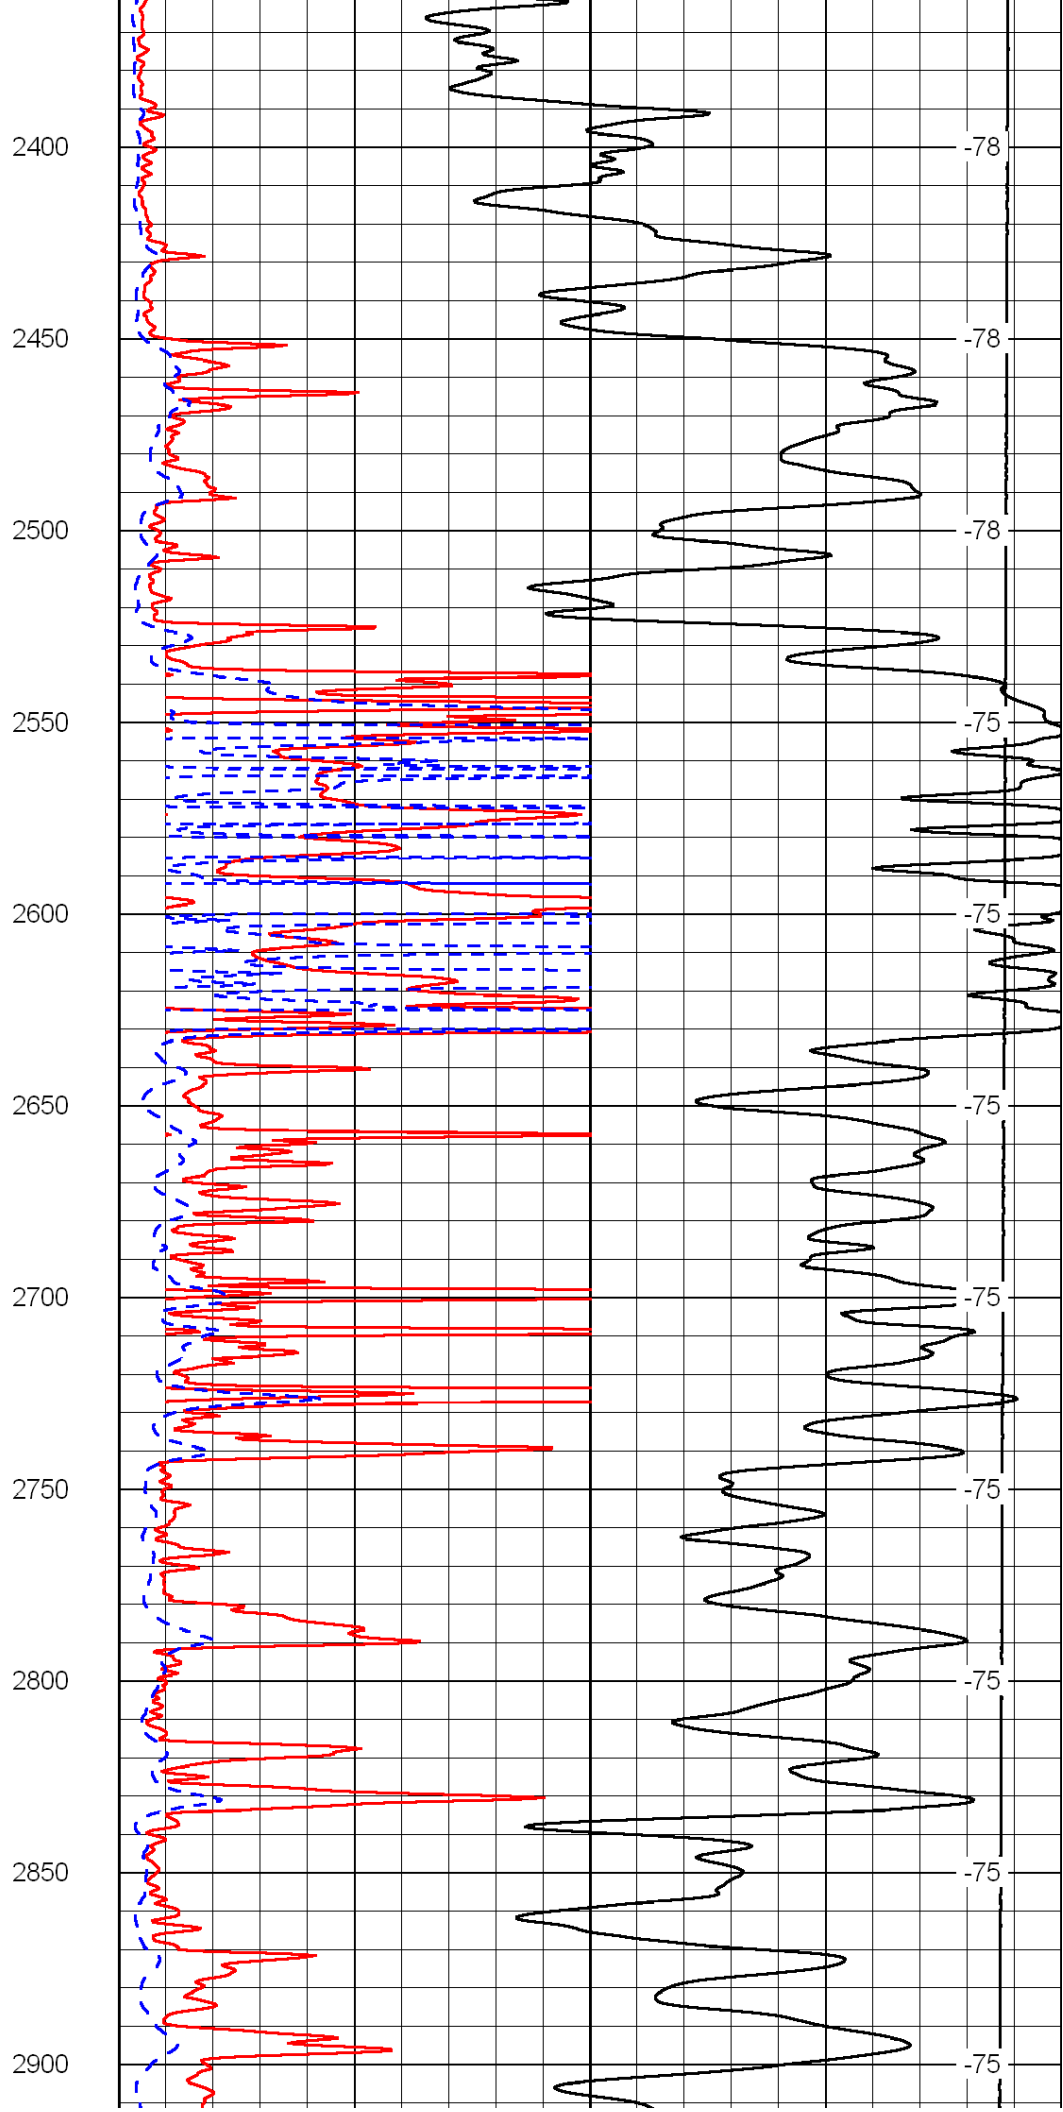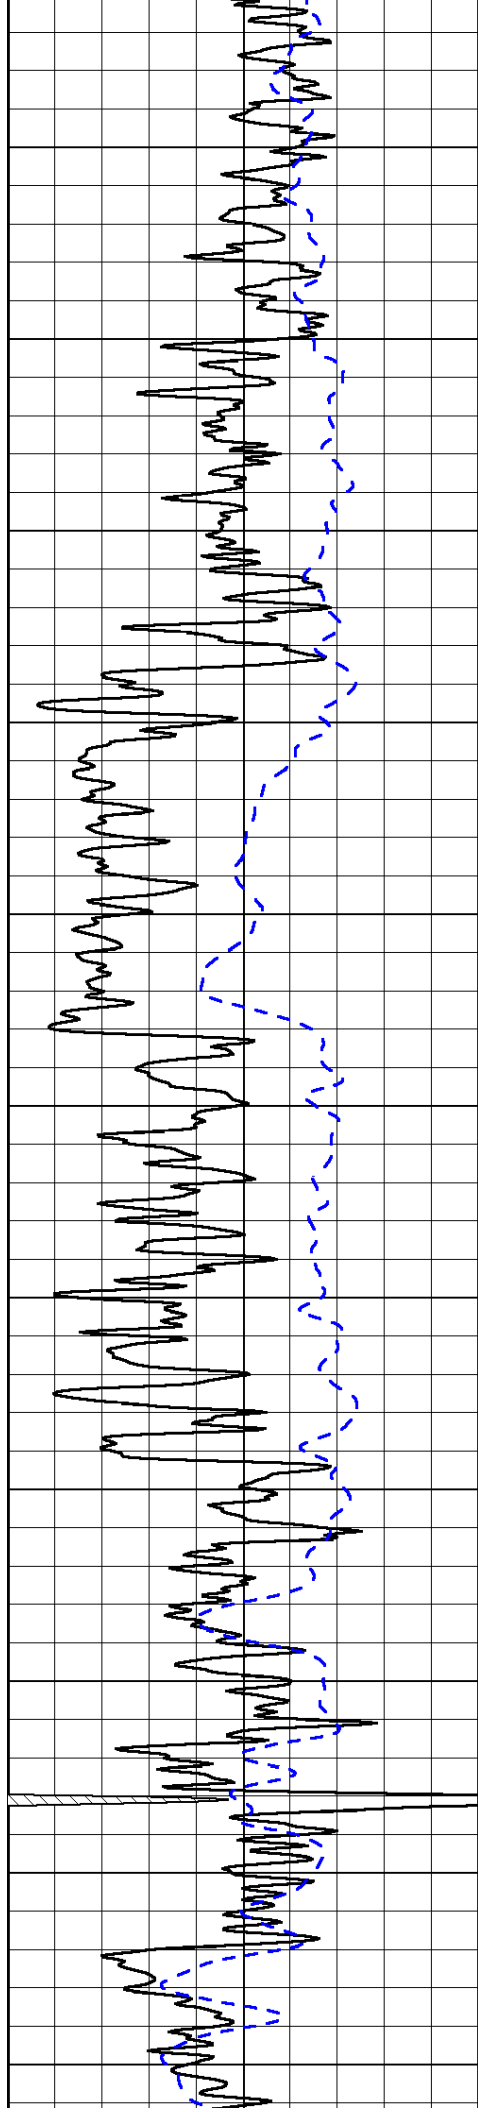

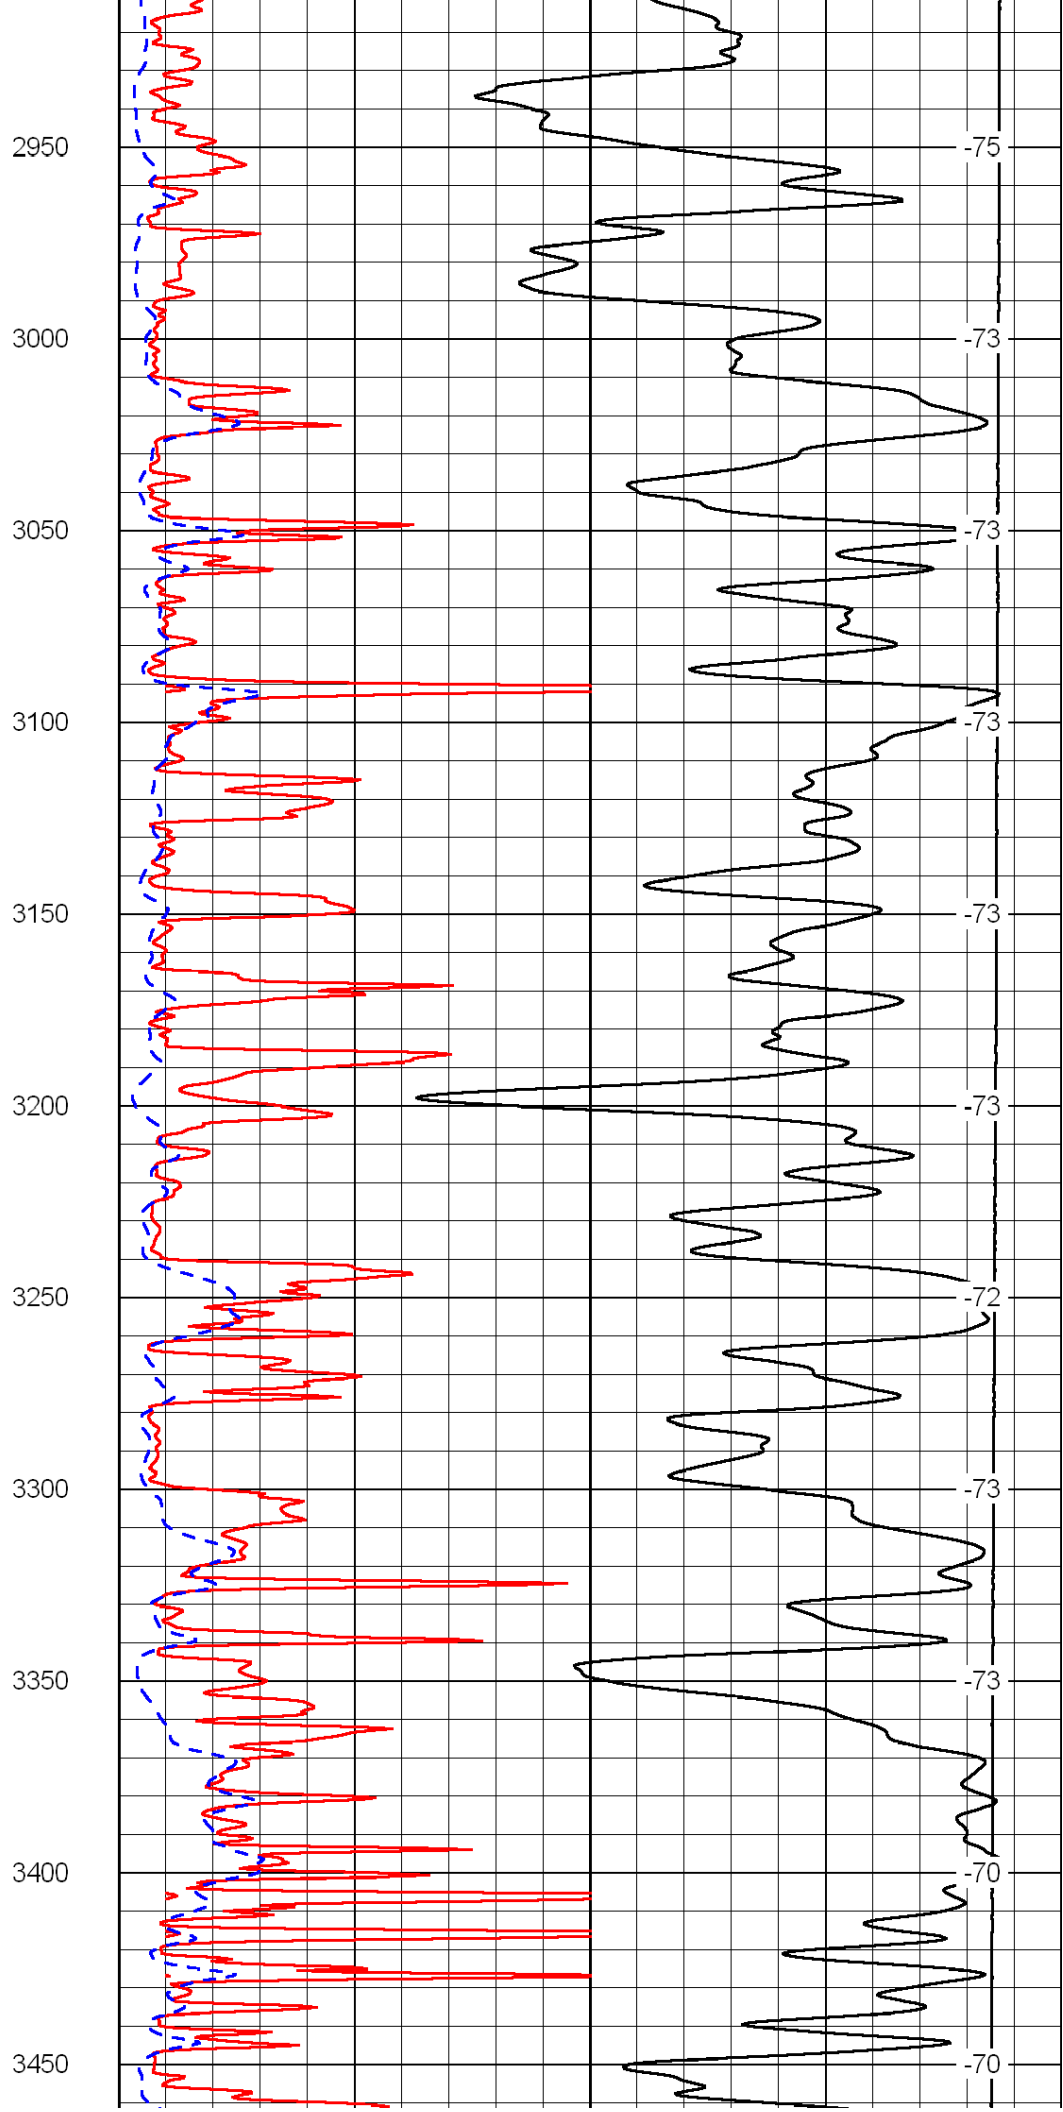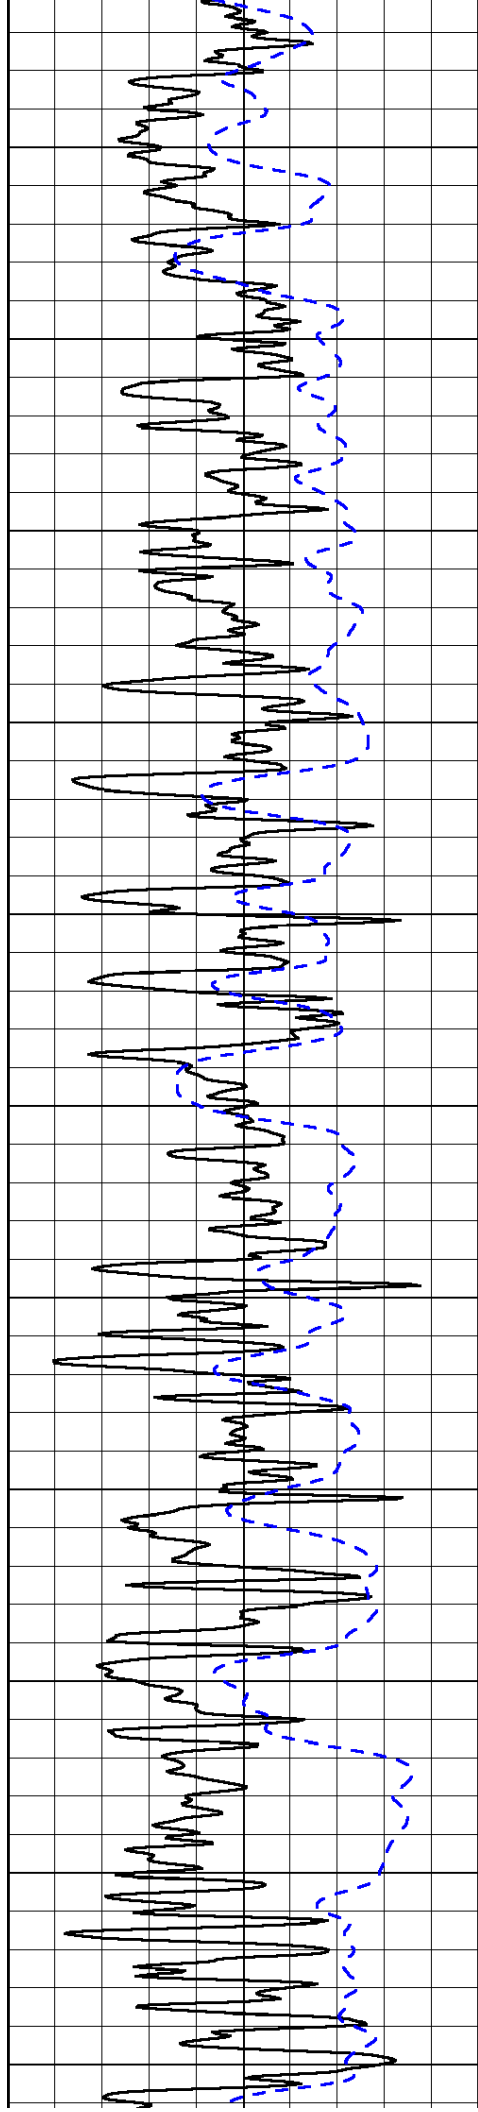

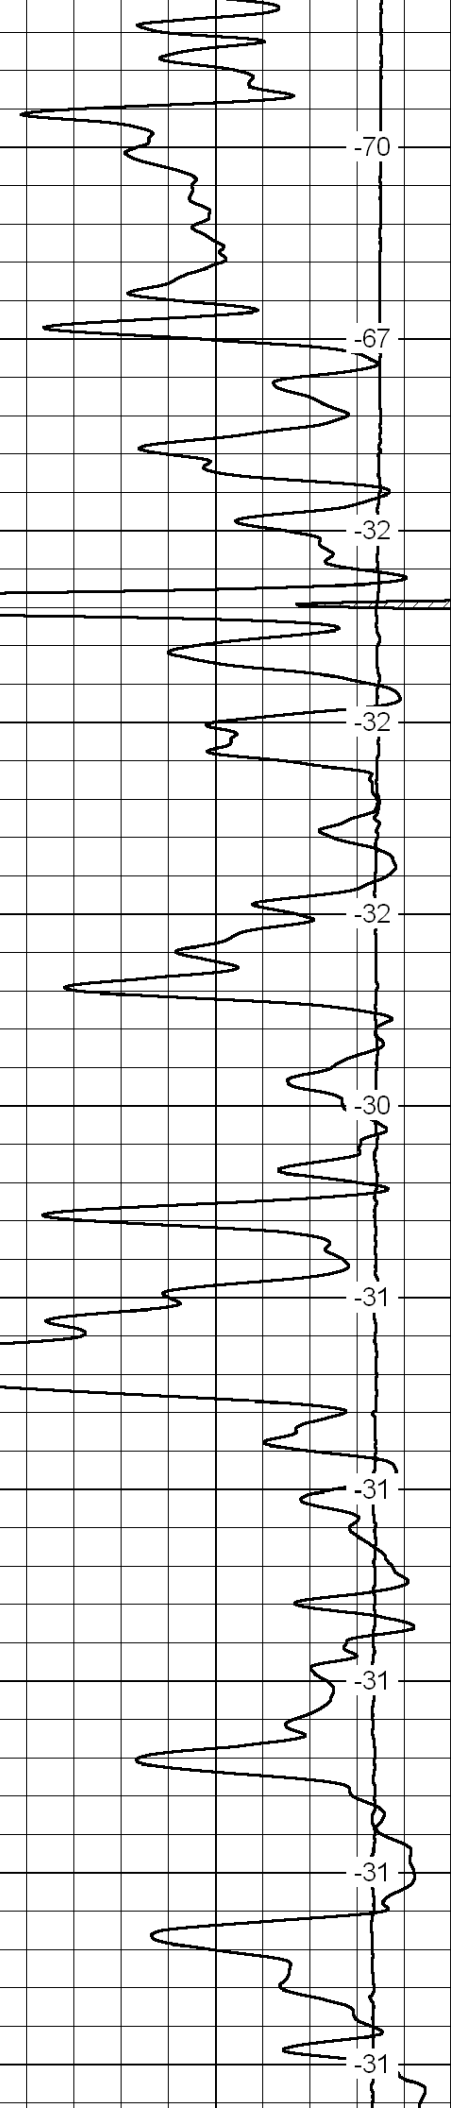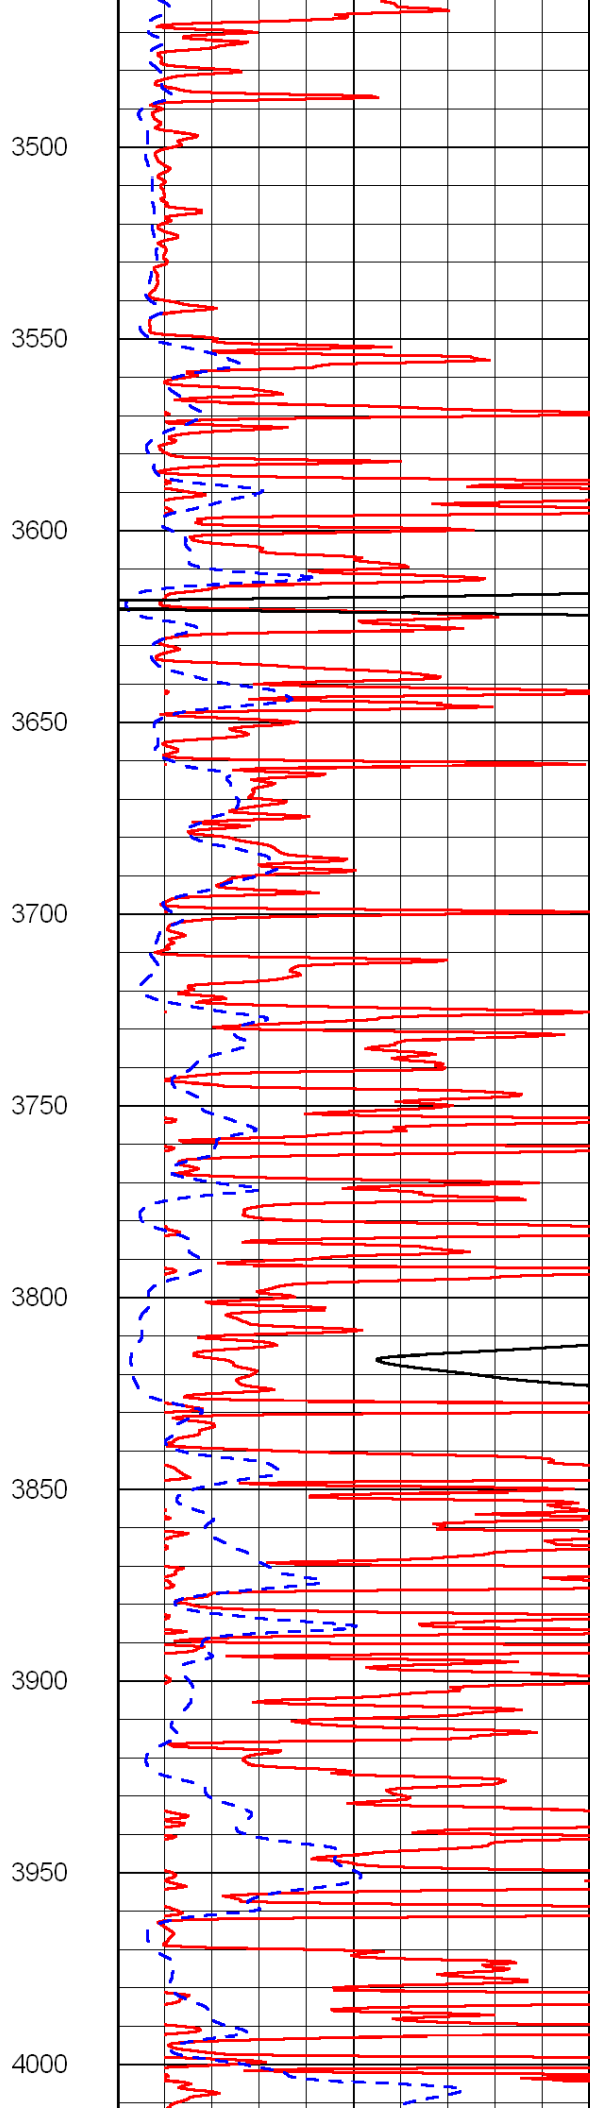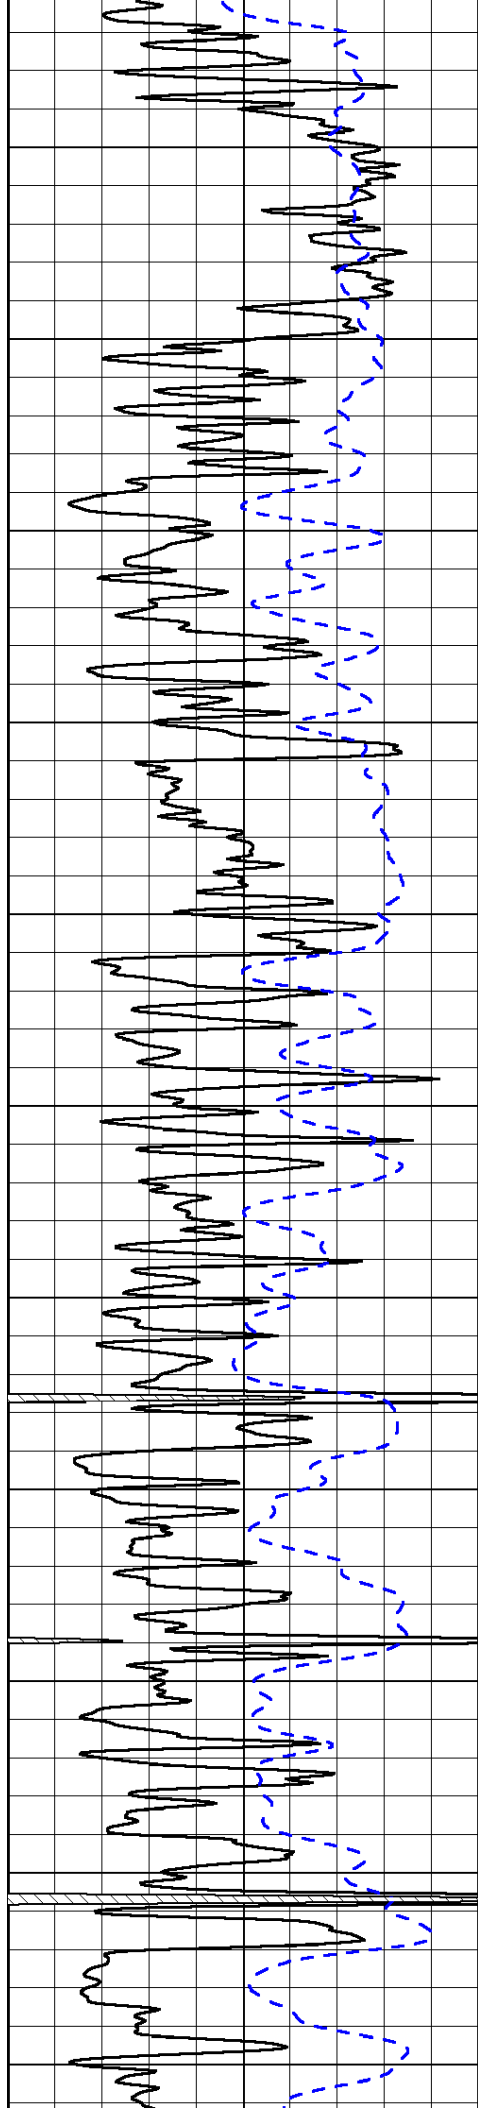

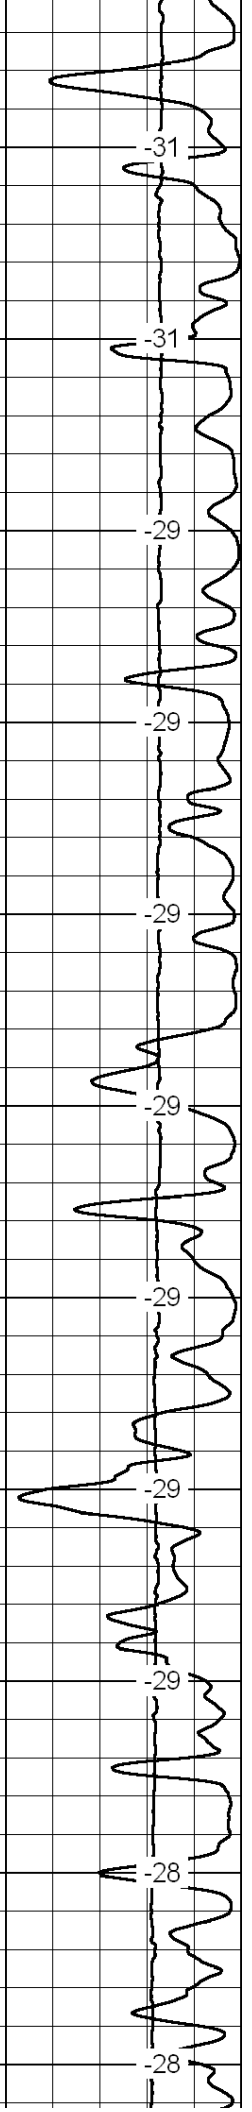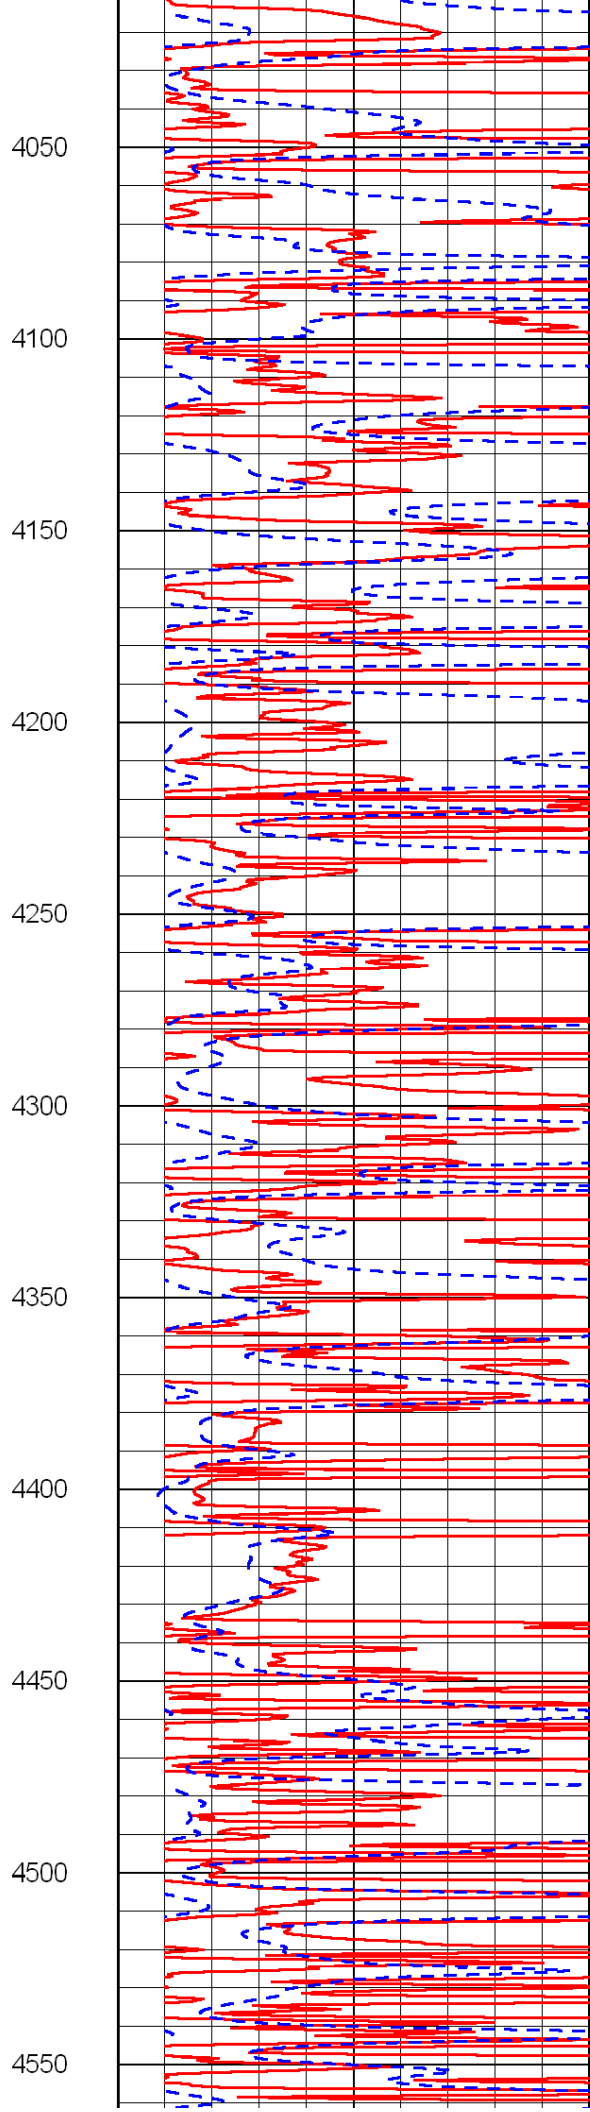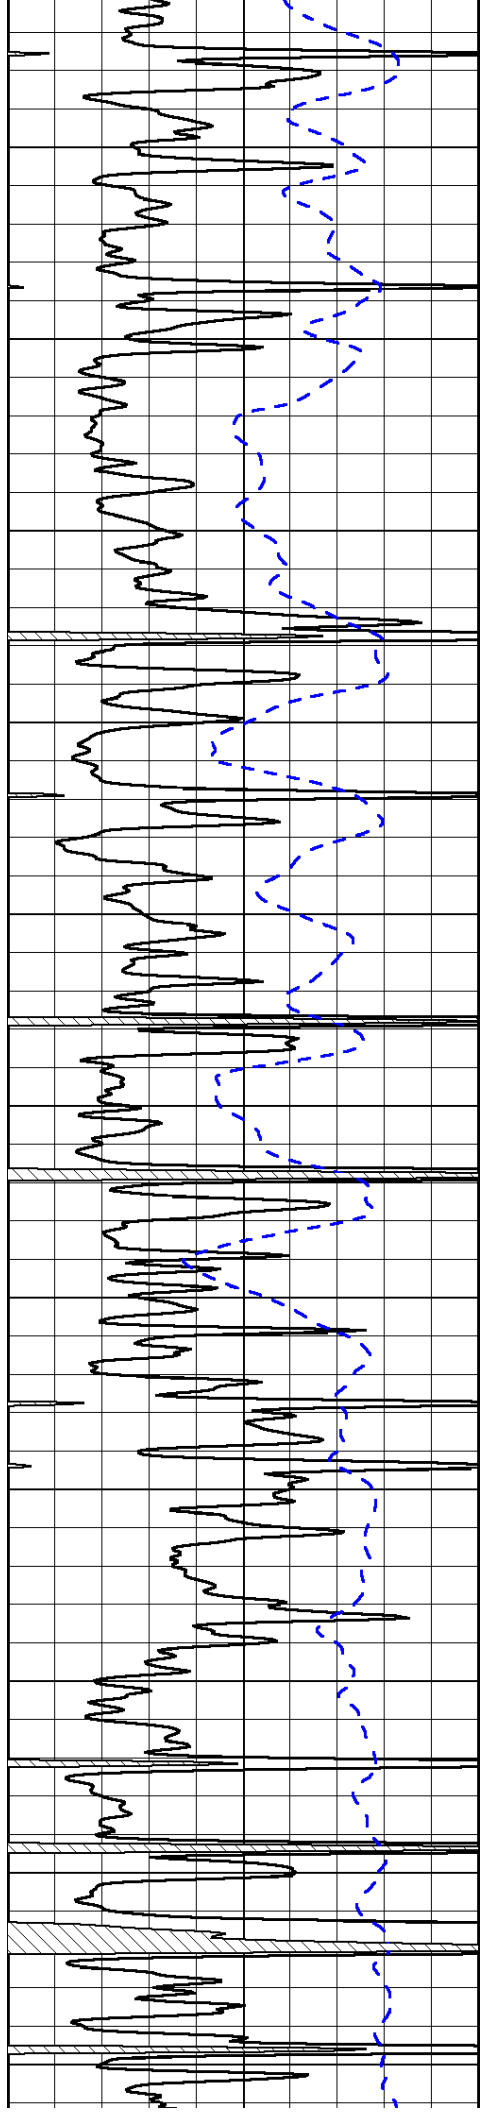

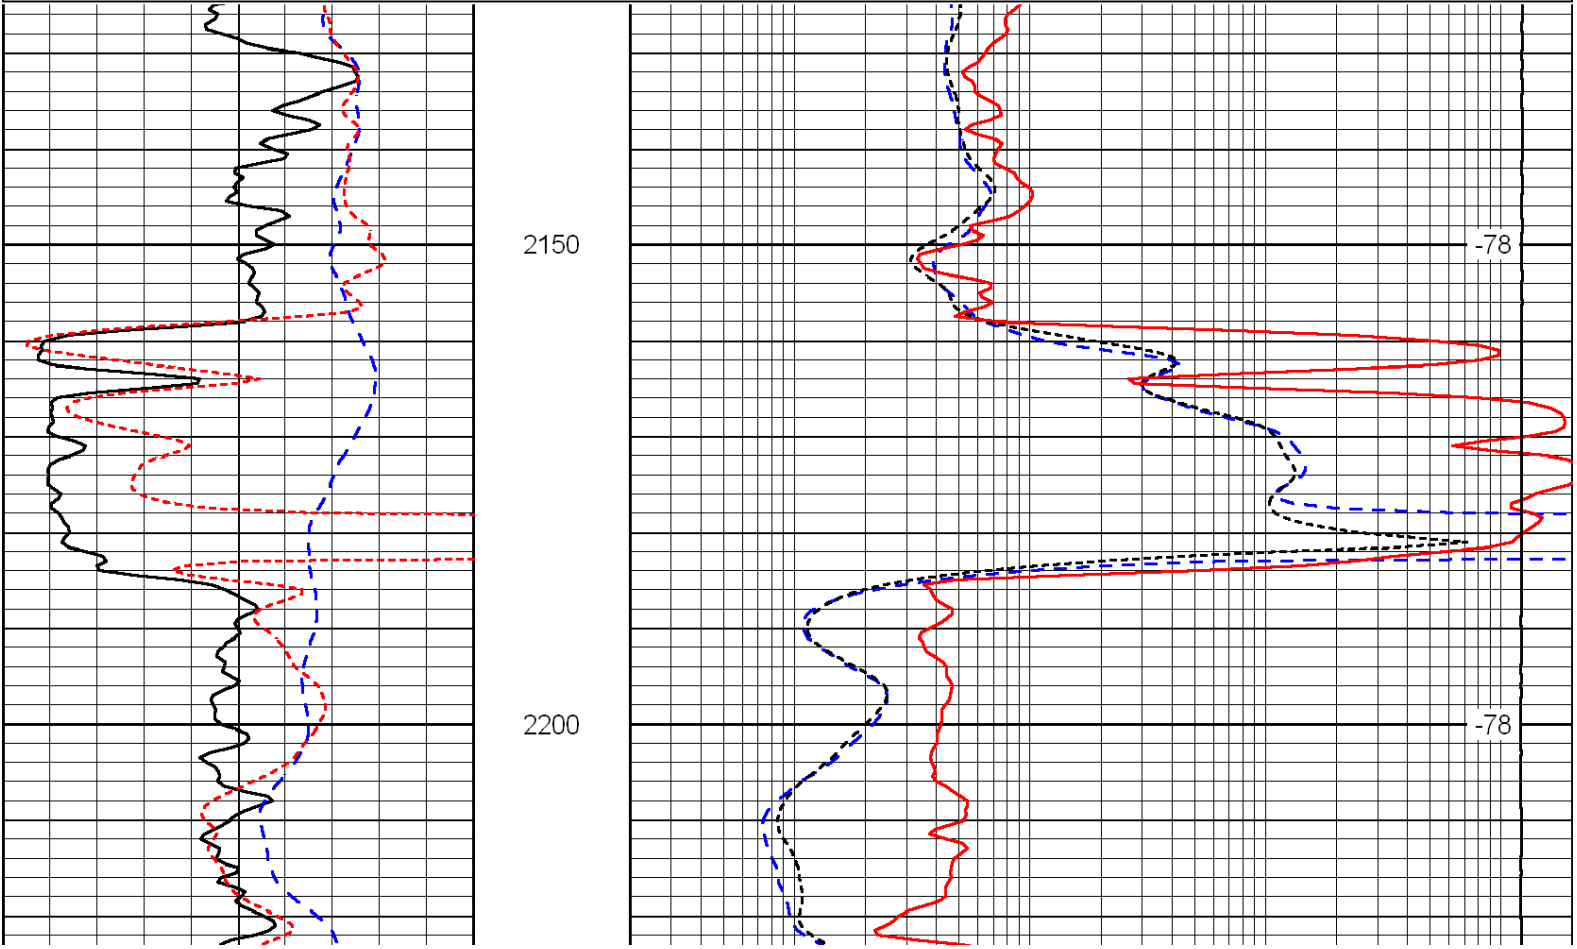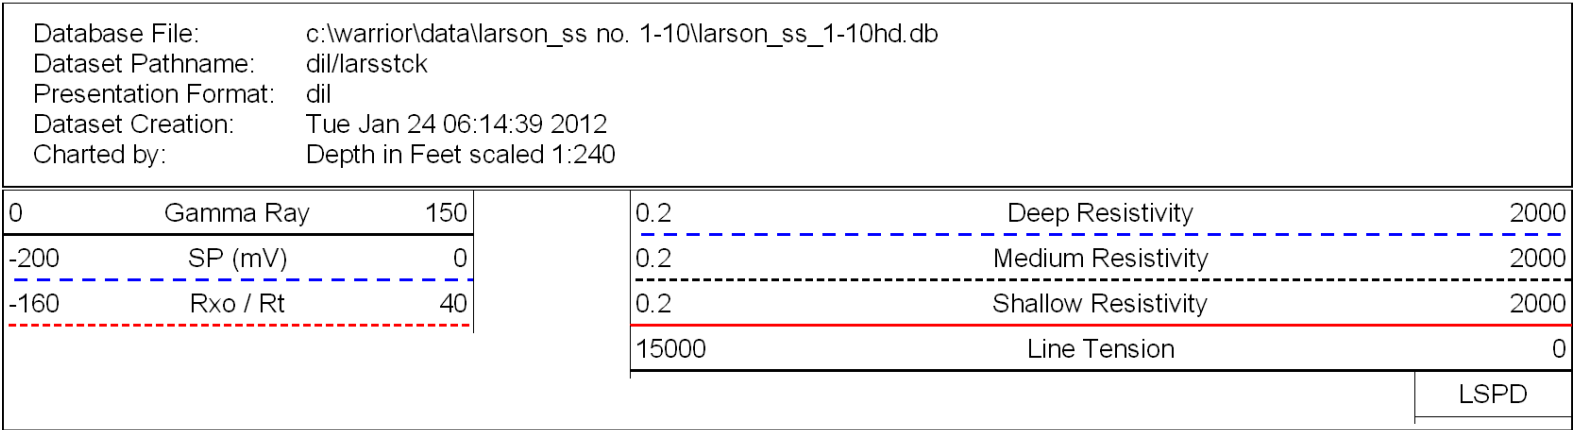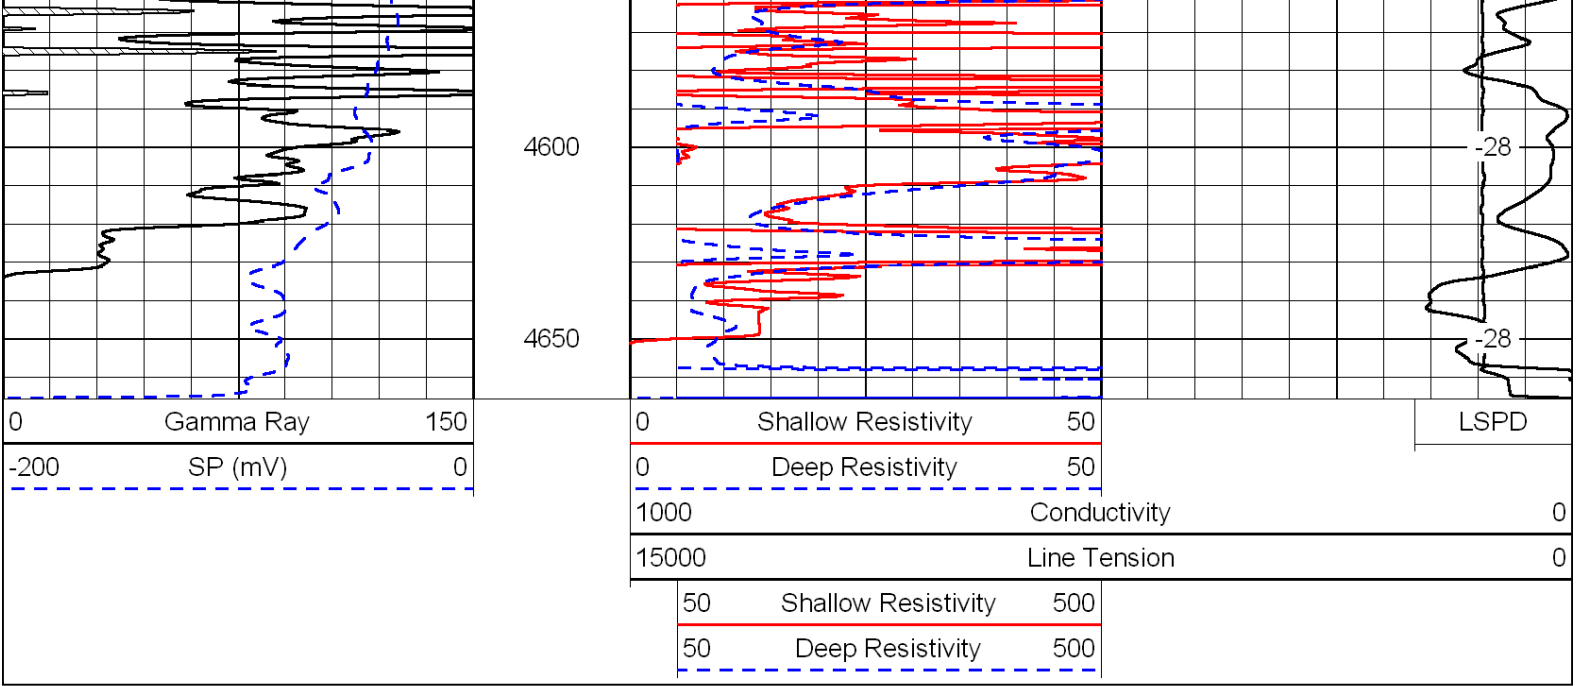

0	Gamma Ray	150
-200	SP (mV)	0
-160	Rxo / Rt	40

0.2	Deep Resistivity	2000
0.2	Medium Resistivity	2000
0.2	Shallow Resistivity	2000
15000	Line Tension	0
		LSPD

Database File:

c:\warrior\data\larson_ss no. 1-10\larson_ss_1-10hd.db

Dataset Pathname:

dil\larsstck

Presentation Format:

dil

Dataset Creation:


Tue Jan 24 06:14:39 2012

Charted by:

Depth in Feet scaled 1:240

0	Gamma Ray	150
-200	SP (mV)	0
-160	Rxo / Rt	40


0.2	Deep Resistivity	2000
0.2	Medium Resistivity	2000
0.2	Shallow Resistivity	2000
15000	Line Tension	0
		LSPD

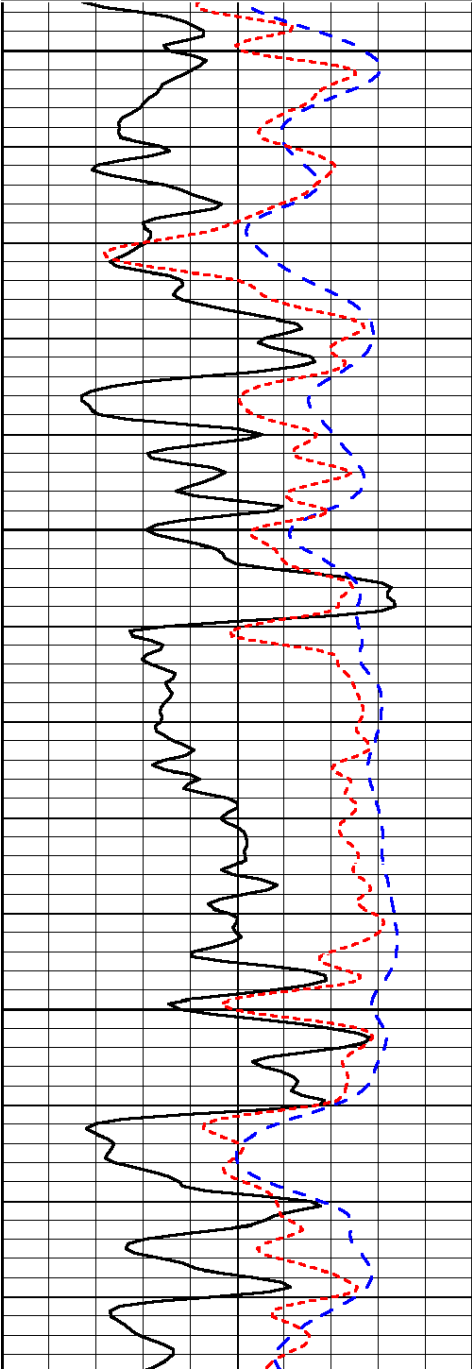

3600

3650


3700

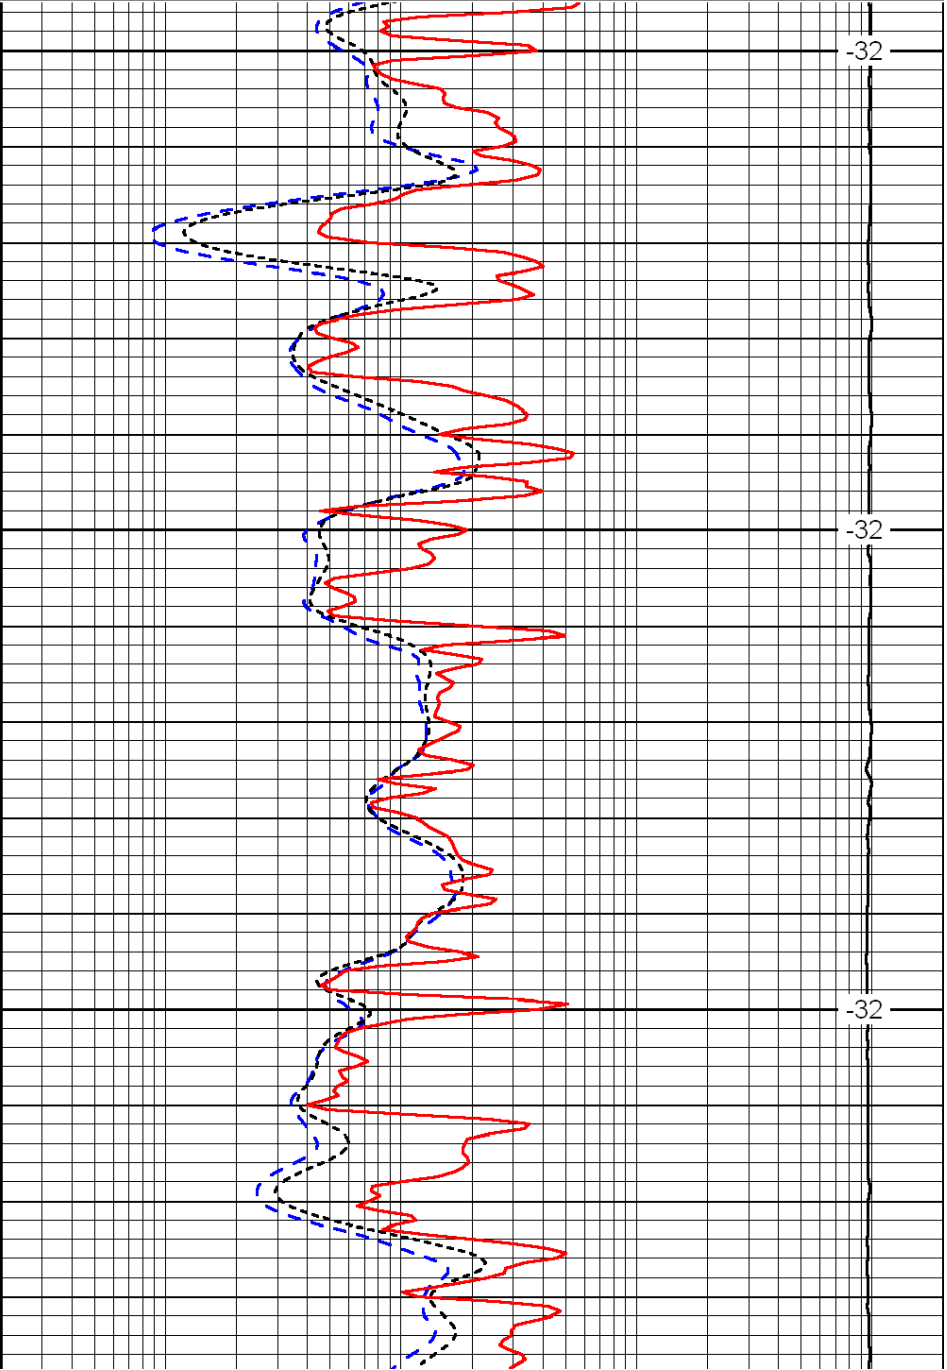

-32

-32

-32

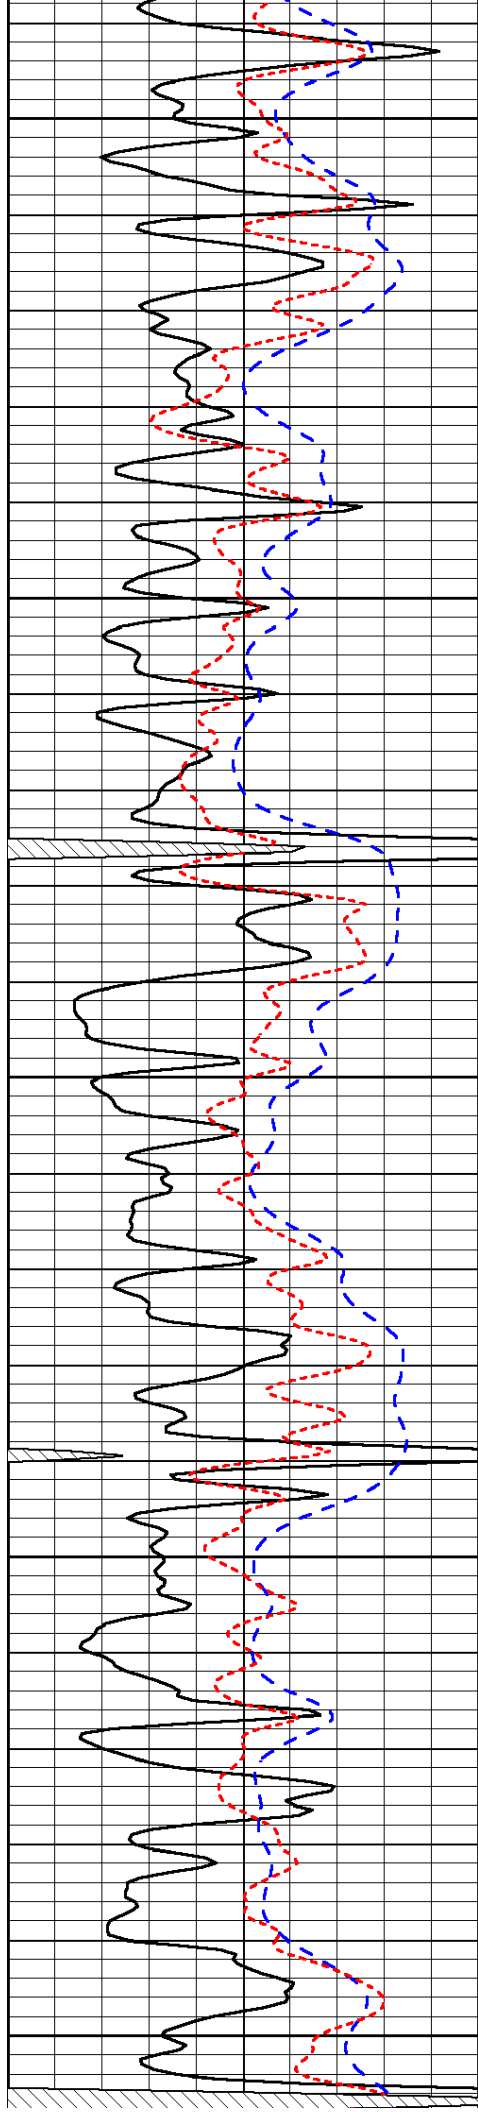


3750

3800

3850

3900

3950

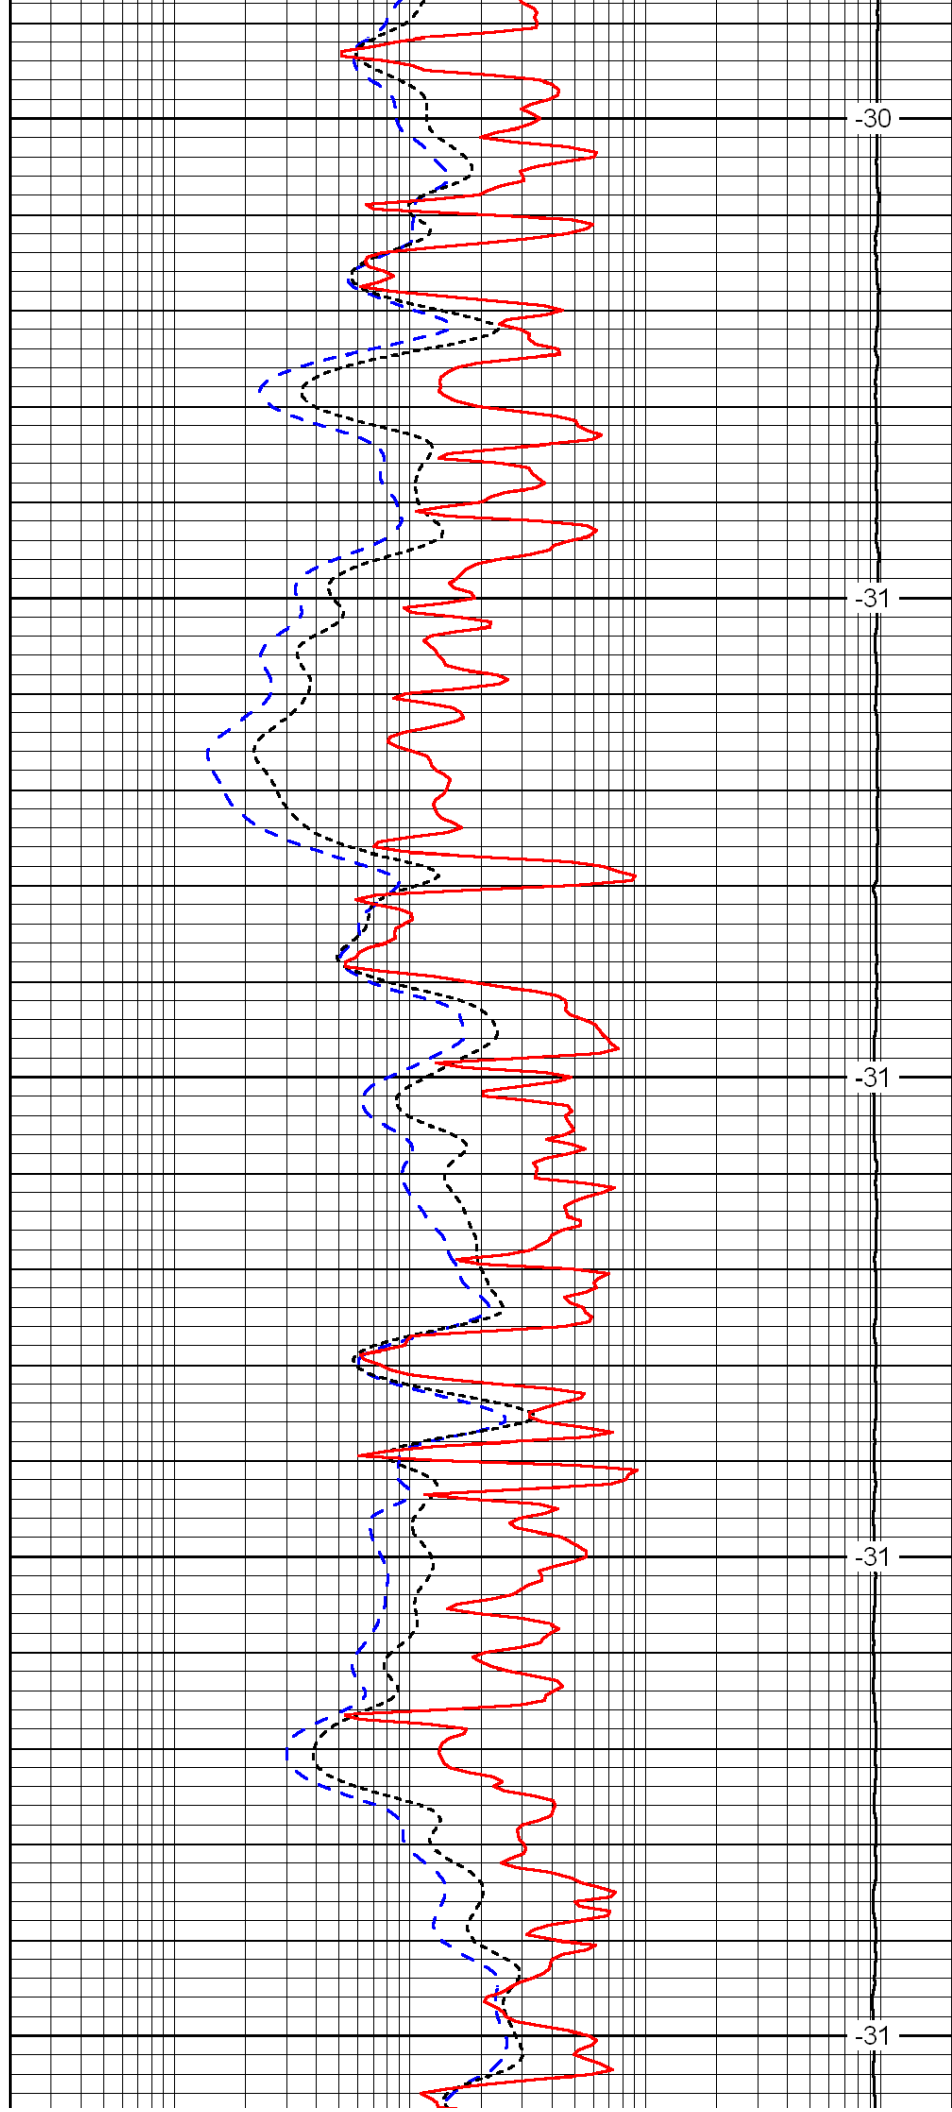


-30

-31

-31

-31

-31

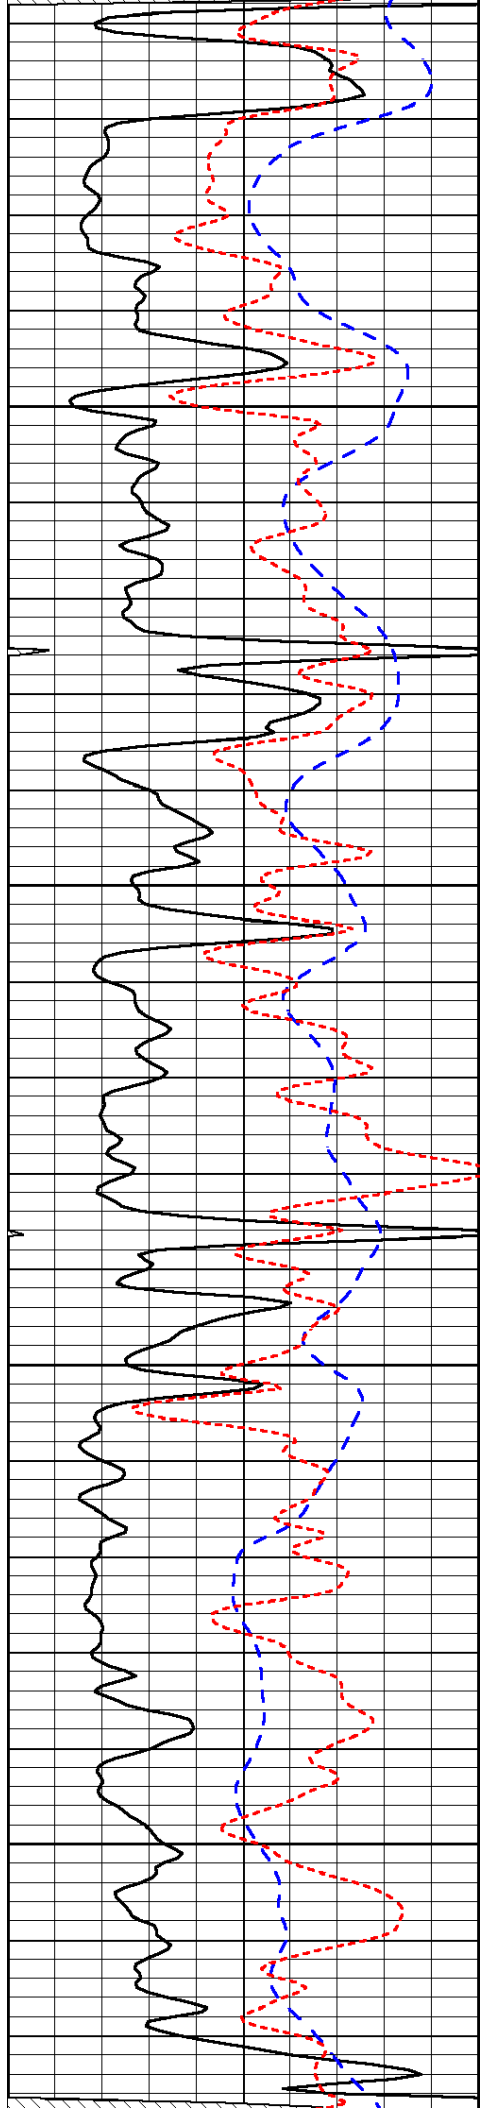


4000

4050

4100

4150

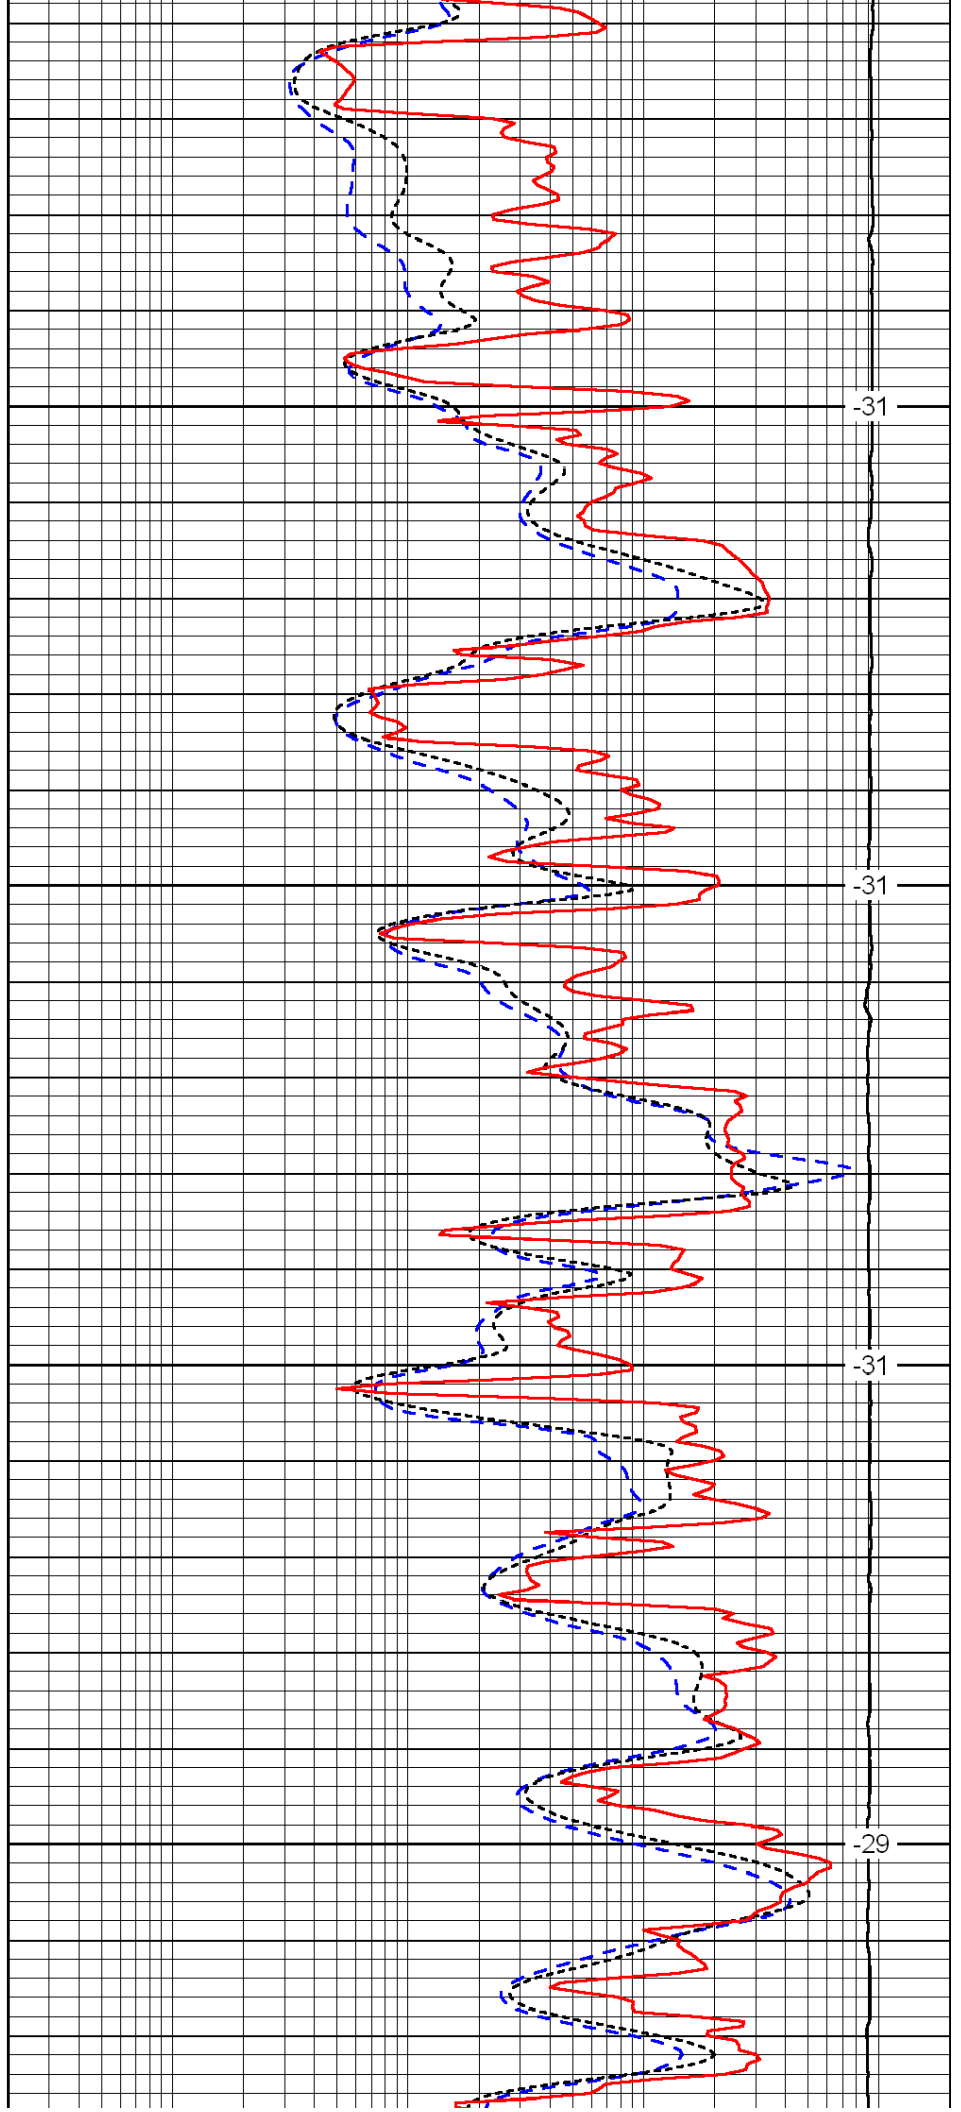


-31

-31

-31

-29

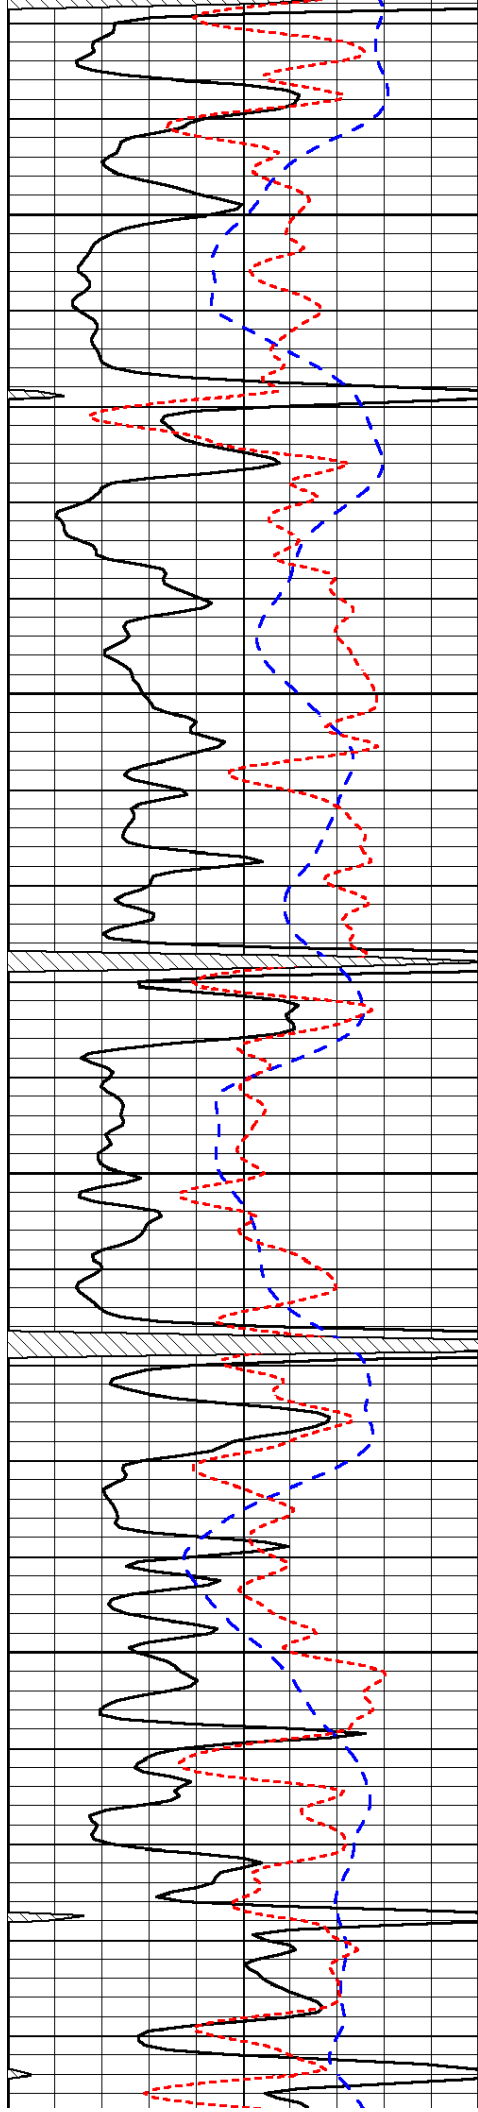


4200

4250

4300

4350

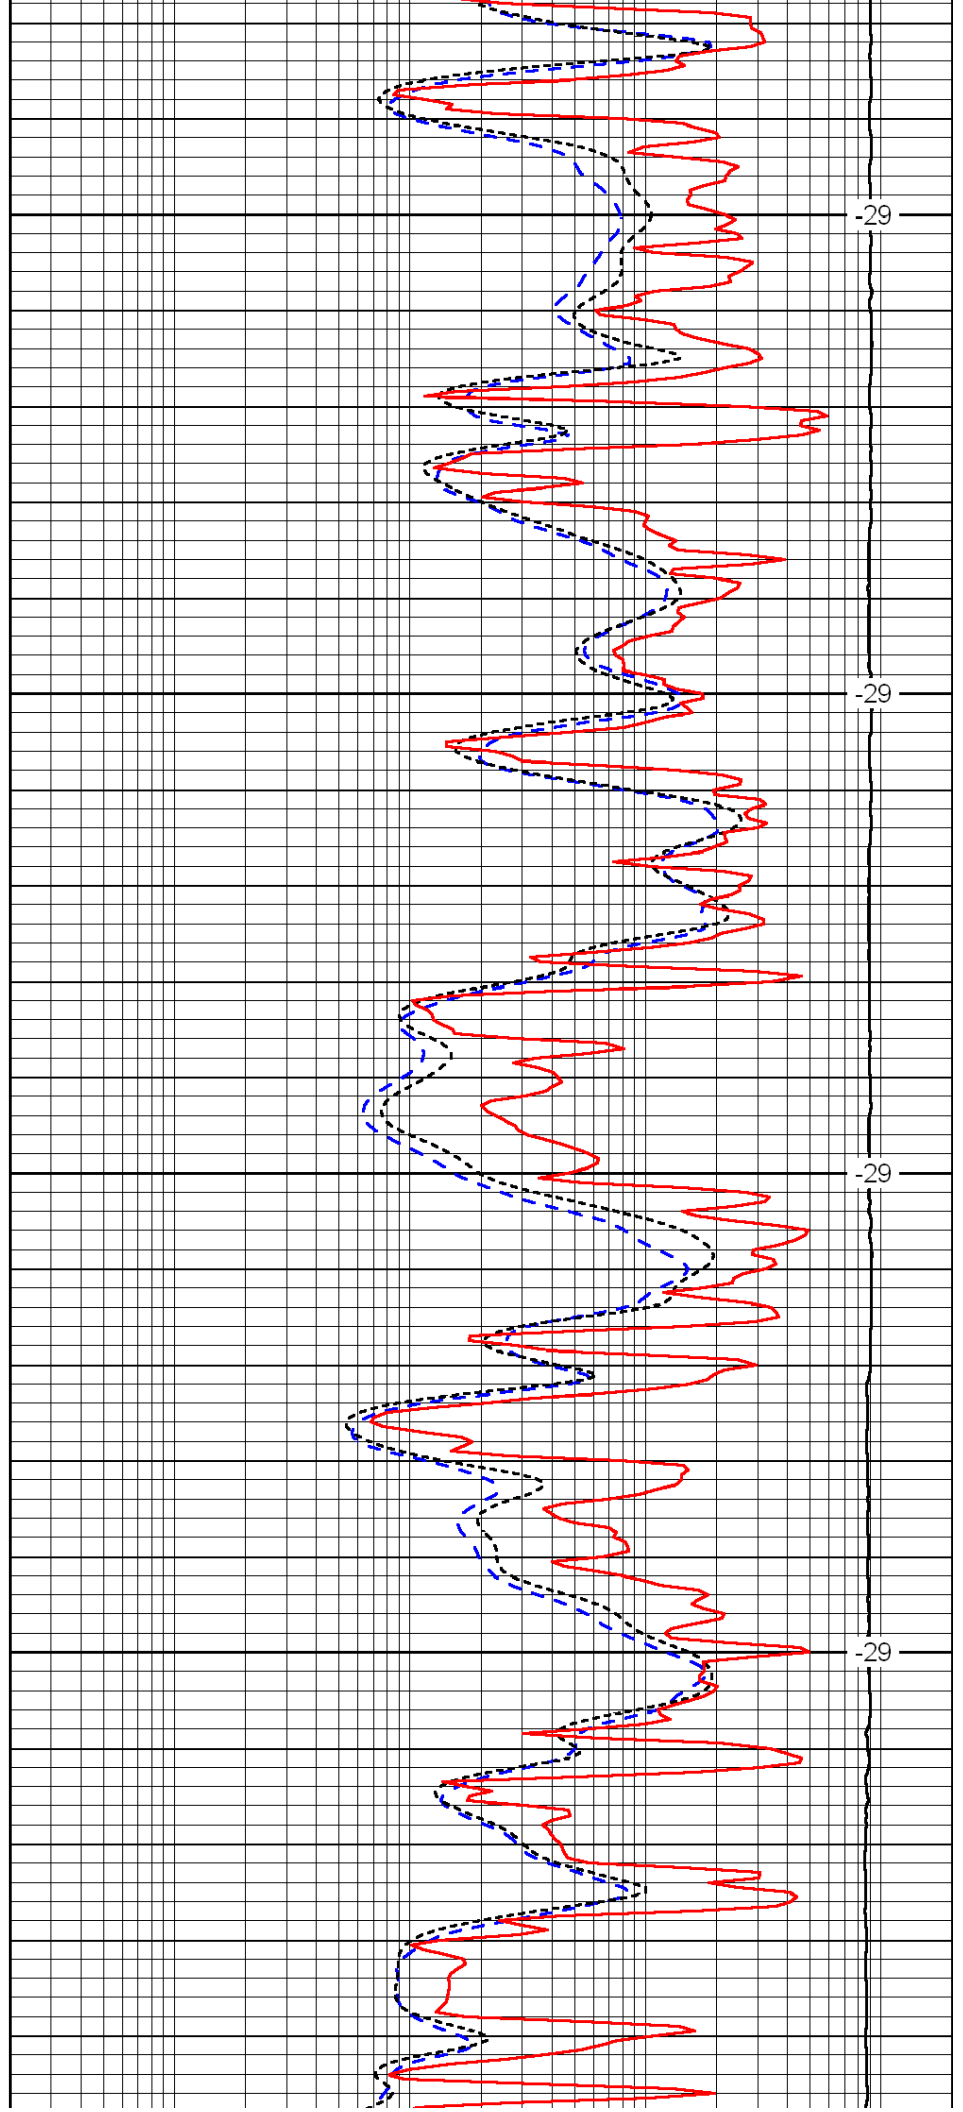


-29


-29

-29


-29

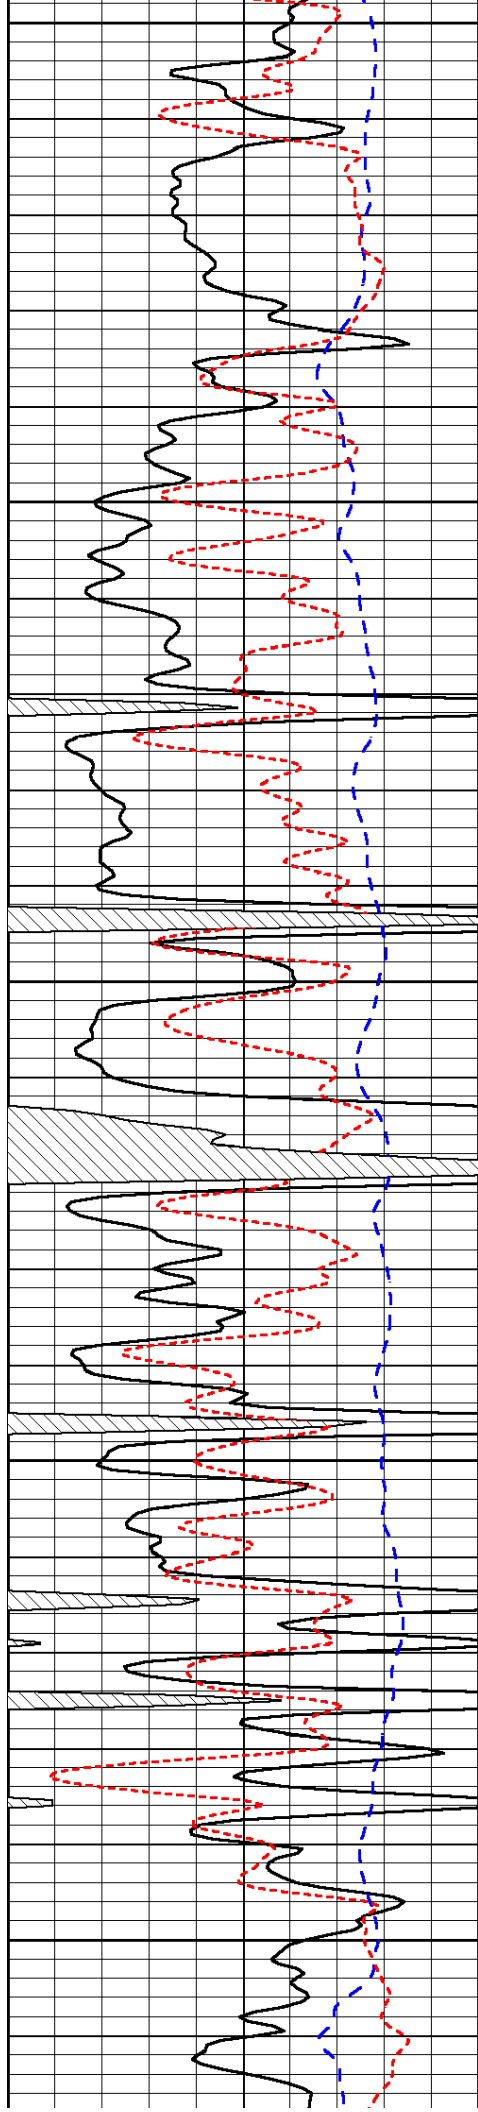

4400
4450
4500
4550
4600

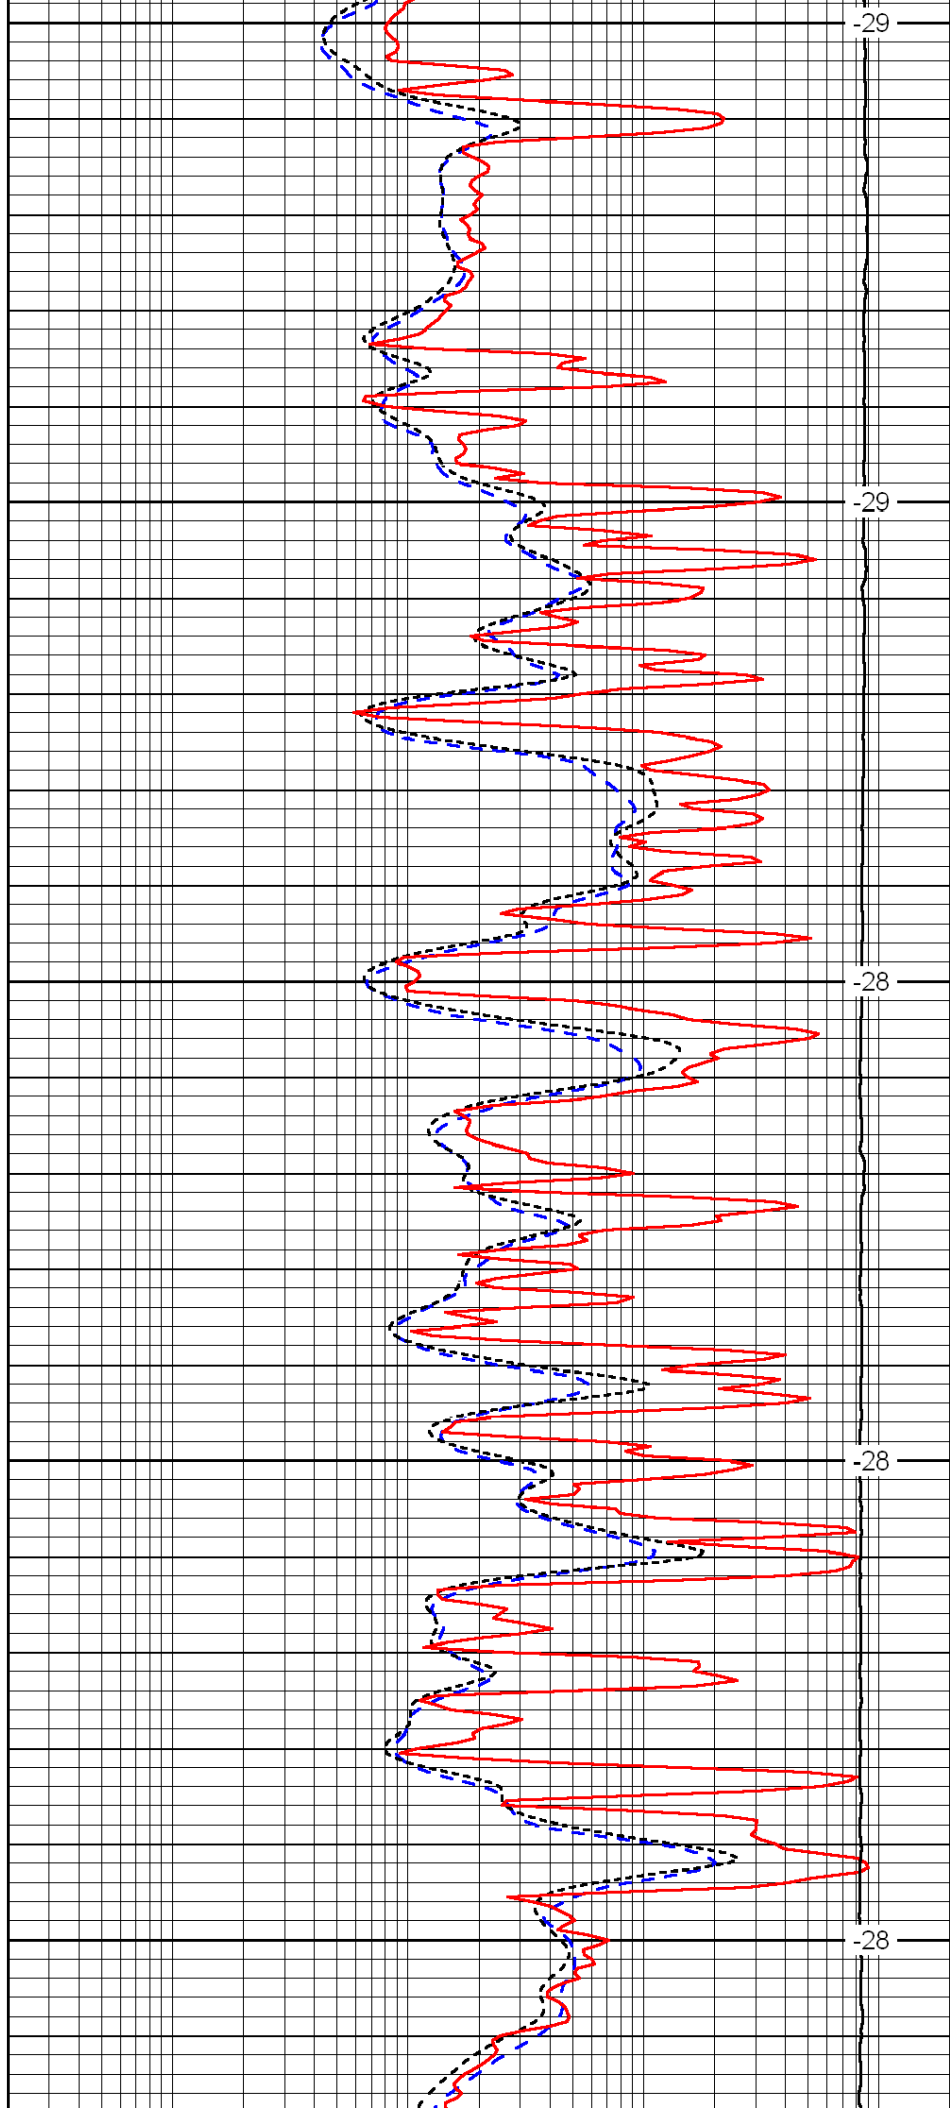

-29
-29
-28
-28
-28
-28

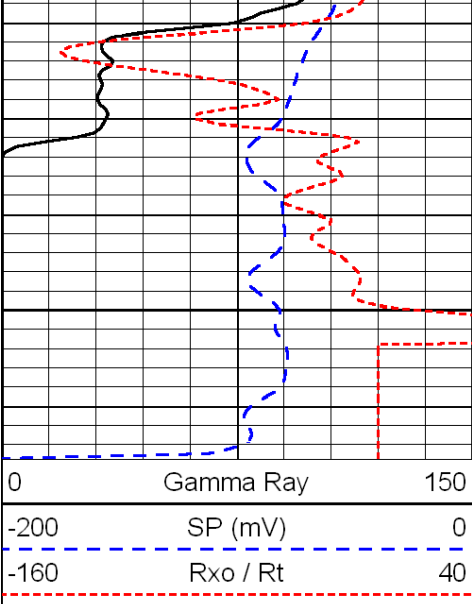

4650

