

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-151-10097-00-02  
Spot: S2N2NE Sec/Twnshp/Rge: 25-27S-11W  
4290 feet from S Section Line, 1320 feet from E Section Line  
Lease Name: CUNNINGHAM B UNIT Well #: 14  
County: PRATT Total Vertical Depth: 3480 feet

Operator License No.: 3880  
Op Name: KC RESOURCES, INC. (DBA CRYSTAL  
Address: P. O. BOX 6749  
SNOWMASS VILLAGE, CO 81615

CIBP Size: feet: 800  
PROD Size: 5.5 feet: 3423 250 SX CMT  
SURF Size: 8.625 feet: 400

# 113<sup>10</sup>

Well Type: OG UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 03/28/2005 12:30 PM  
Plug Co. License No.: 7023 Plug Co. Name: KLIMA WELL SERVICE, INC.  
Proposal Rcvd. from: JACK LUTHI Company: KC RESOURCES Phone: (760) 753-3330

Proposed Plugging Method: AS PER KCC RECOMMENDATION. SET CIBP INSIDE 5-1/2" CSG. @ 3400', W/10 SX CMT ON TOP. SET CIBP INSIDE 5-1/2" CSG. @ 800' AND FILL 5-1/2" CSG S/CEMENT FROM 800' TO SURFACE.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 03/28/2005 6:00 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SPOT 50 SX COMMON CMT W/3% CC @ 3000'. PULLED TUBING UP HOLE 20 JOINTS. LET CMT SET. RAN TUBING BACK IN & TAGGED TOP OF CMT PLUG AT 2615'. PULLED TUBING OUT OF HOLE. PREVIOUS WORKOVER 5 1/2" HAD BEEN PERFORATED AT 600' & CEMENT CIRCULATED TO SURFACE UP 5 1/2" X 8 5/8" ANNULUS. SET CIBP @ 800' IN 5 1/2" CASING. RUN TUBING IN TO 800' & CIRCULATED 95 SX CMT (60/40 POZMIX 6% GEL) INSIDE OF 5 1/2" CASING TO SURFACE. LAID TUBING DOWN & TOPPED OFF WITH 10 SX CMT.

Perfs:


Top	Bot	Thru	Comments
3423	3480	OH	

RECEIVED  
APR 07 2005  
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL & COMMON CEMENT W/3% CC BY COPELAND ACID & CEMENT. NO CASING RECOVERED.

Plugged through: TBG

District: 01

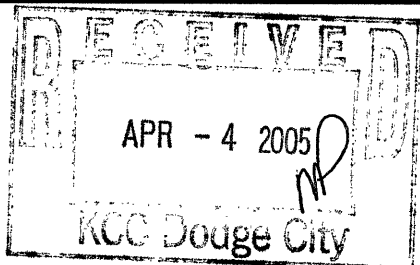

Signed

*Stephen J. Pfeifer*  
(TECHNICIAN)

INVOICED

DATE 4-7-05

NO. 2005061385

Form CP-3