




Weatherford[®]

**COMPACT WELL SHUTTLE
COMPACT PHOTO DENSITY
COMPENSATED DUAL NEUTRON LOG**

COMPANY CMX INC.
WELL SOCRATES 1H
FIELD WHERRY
PROVINCE/COUNTY RICE
COUNTRY/STATE U.S.A. / KANSAS
LOCATION 2490' FNL & 1320' FEL
S2 S2 S2 NE



SEC TWP RGE Other Services
10 21S 7W MAI
API Number 15159226670100 CMI
Permit Number
Permanent Datum G.L., Elevation 1602 feet
Log Measured From D.F. 12 FEET above Permanent Datum
Drilling Measured From D.F.

Elevations:
KB 1614.00
DF 1614.00
GL 1602.00

Date	20-JAN-2012	
Run Number	1	
Depth Driller	7950.00	feet
Depth Logger	7828.00	feet
First Reading	7773.00	feet
Last Reading	3749.00	feet
Casing Driller	3749.00	feet
Casing Logger	3749.00	feet
Bit Size	6.125	inches
Hole Fluid Type	WATER BASED	
Density / Viscosity	8.40 g/c3	30.00 CP
PH / Fluid Loss	8.00	88.00 ml/30Min
Sample Source	FLOWLINE	
Rm @ Measured Temp	1.34 @ 76.0	ohm-m
Rmf @ Measured Temp	1.07 @ 76.0	ohm-m
Rmc @ Measured Temp	1.60 @ 76.0	ohm-m
Source Rmf / Rmc	CALC	CALC
Rm @ BHT	0.96 @106.0	ohm-m
Time Since Circulation	.5 HOUR	
Max Recorded Temp	106.00	deg F
Equipment Name	COMPACT	
Equipment / Base	18064	OKC
Recorded By	C. GRIFFIN	
Witnessed By	L. KASTEN	
S.O. #	3534193	

BOREHOLE RECORD

Last Edited: 20-JAN-2012 04:34

Bit Size inches	Depth From feet	Depth To feet
6.125	3749.00	7950.00

CASING RECORD

Type	Size inches	Depth From feet	Shoe Depth feet	Weight pounds/ft
INTERMED	7.000	0.00	3749.00	26.00


REMARKS


WLS SOFTWARE VERSION 11.02. USED.
 TOOLS RUN ON DRILLPIPE USING COMPACT WELL SHUTTLE DEPLOYMENT TECHNIQUE.
 DEPTH MEASURED USING ADVANTAGE RIG DEPTH CORRECTED TO PIPE TALLY.
 TOOLS DEPLOYED WITH MULE SHOE SITTING AT 7727 FT.
 AFTER DEPLOYMENT LOGGING TOOL WAS AT 7828 FT.
 4.5 " PRODUCTION CASING USED TO CALCULATE ANNULAR HOLE VOLUMES.
 OPERATORS: S. WORLEY, D. TURNER
 S.O. # 3534193
 RIG: DUKE RIG 20


All interpretations are opinions based on inferences from electrical or other measurements and we cannot, and do not, guarantee the accuracy or correctness of any interpretations, and we shall not, except in the case of gross or wilful negligence on our part, be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or


5 INCH MAIN PASS DSC


Depth Based Data - Maximum Sampling Increment 10.0cm
 Plotted on 20-JAN-2012 04:57
 Filename: C:\Data\CMX\CMX Socrates 1\MMS166 Depthlog.dta
 Recorded on 20-JAN-2012 03:46
 System Versions: Logged with 11.02.3186 Processed with 11.02.3186 Plotted with 11.02.3186

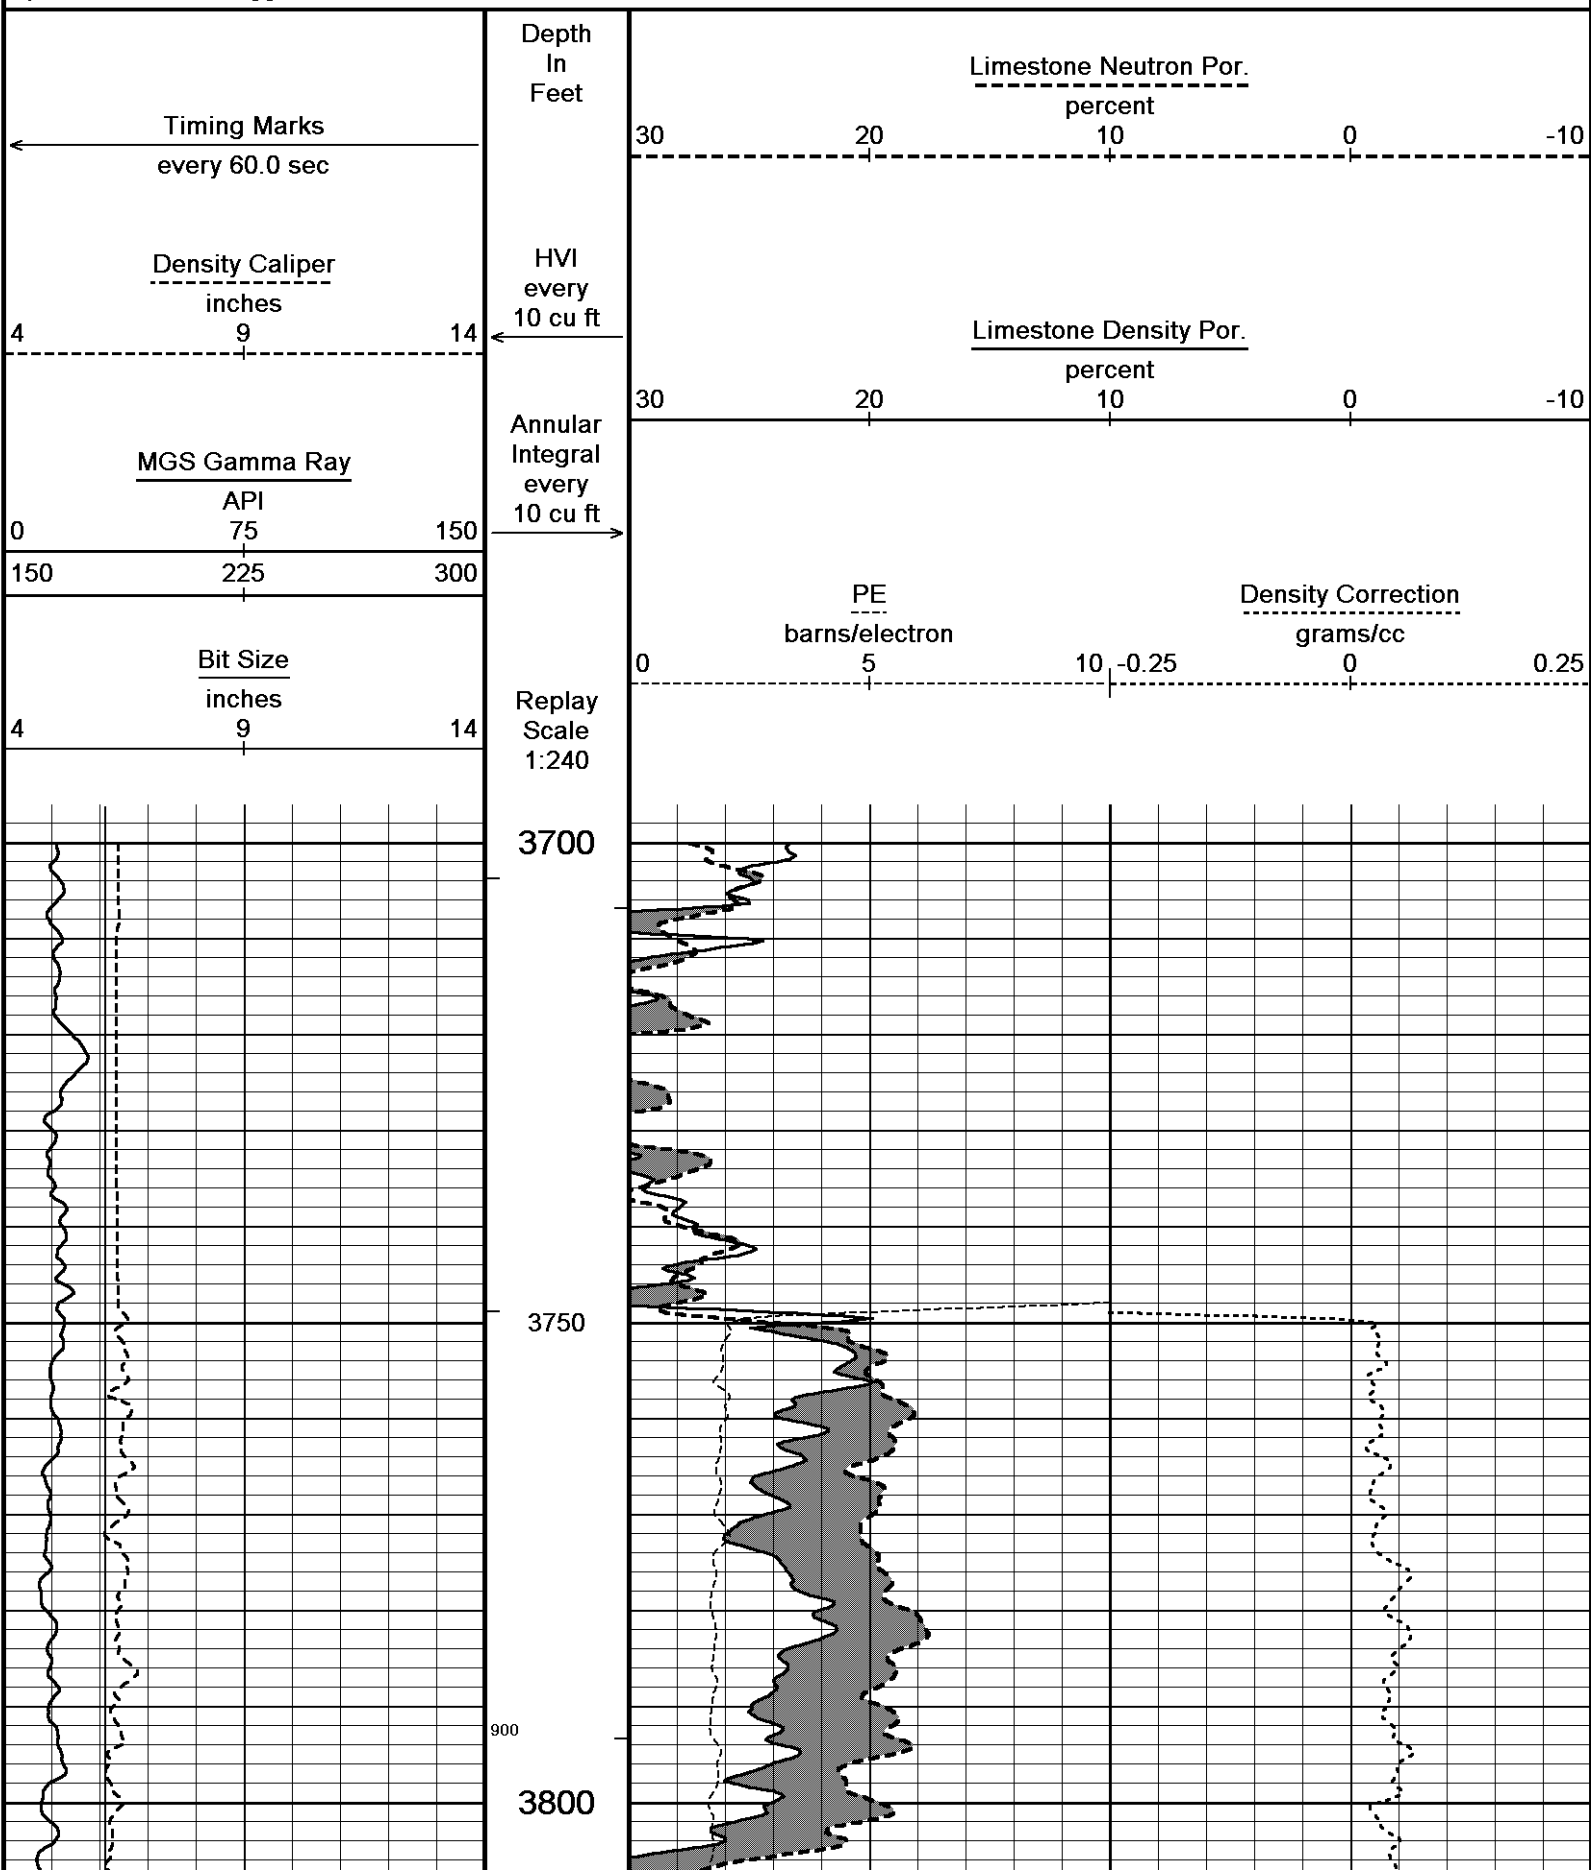


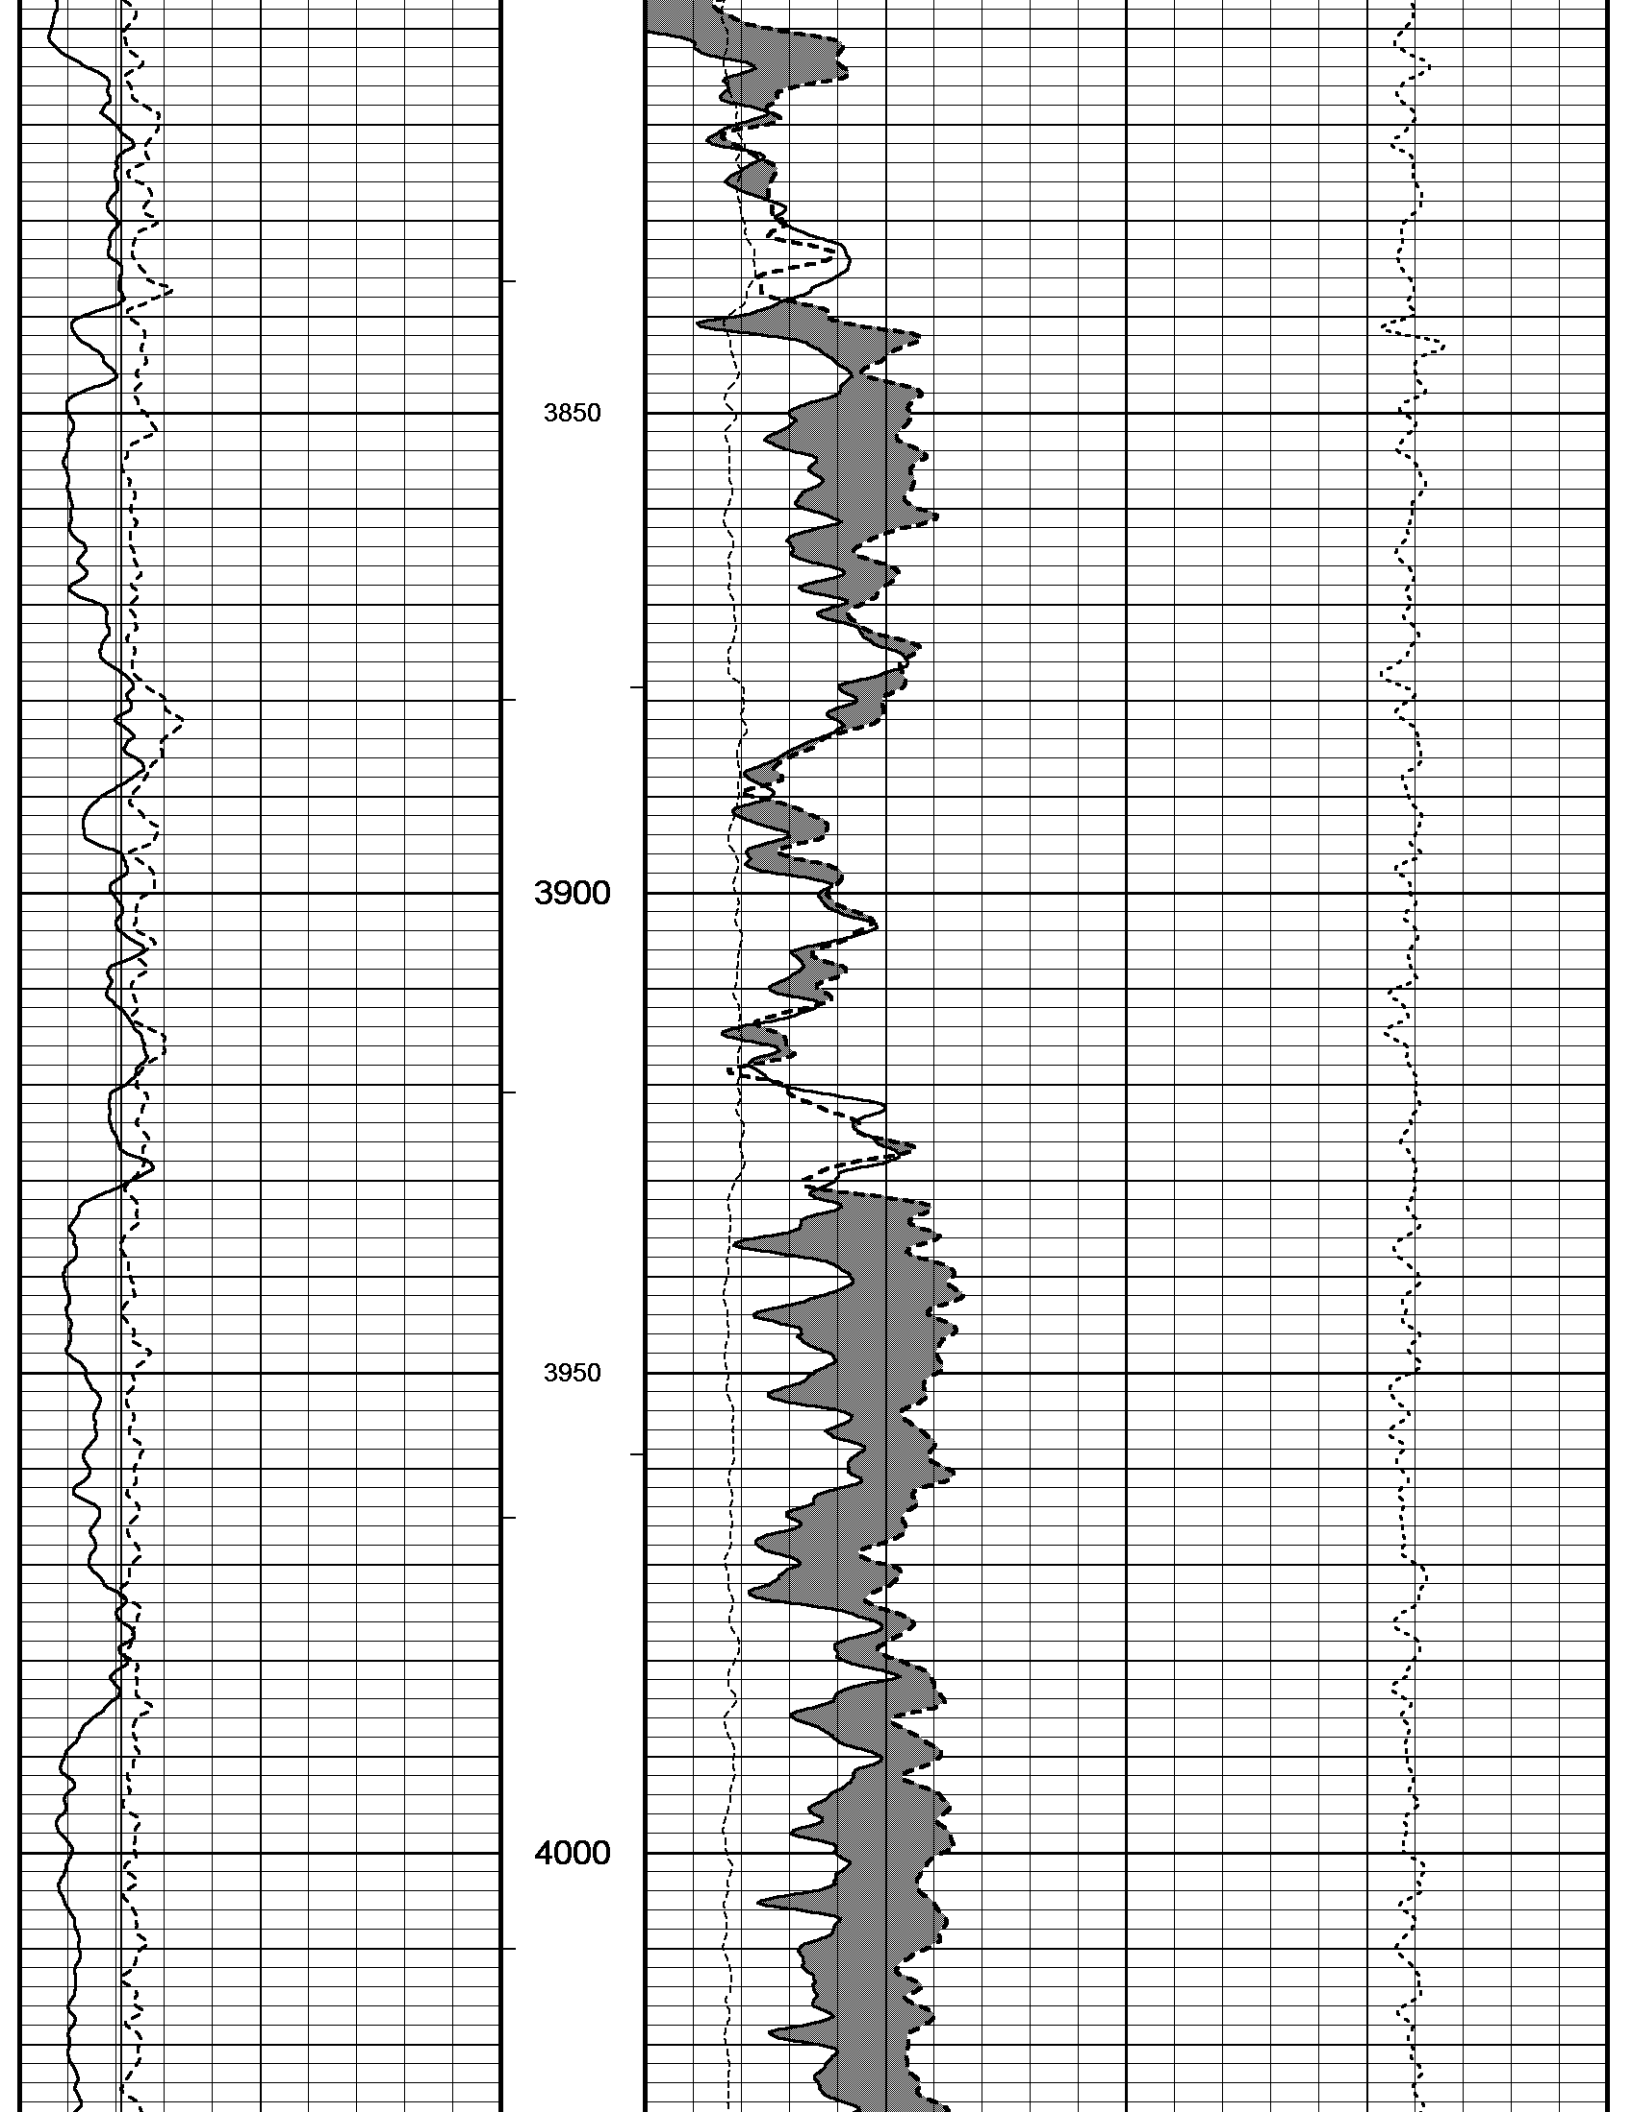


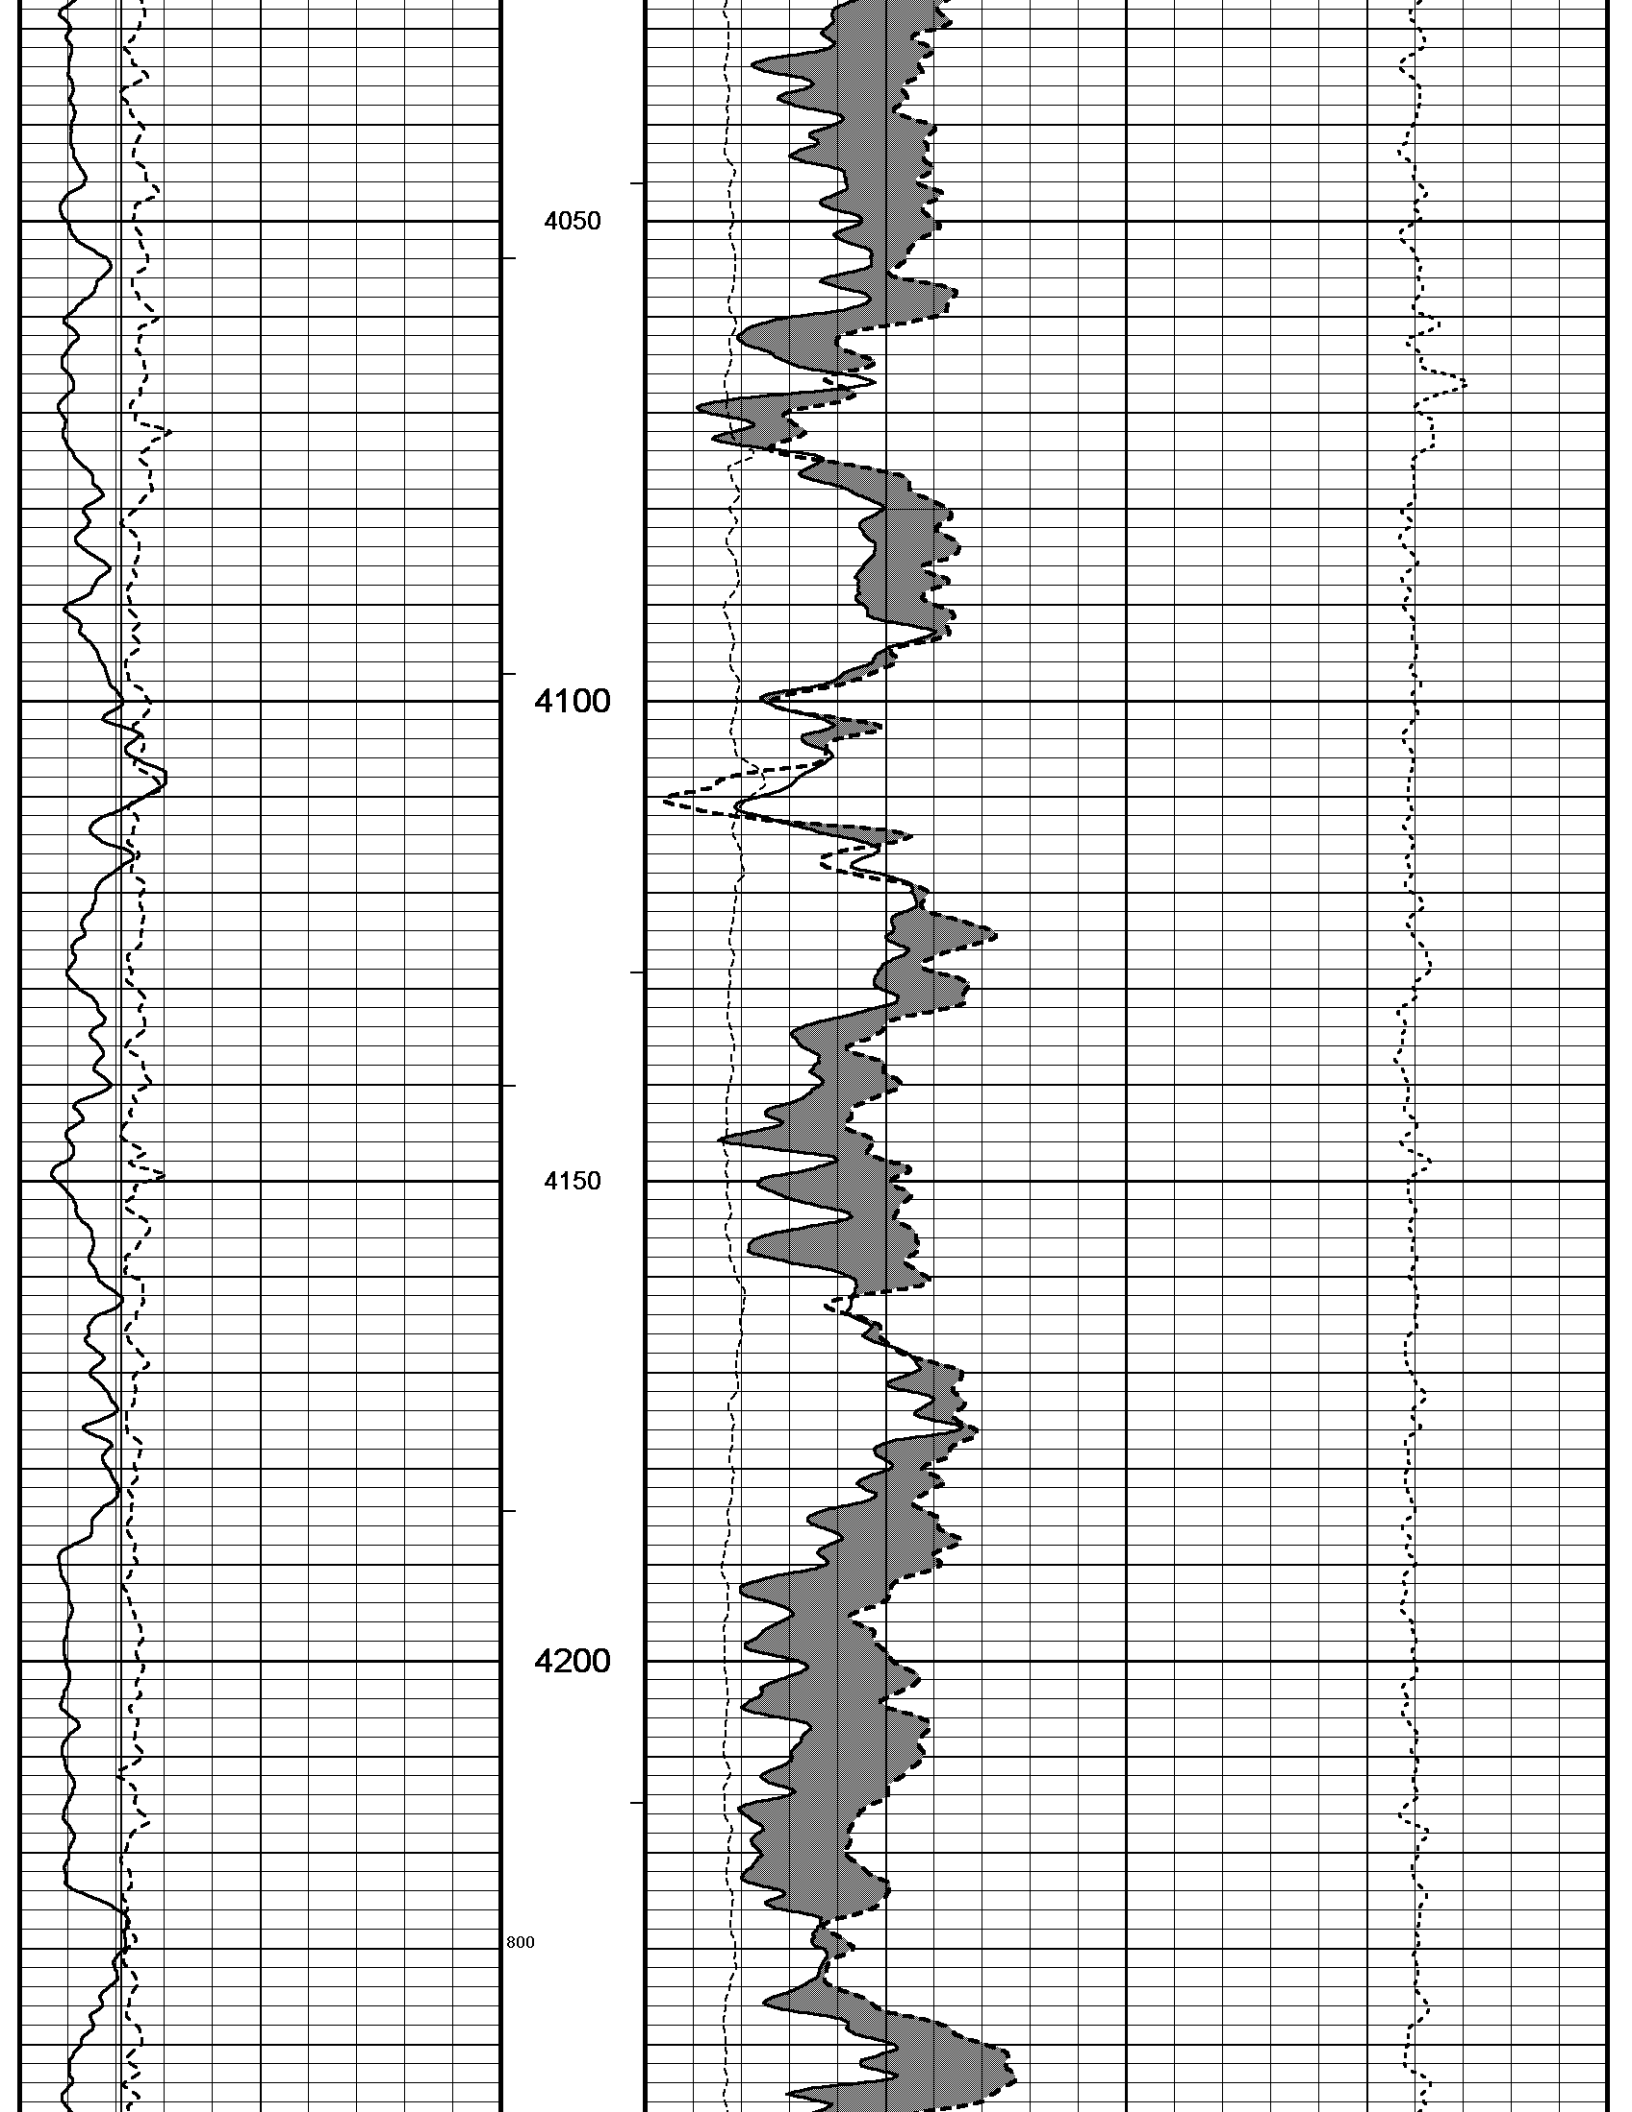


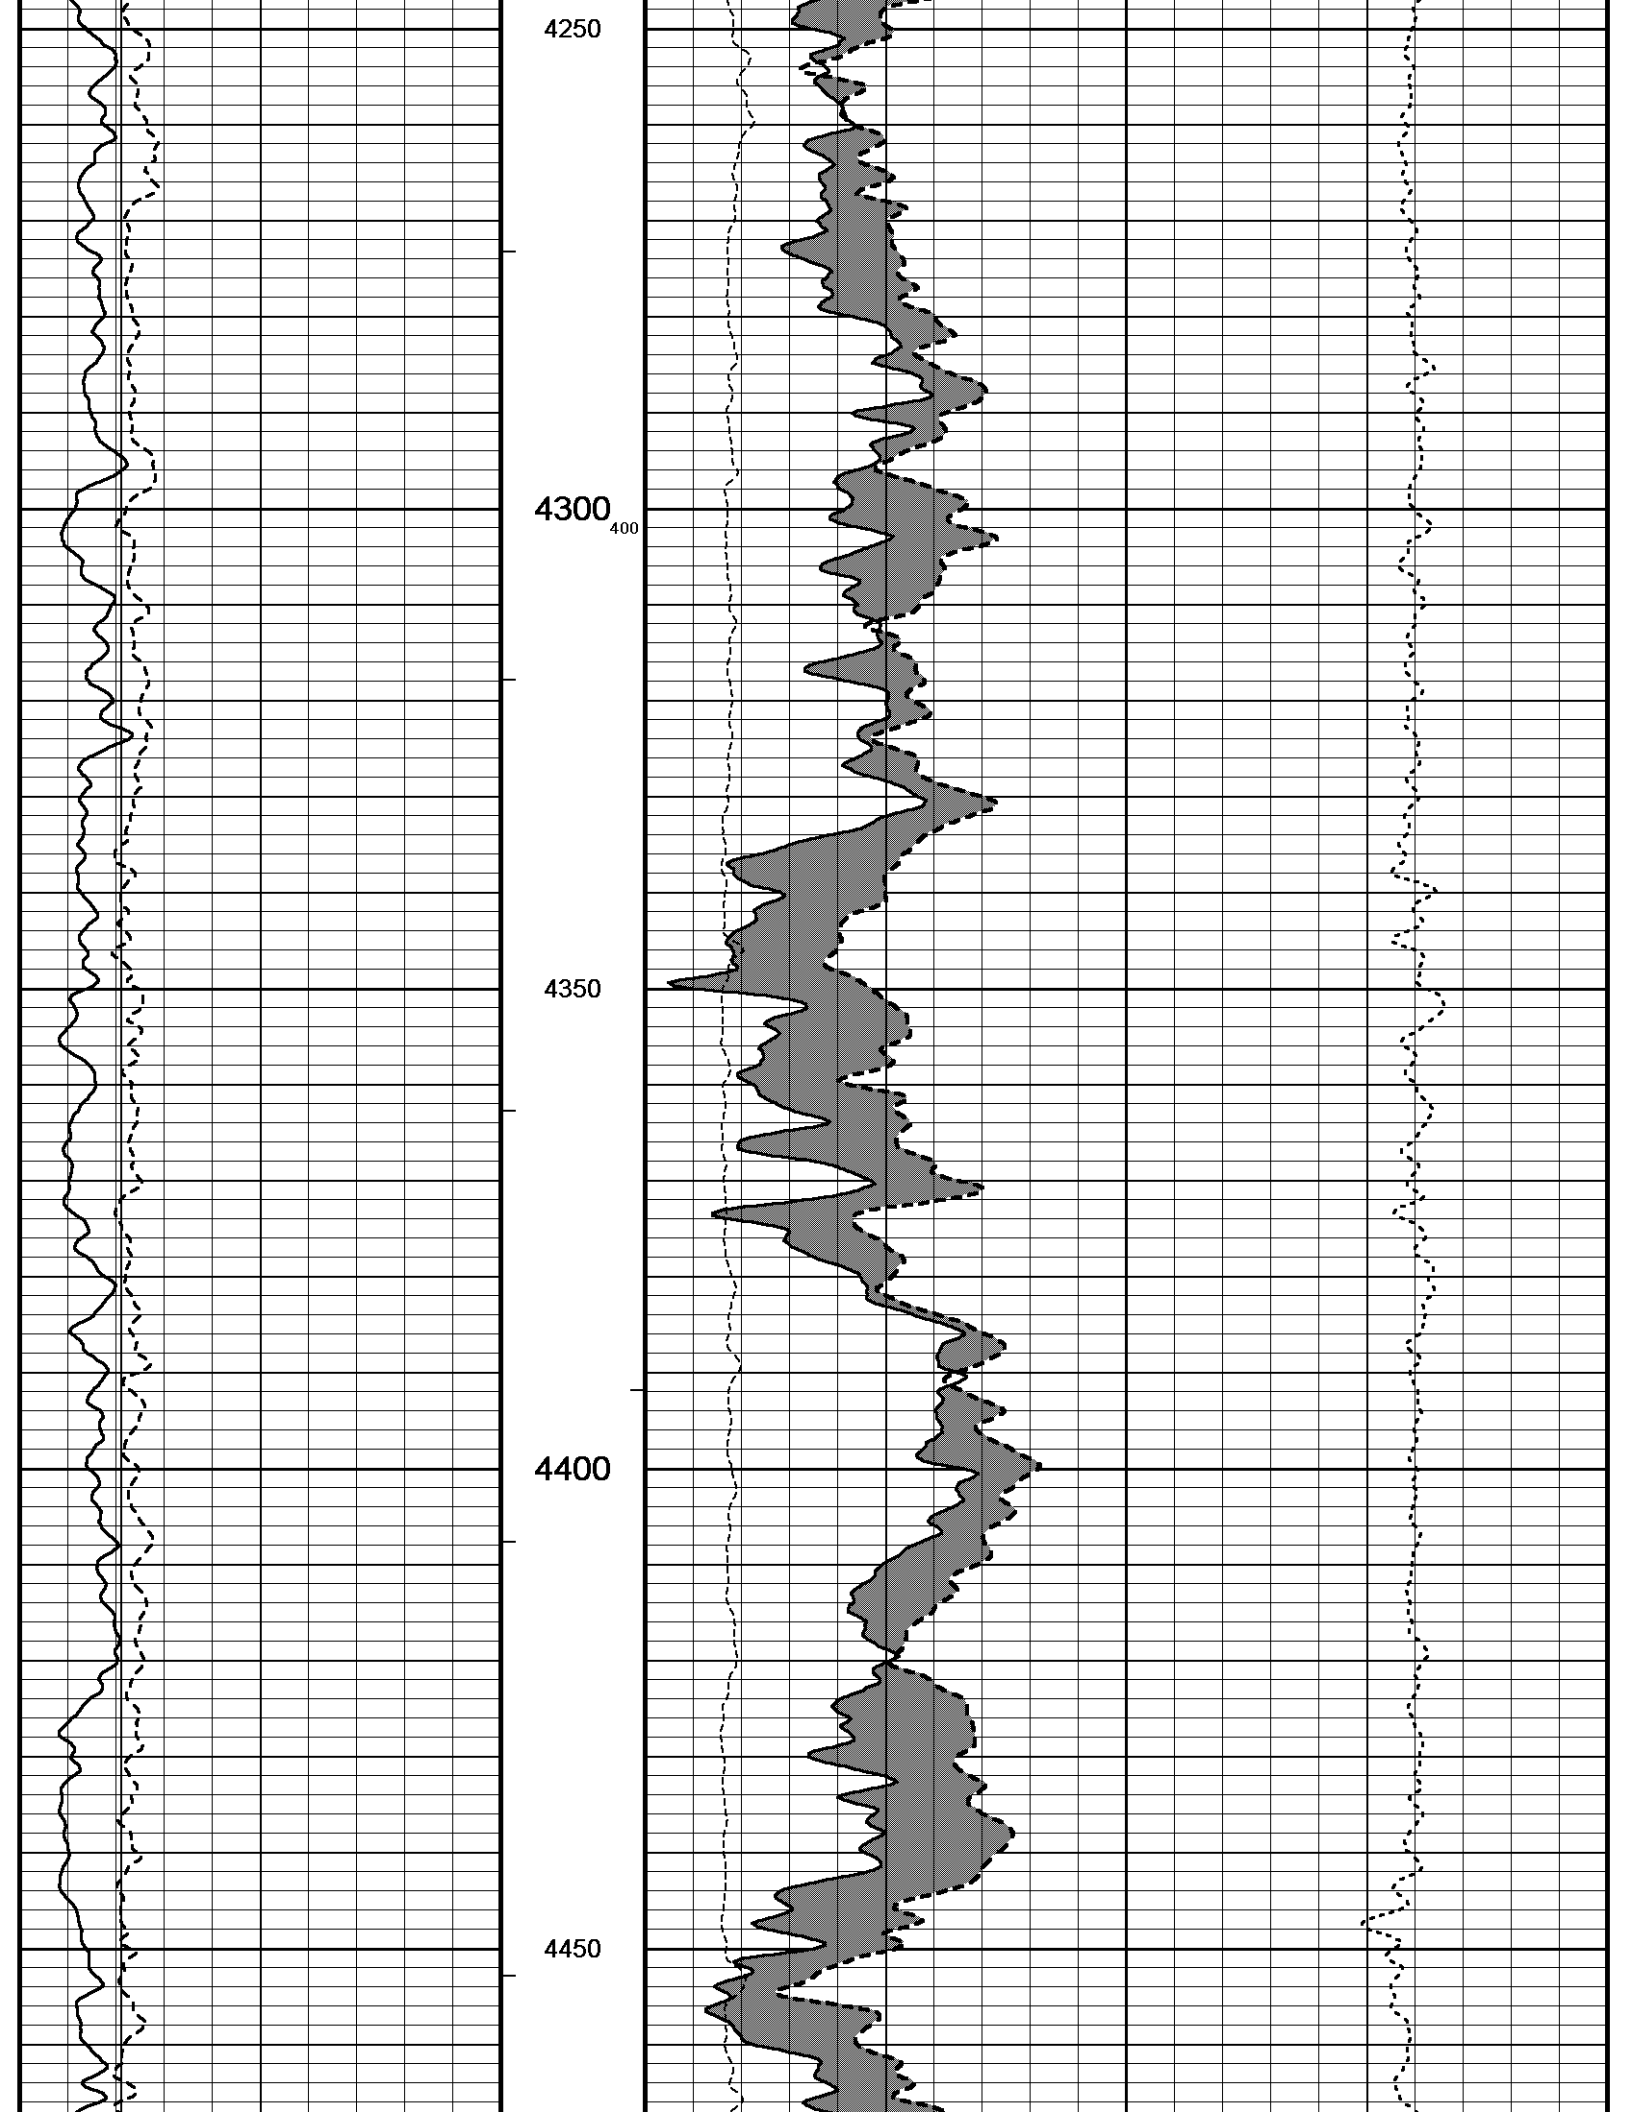


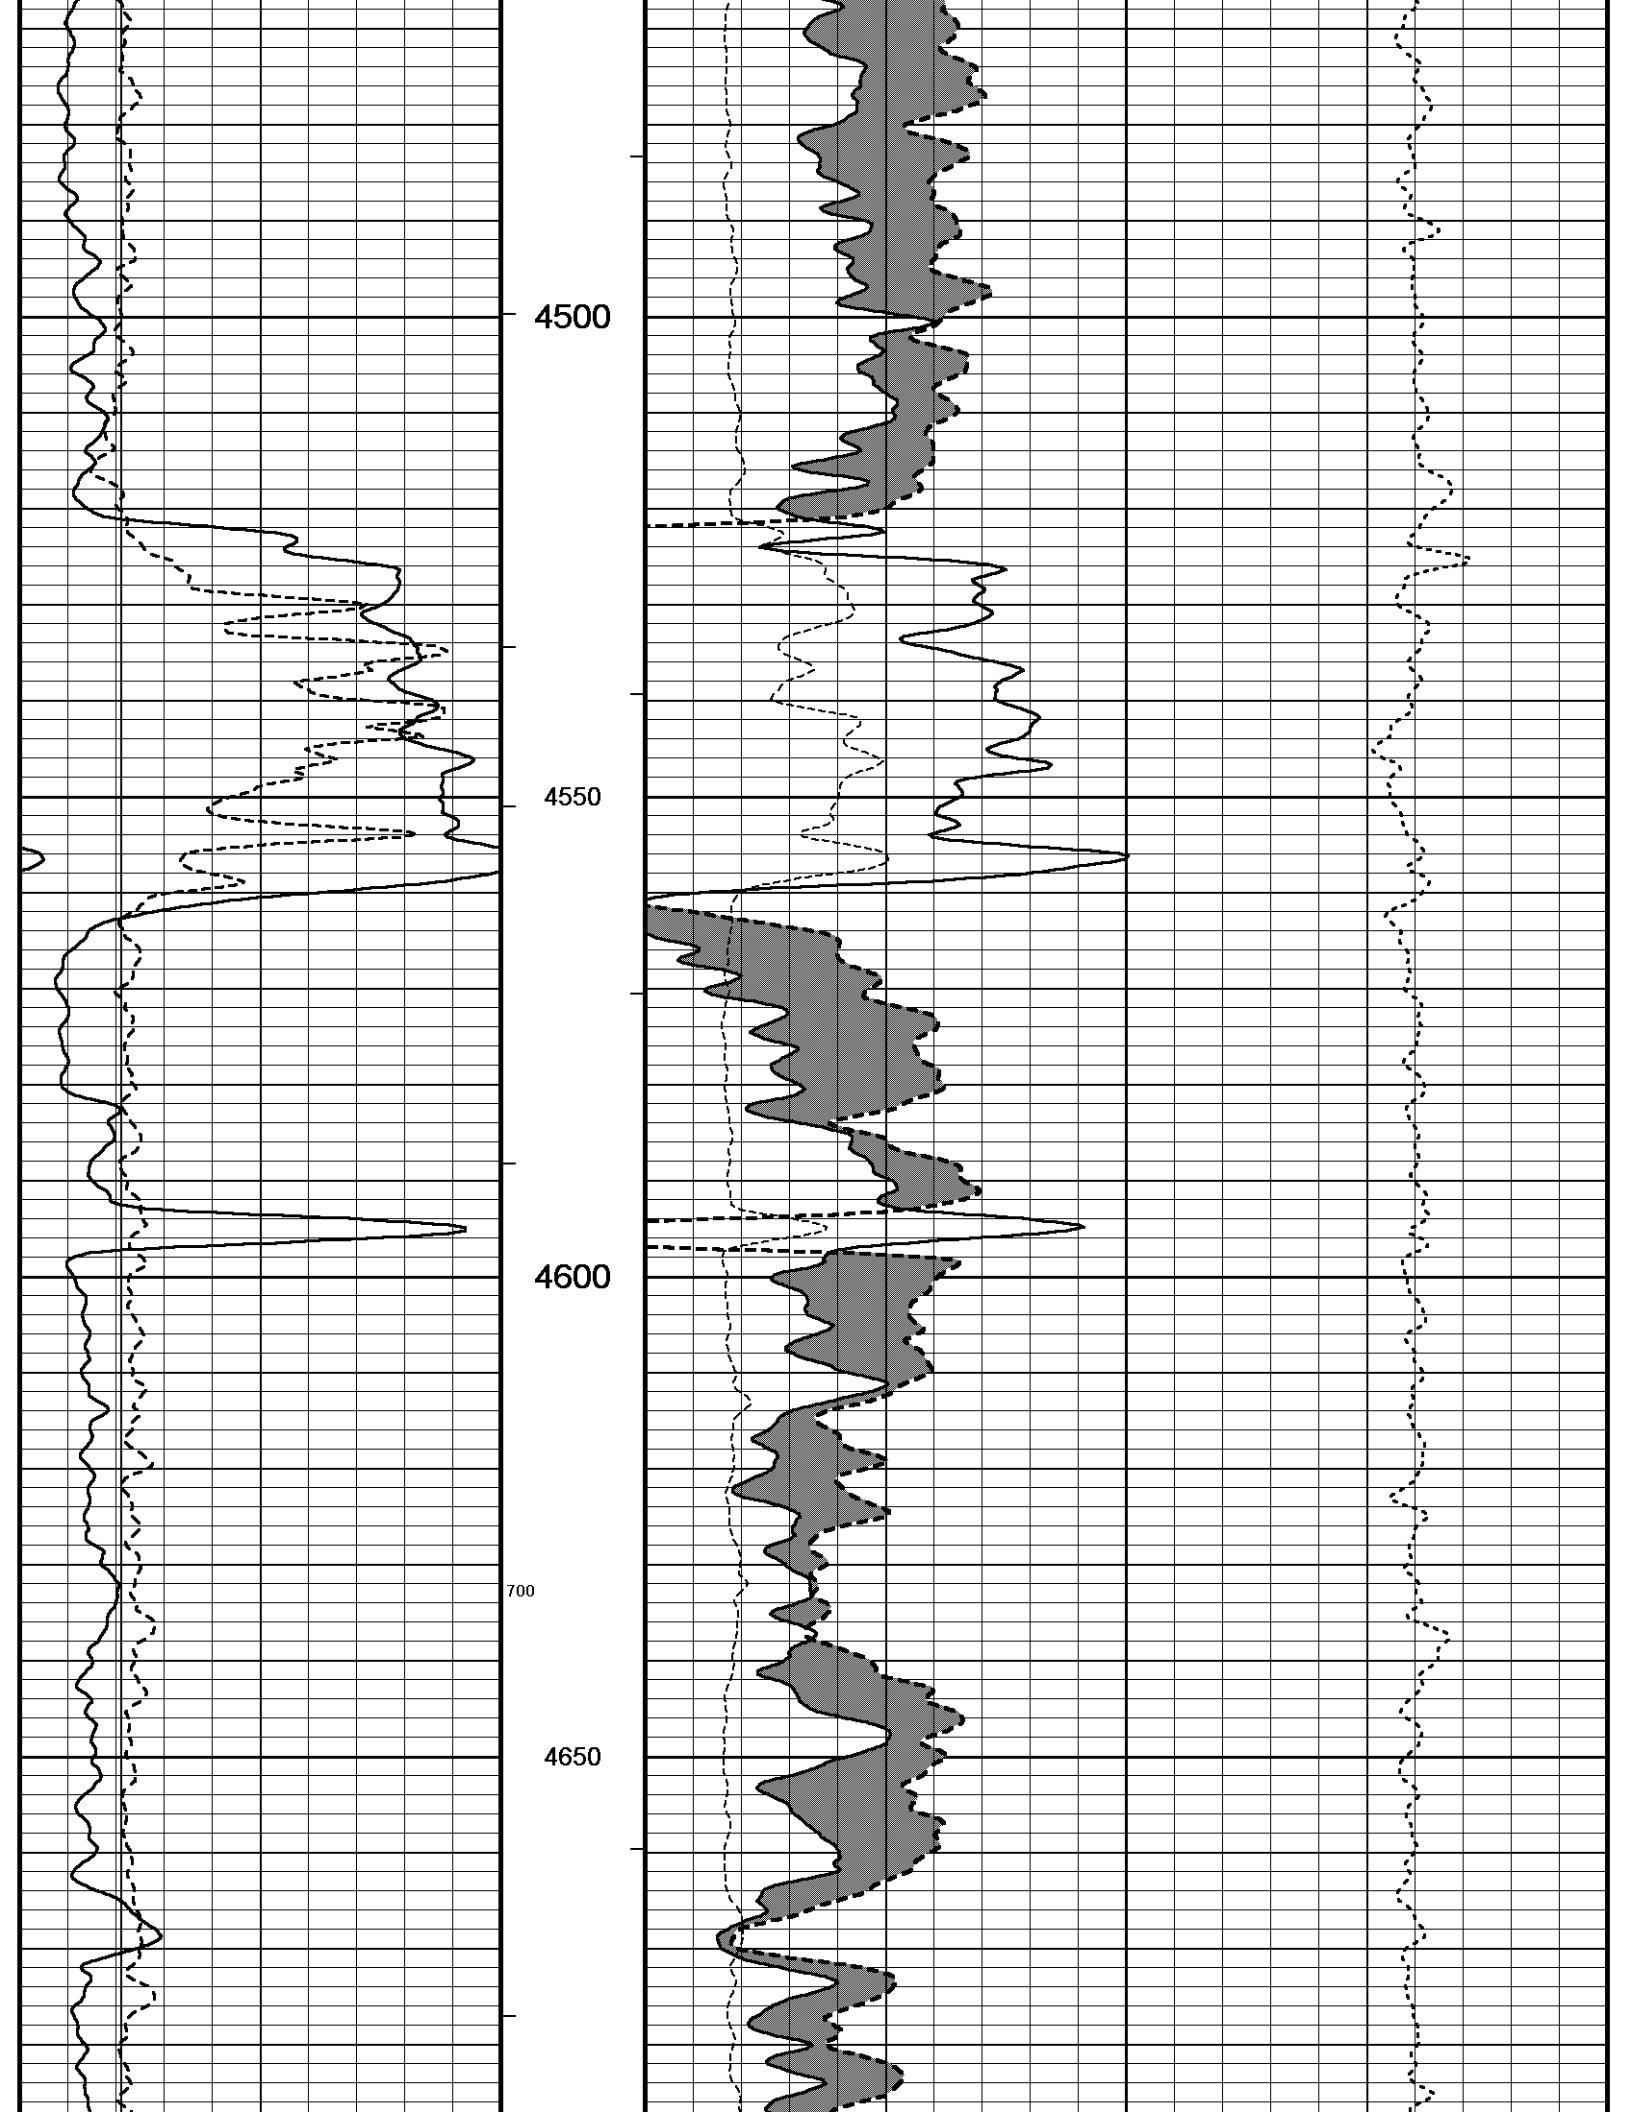


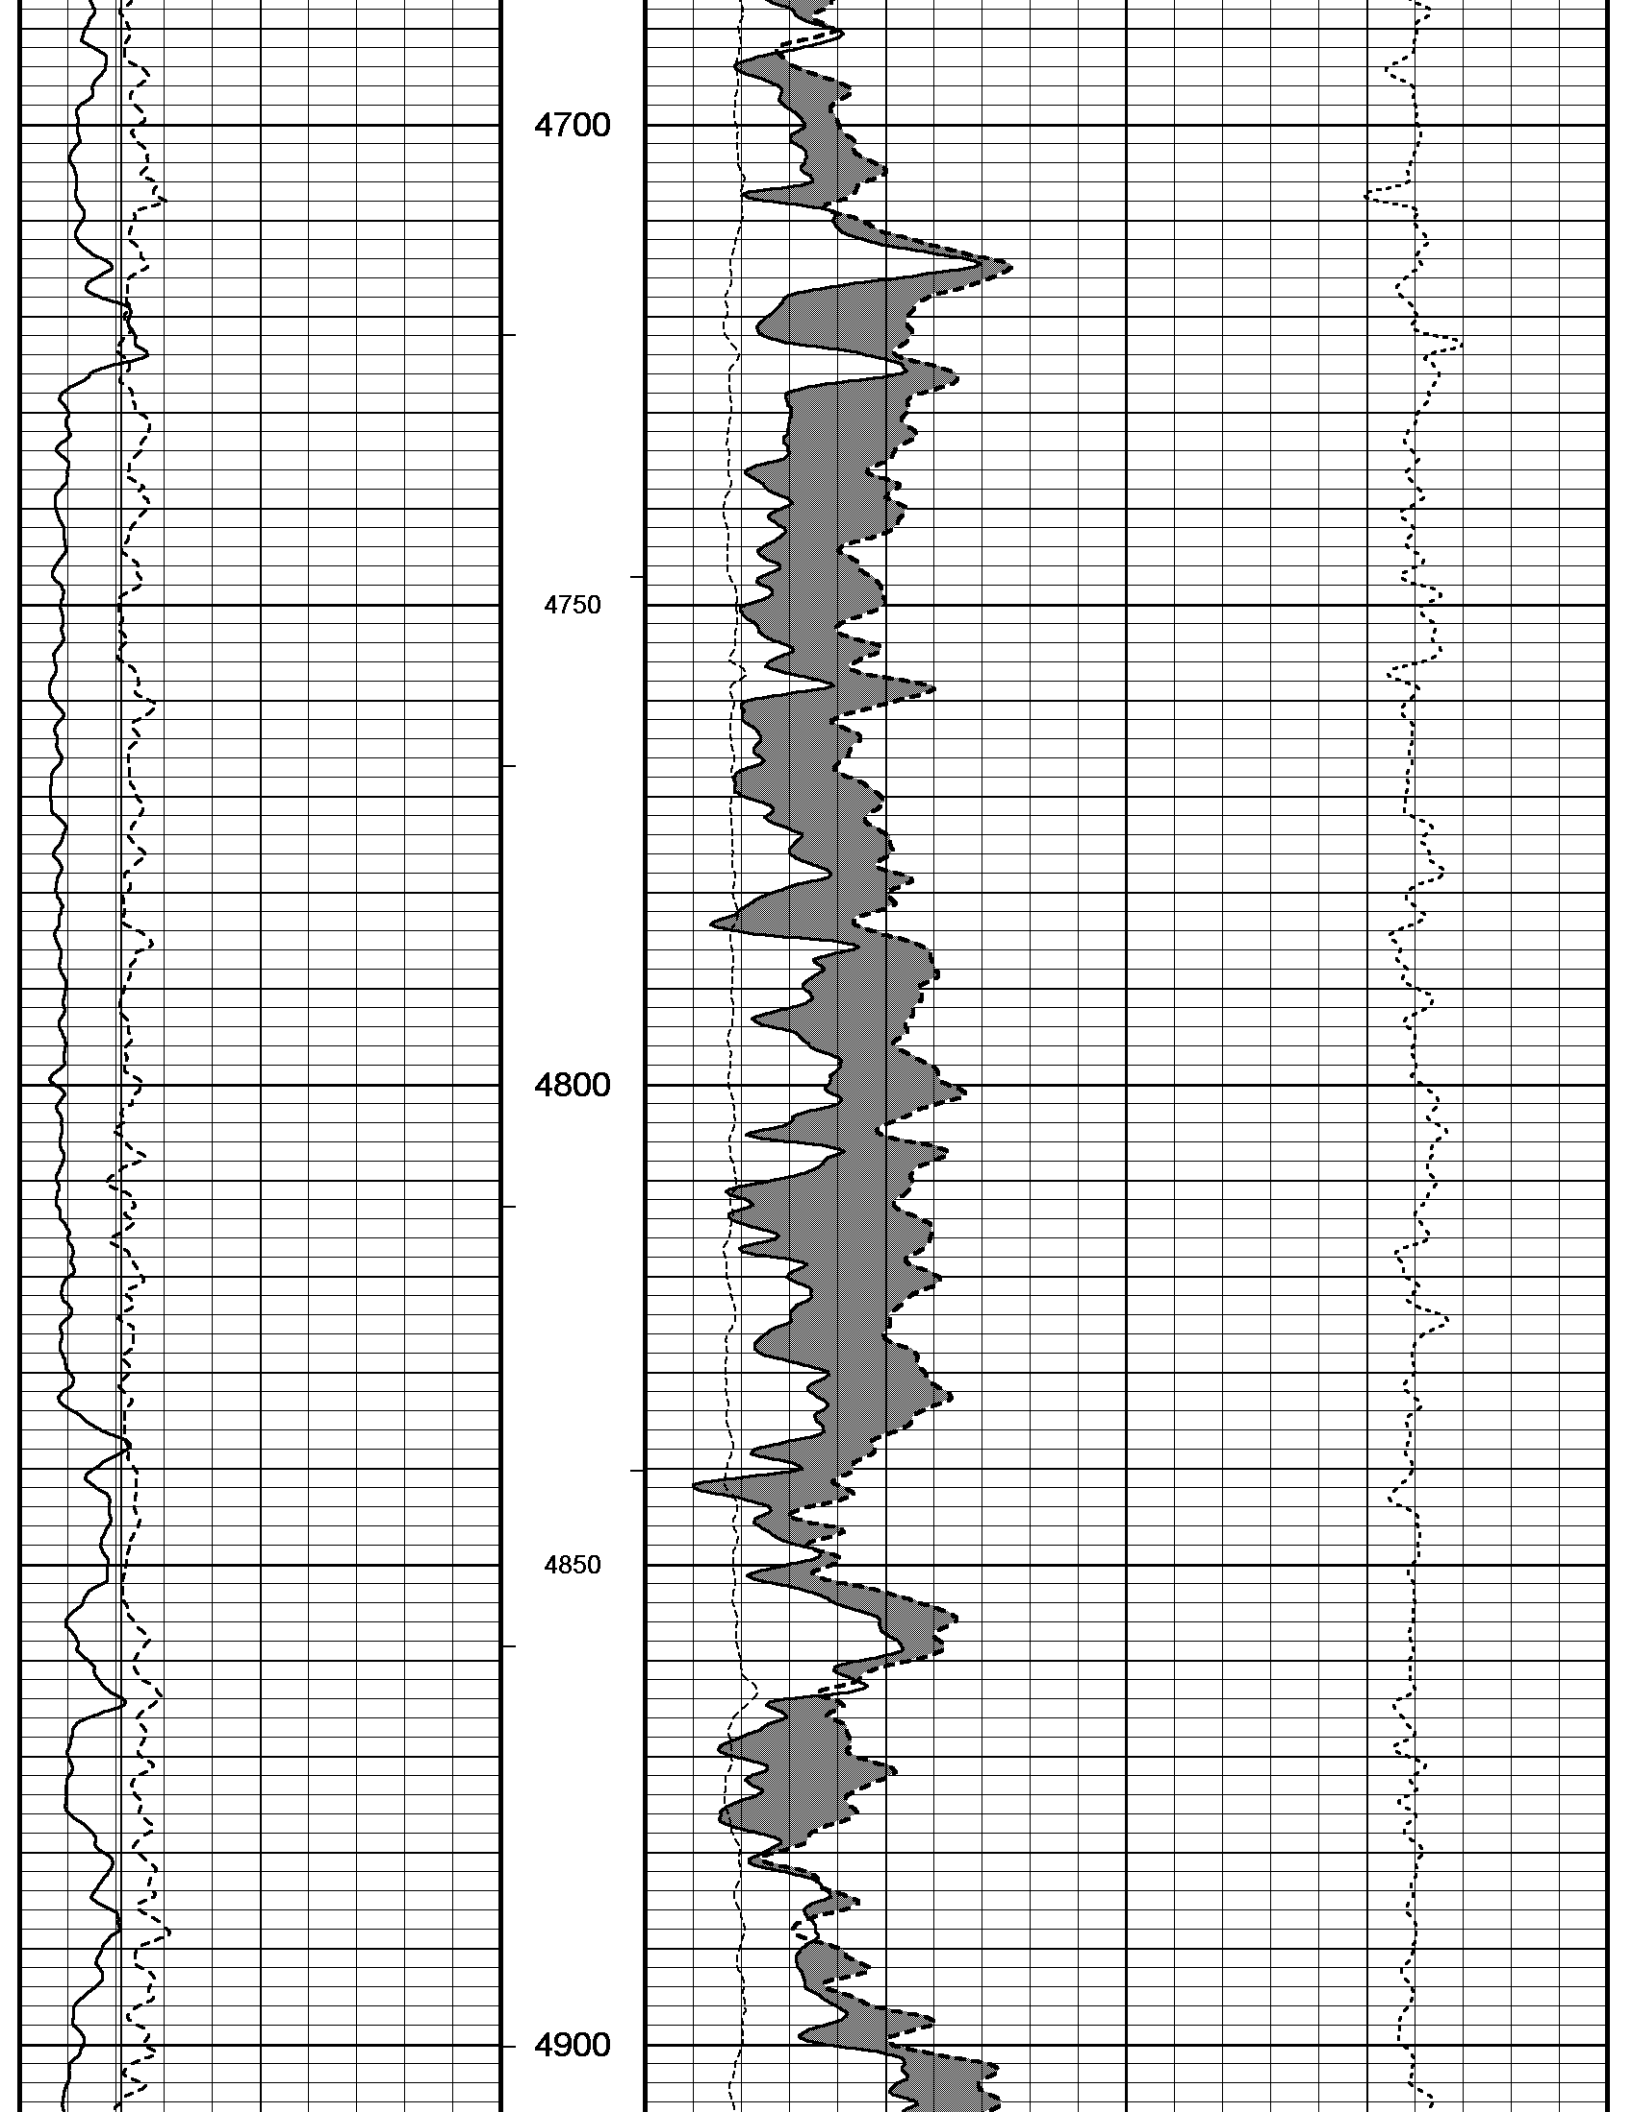


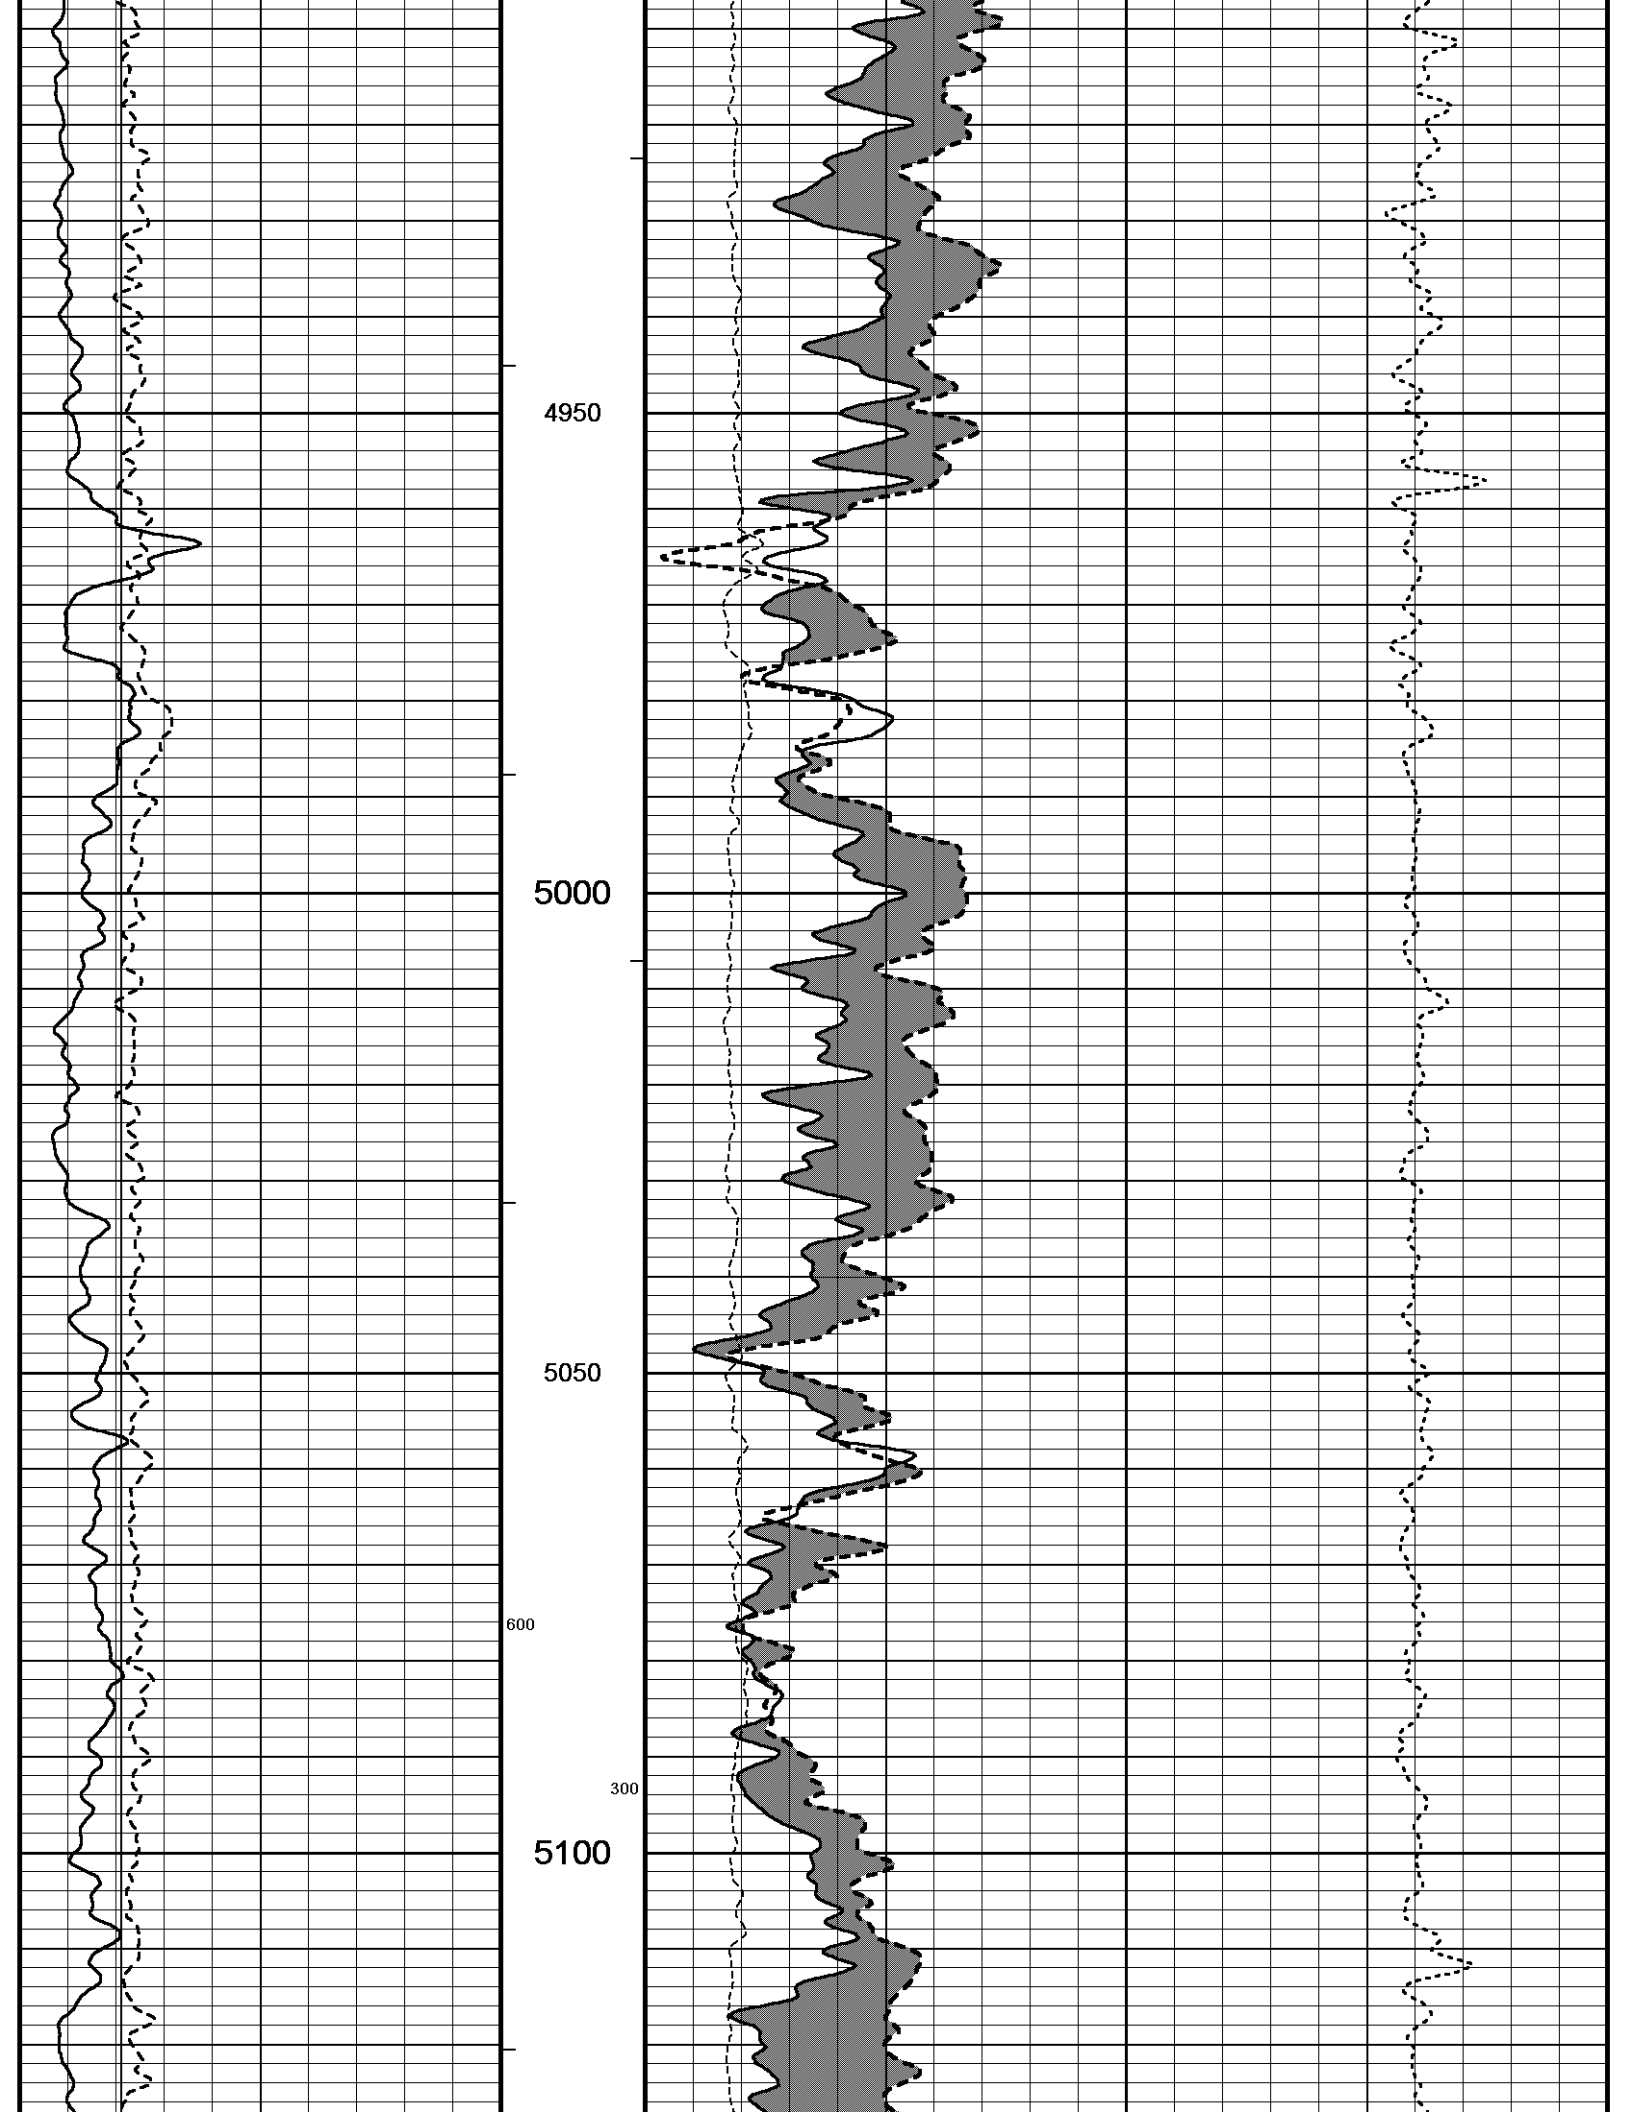


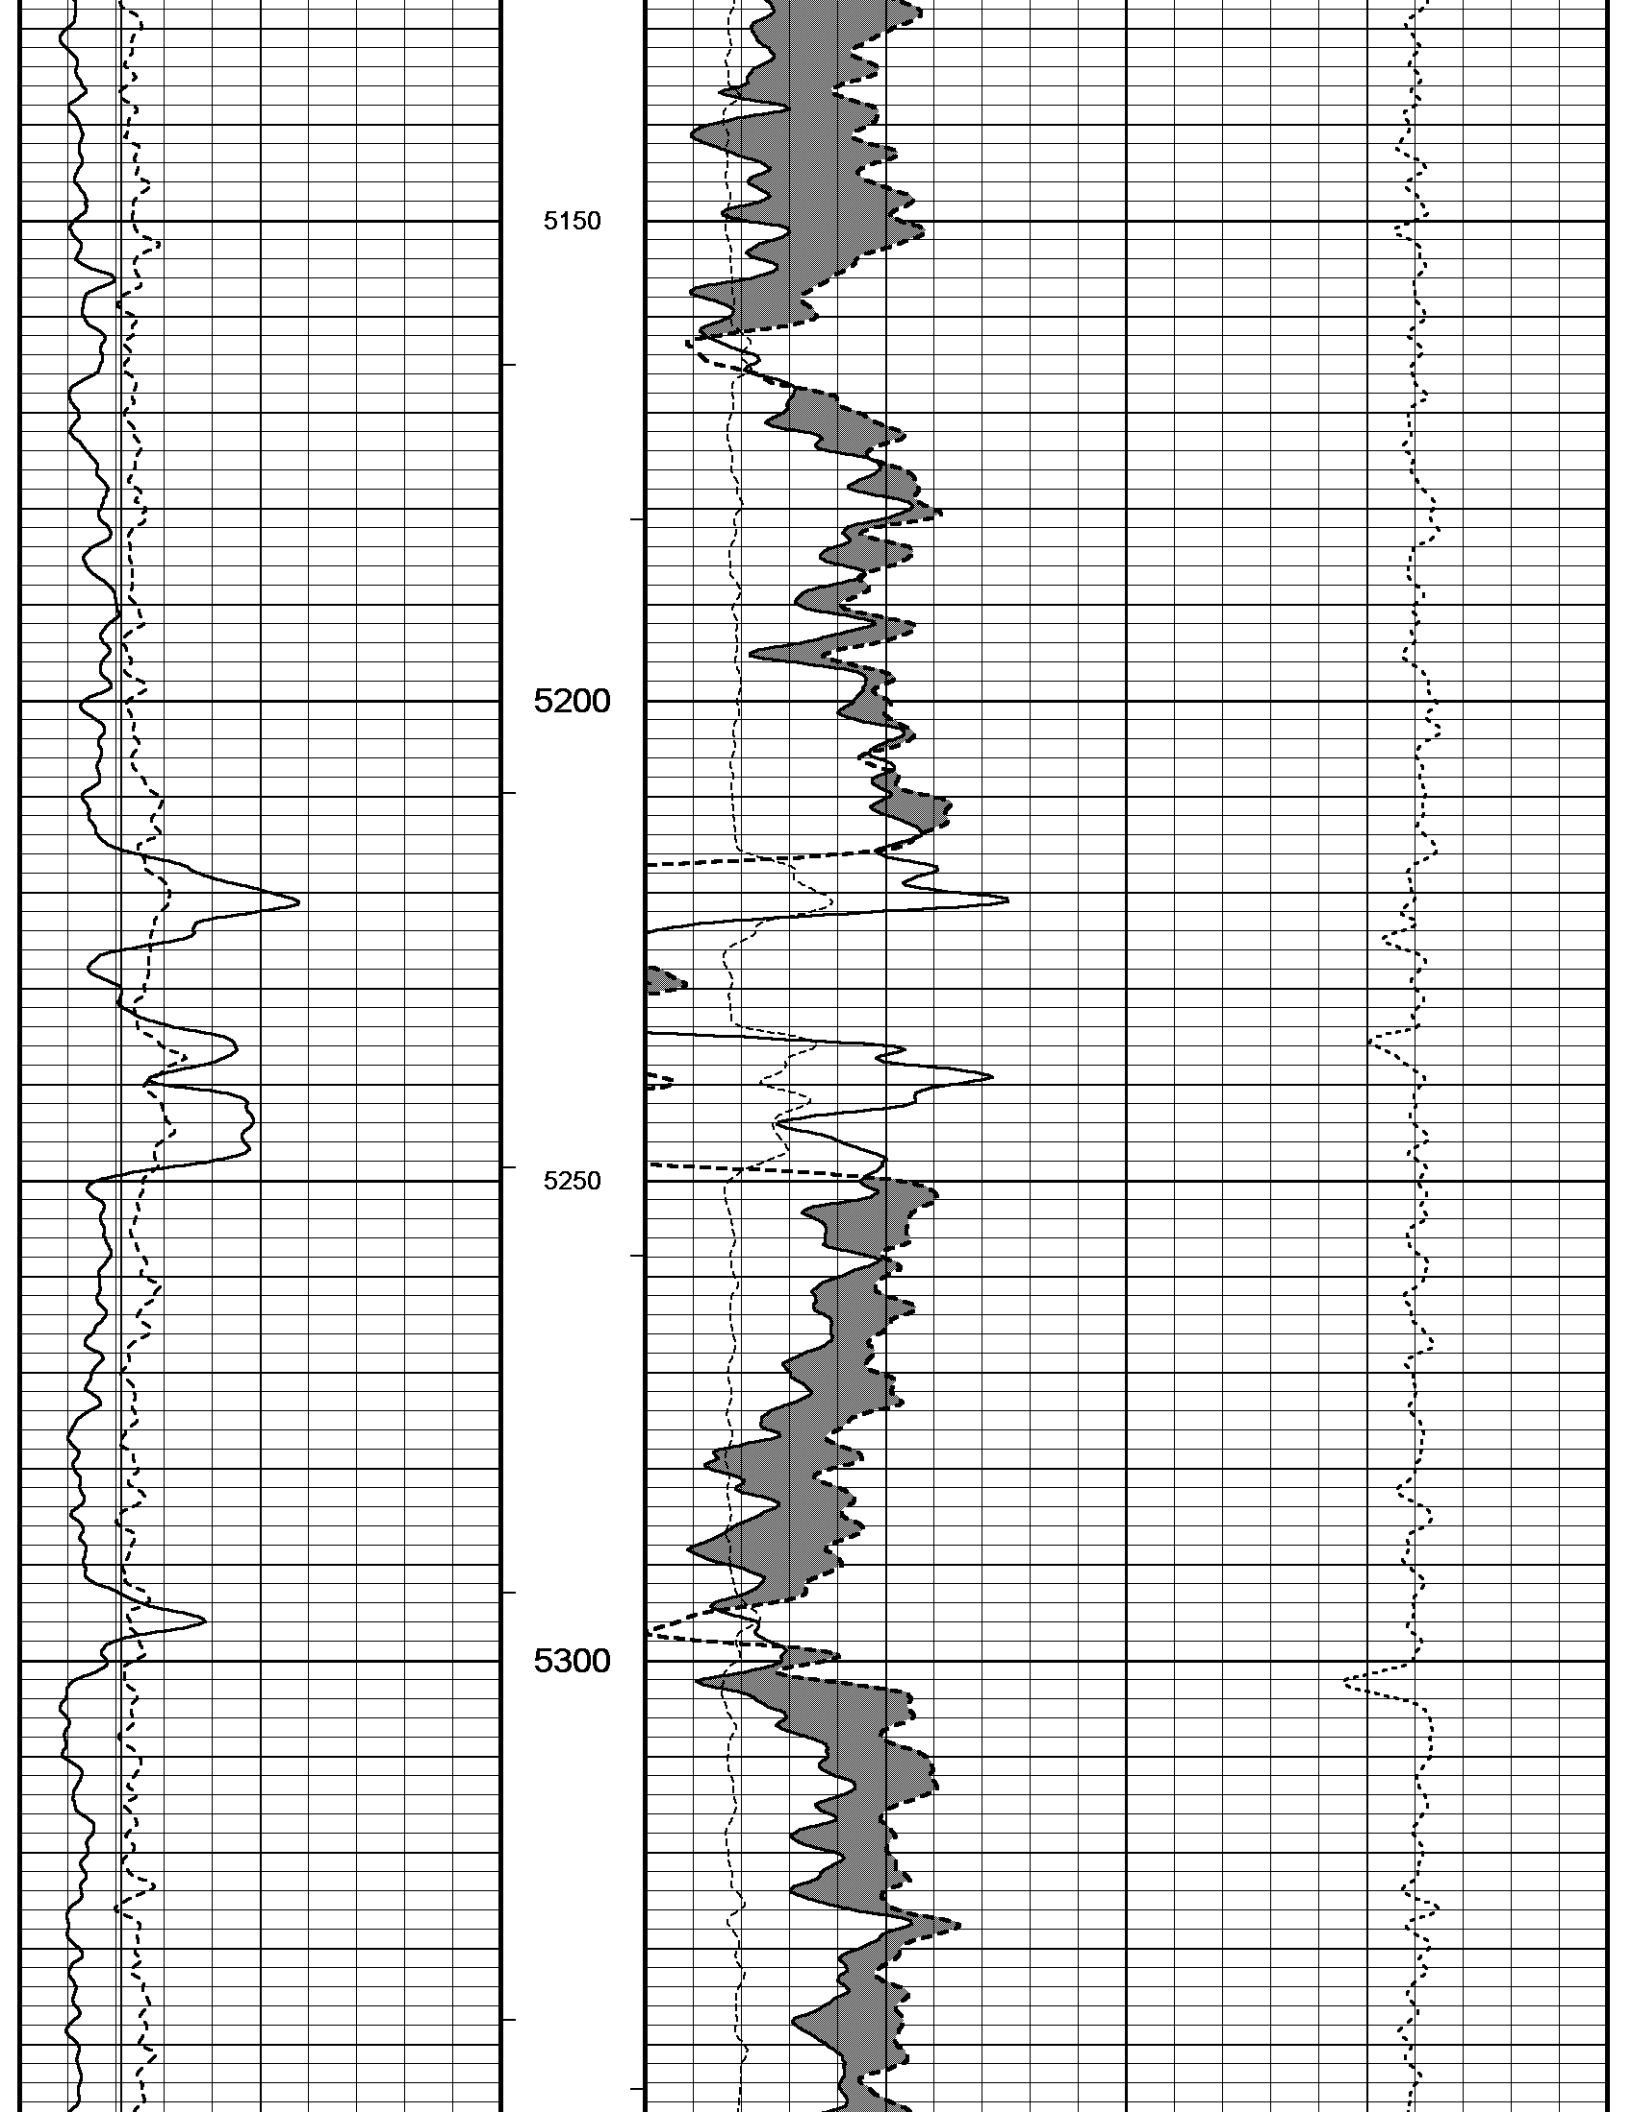


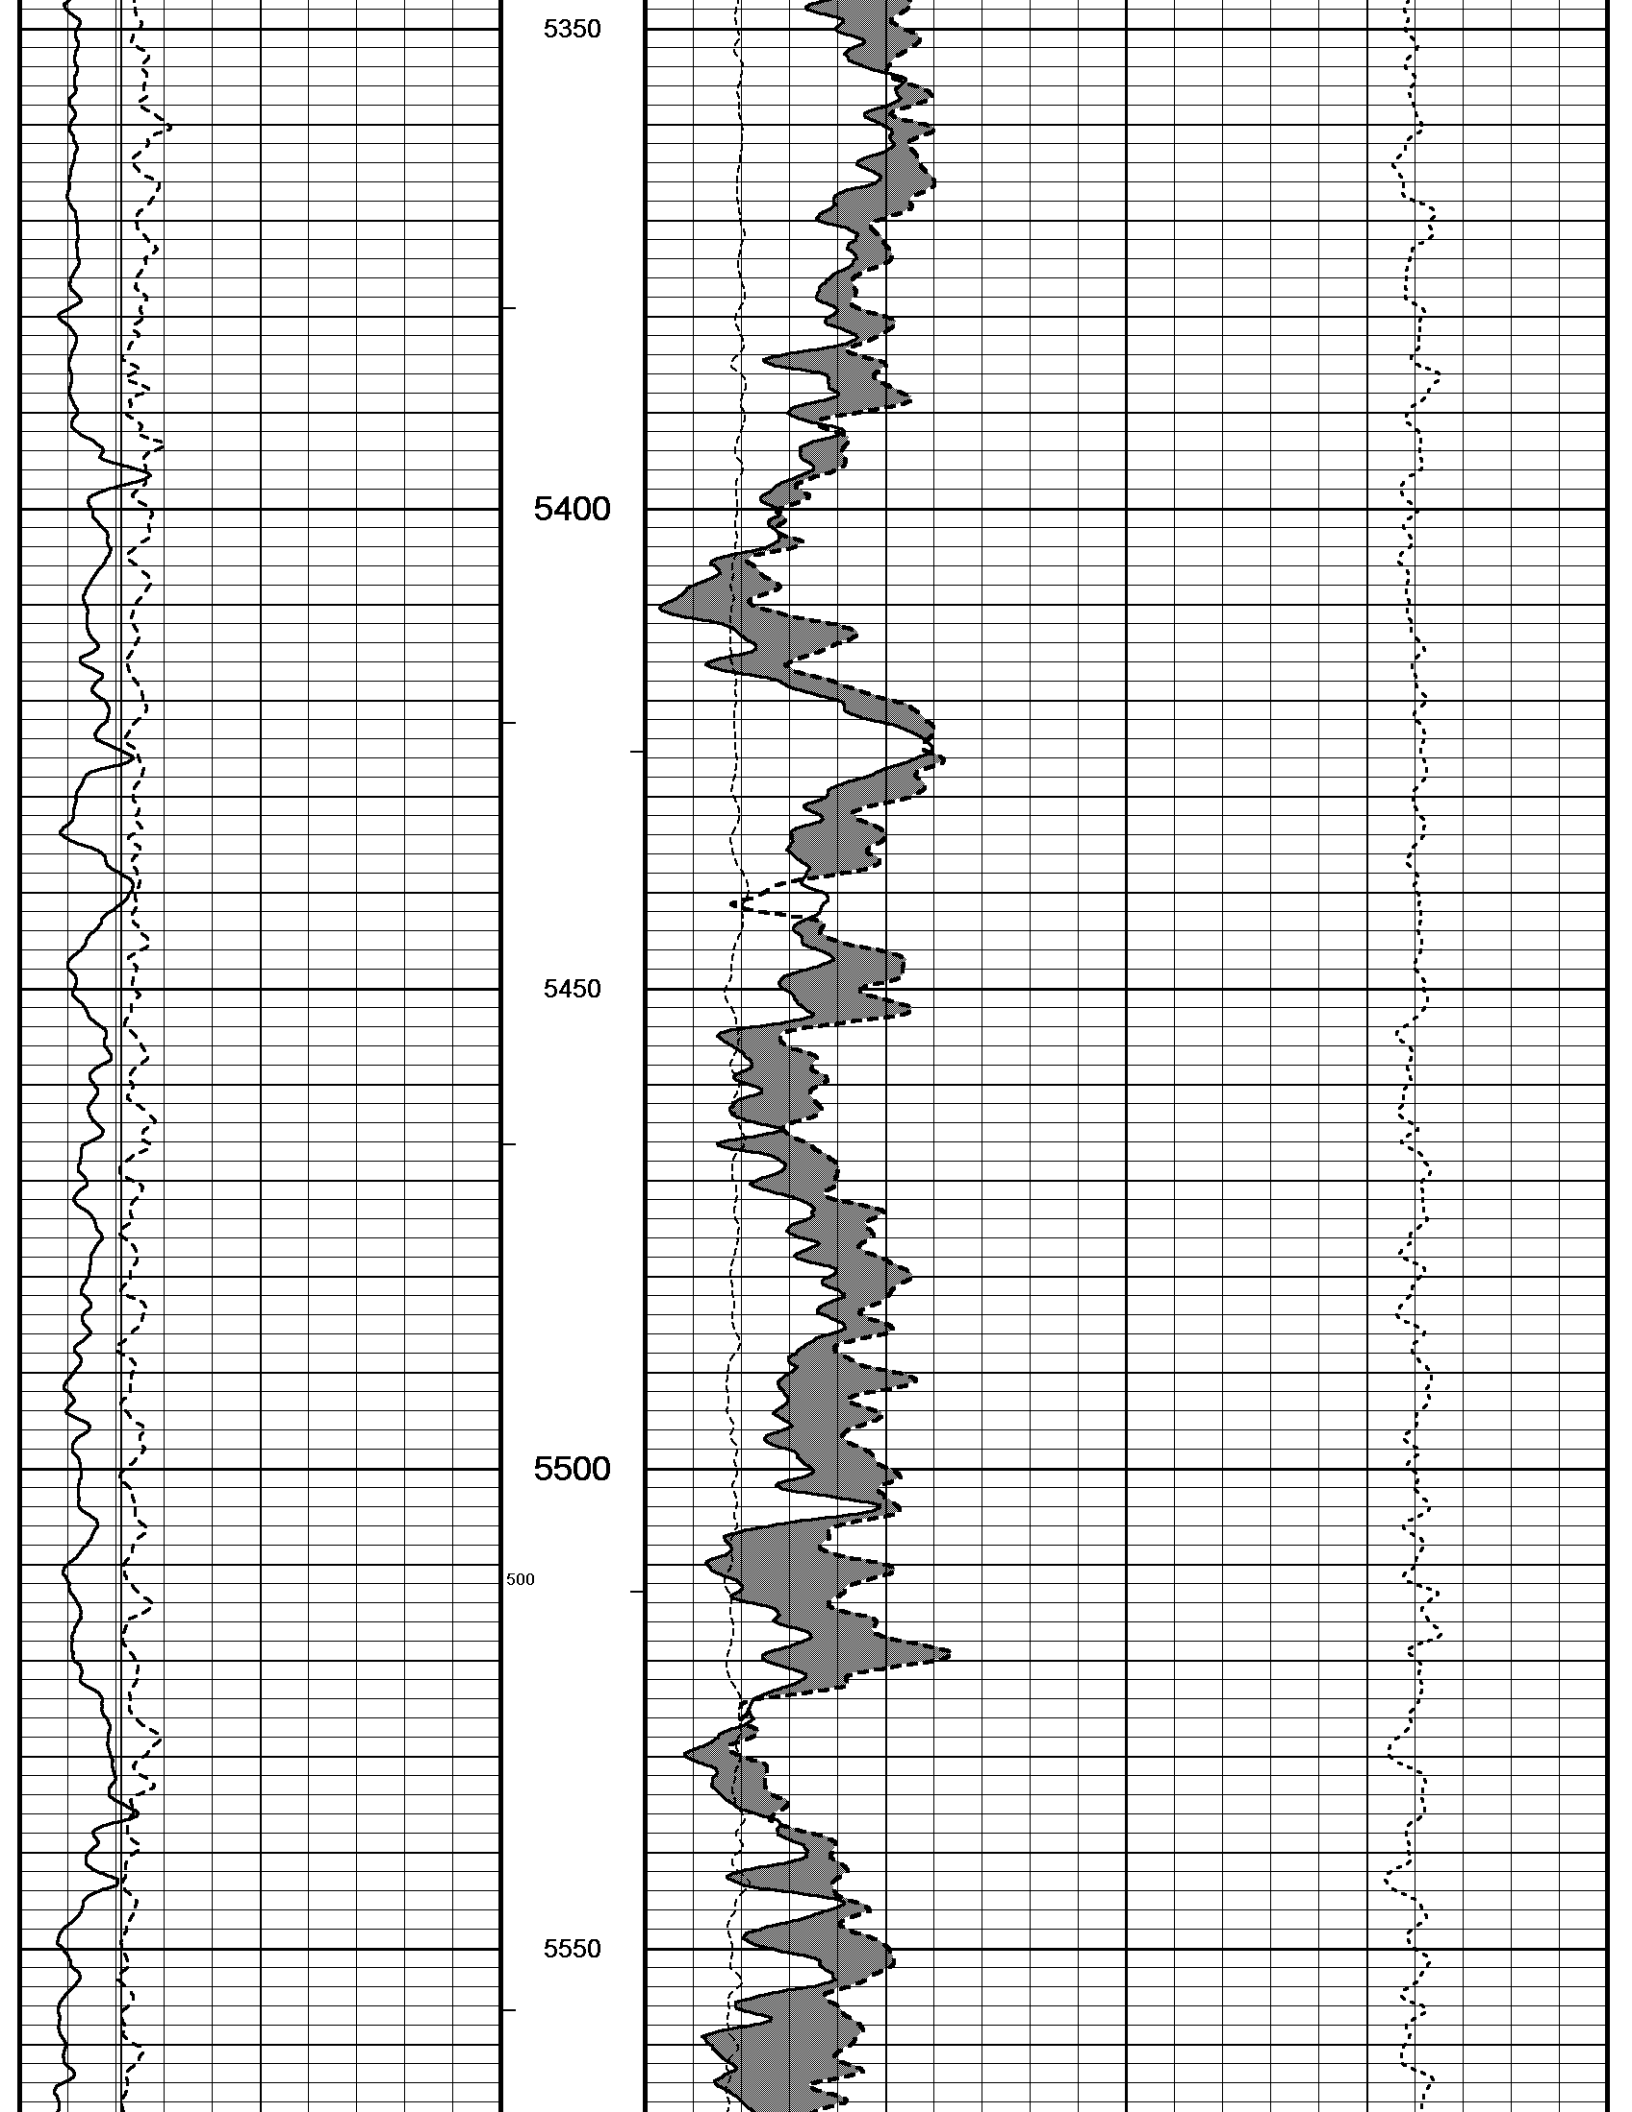


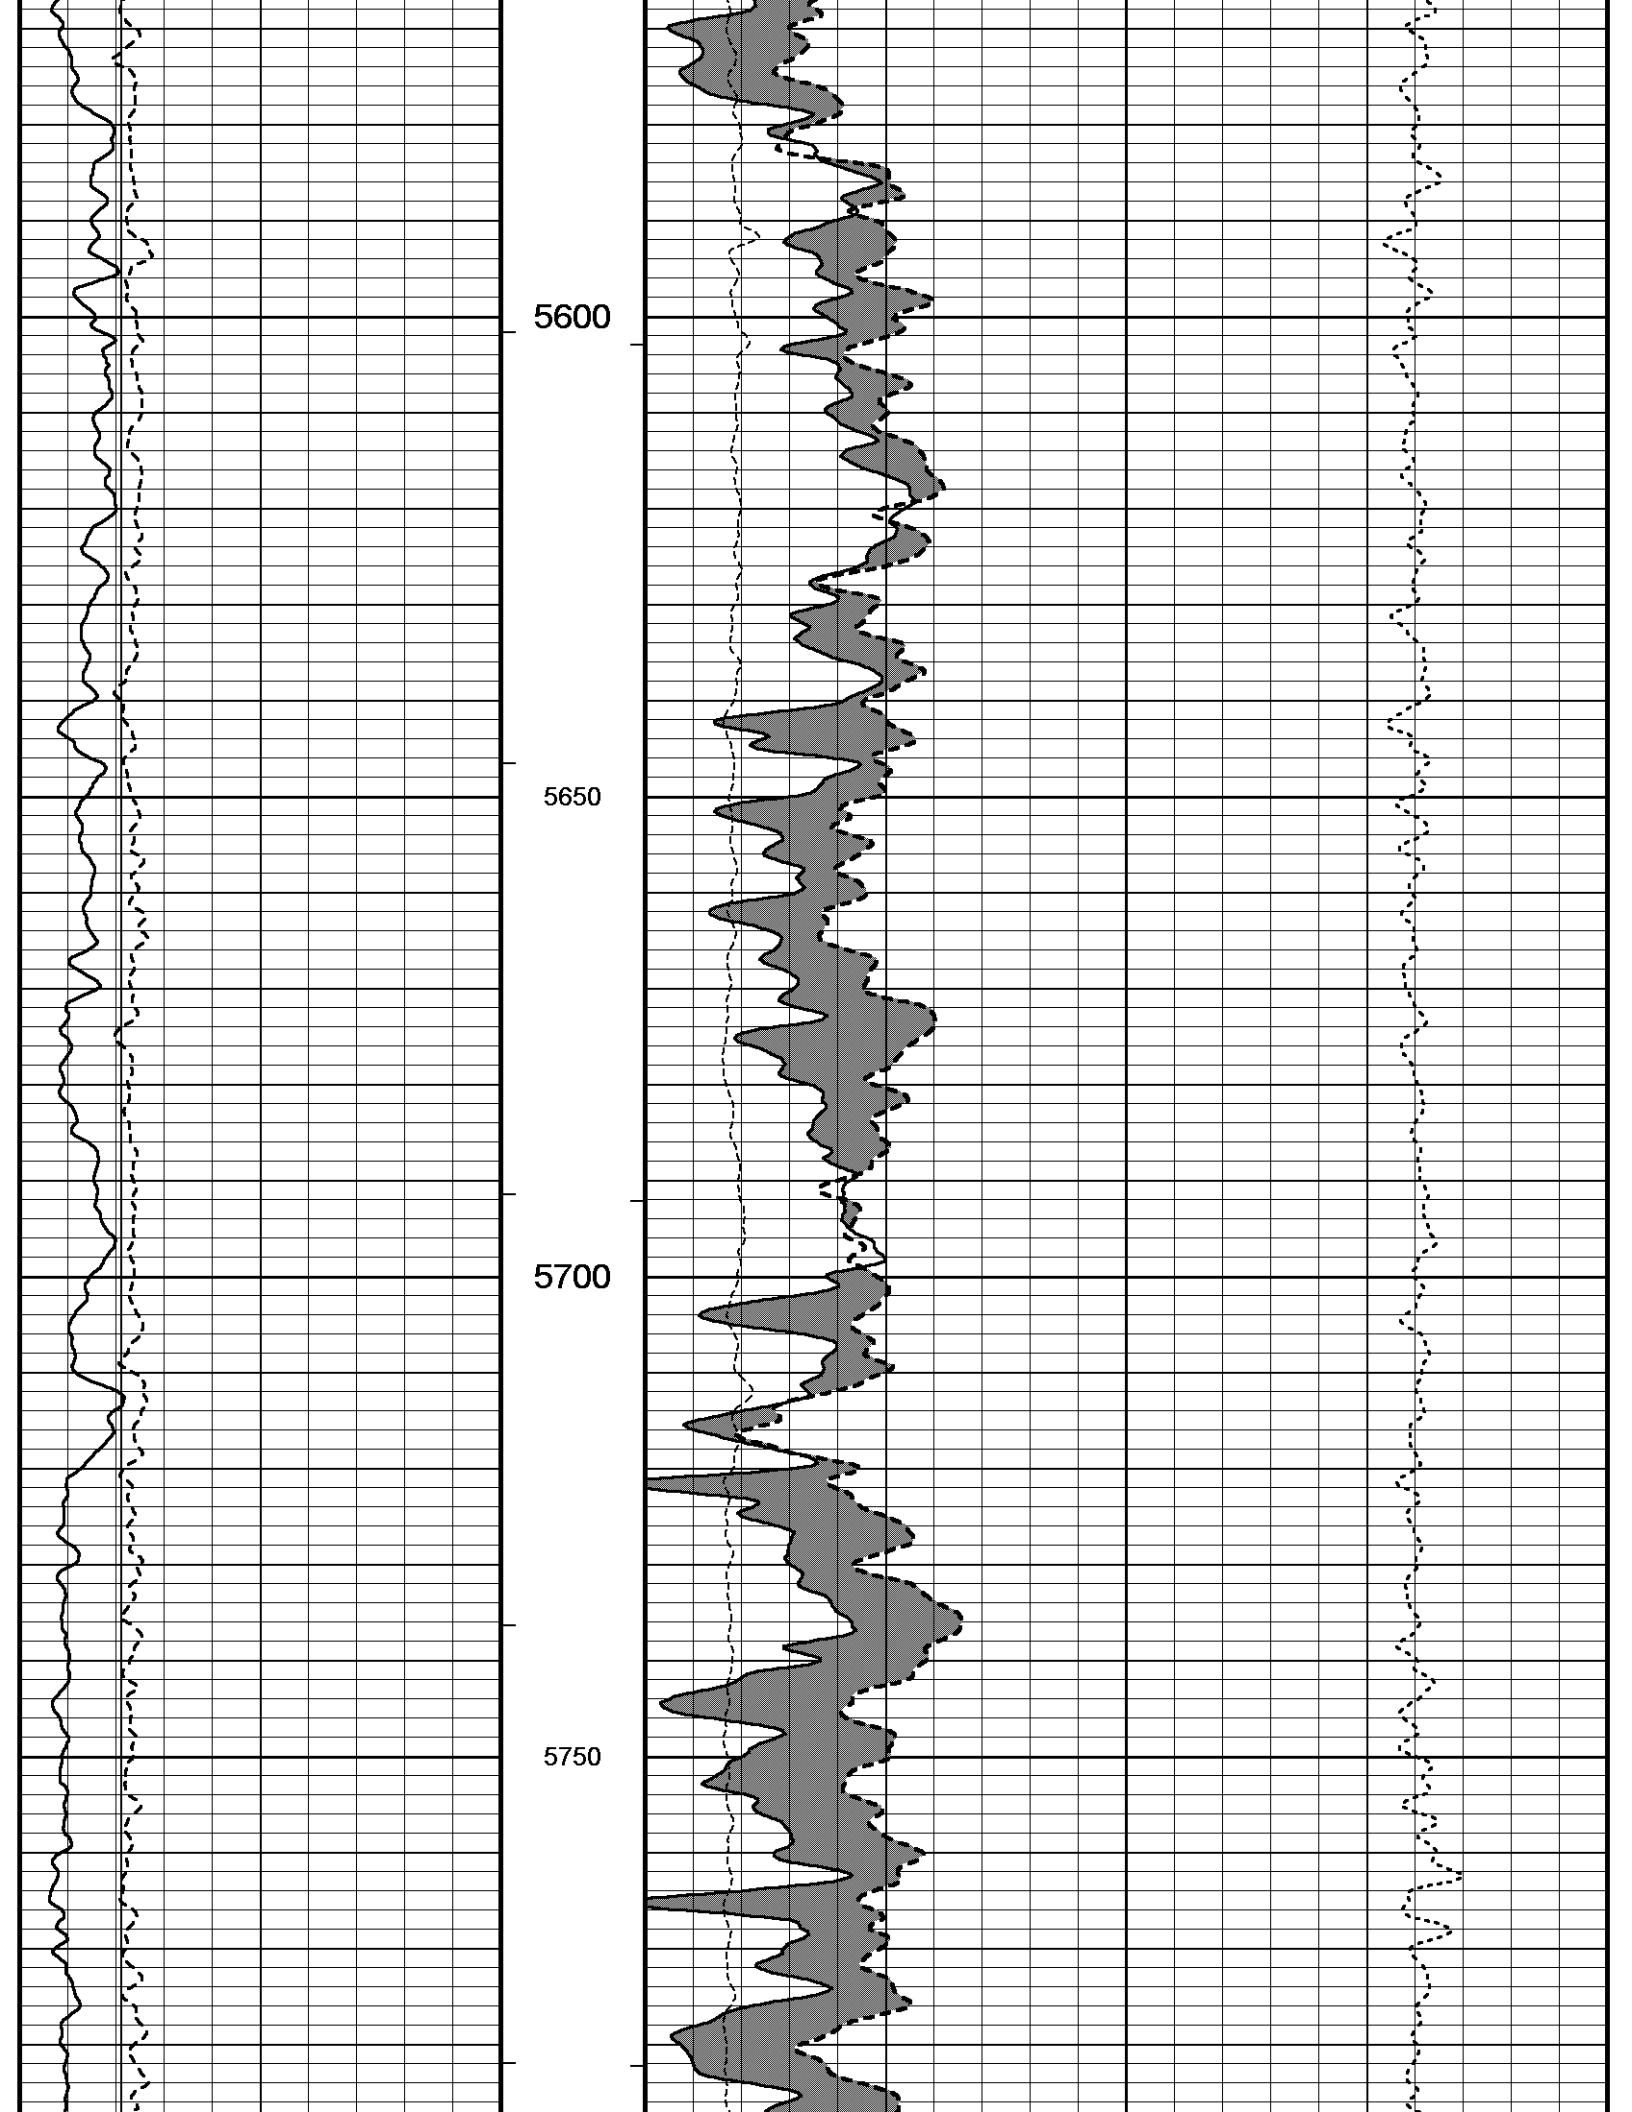


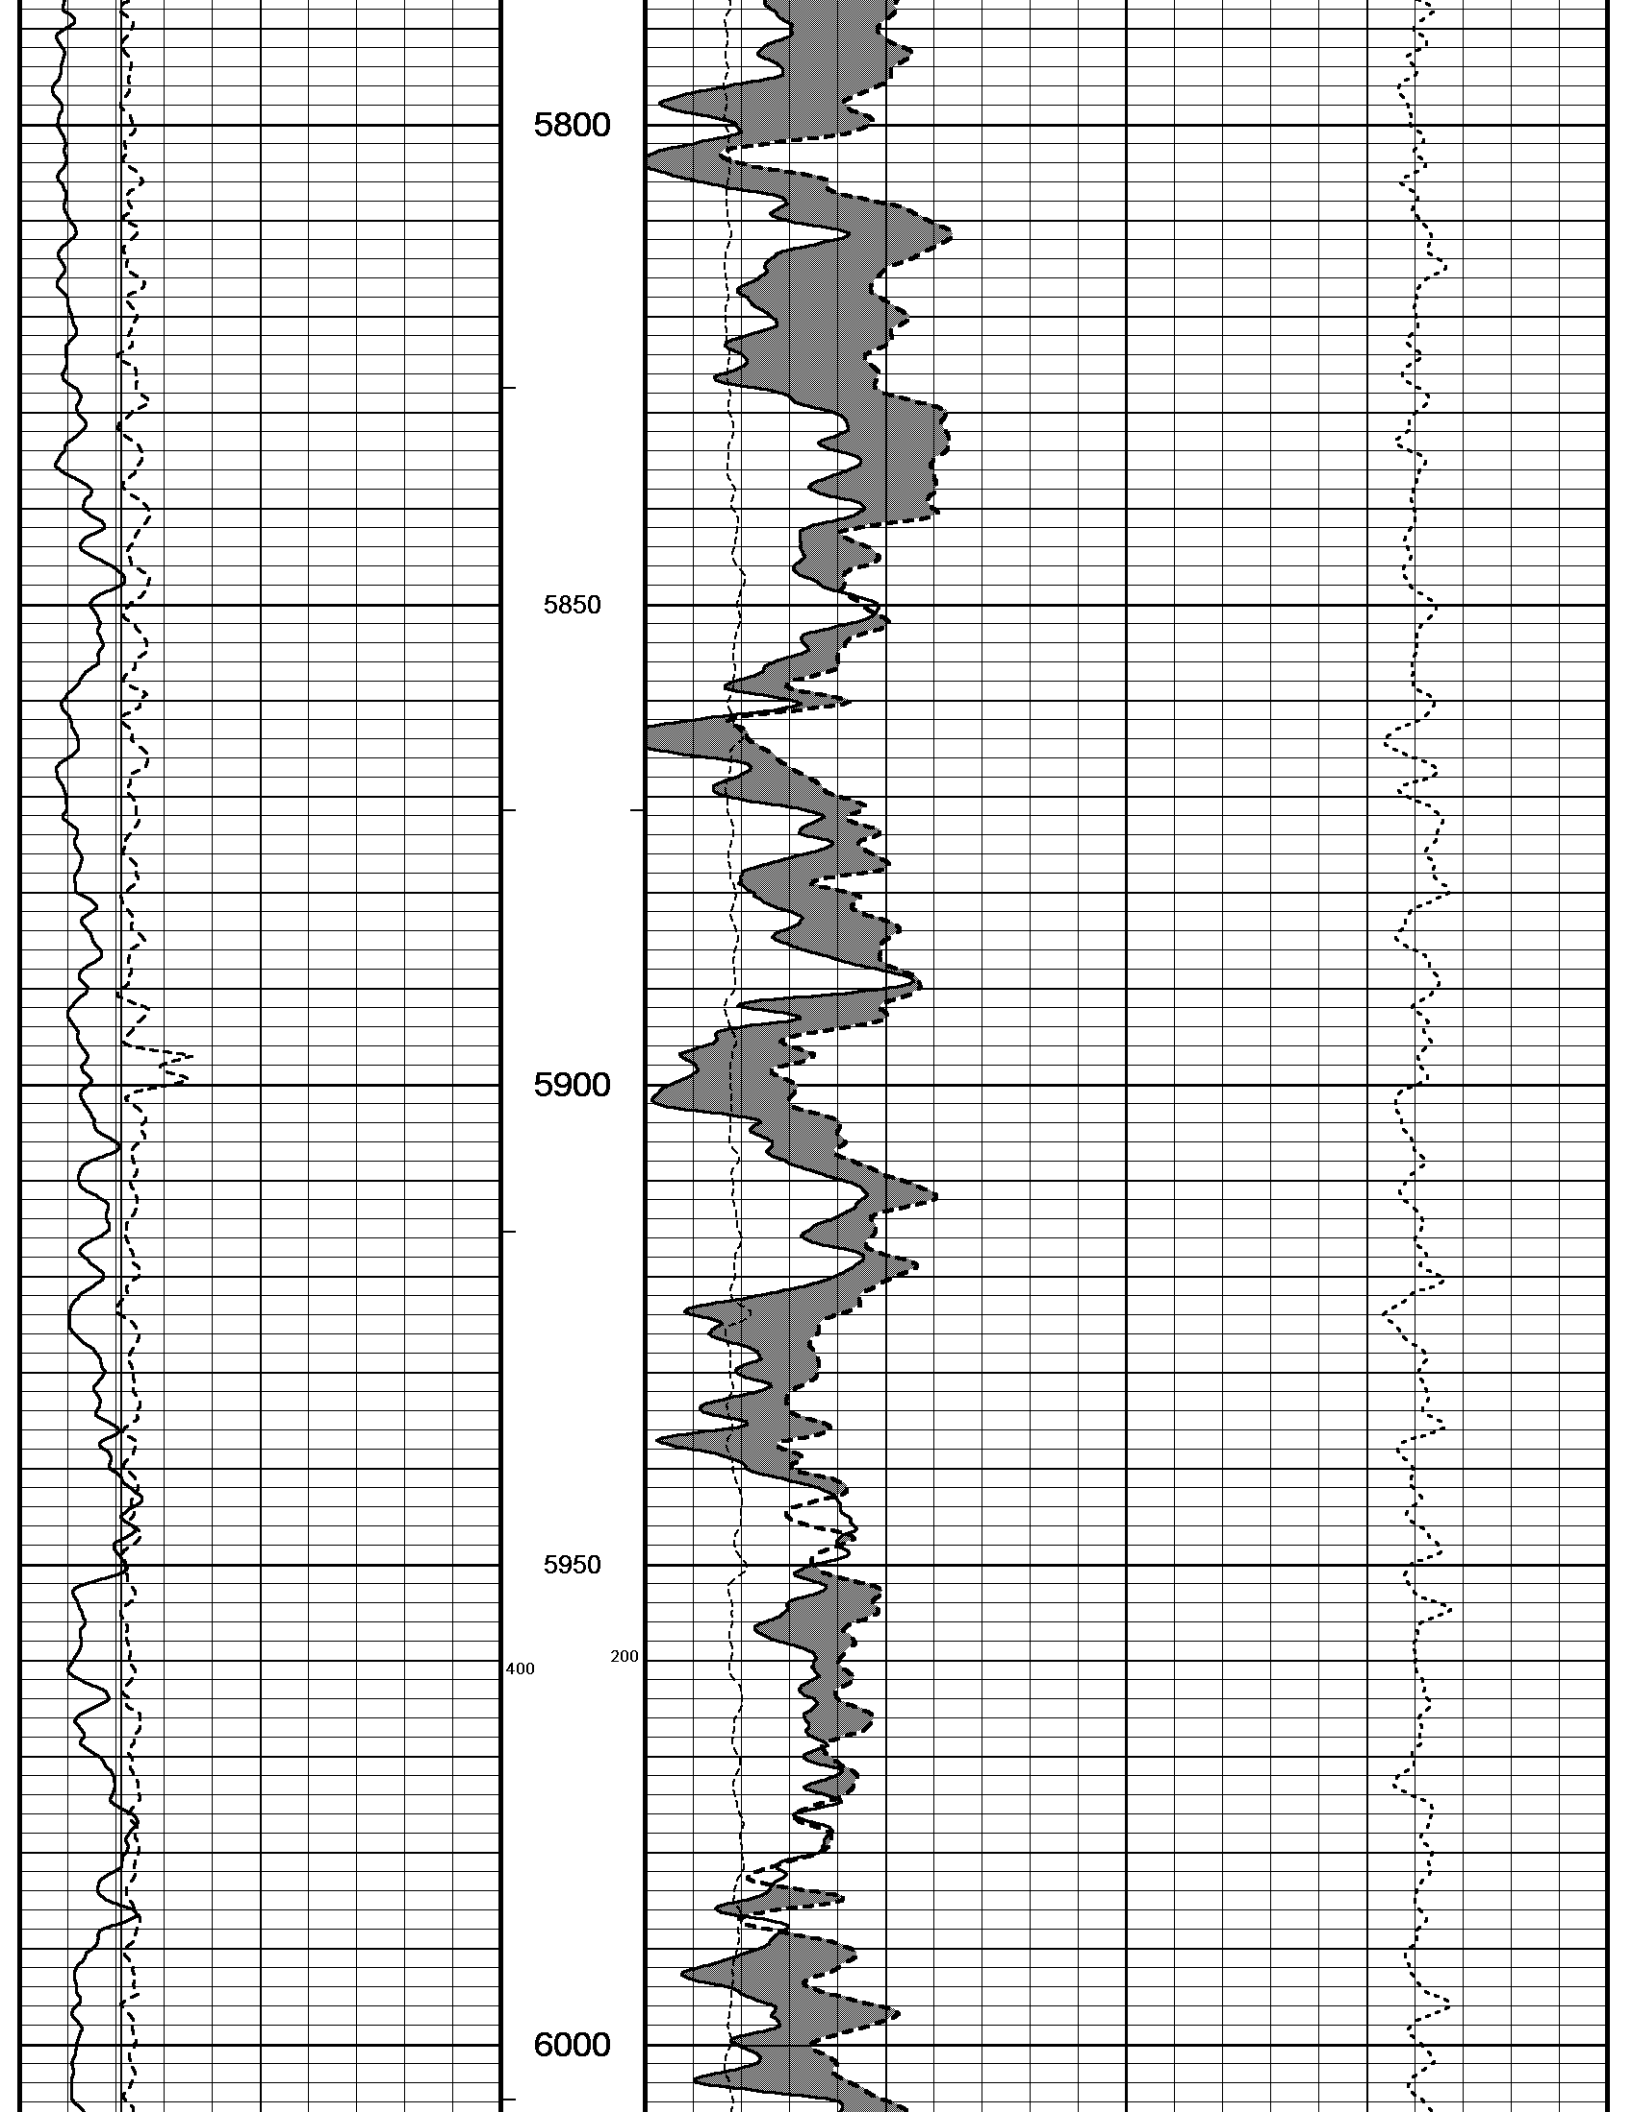


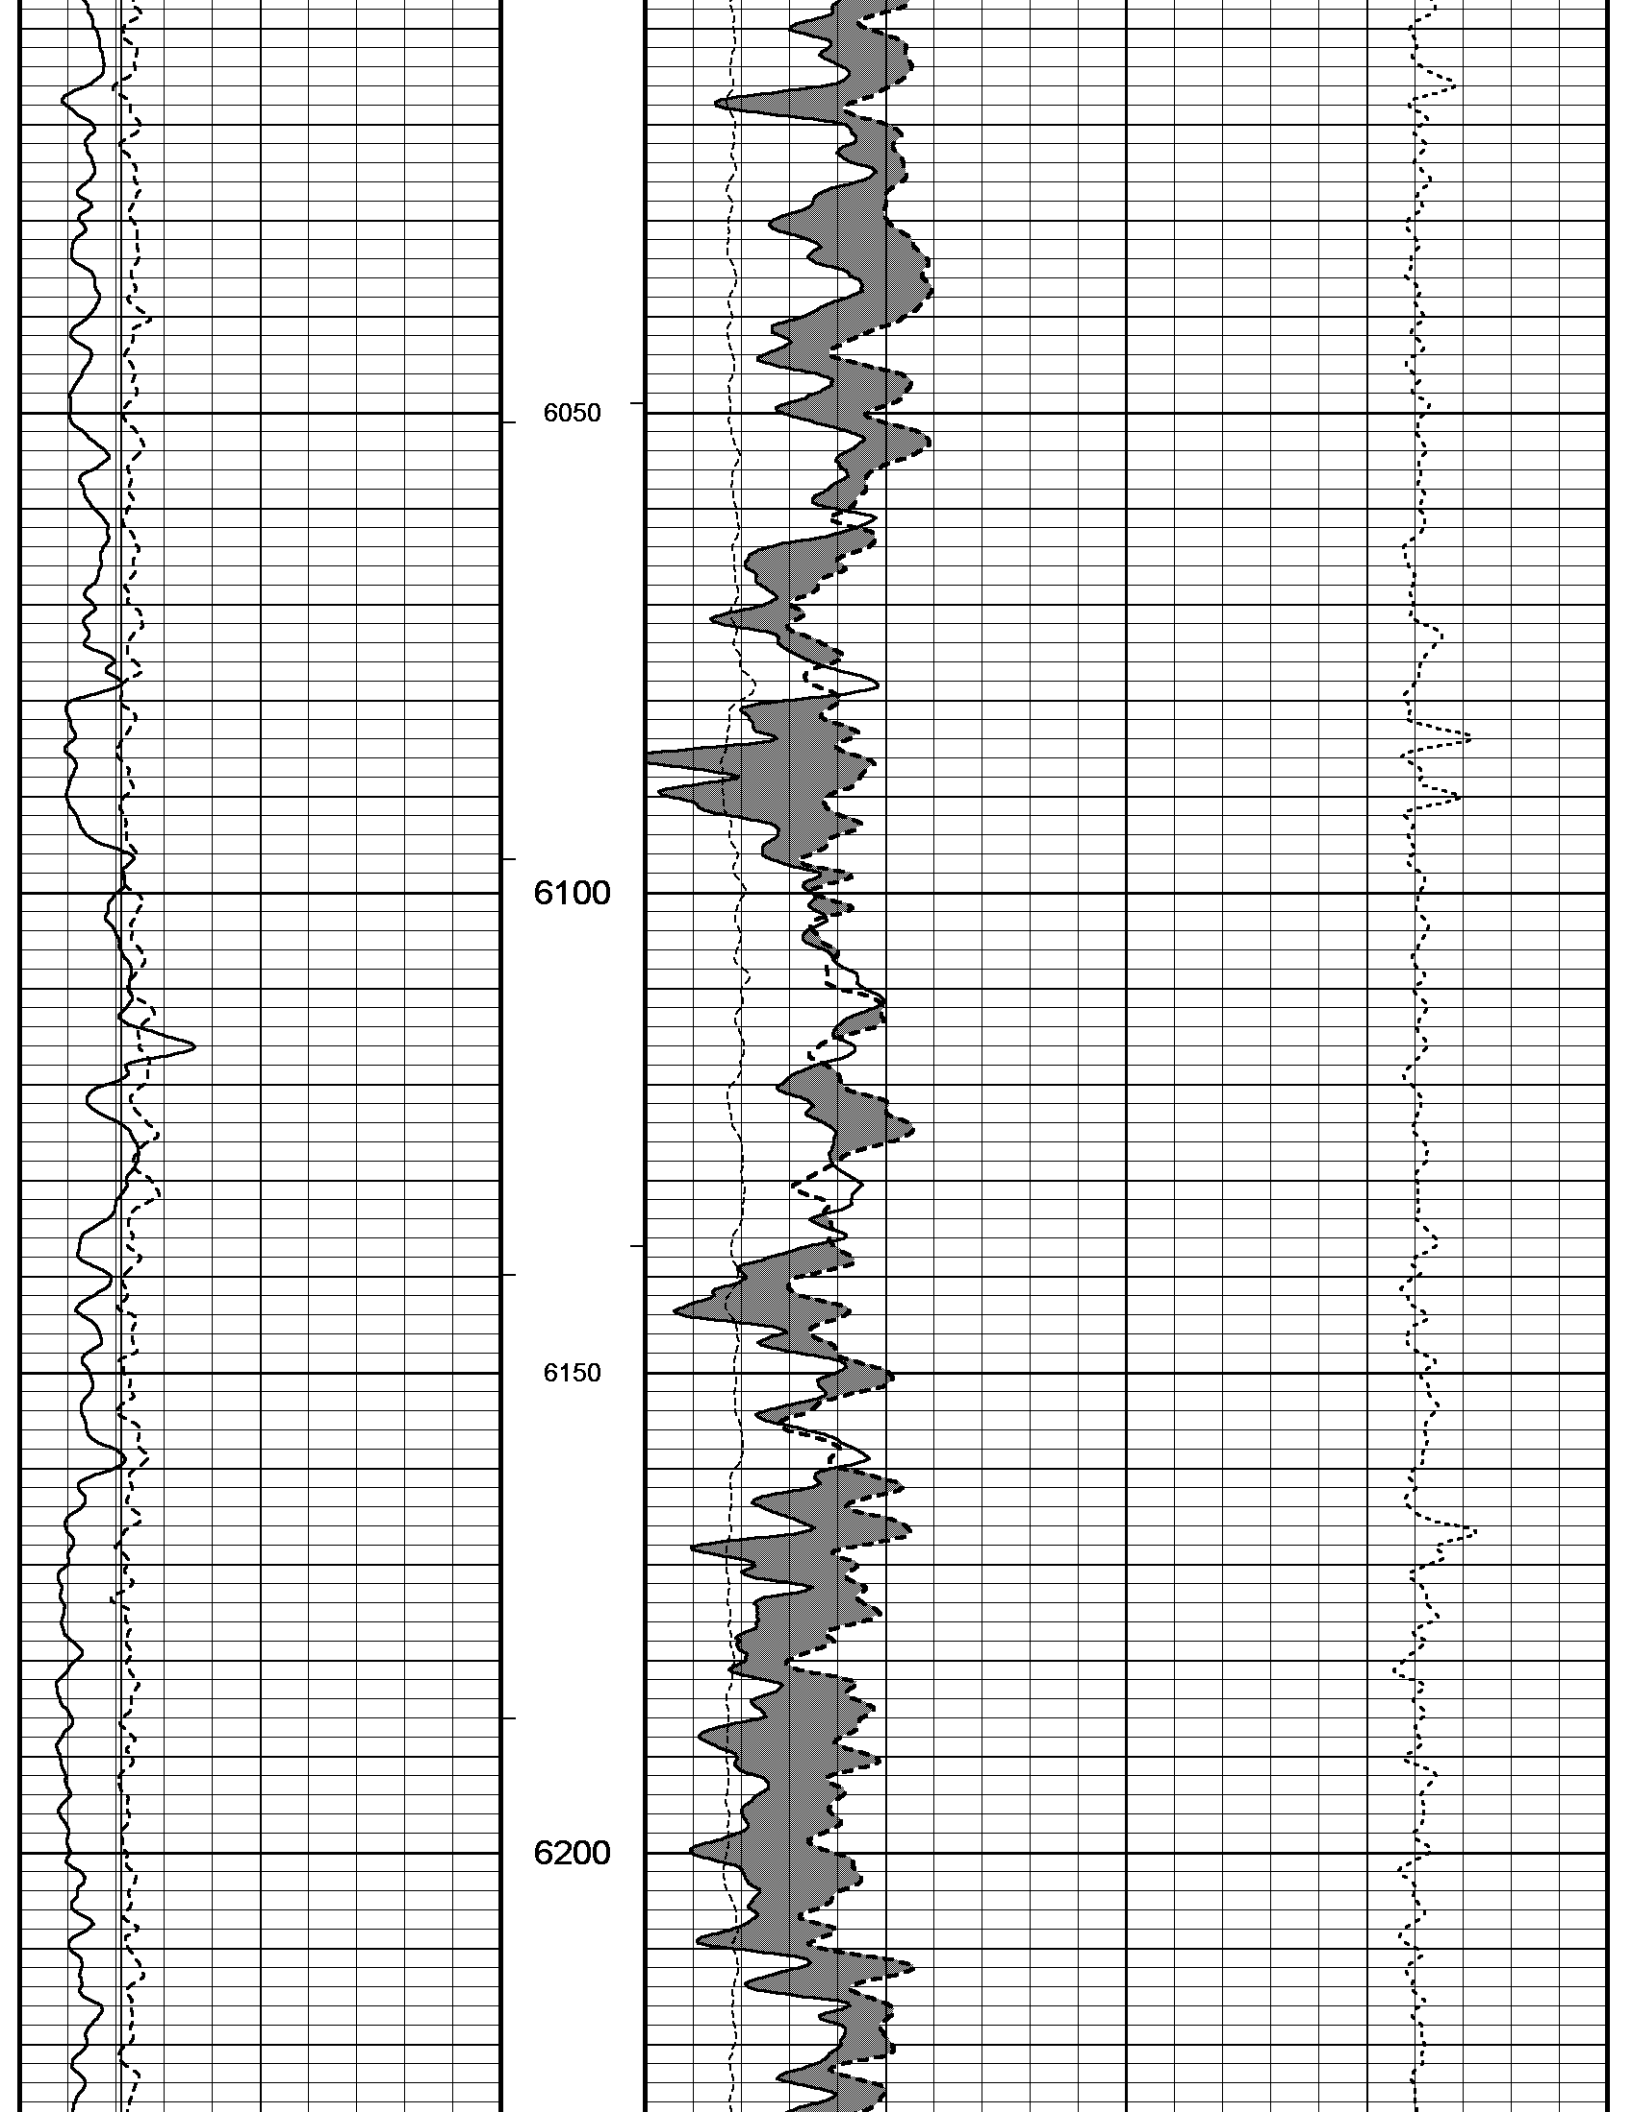


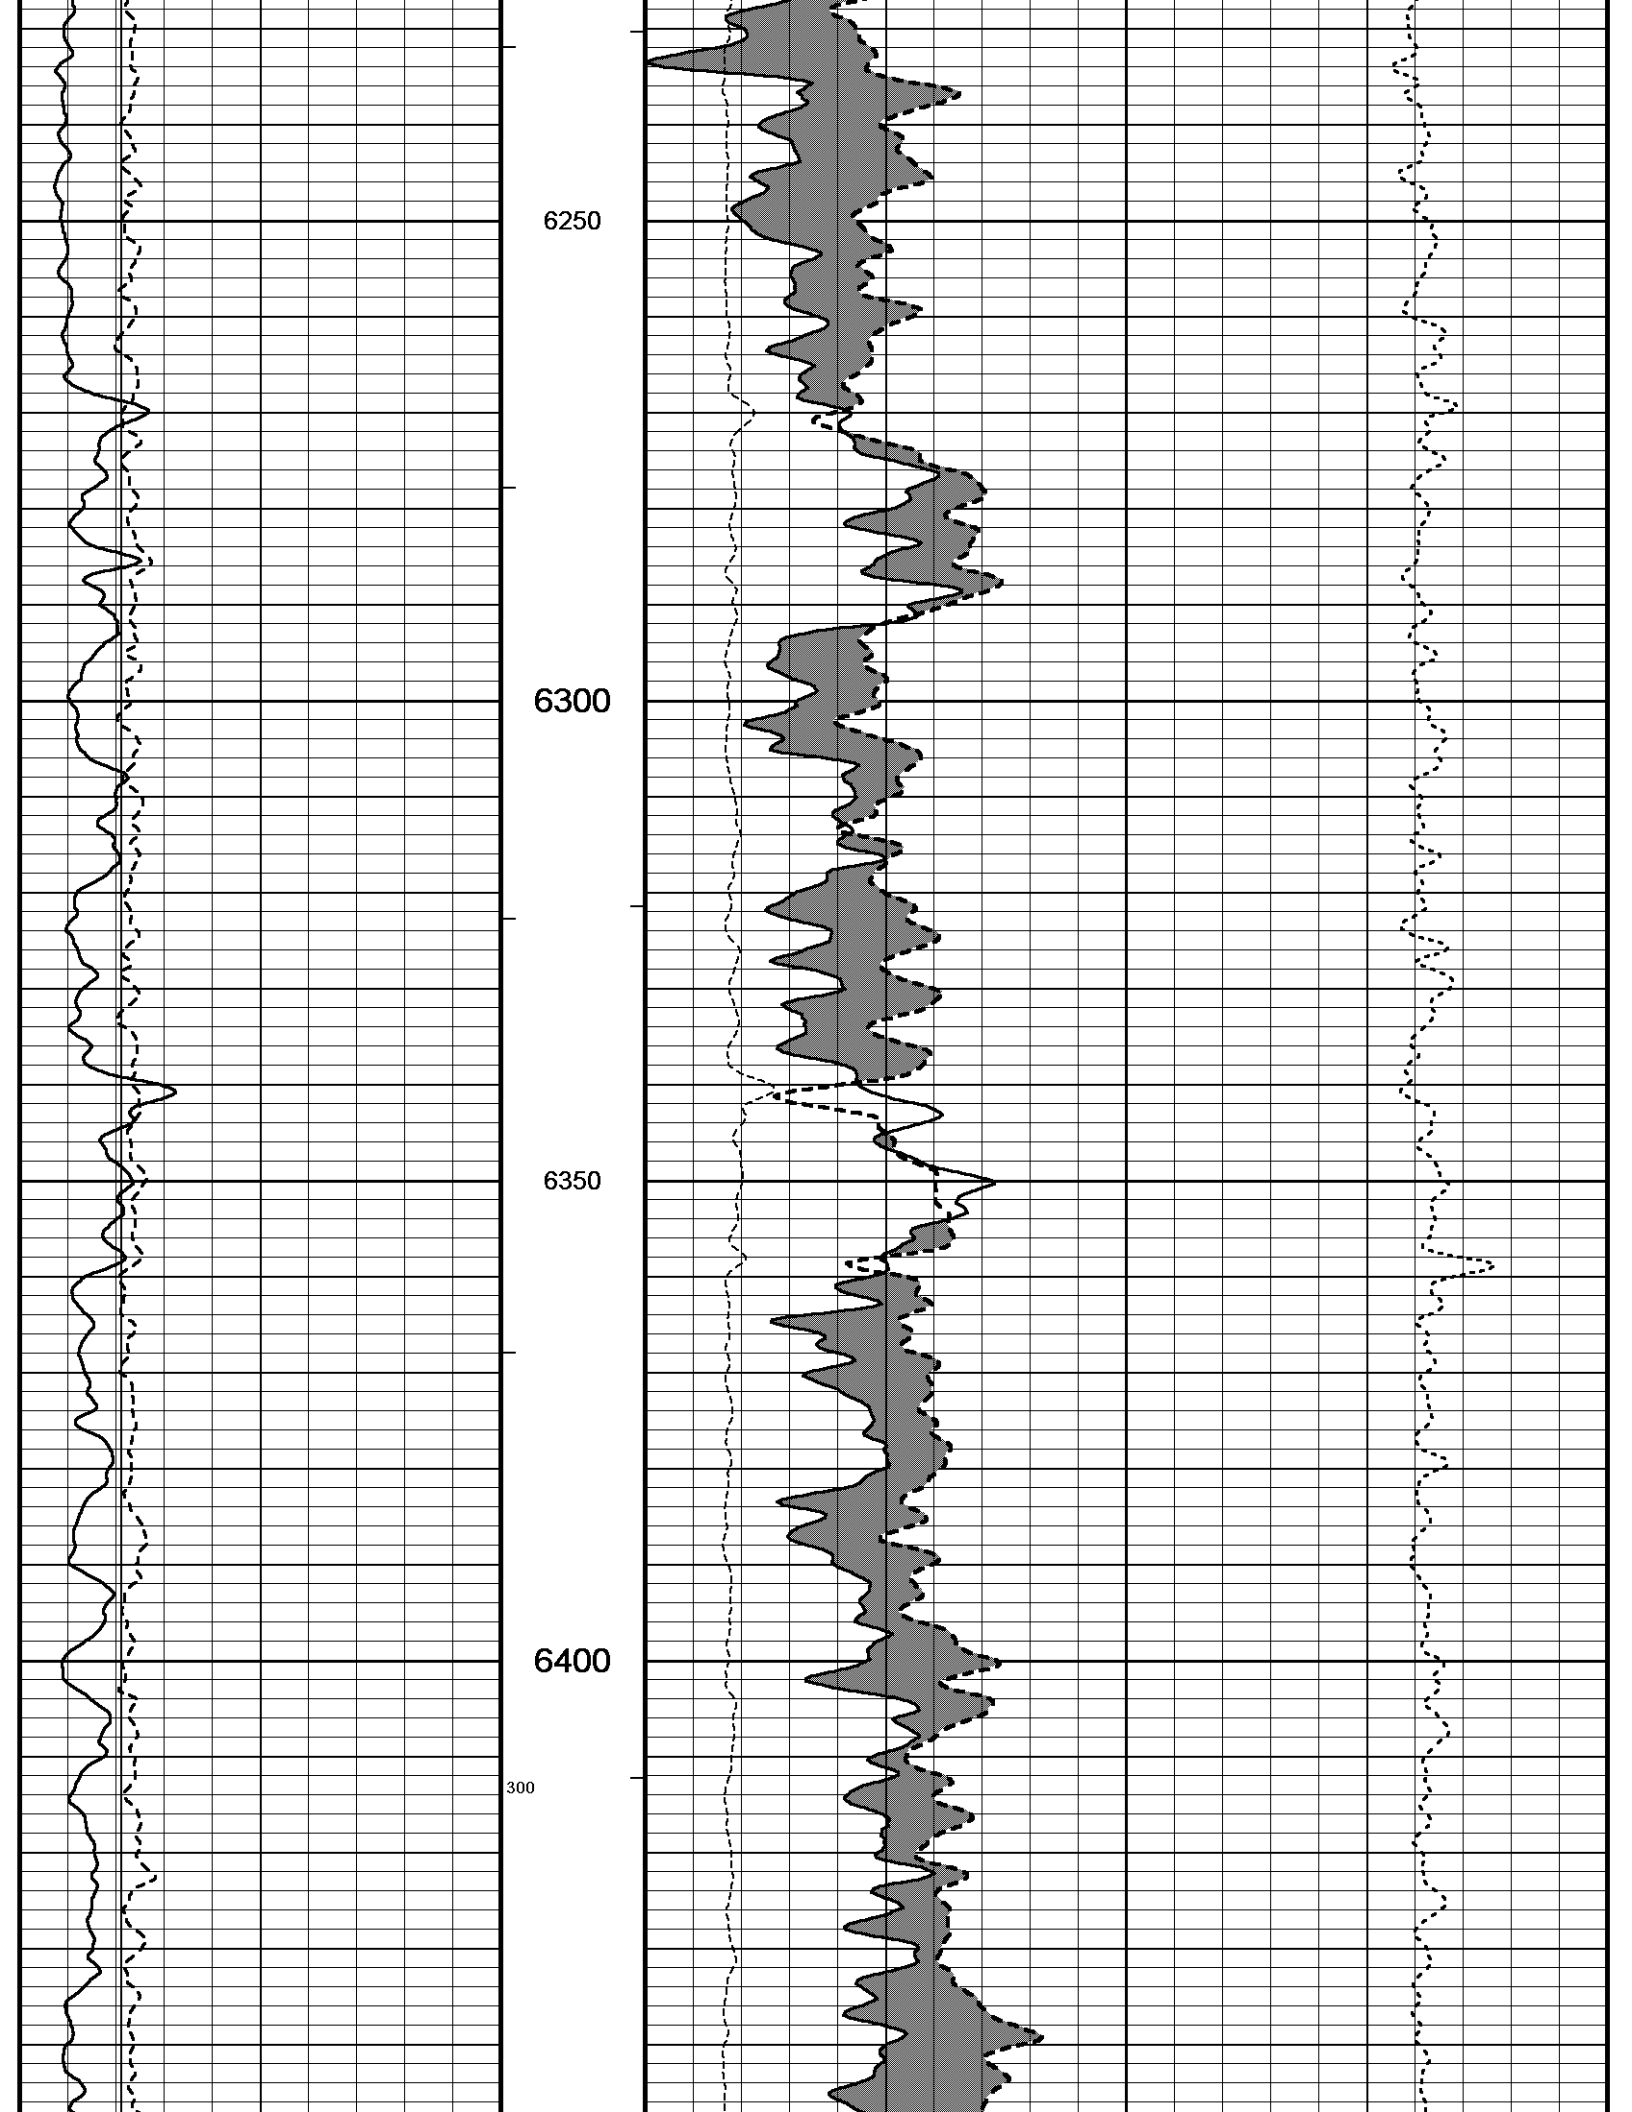


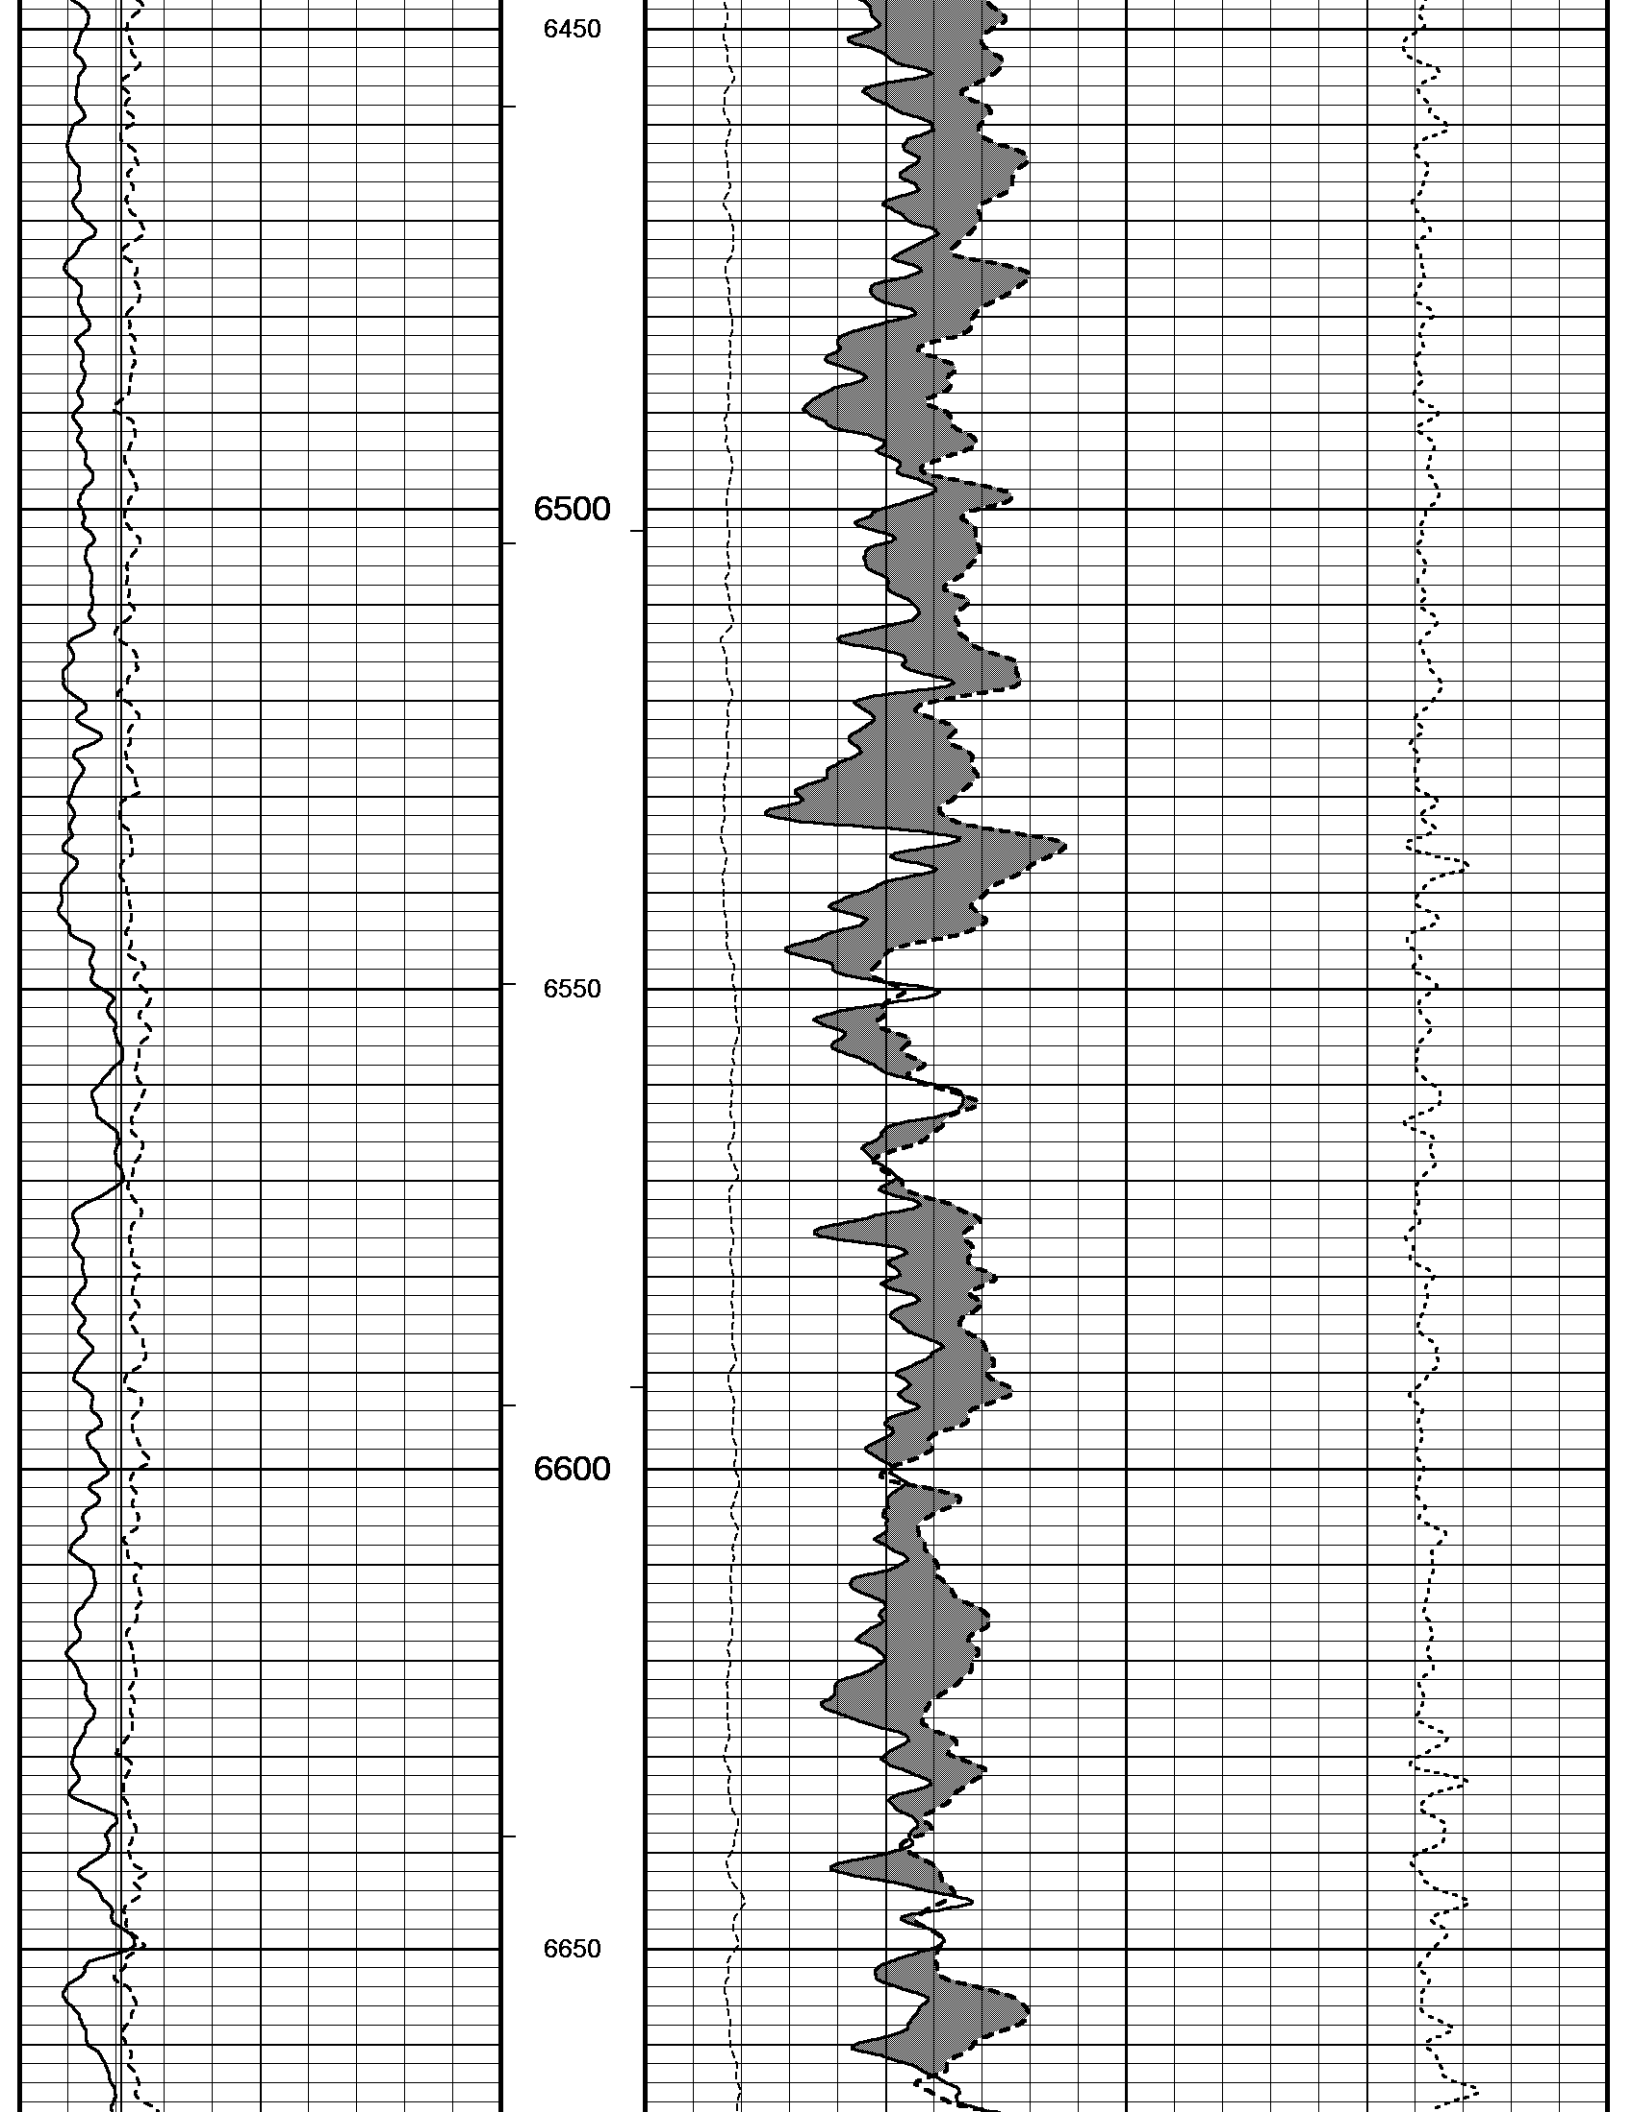


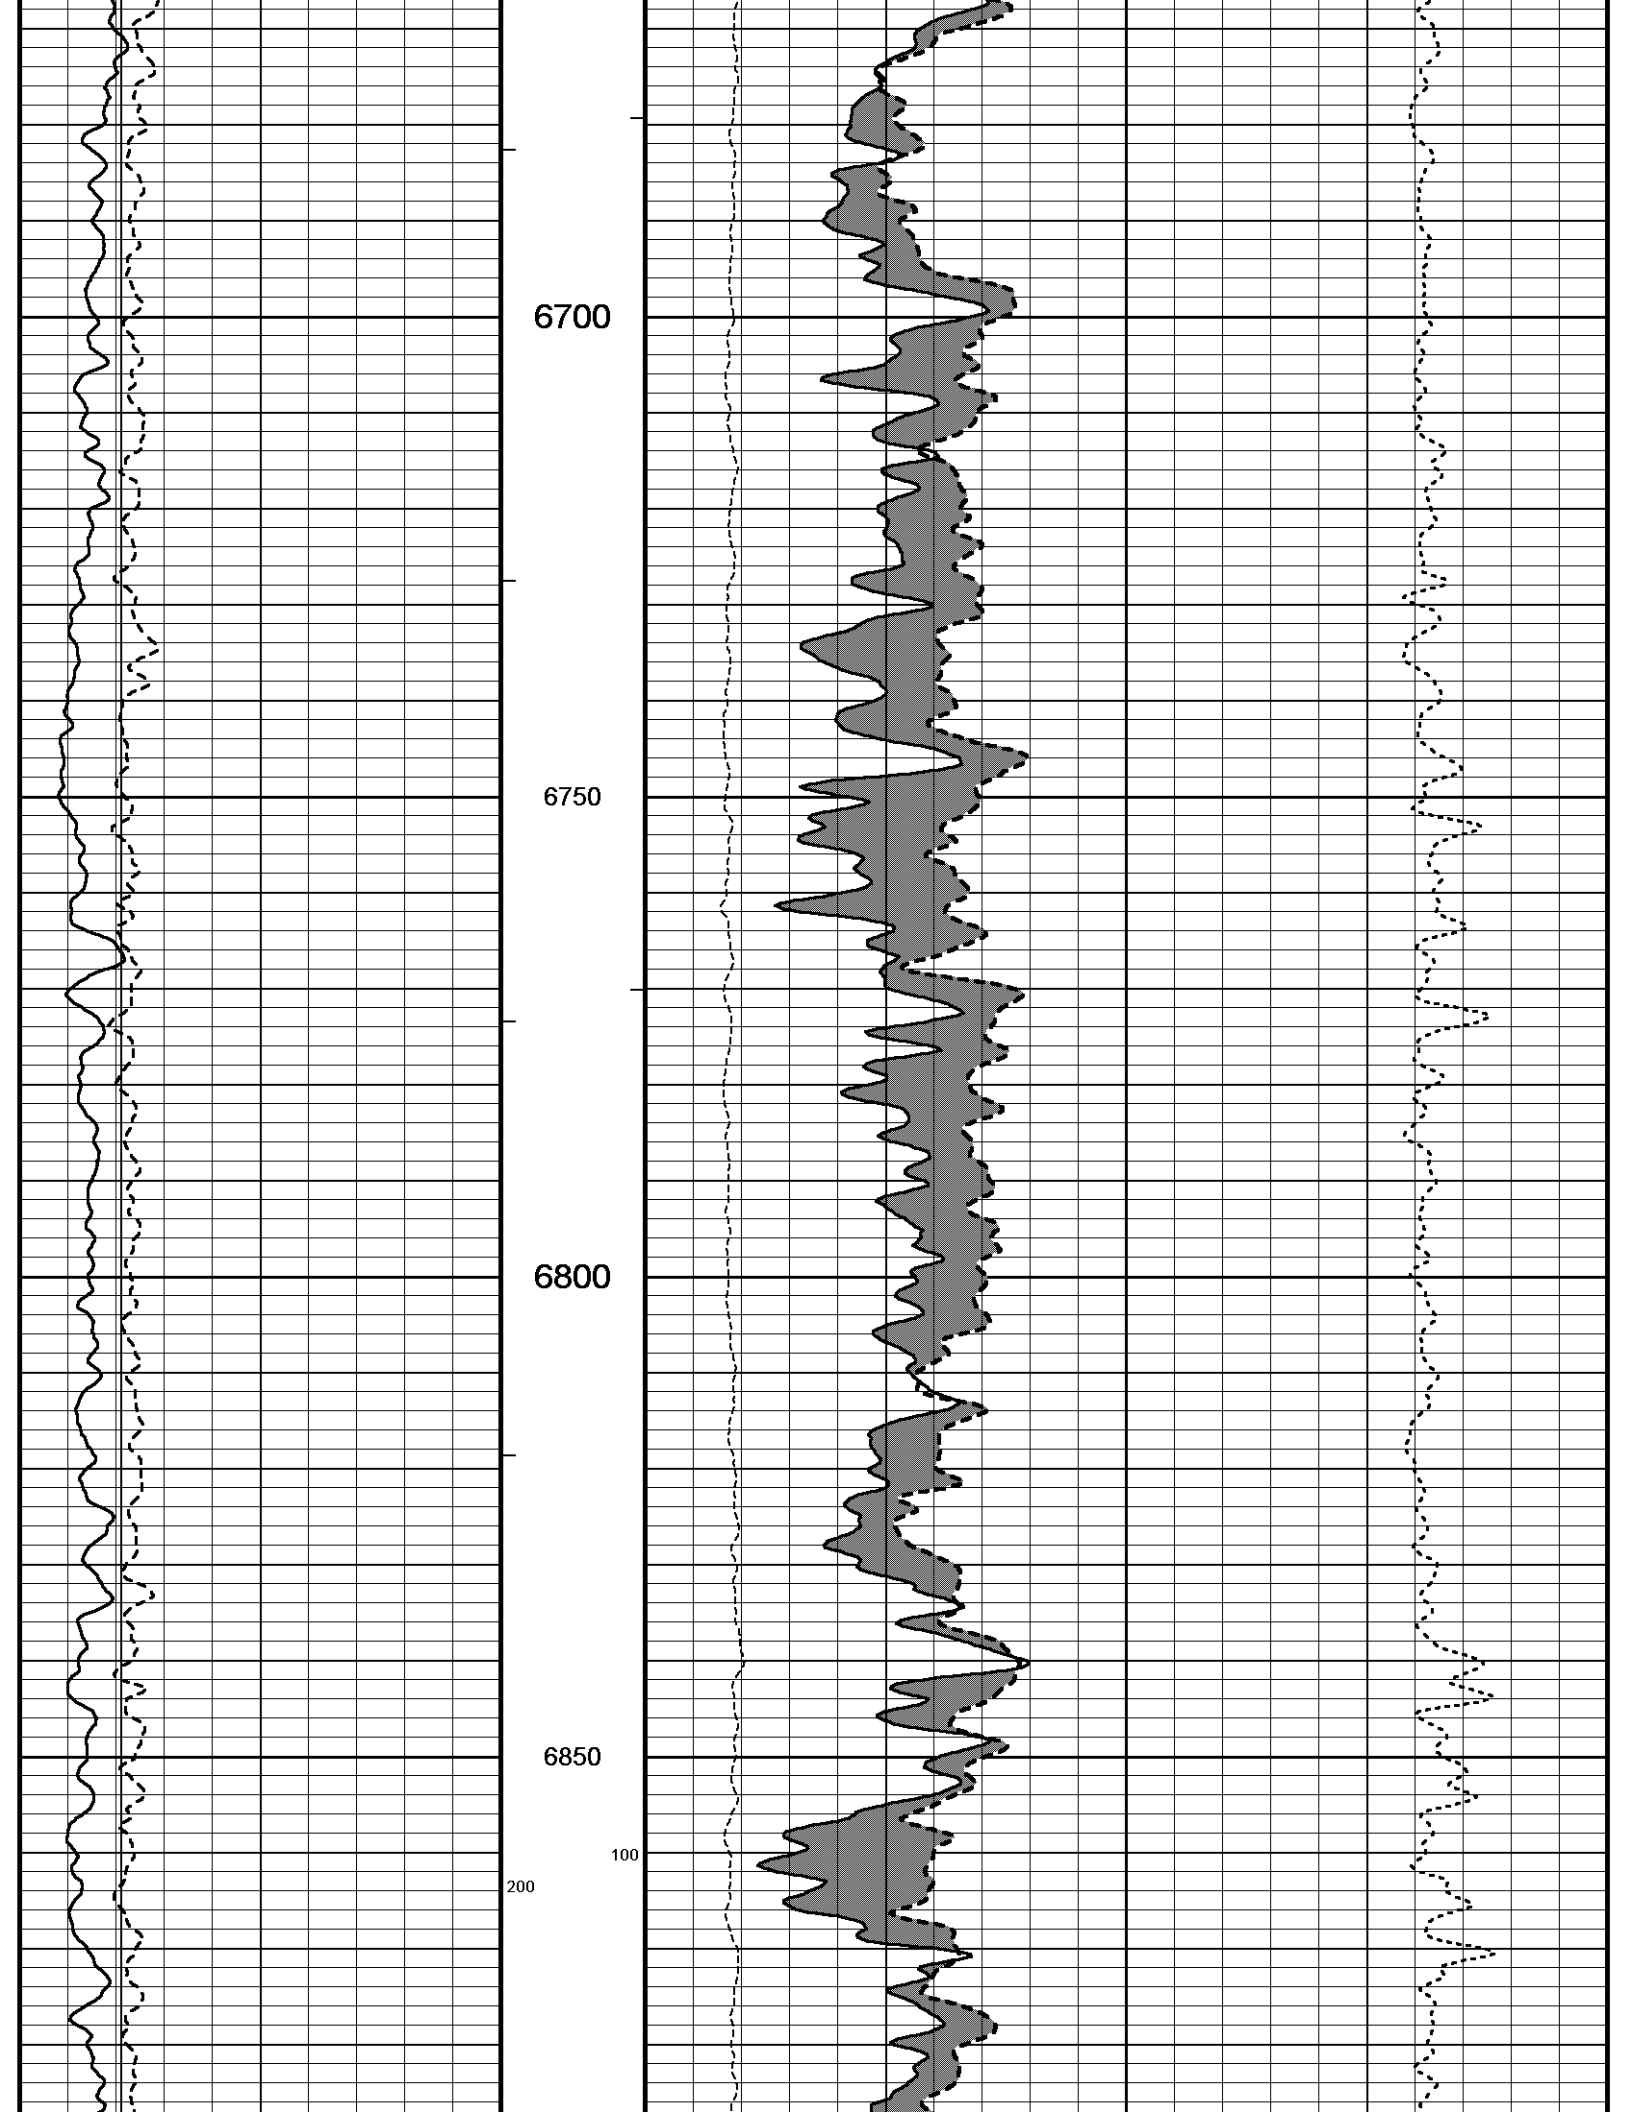


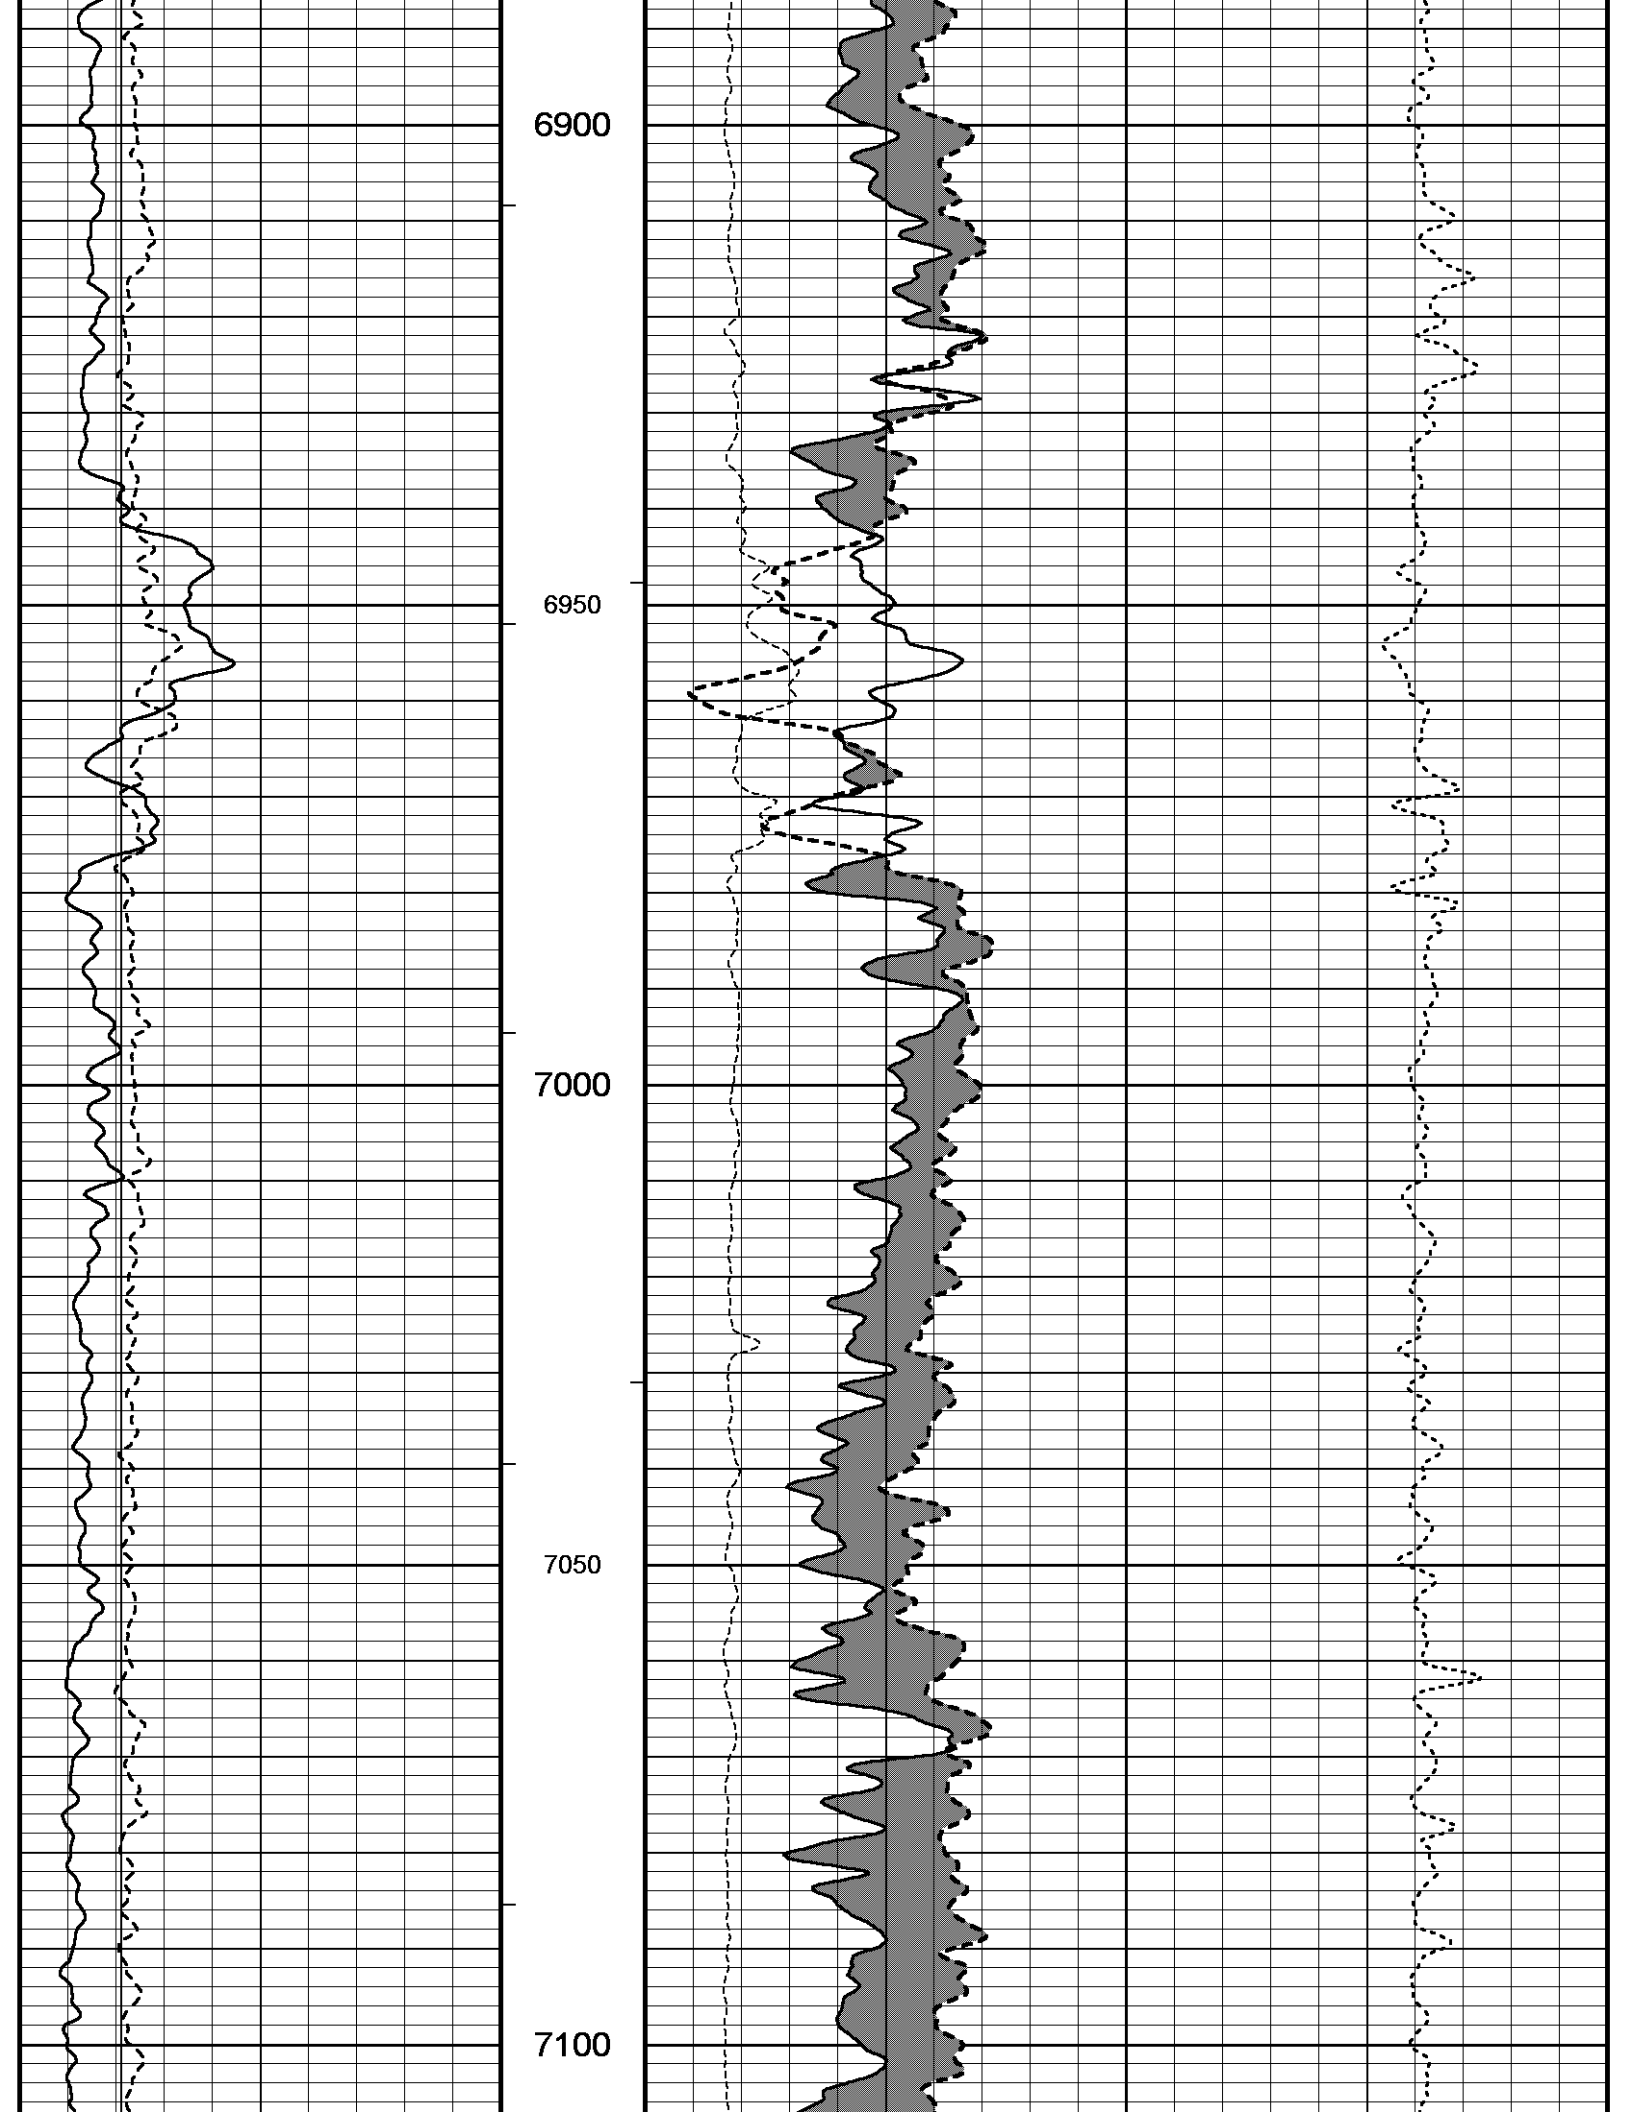

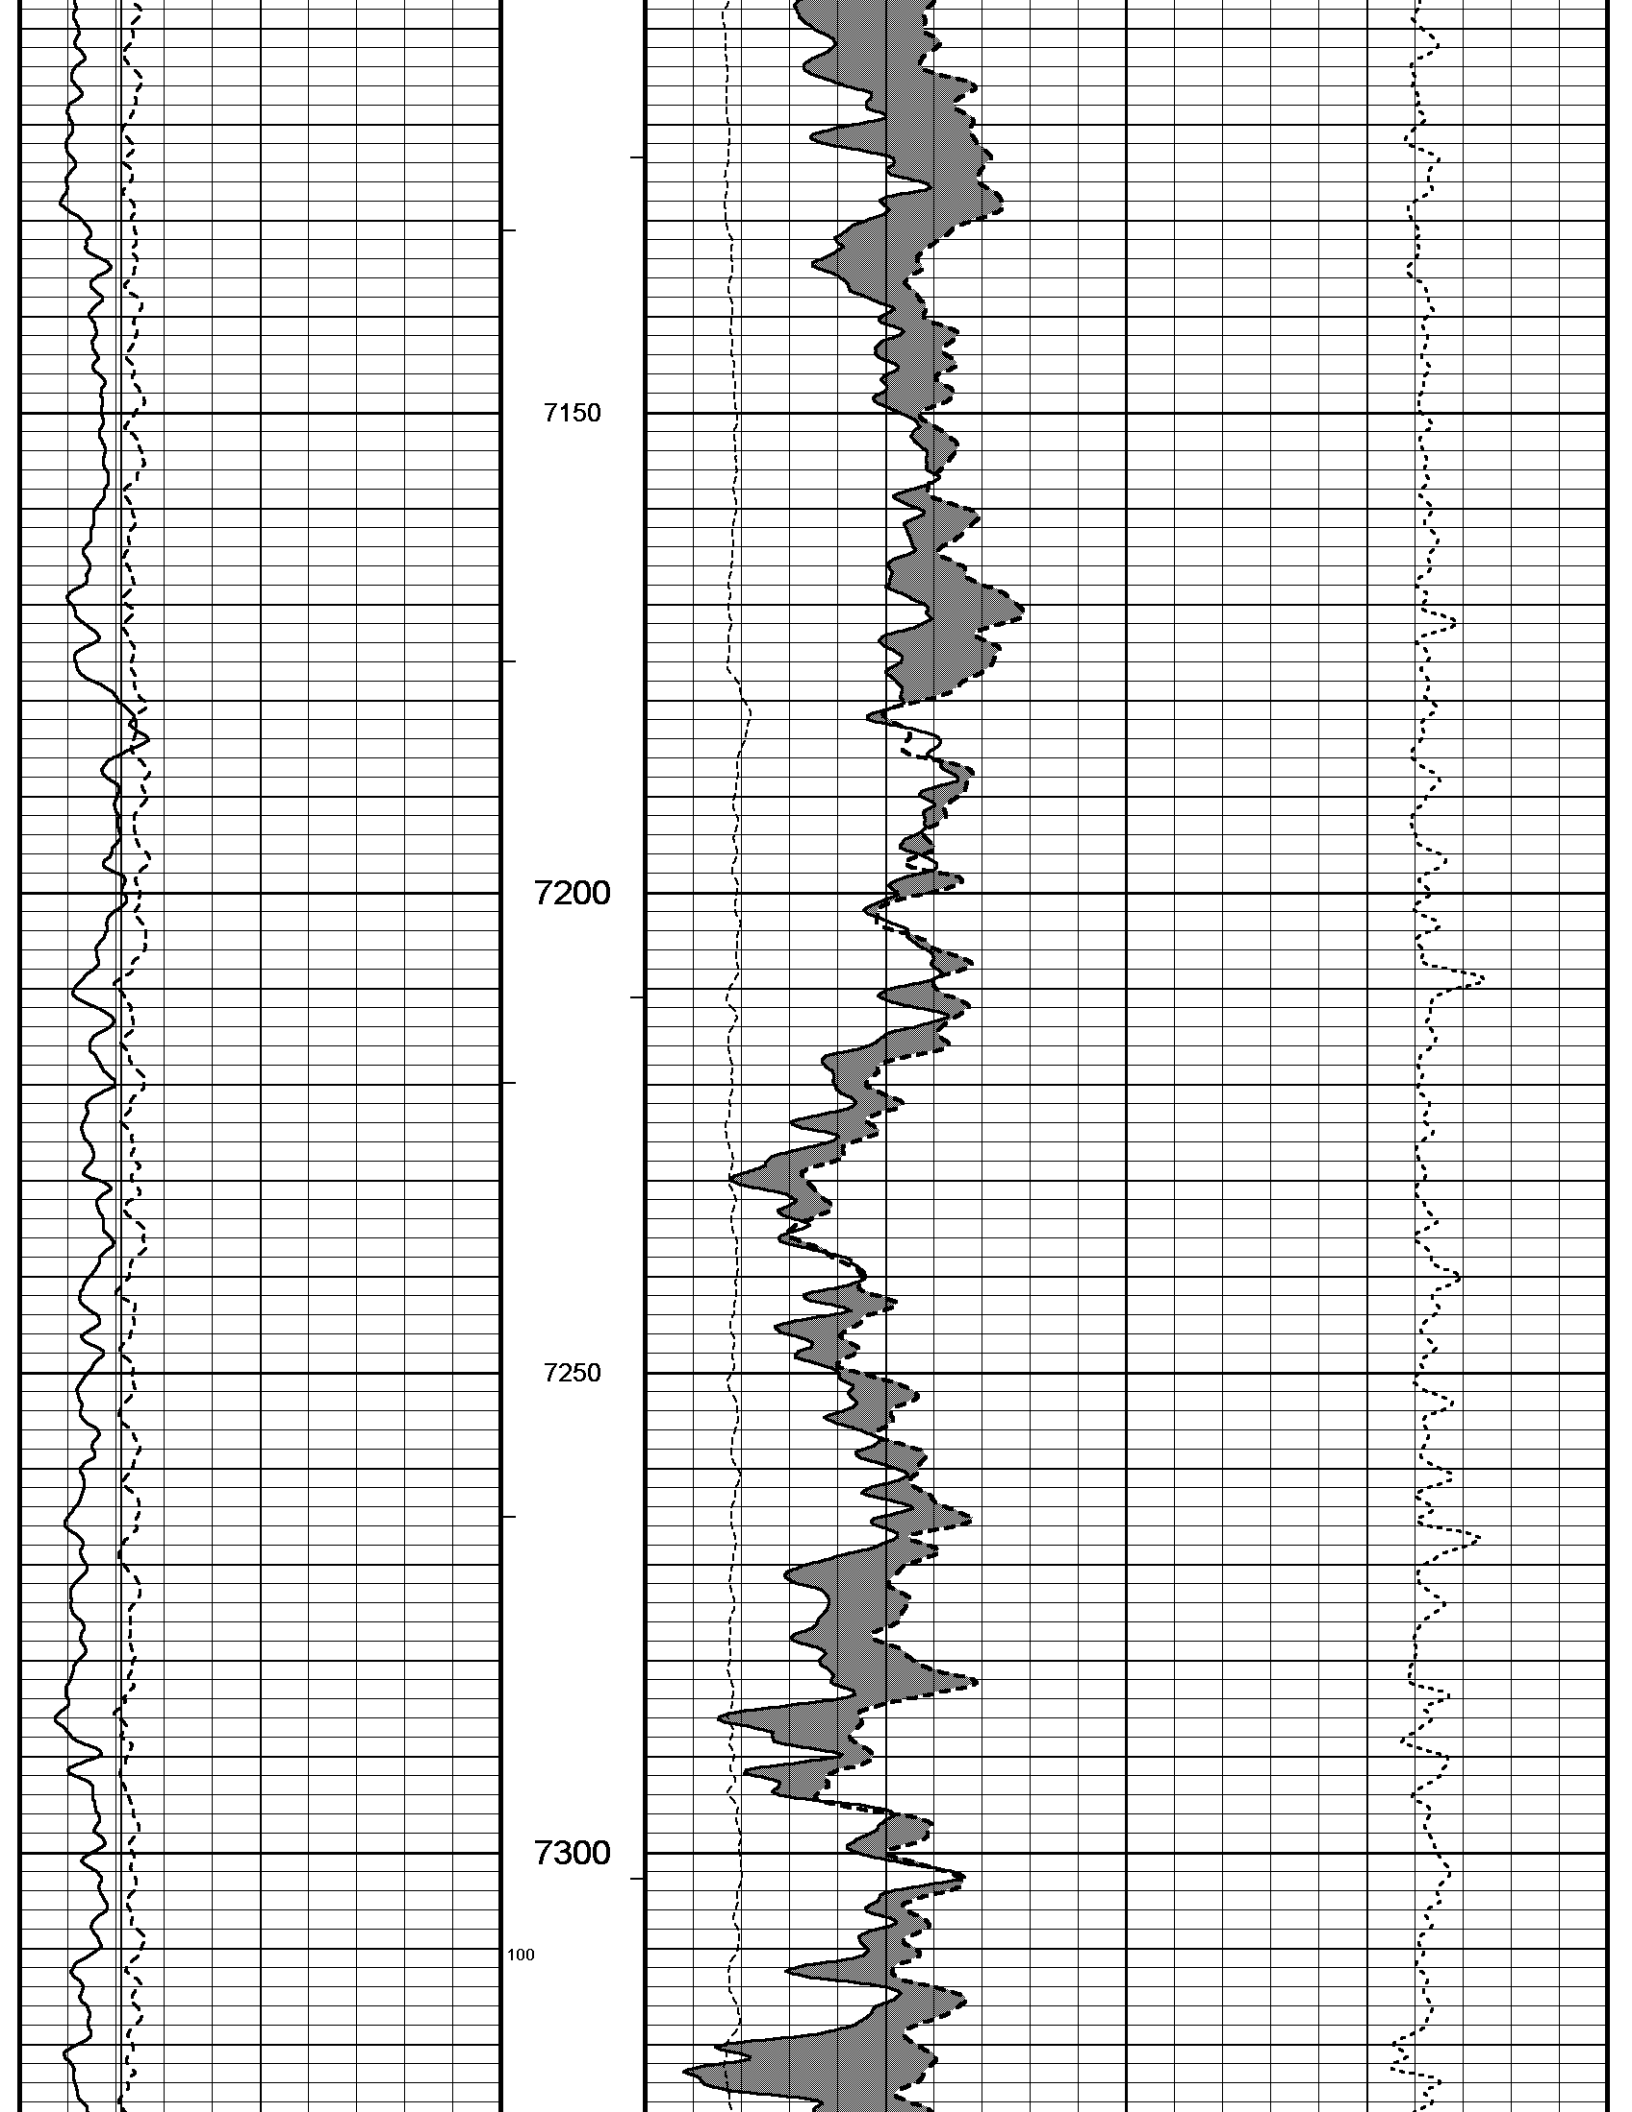

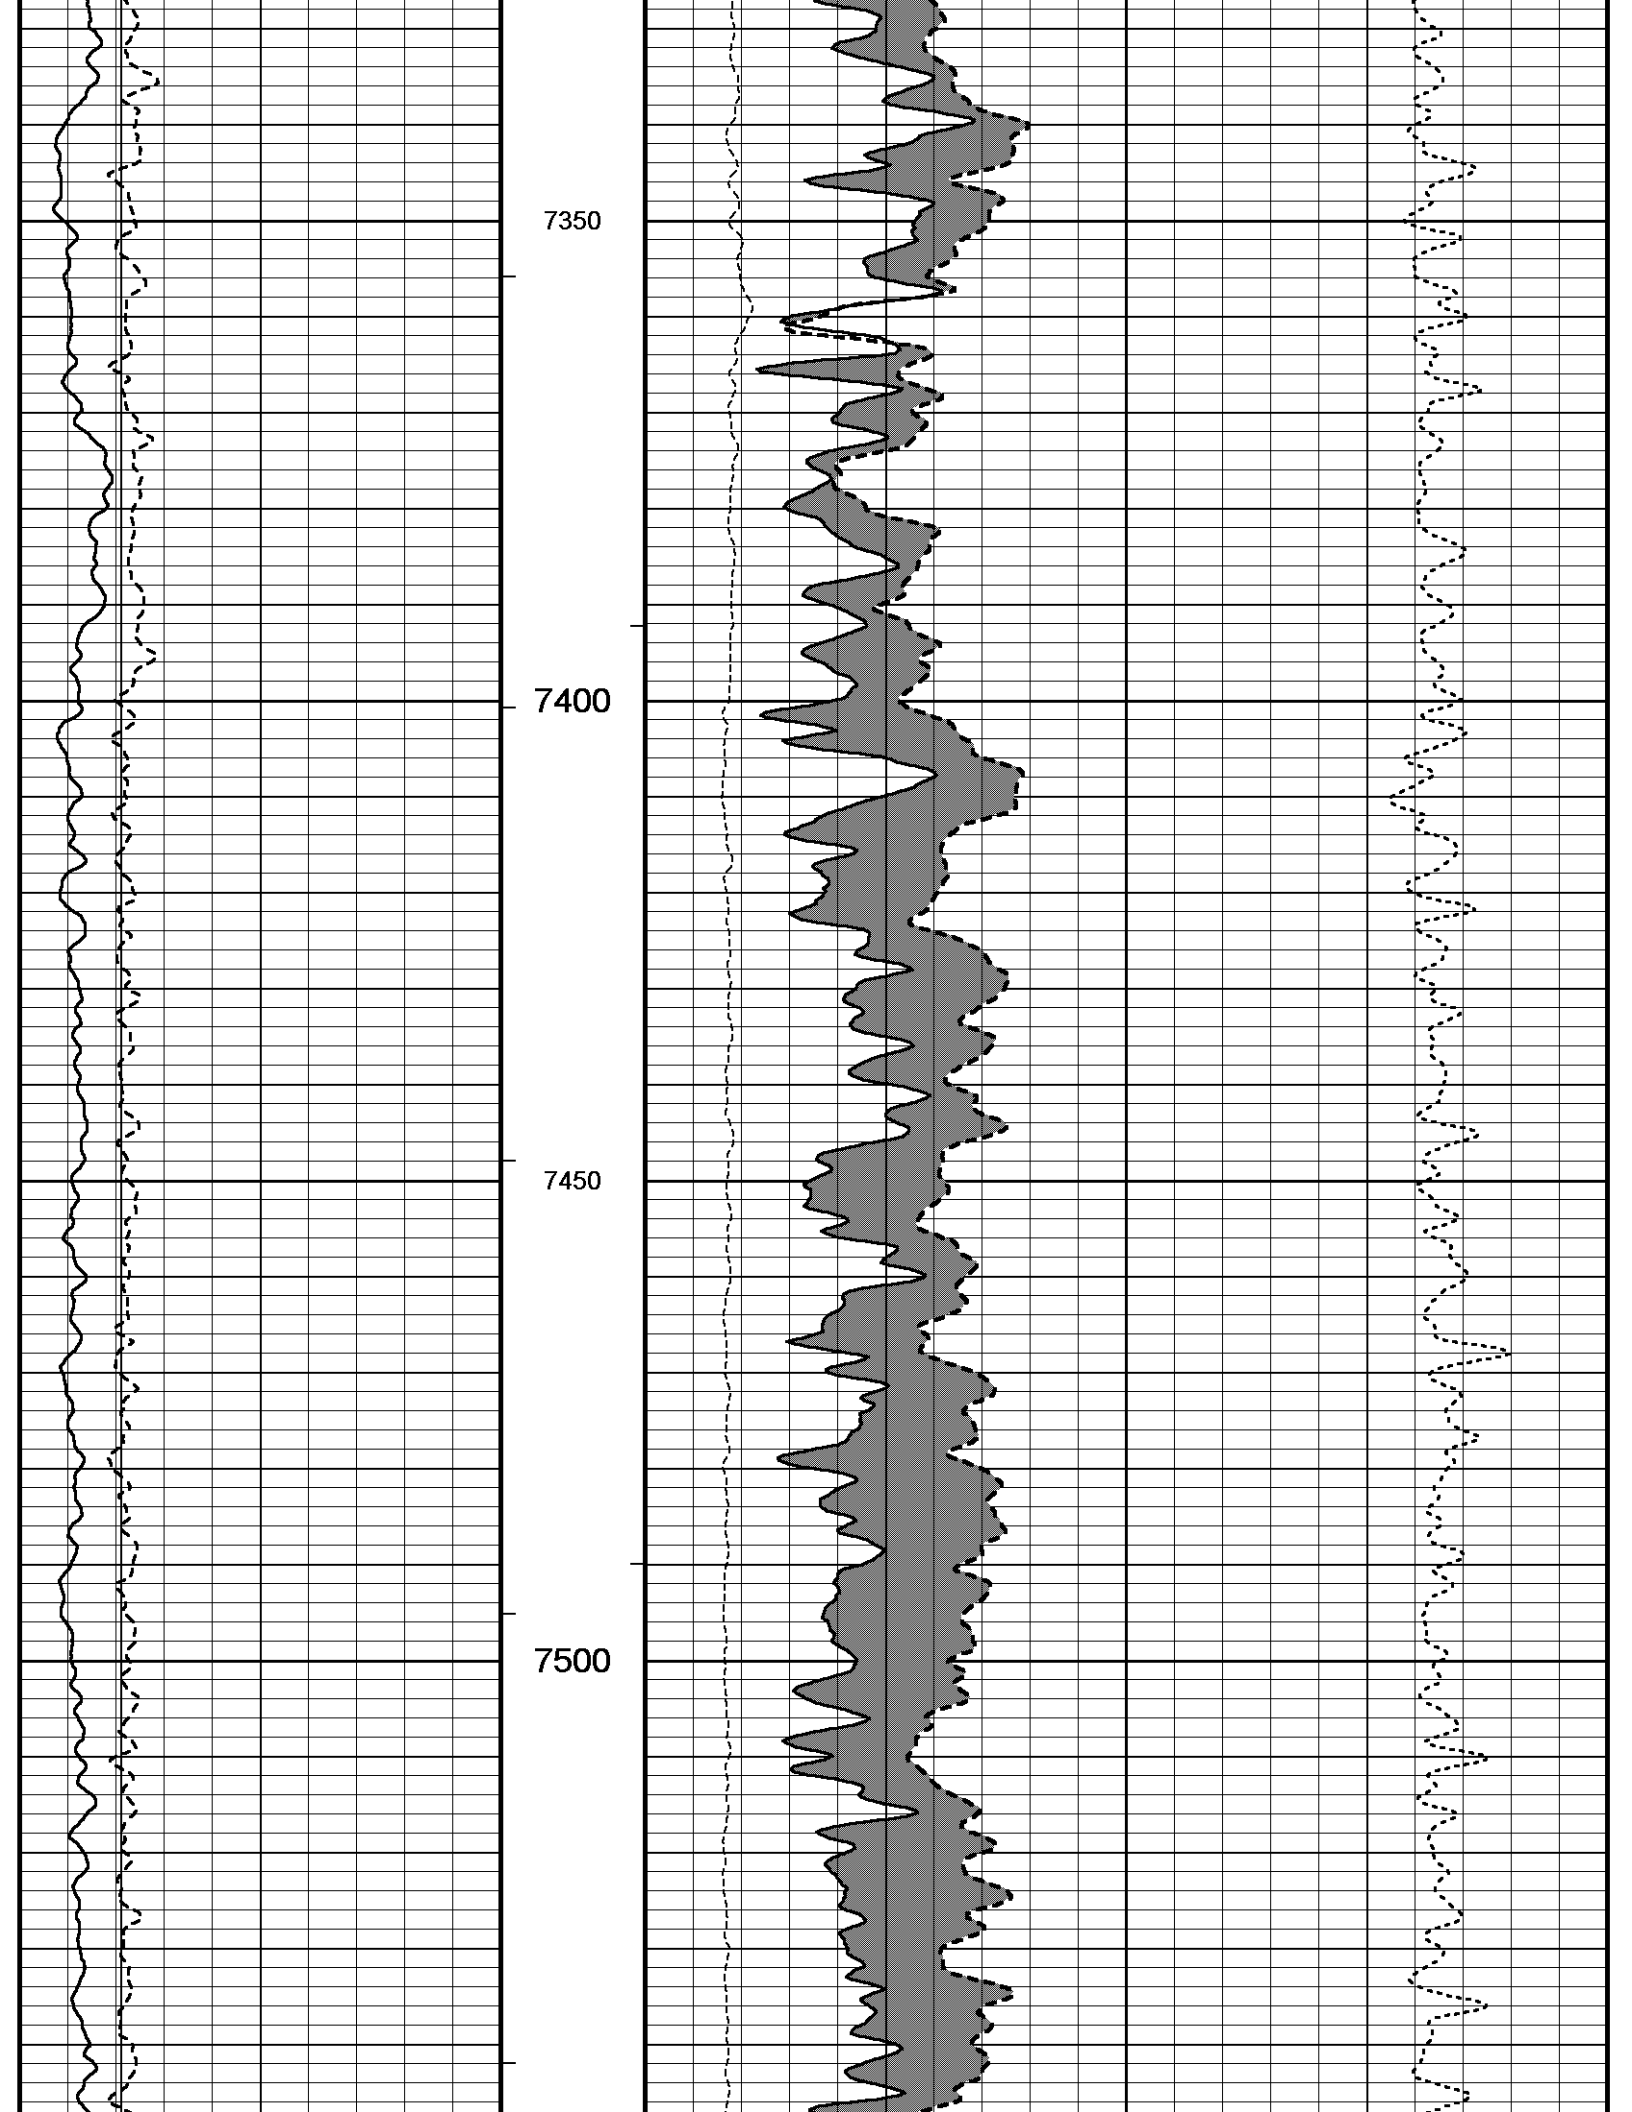

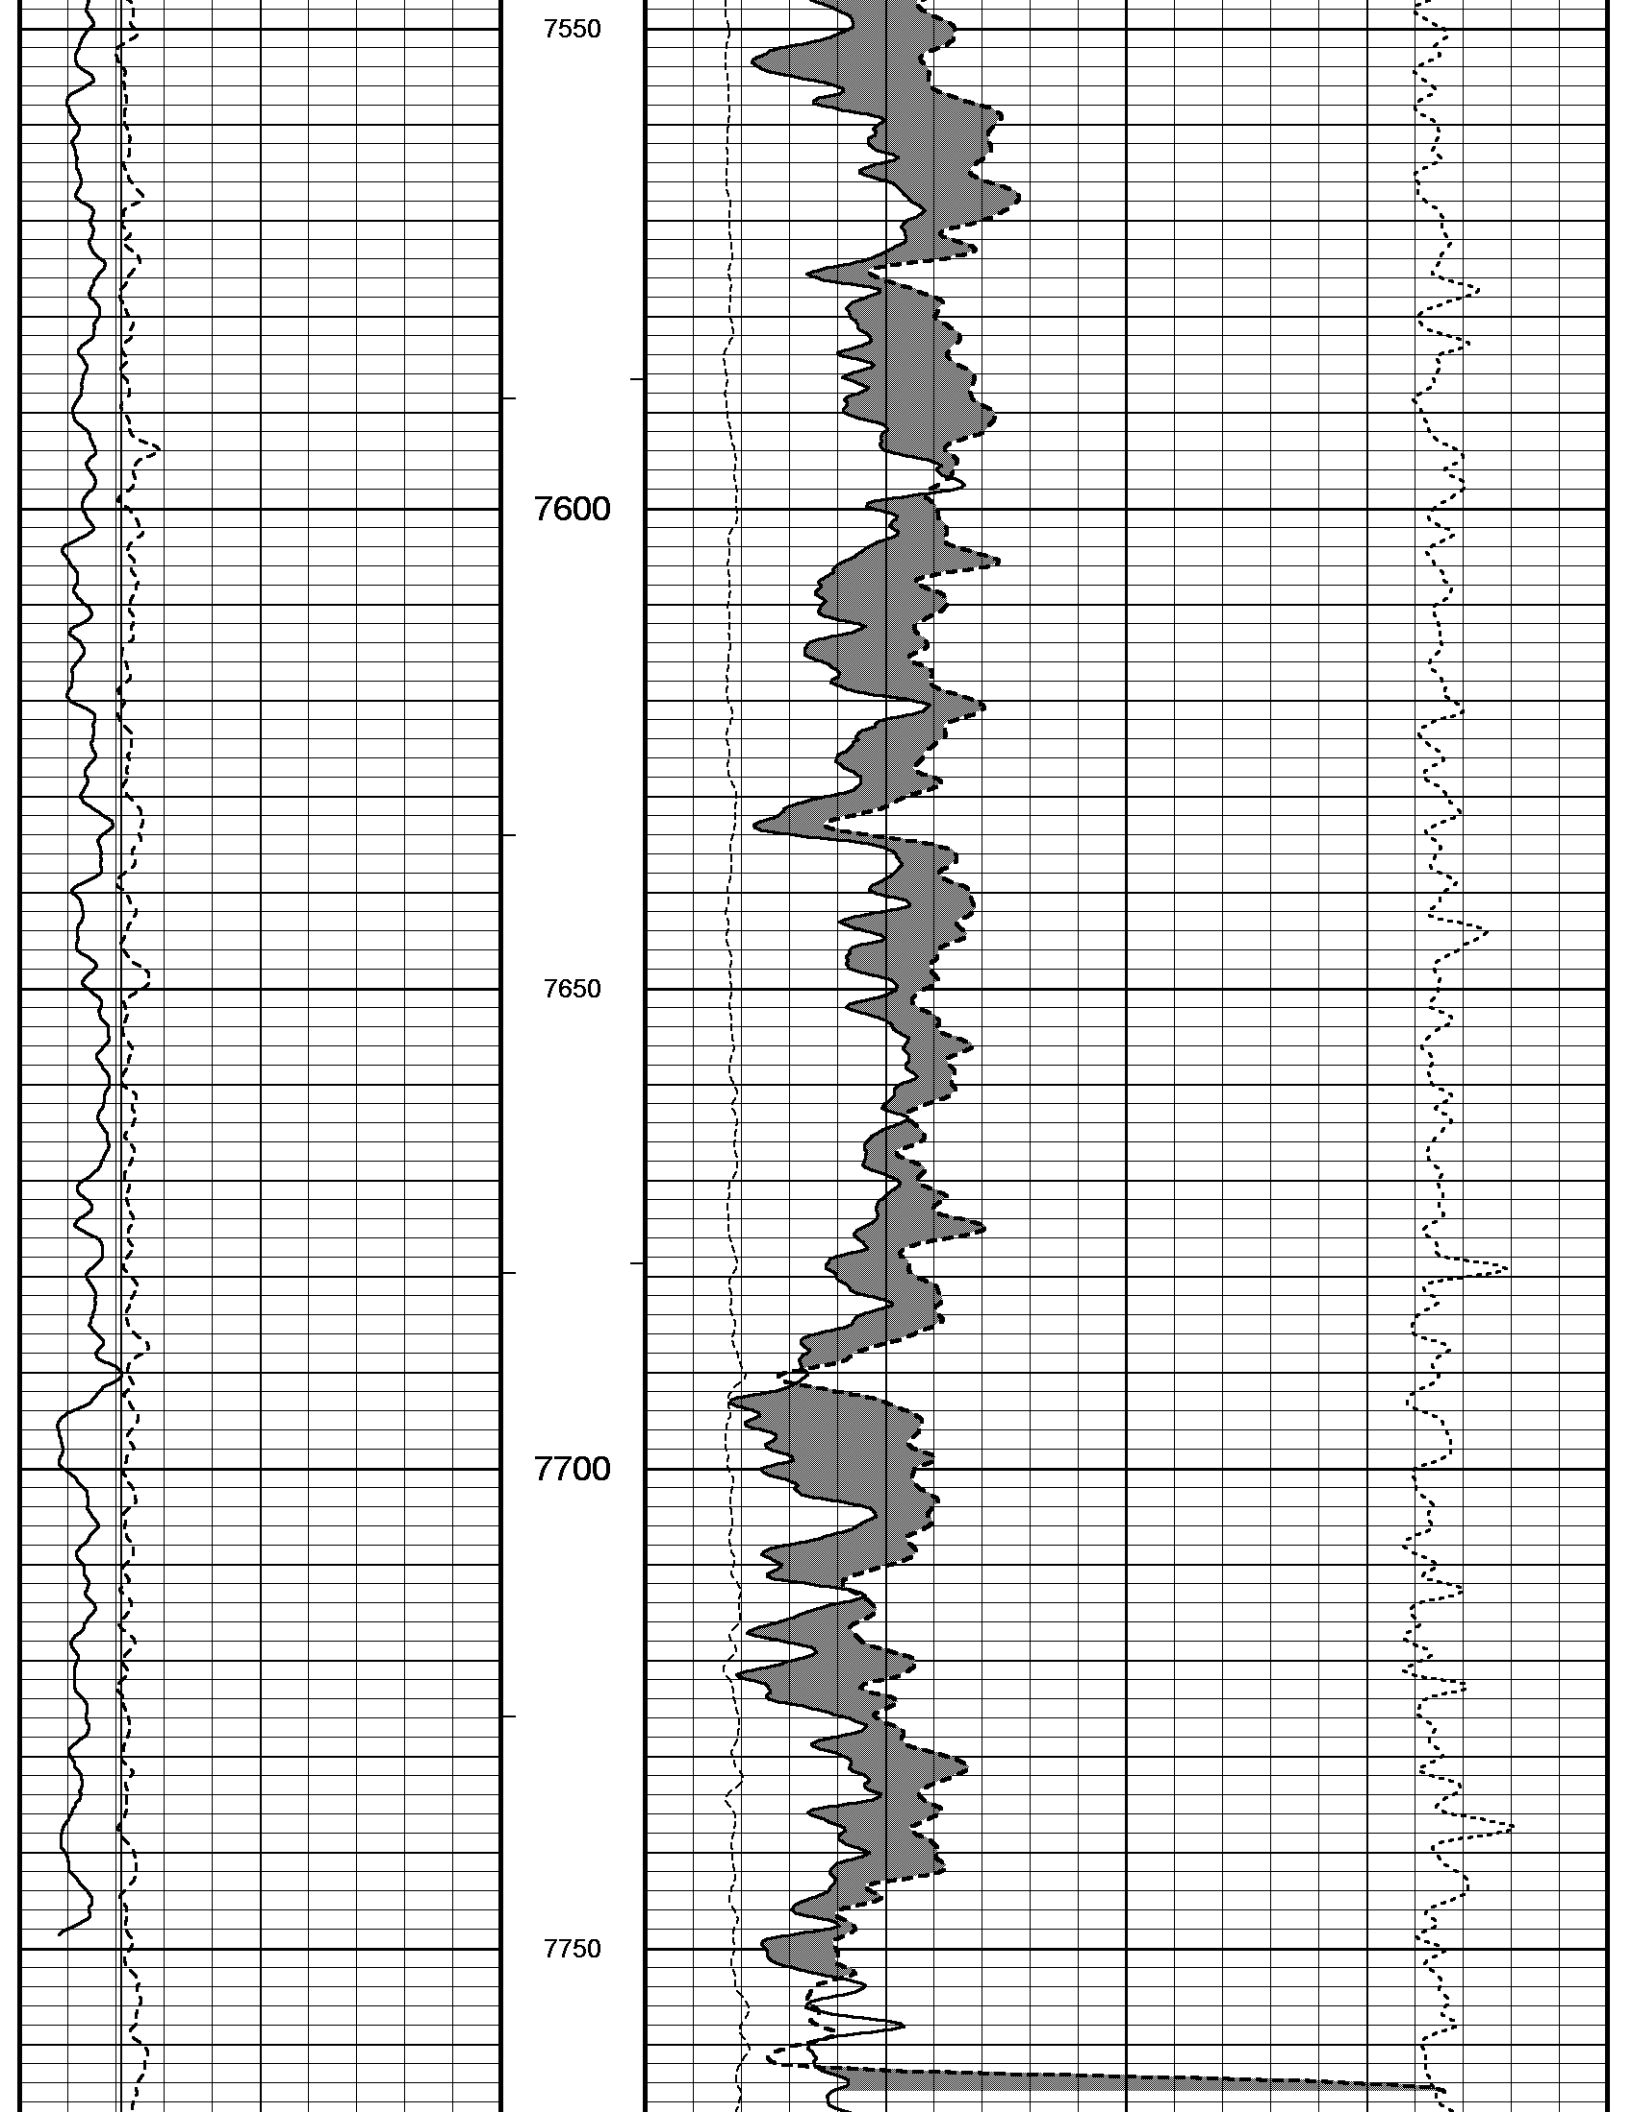




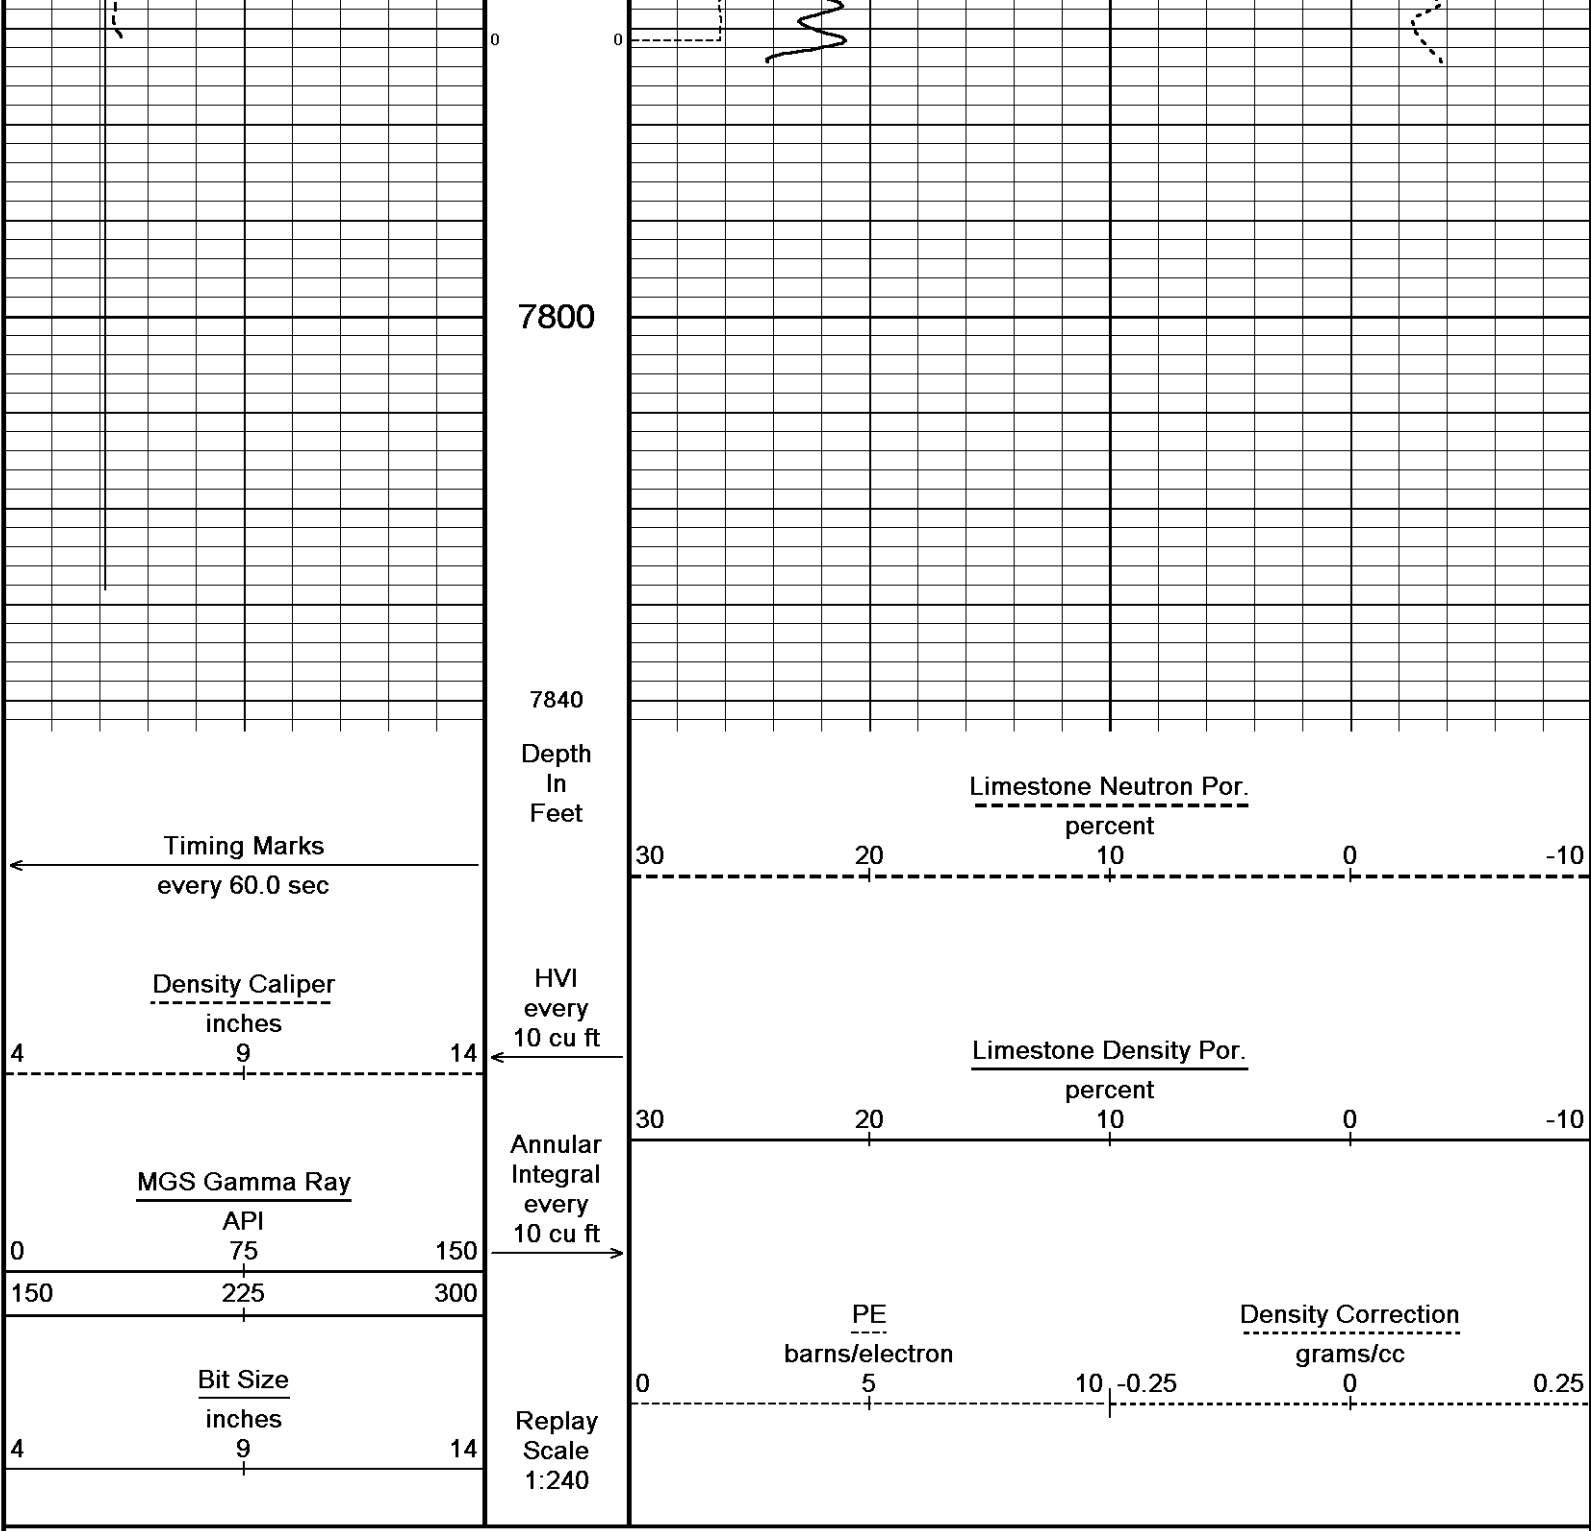



↑ 5 INCH MAIN PASS DSC ↑


↓ 5 INCH BULK DENSITY DSC ↓


Depth Based Data - Maximum Sampling Increment 10.0cm
 Plotted on 20-JAN-2012 04:57
 Filename: C:\Data\CMX\CMX Socrates 1\MMS166 Depthlog.dta
 Recorded on 20-JAN-2012 03:46
 System Versions: Logged with 11.02.3186 Processed with 11.02.3186 Plotted with 11.02.3186

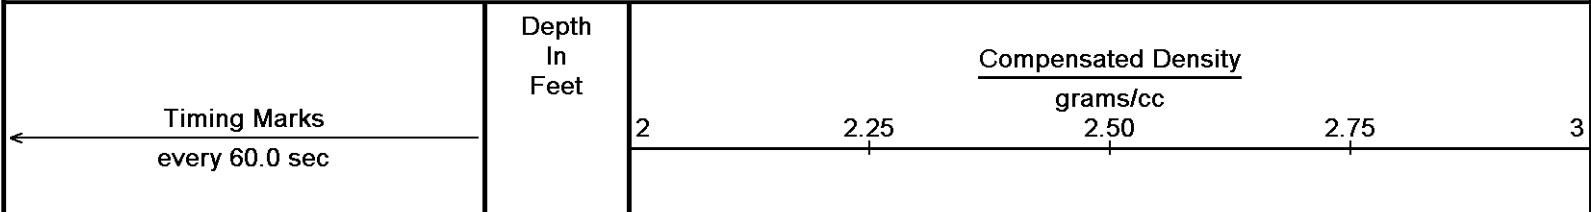


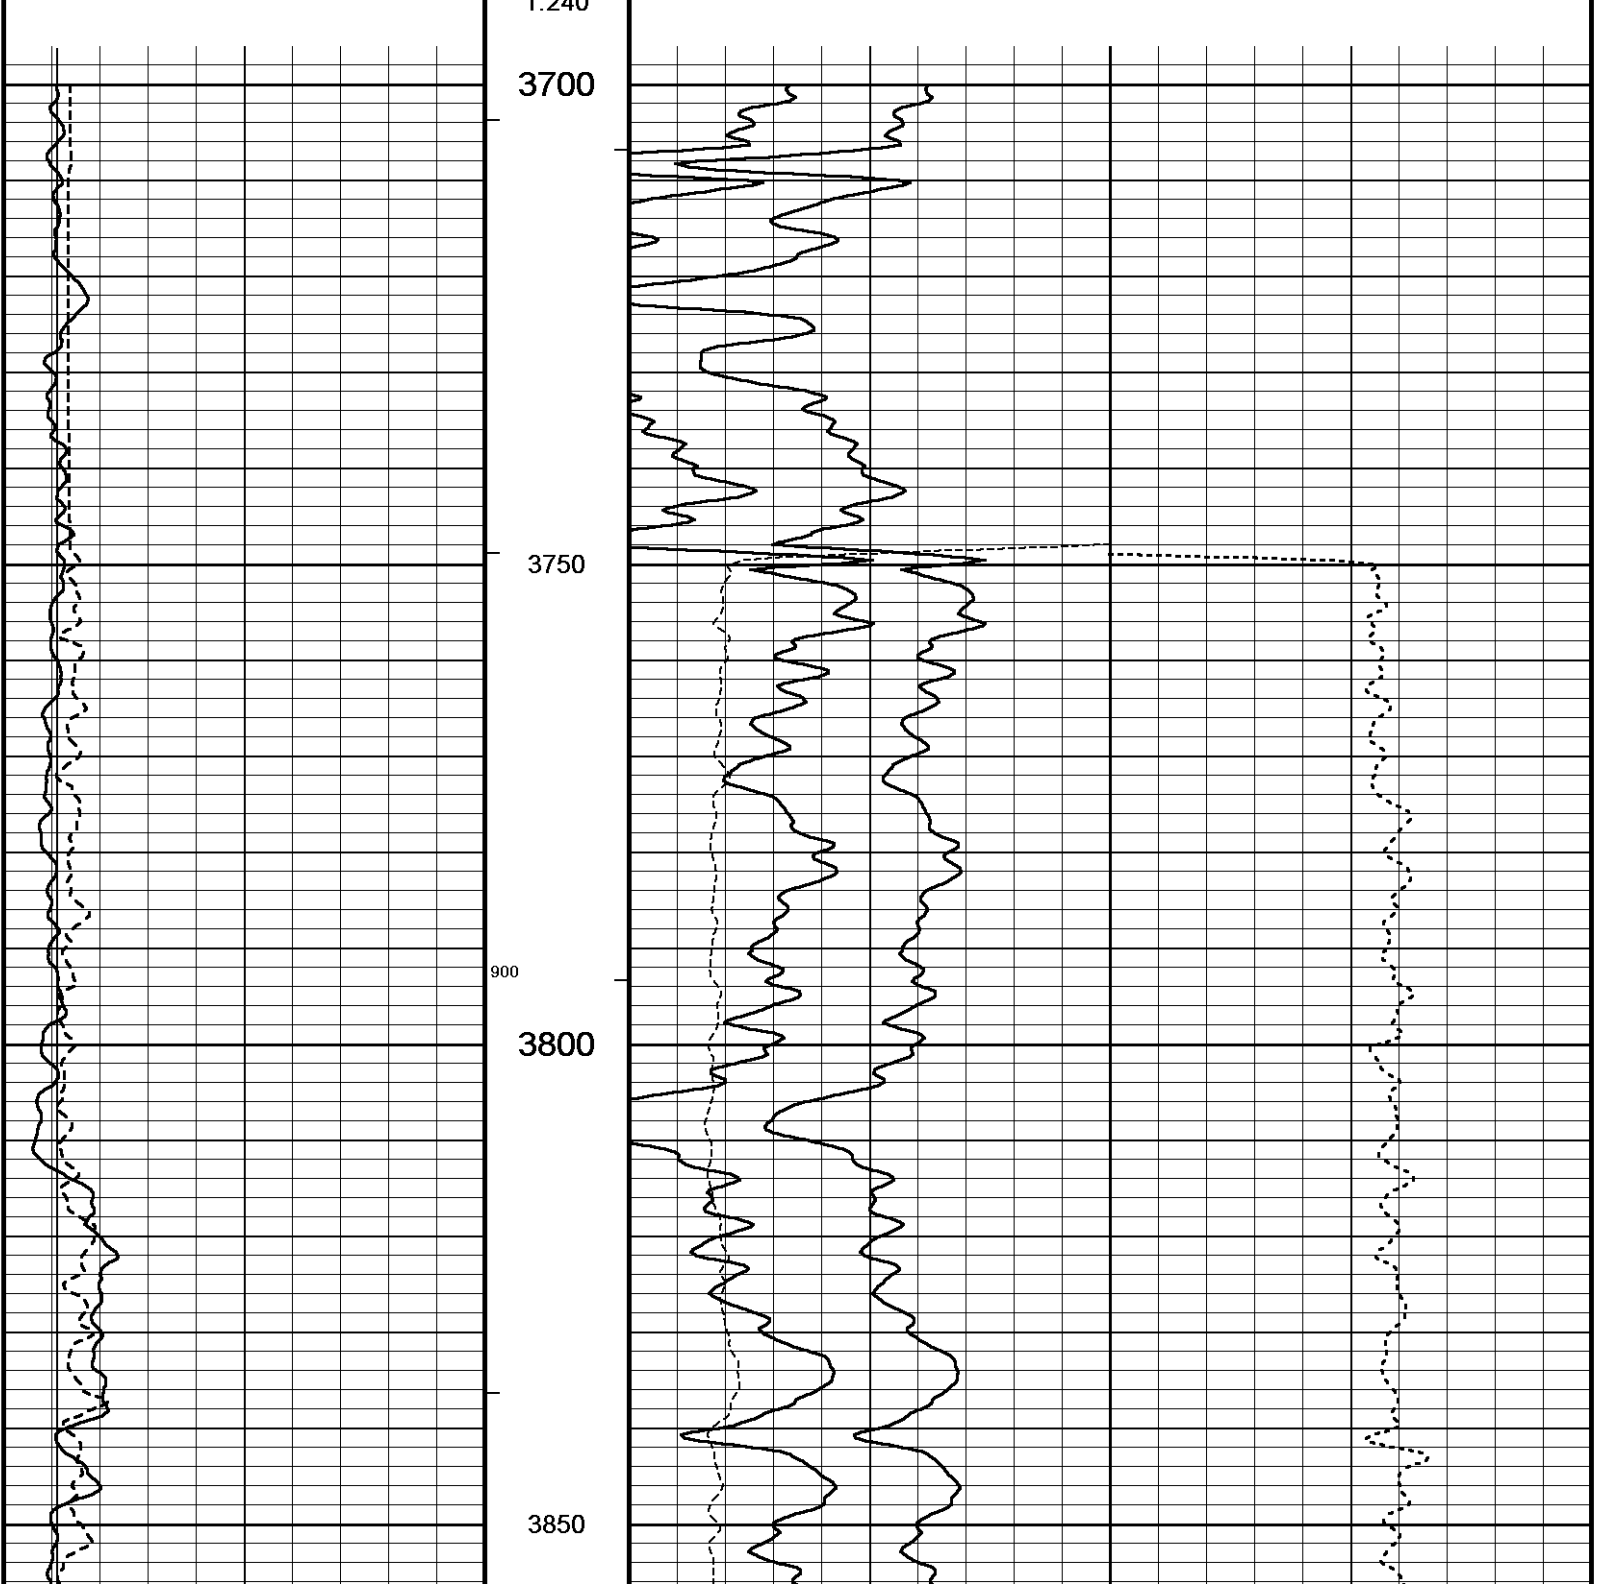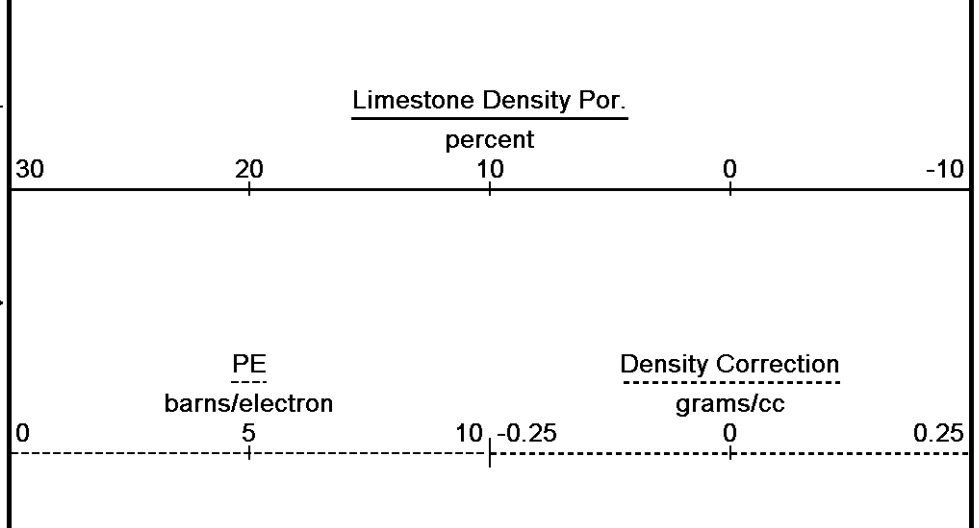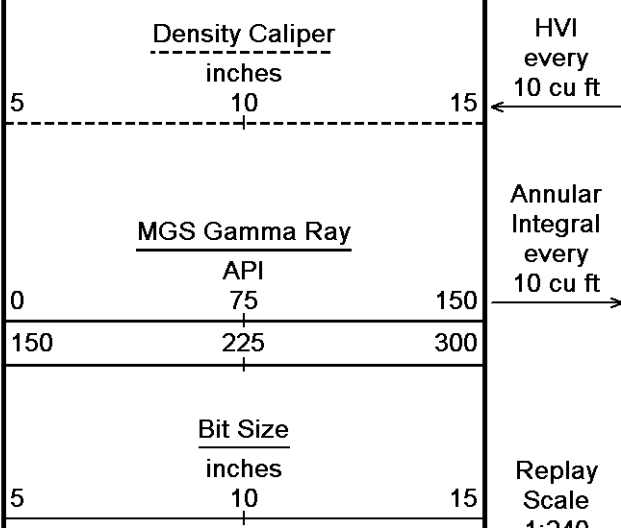


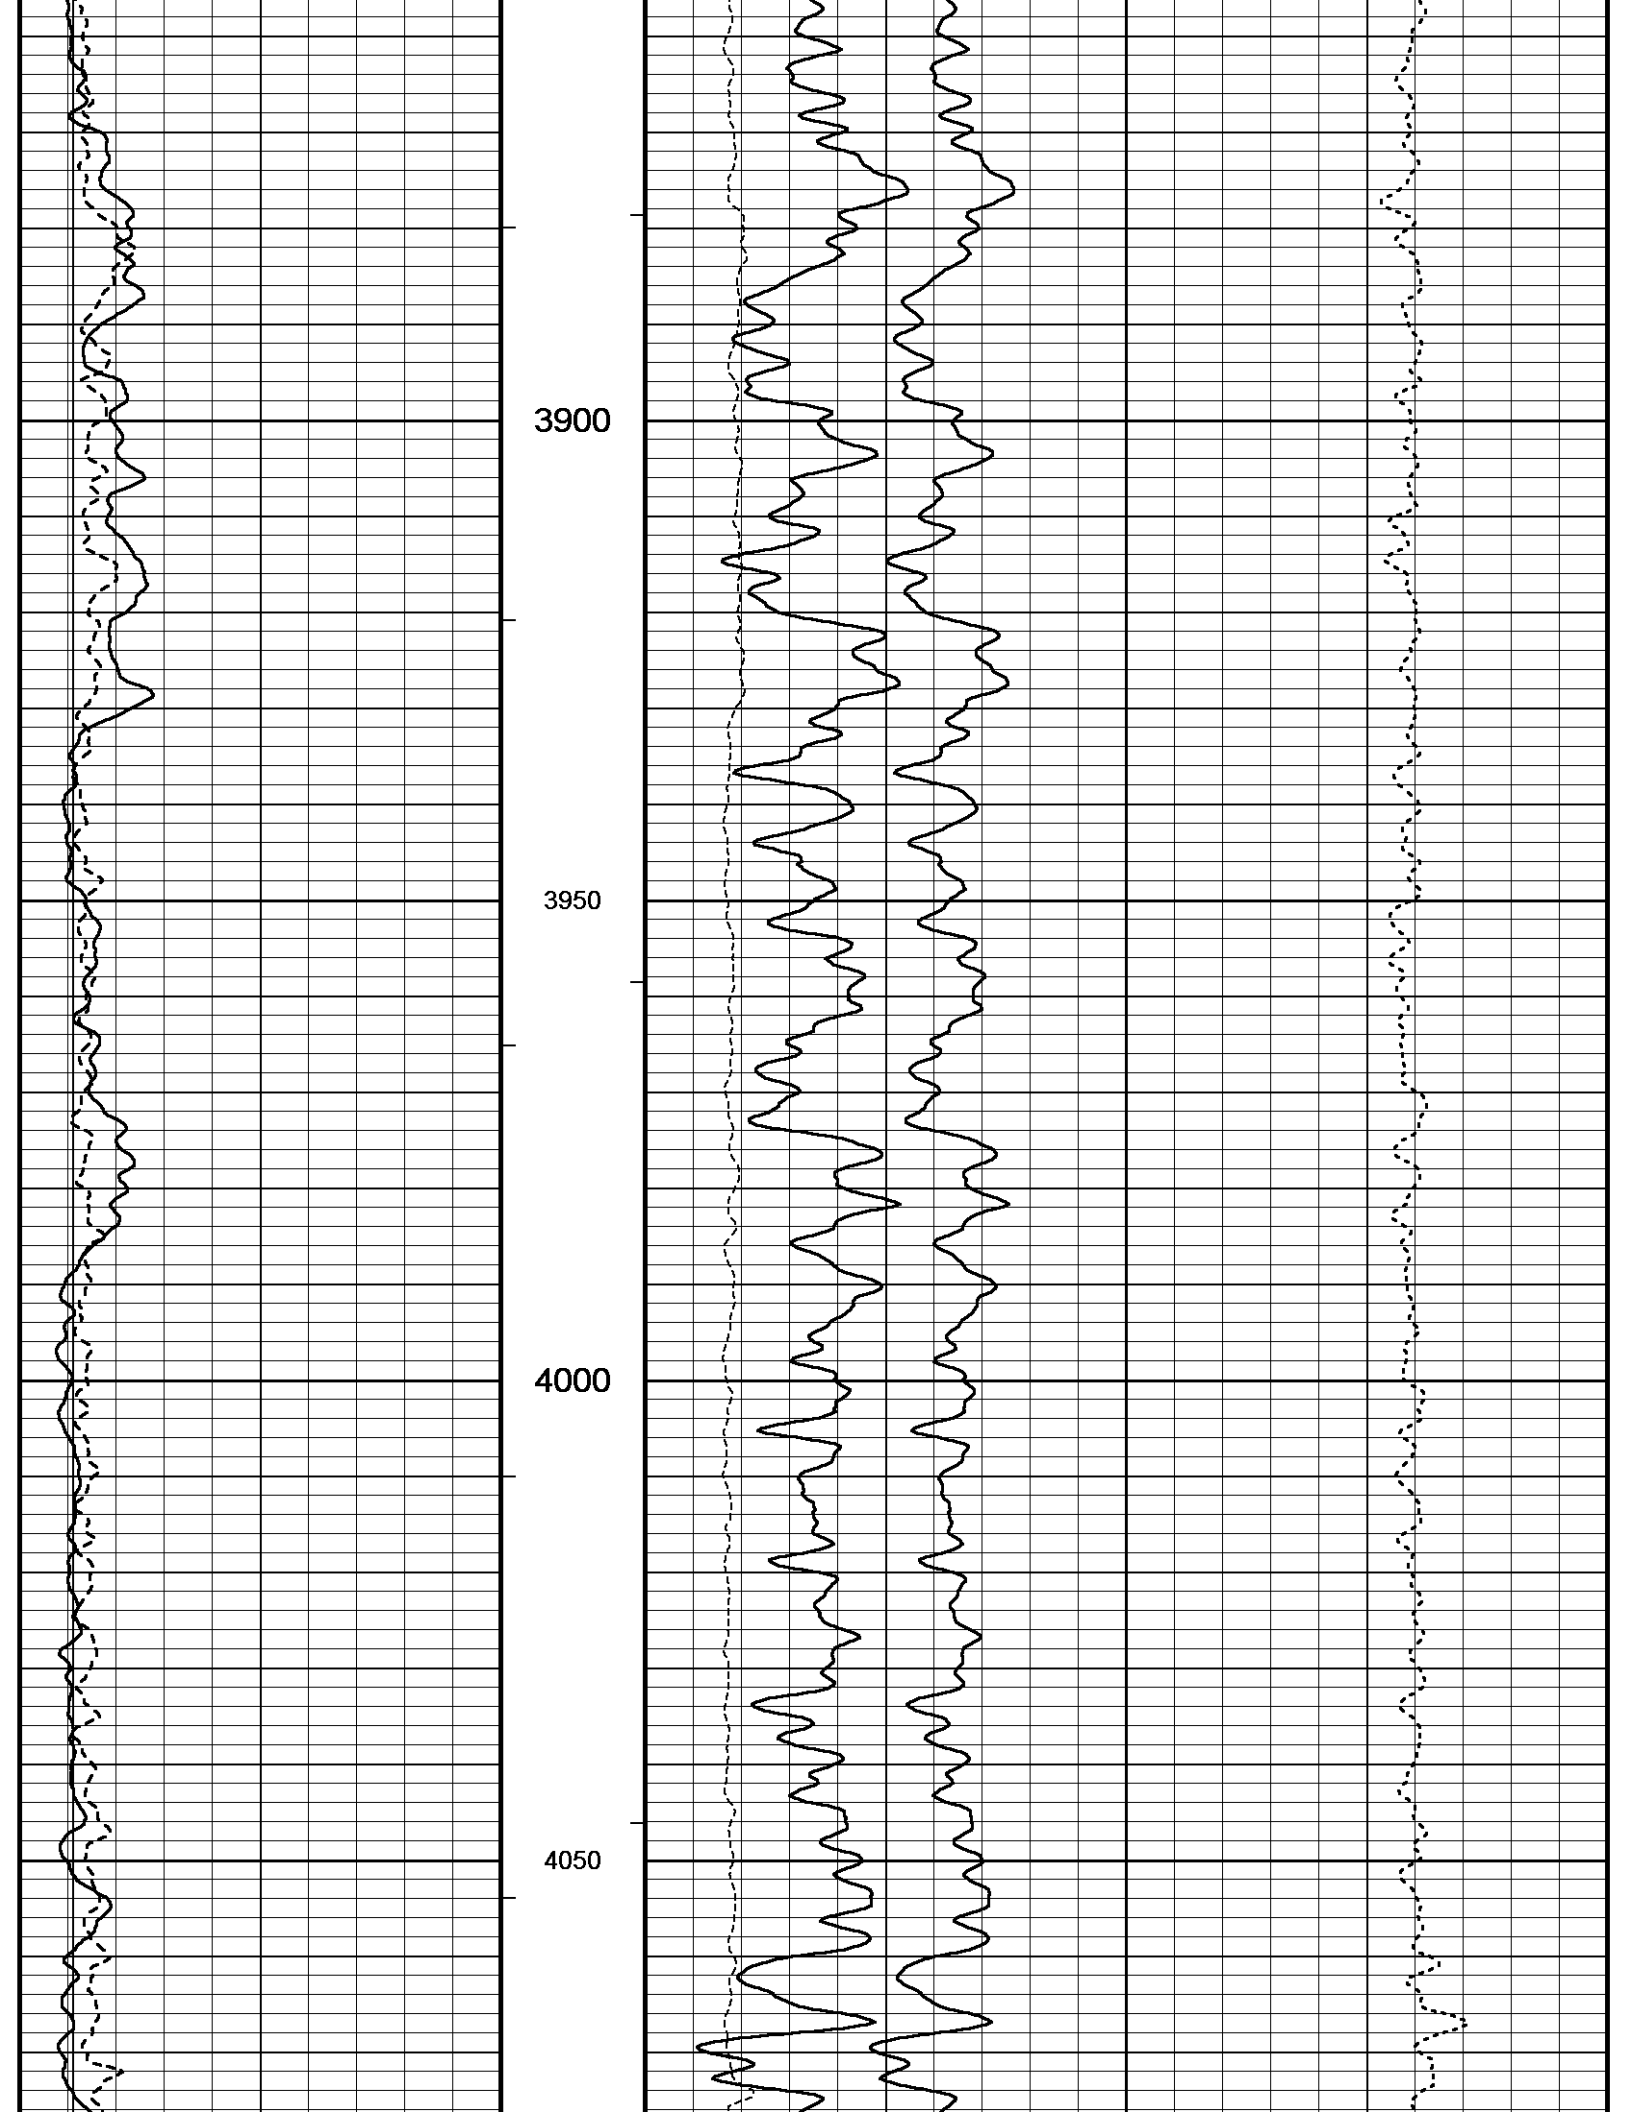


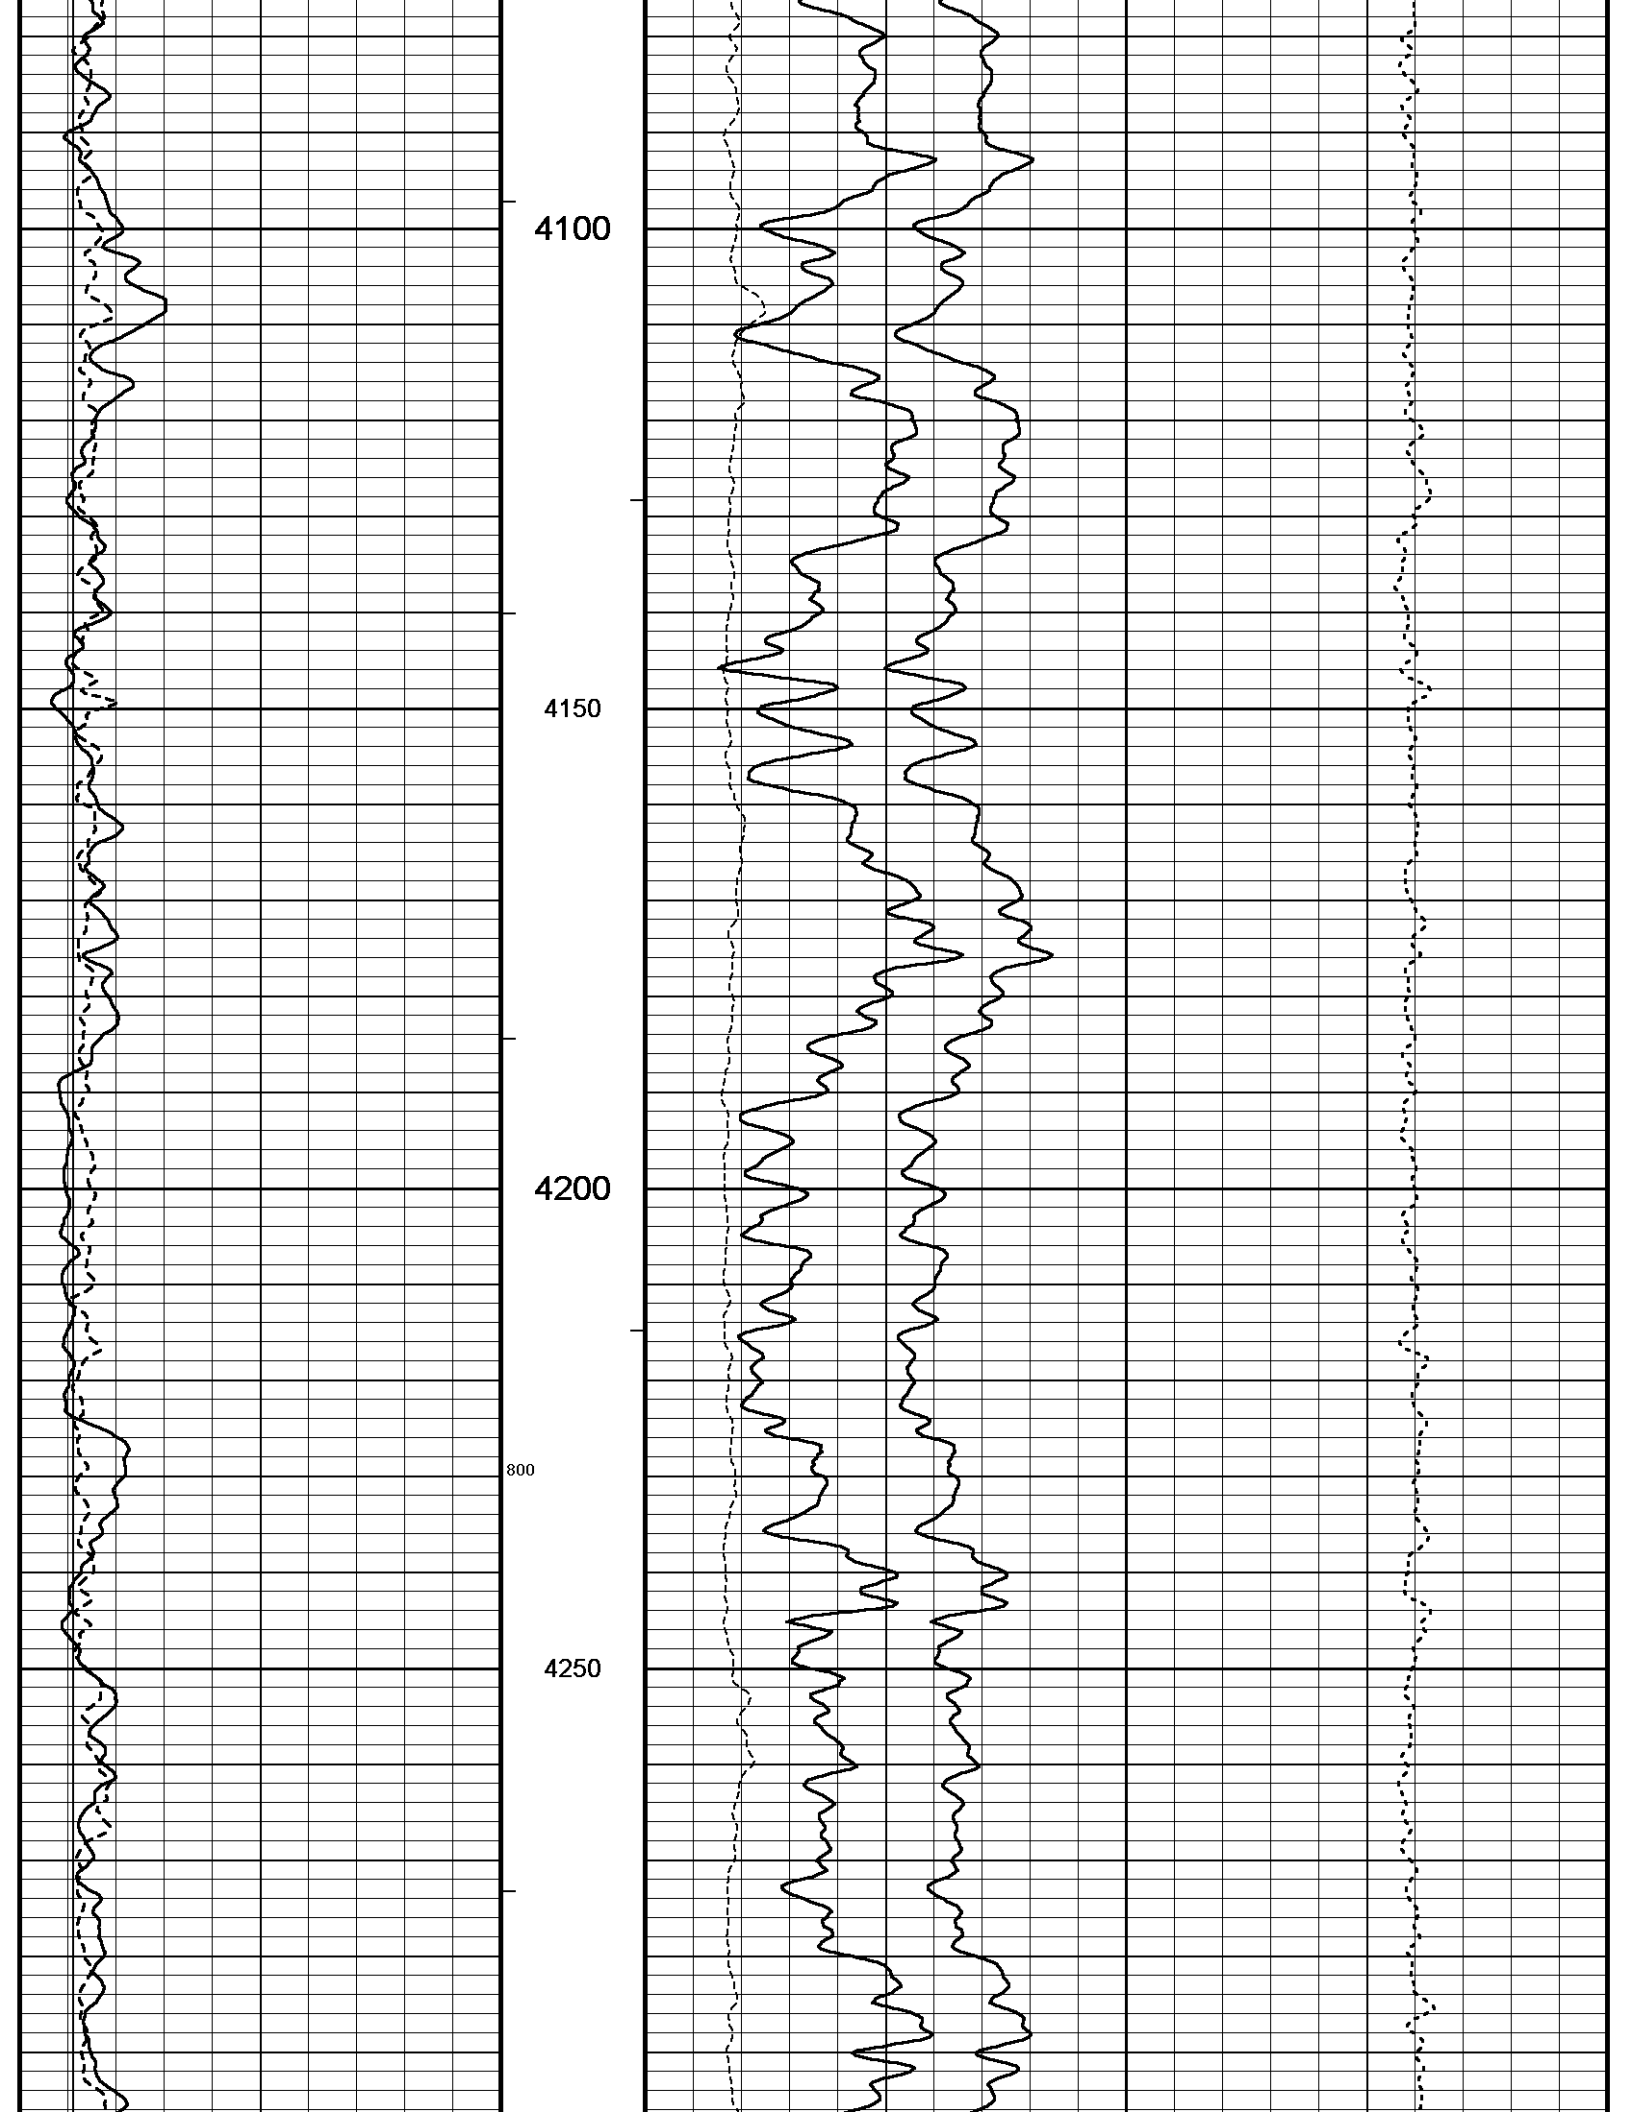


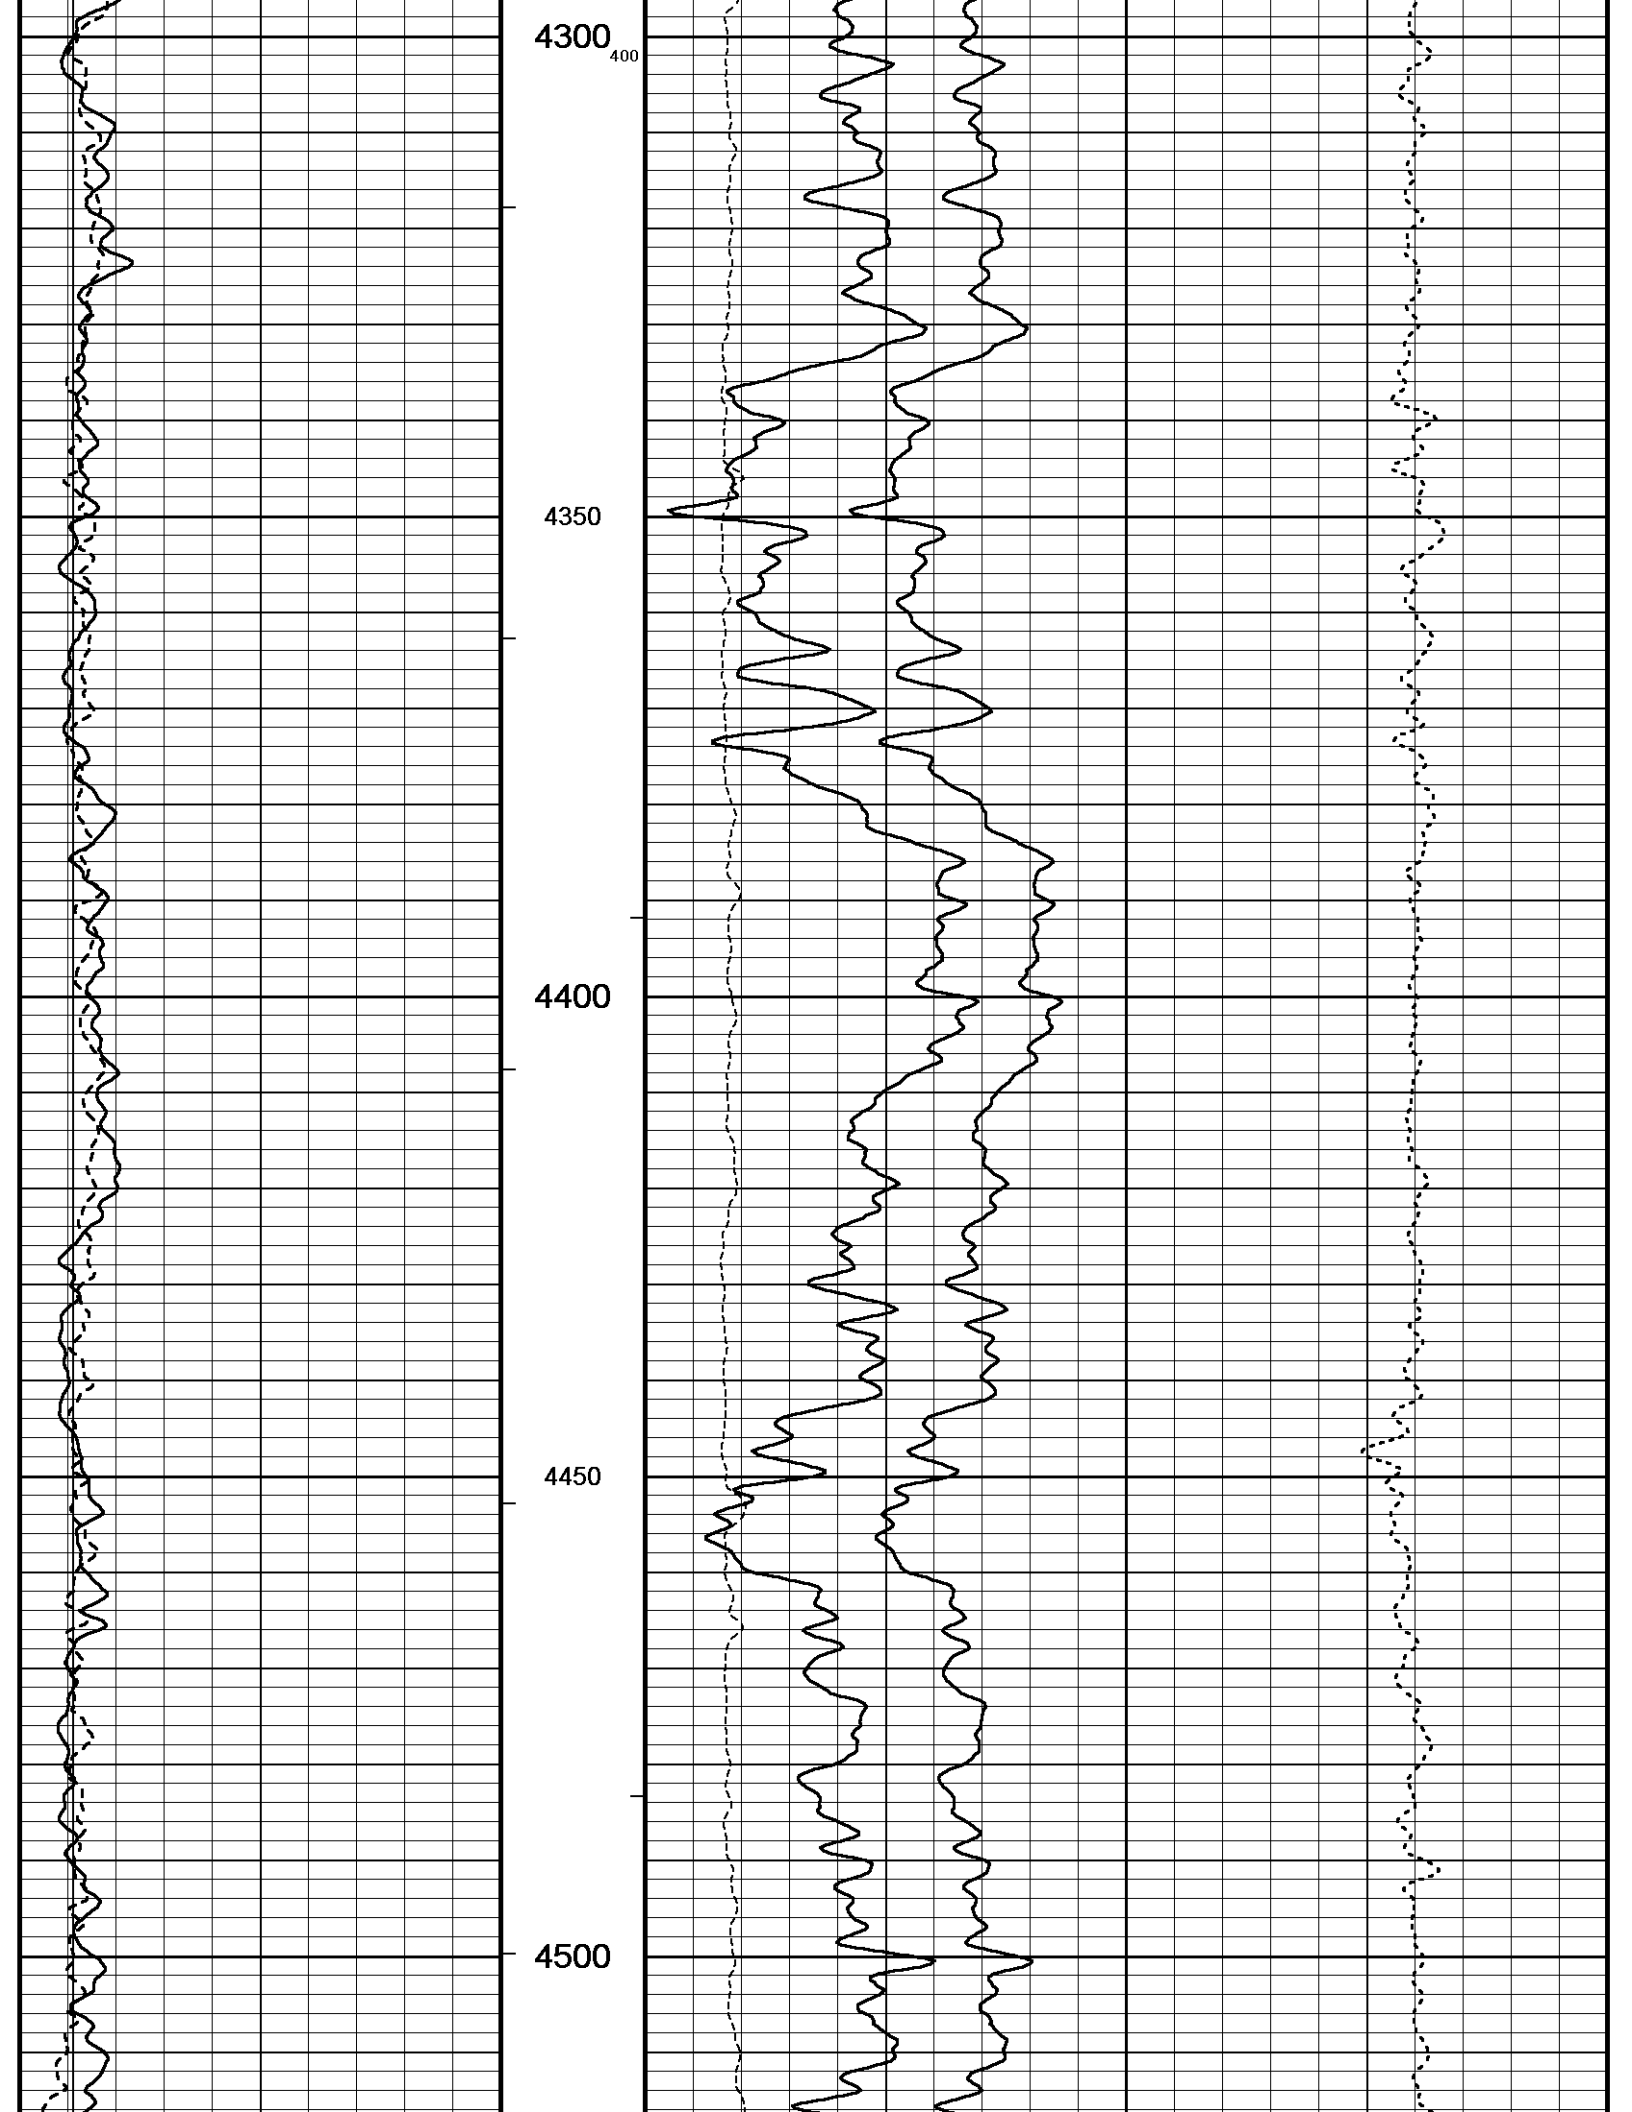


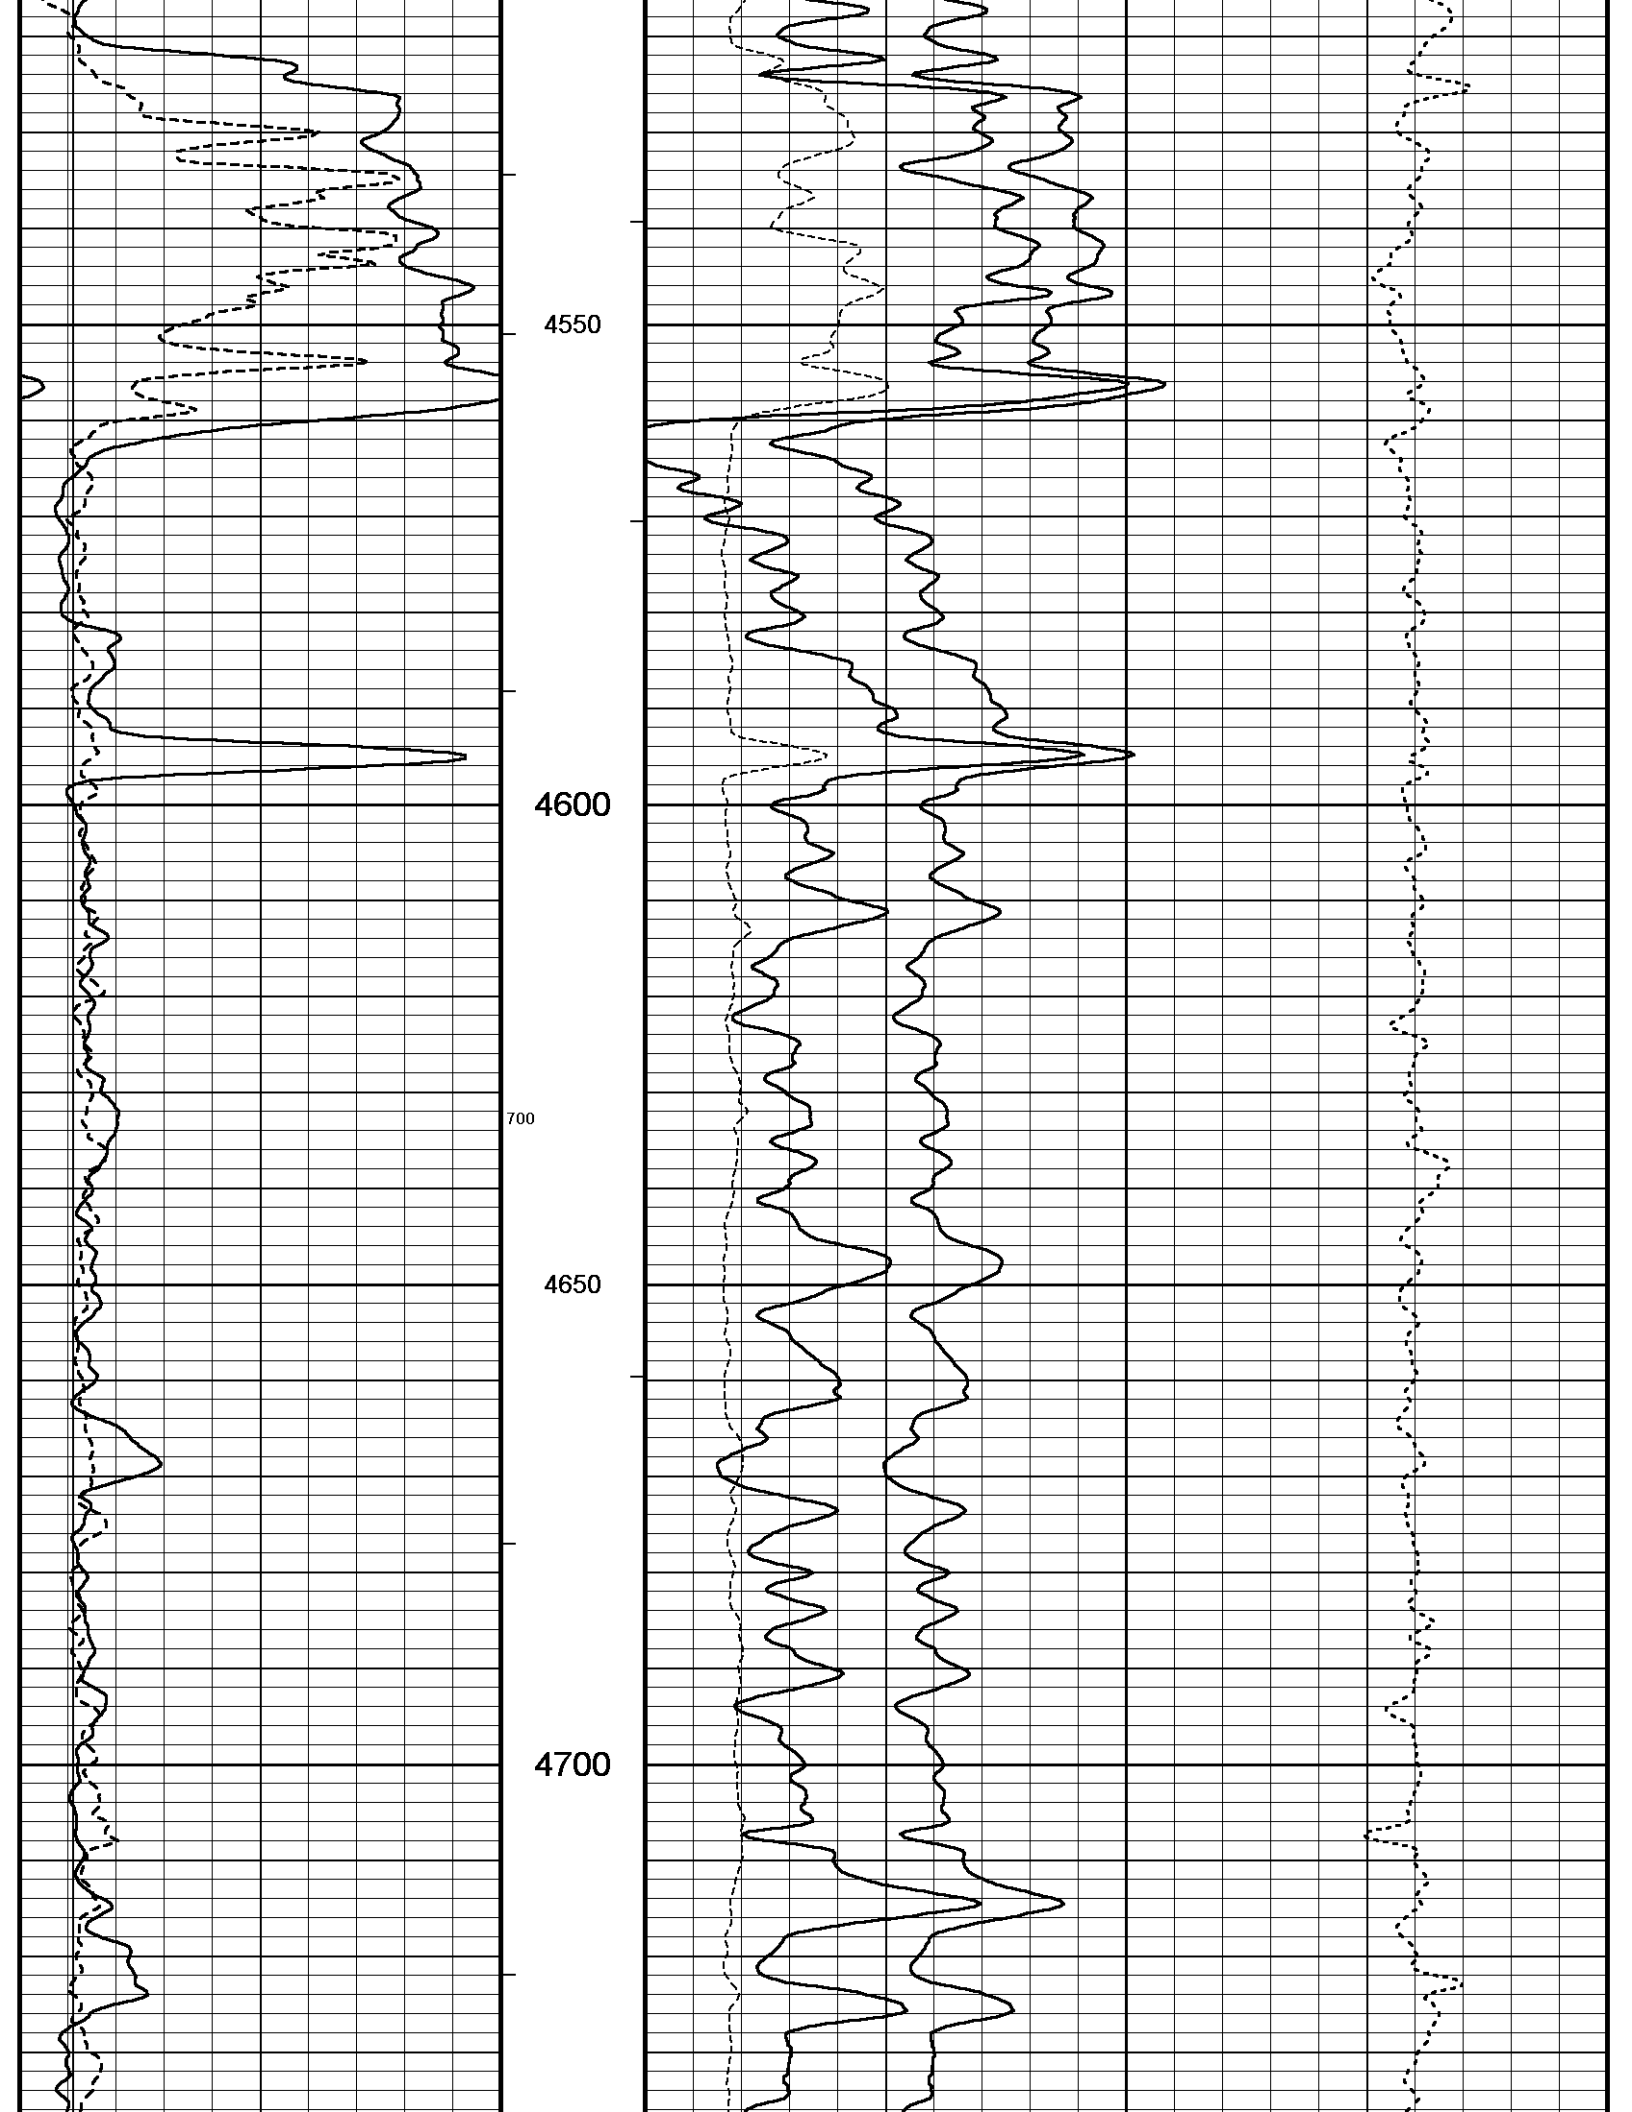


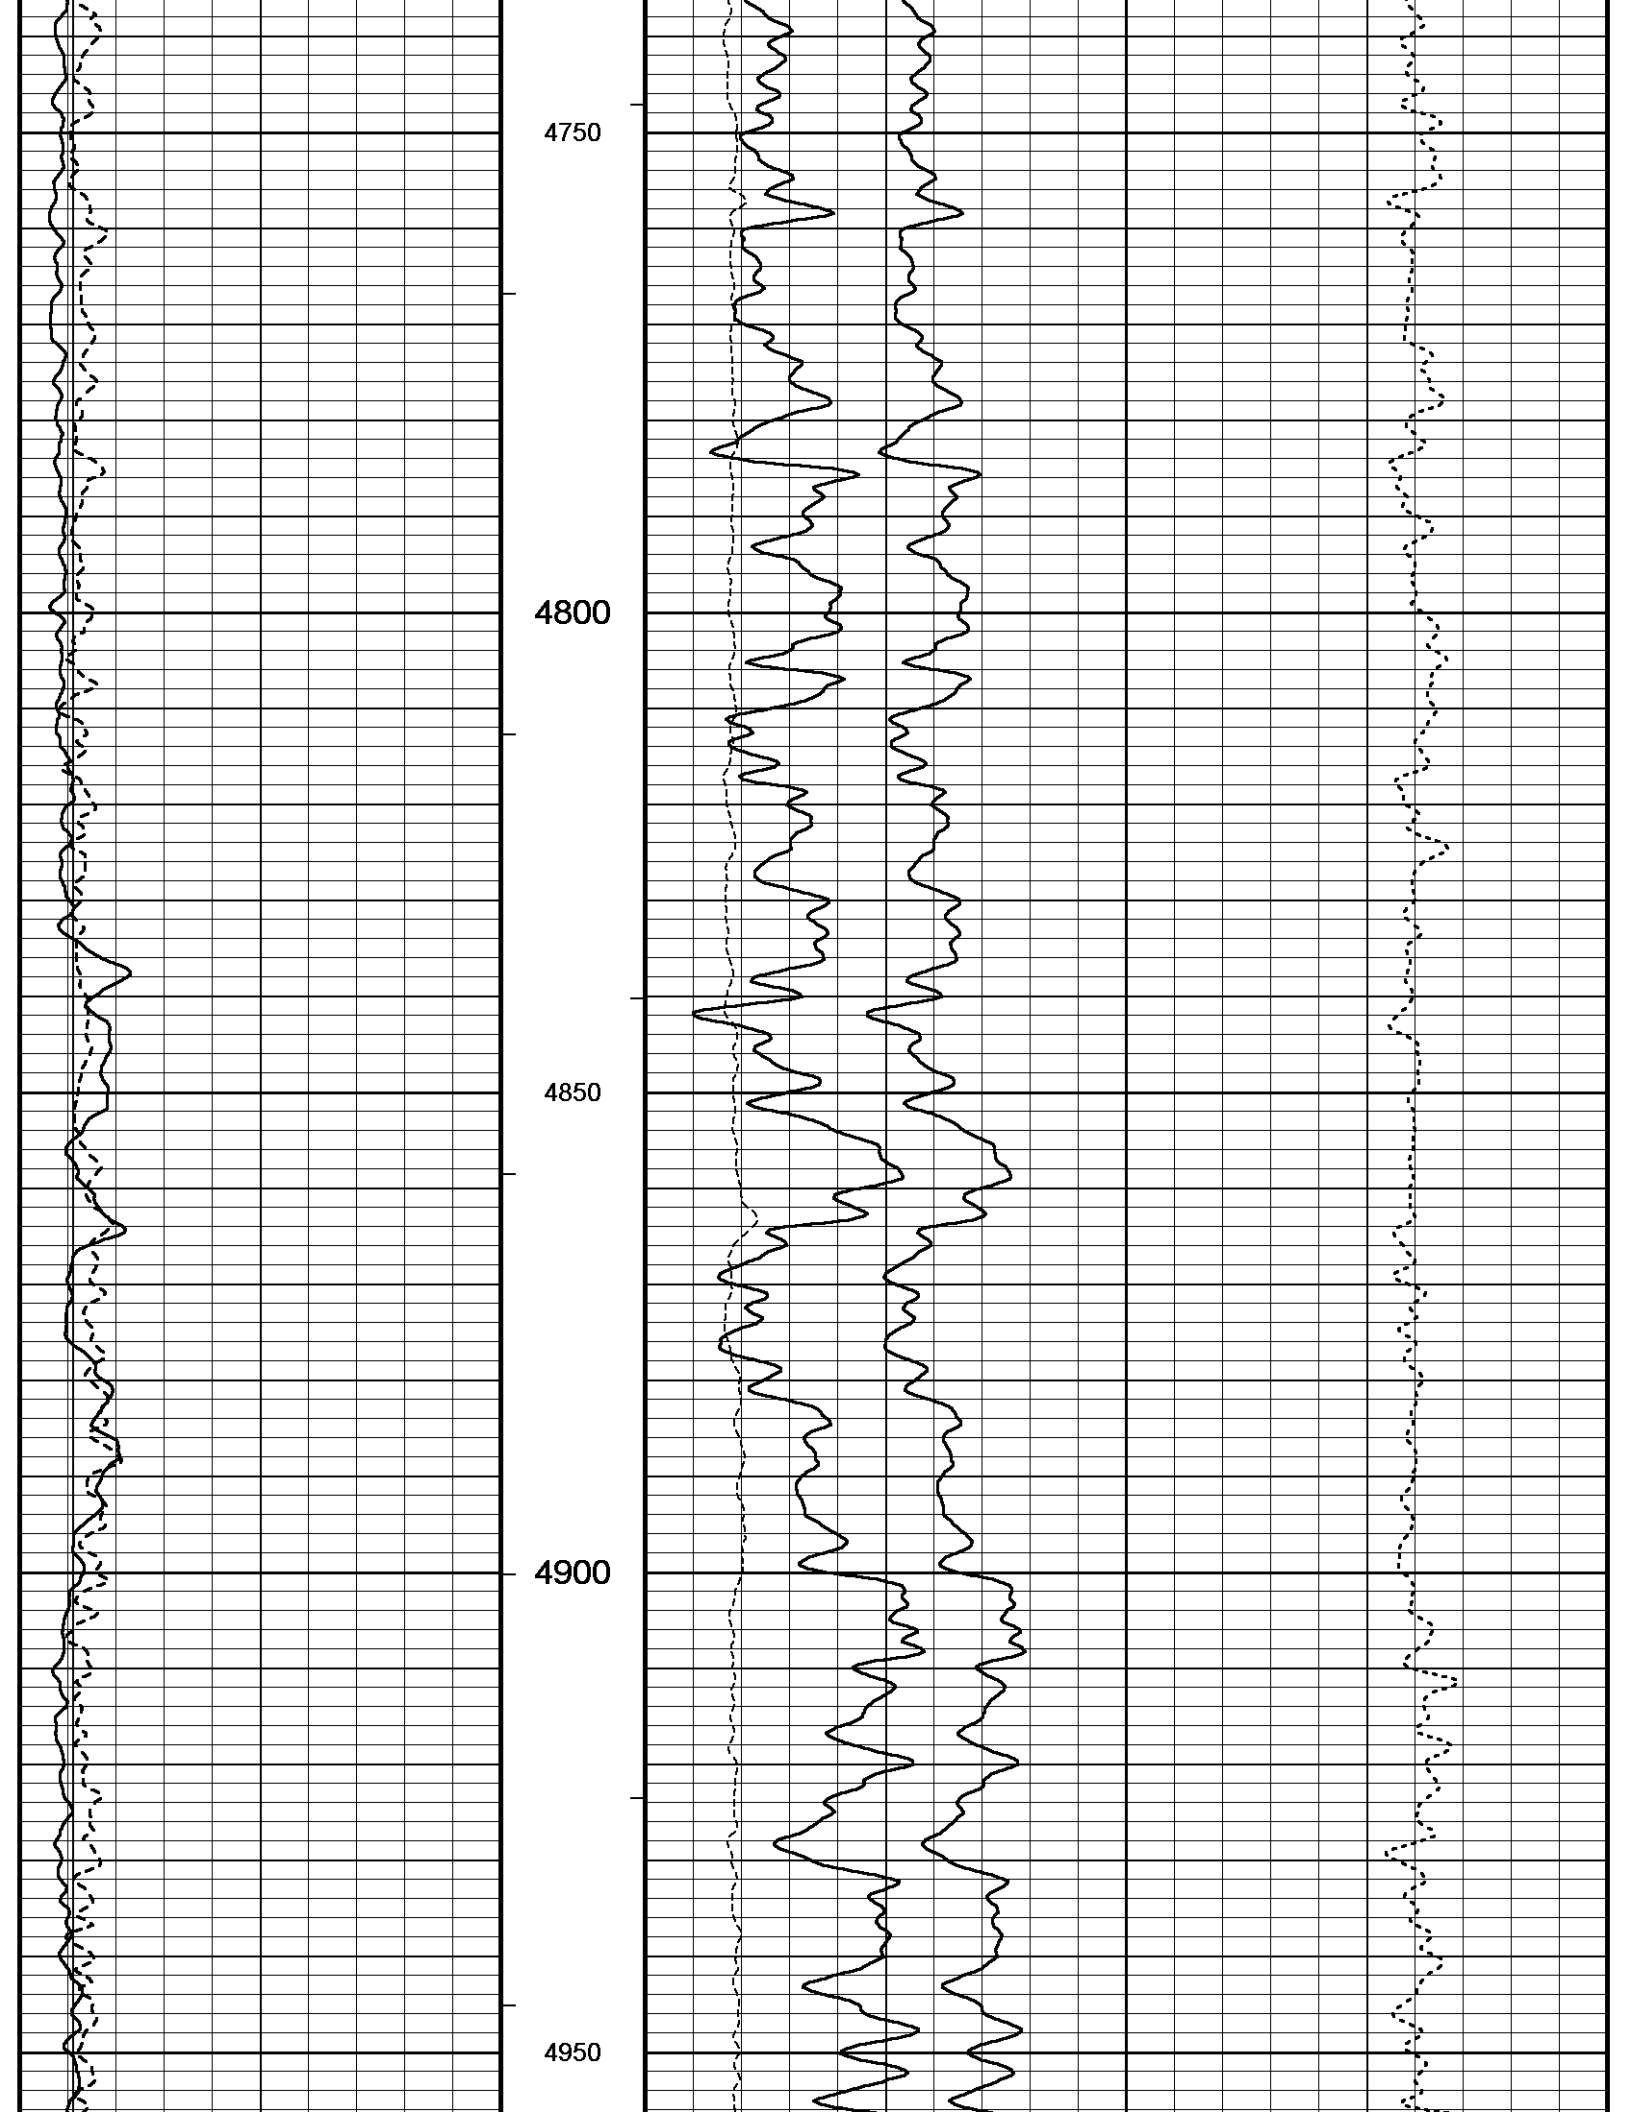


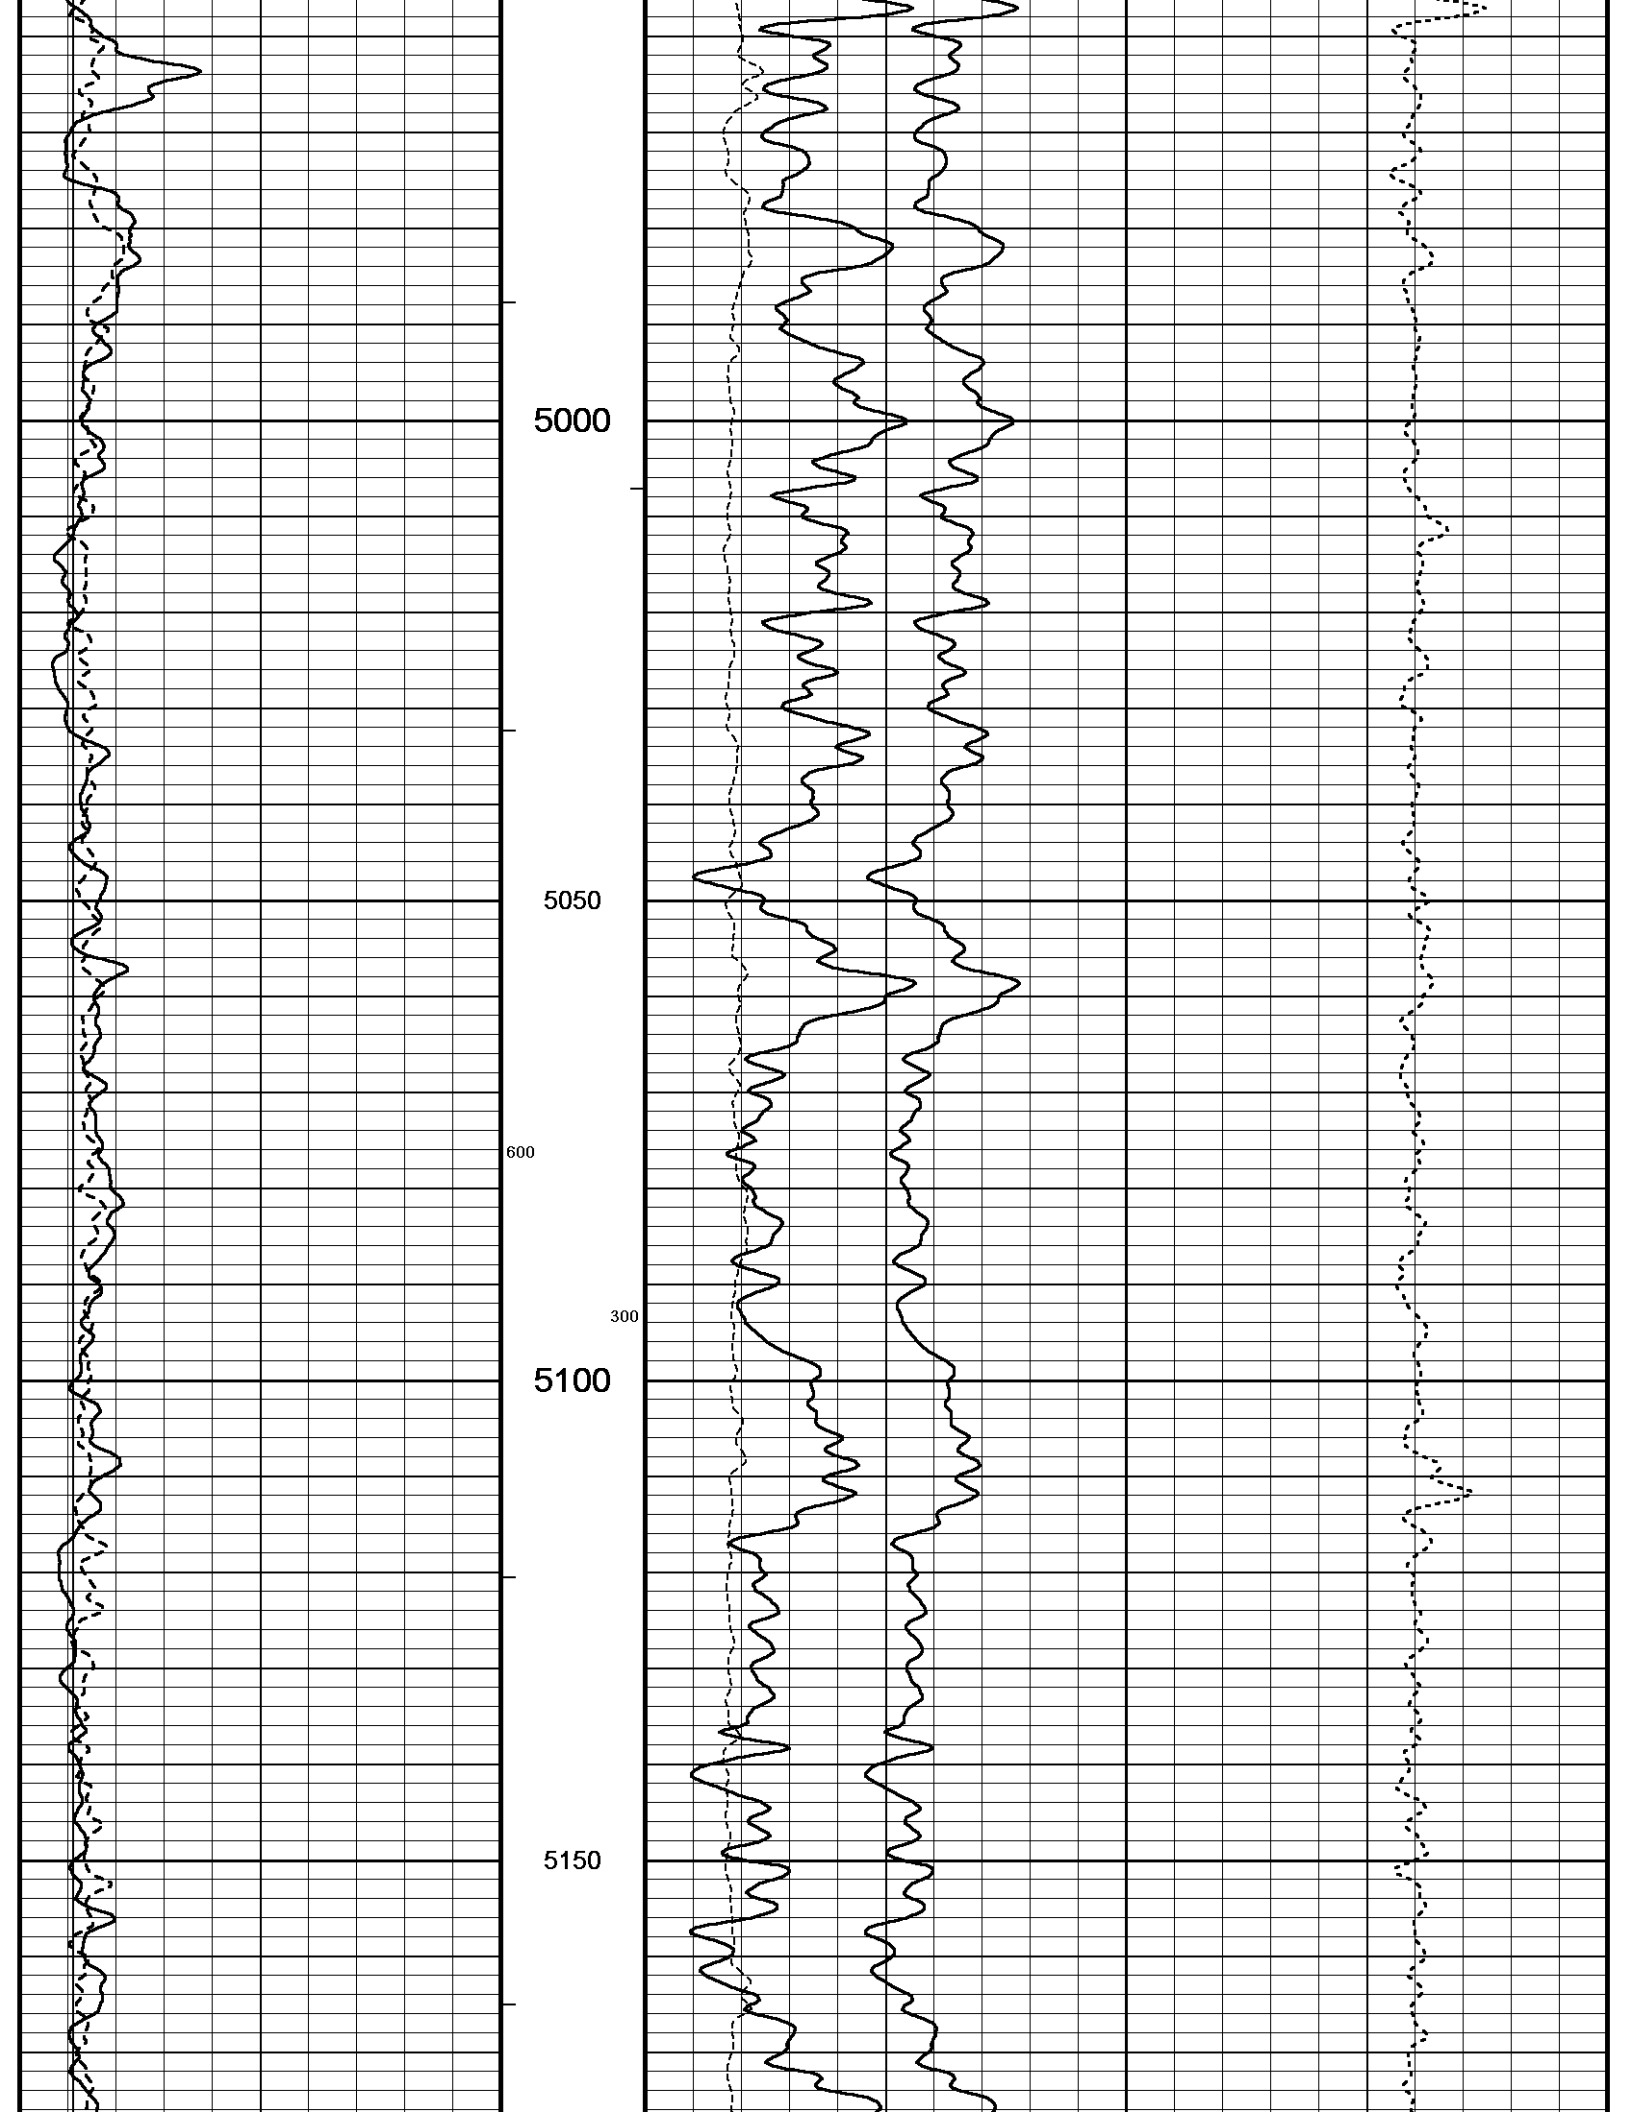


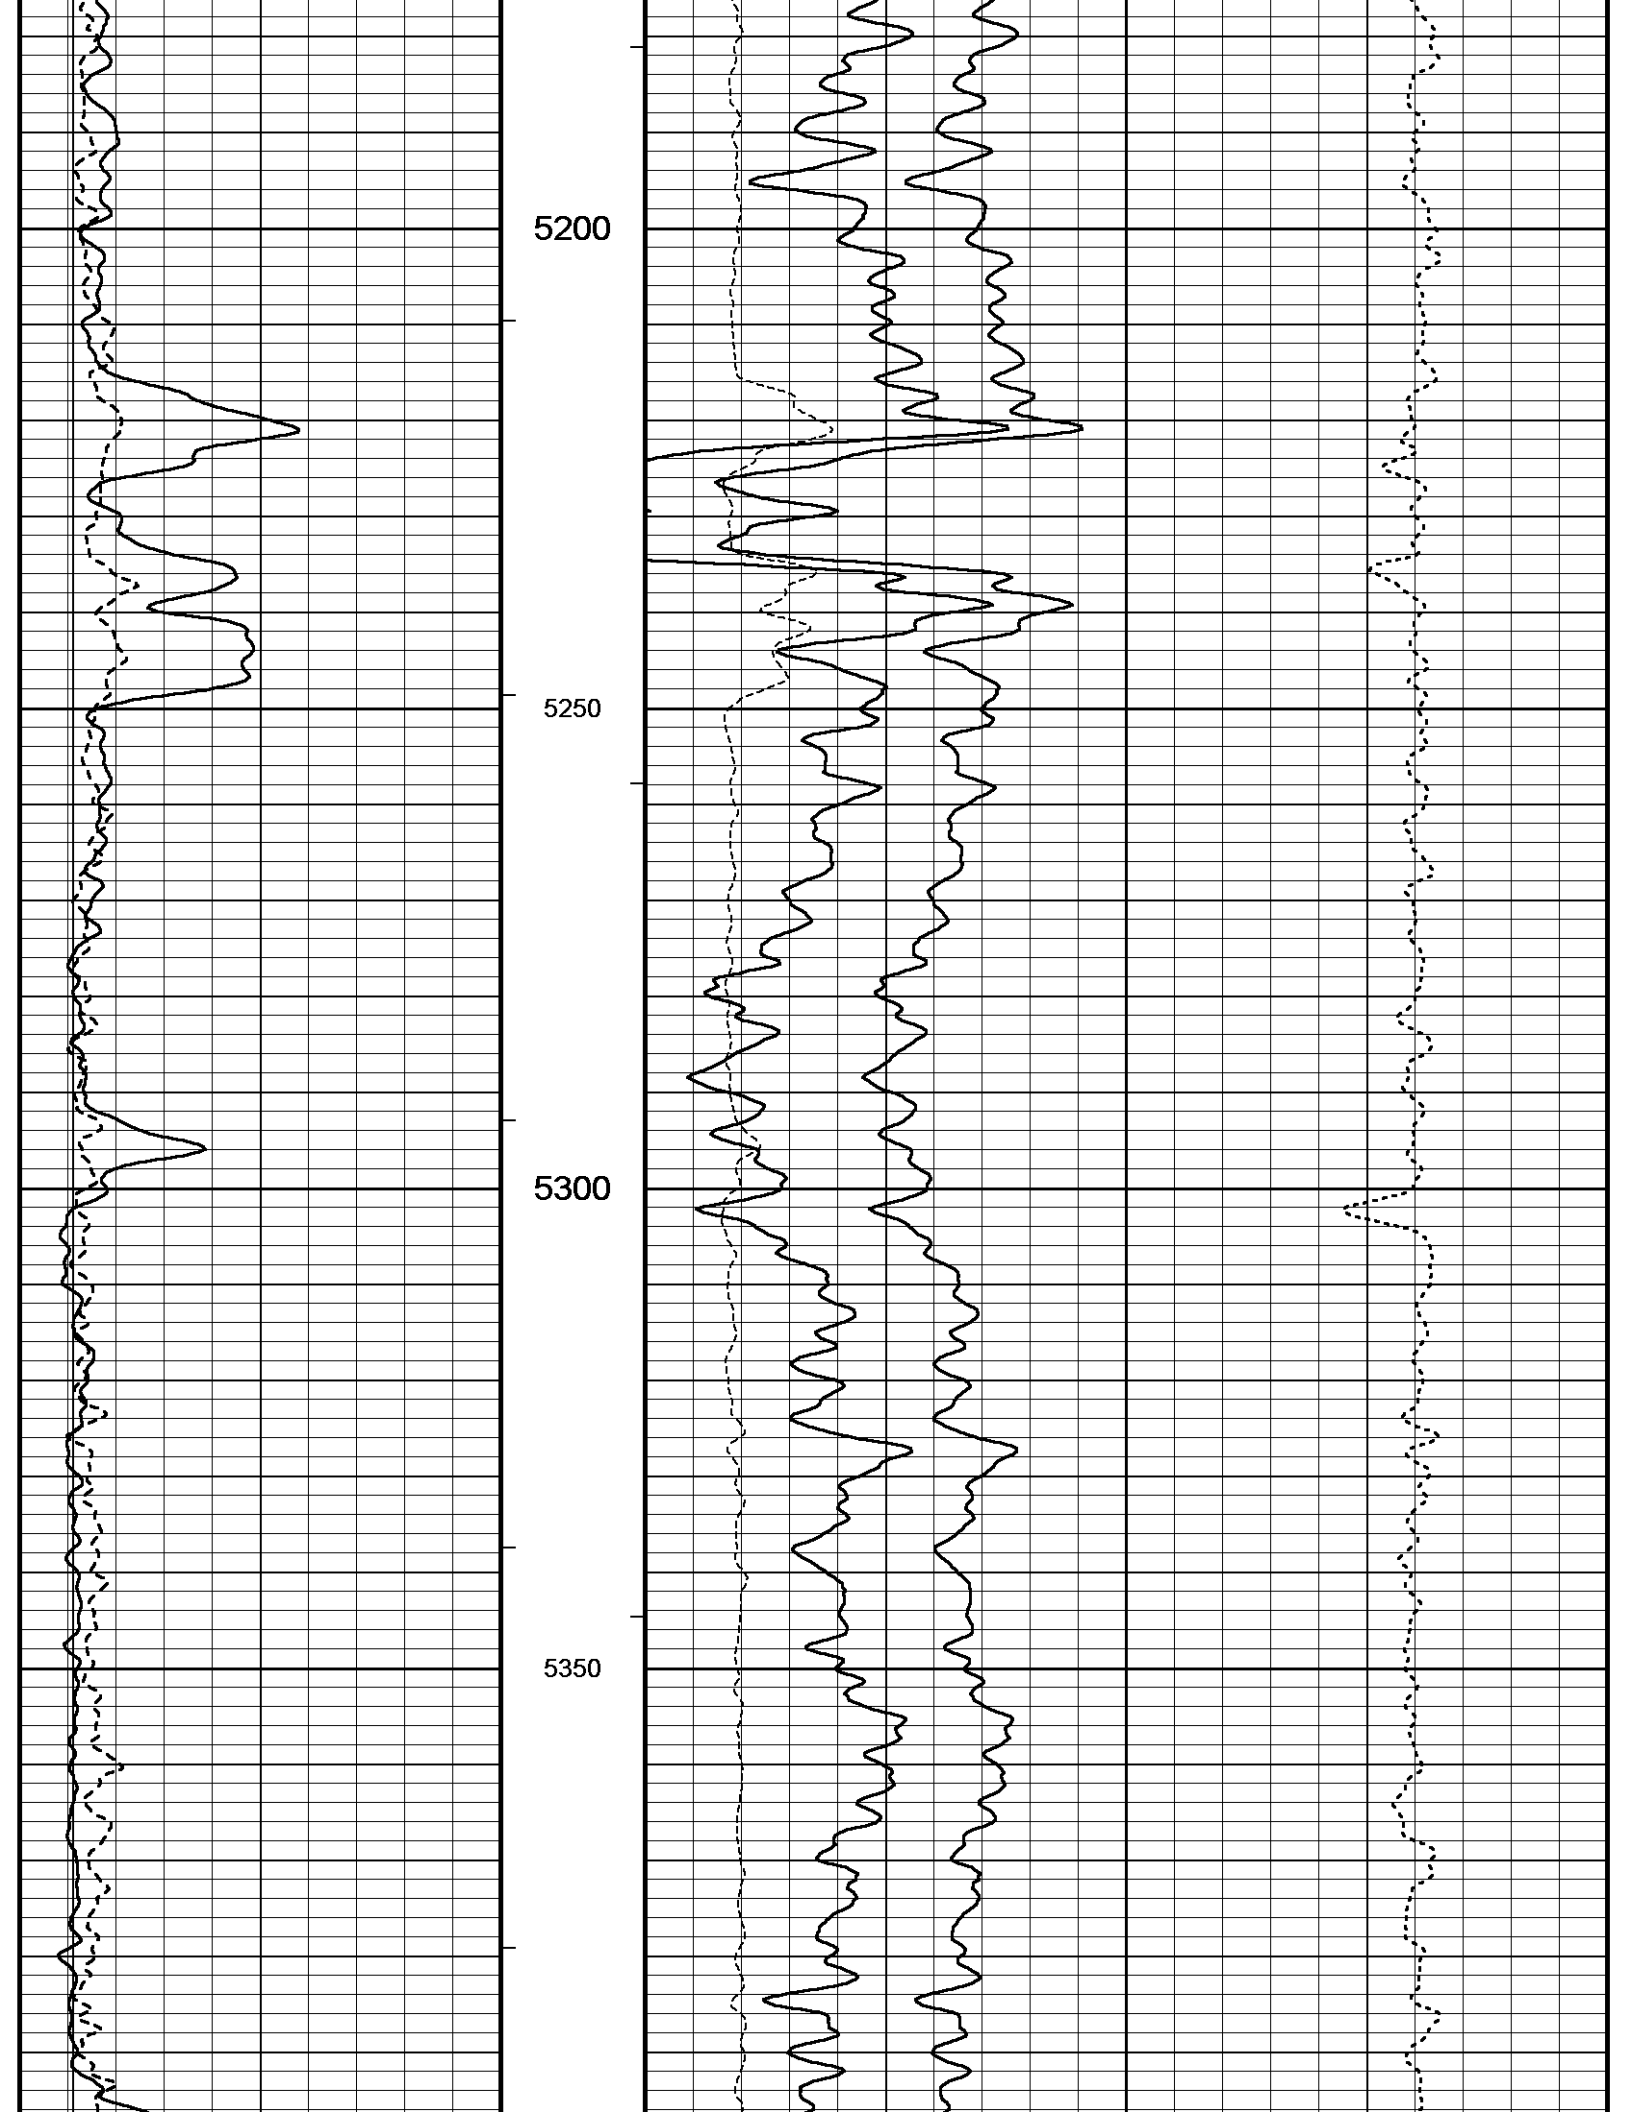


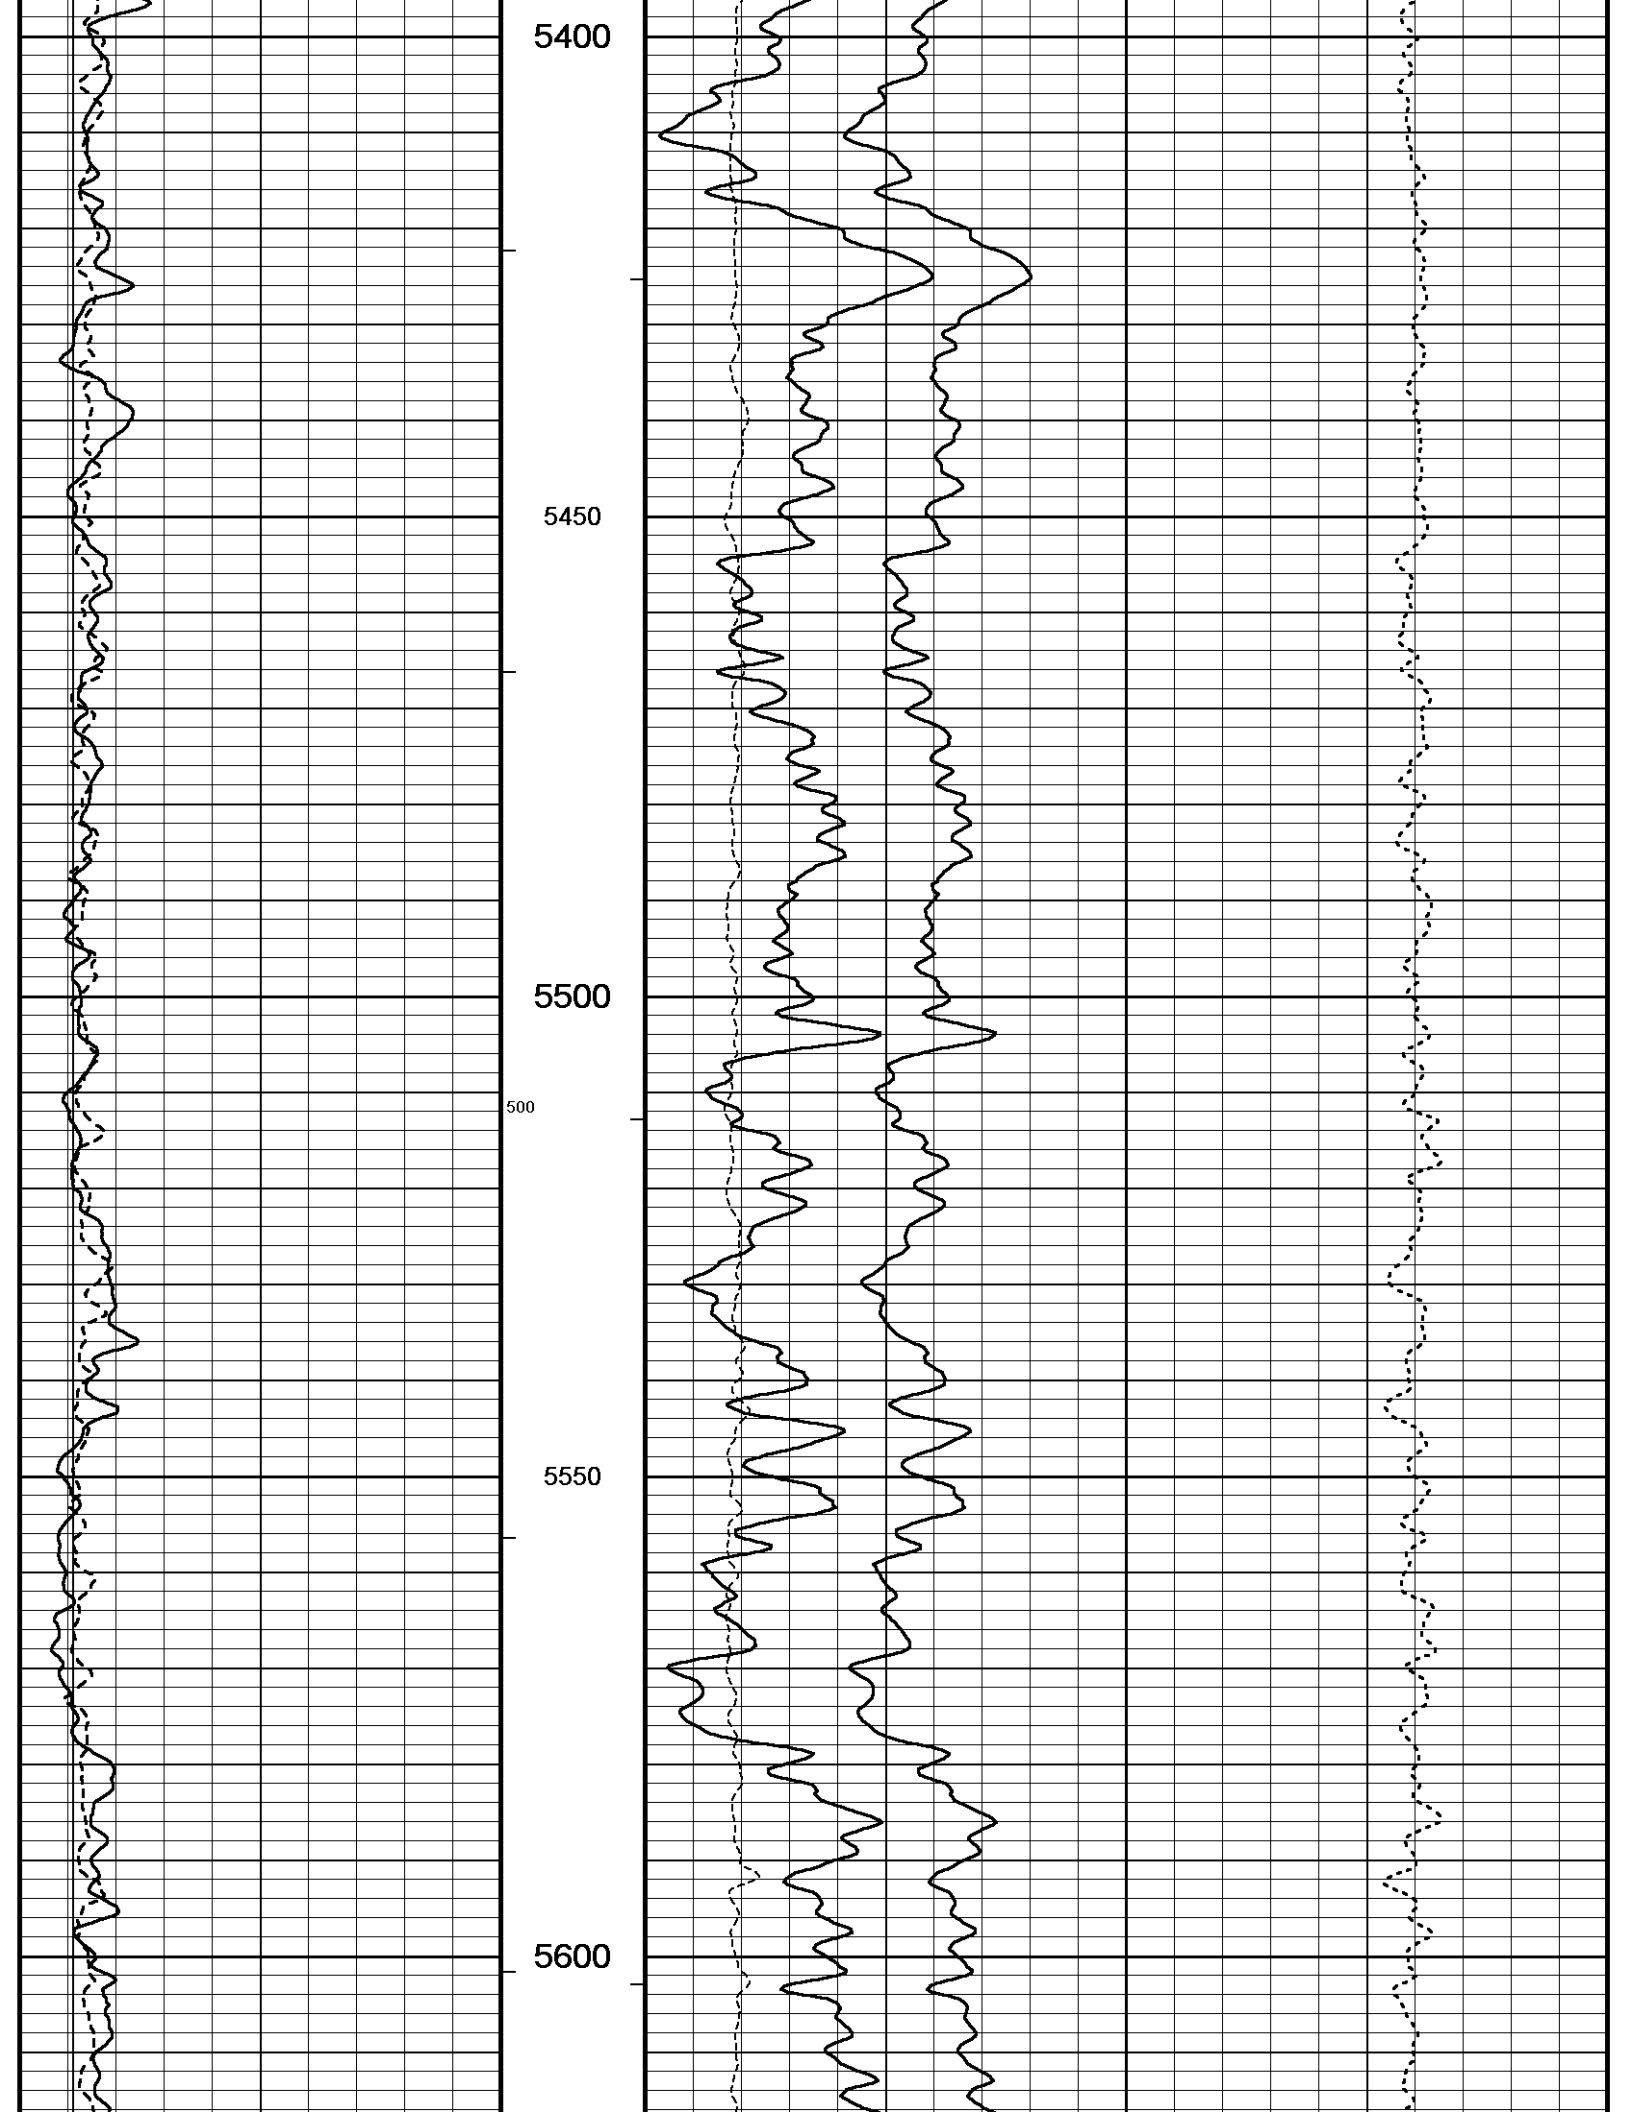


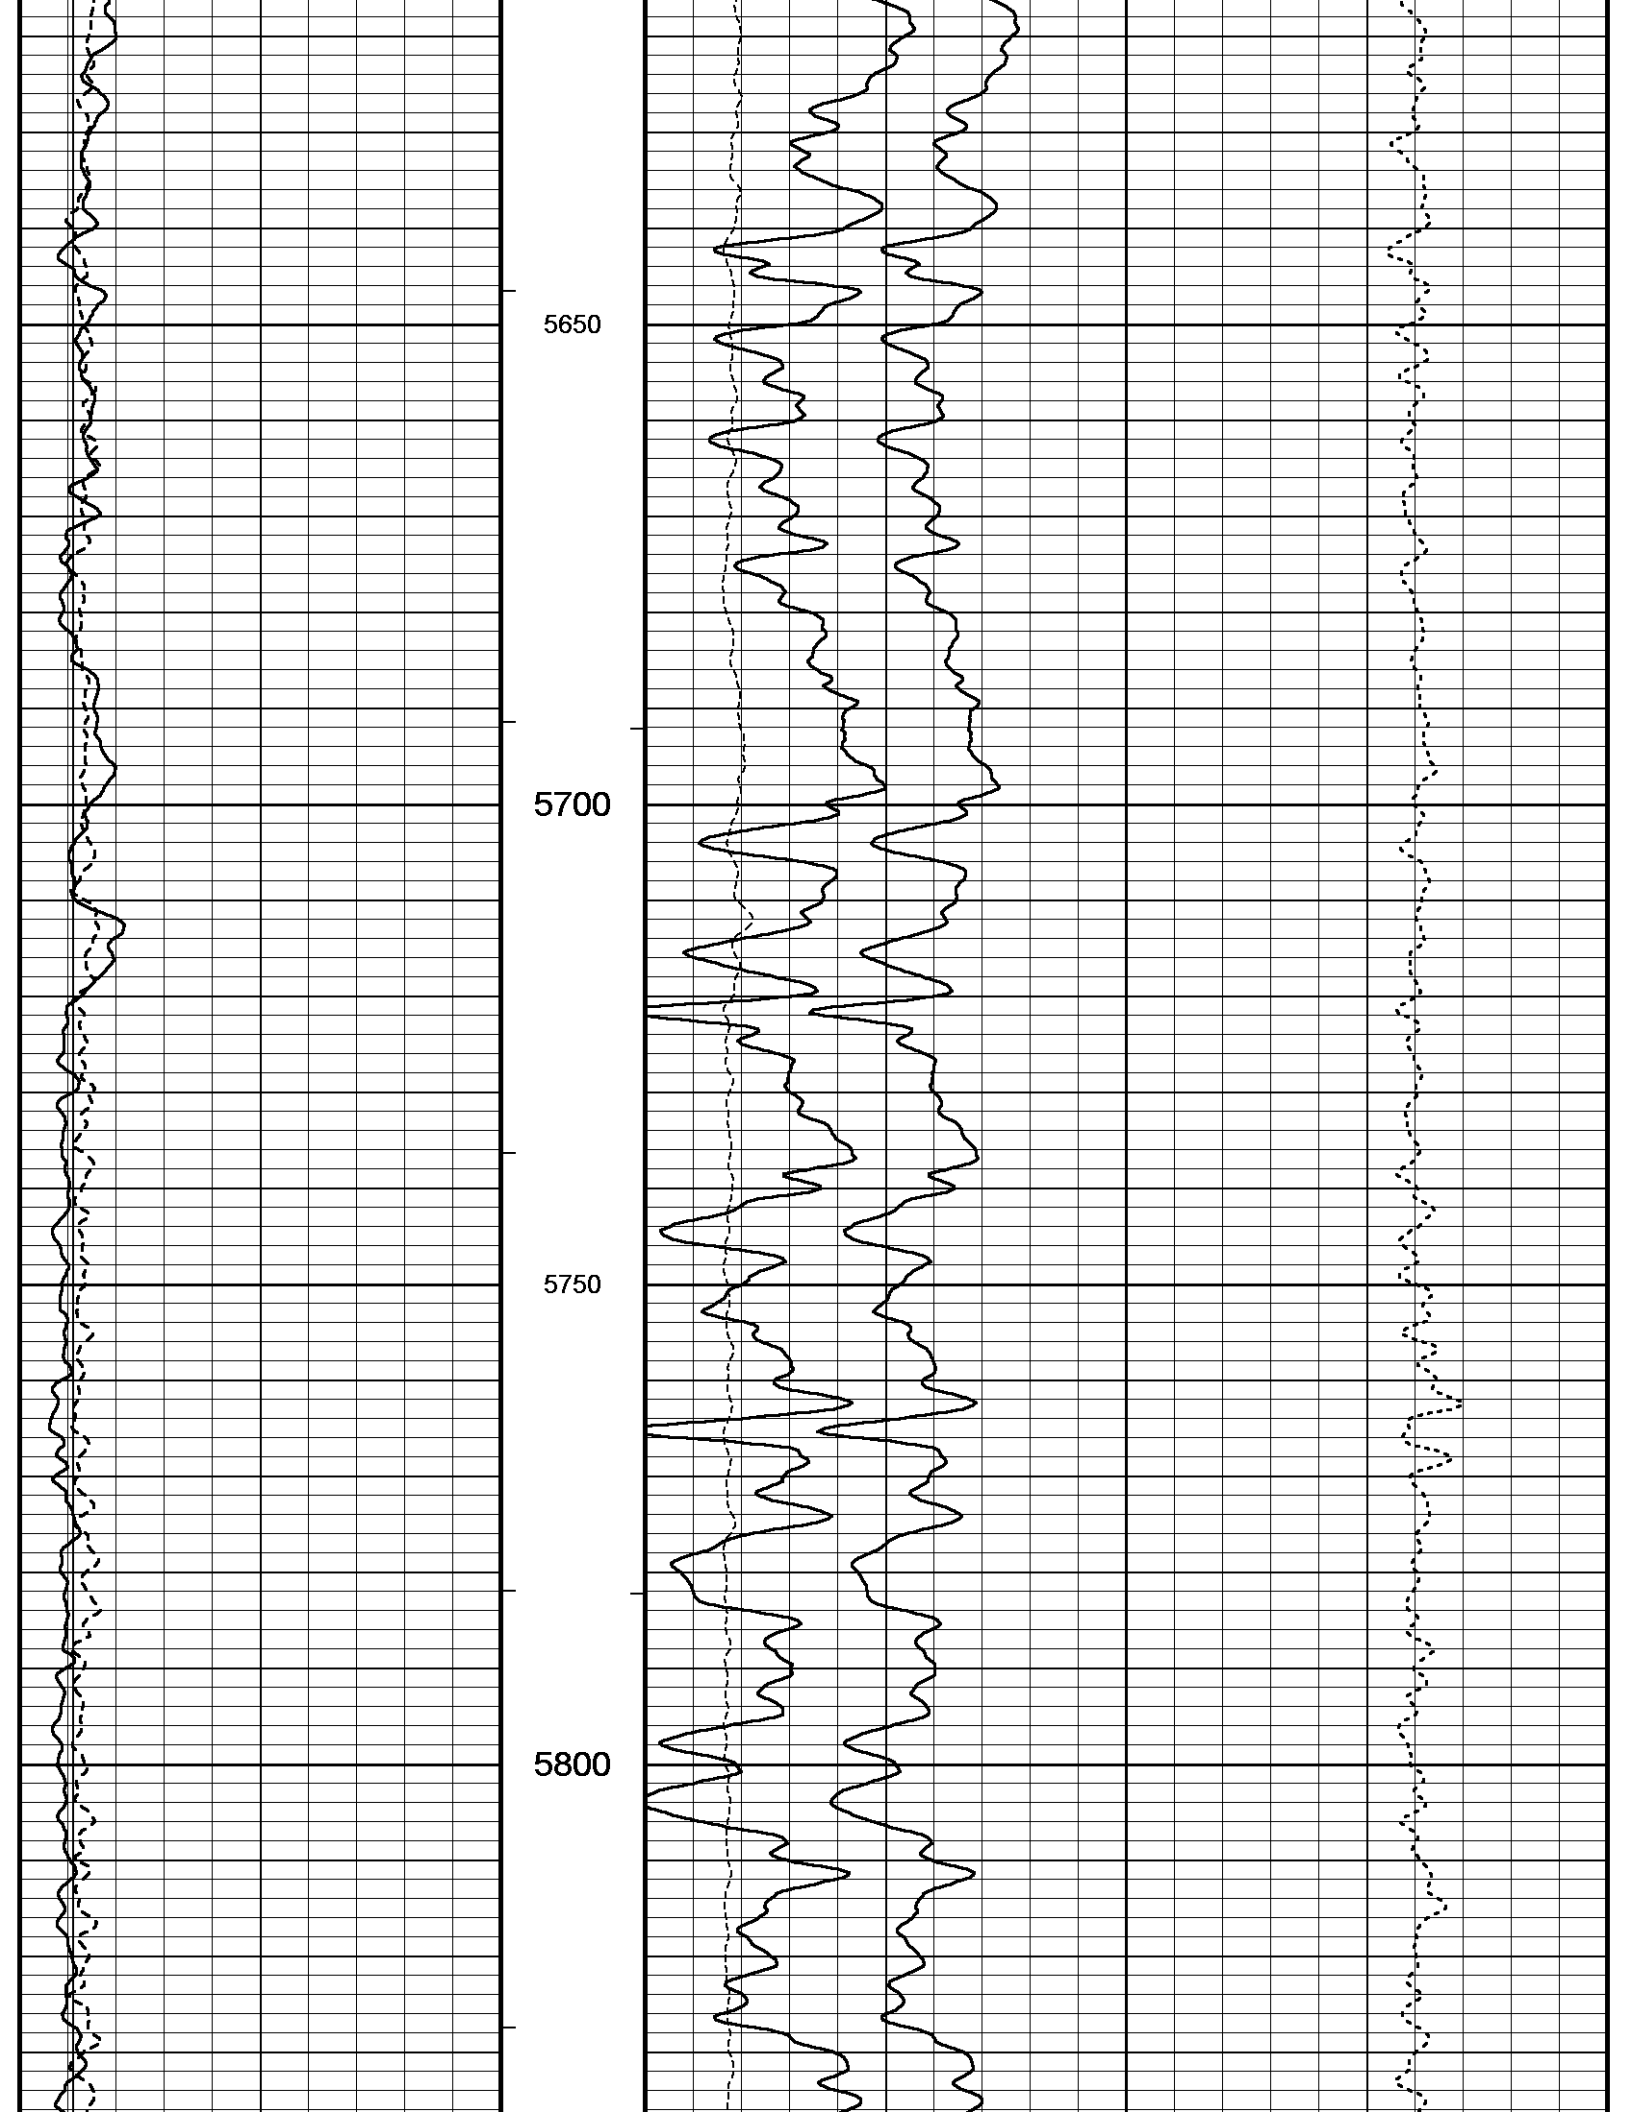


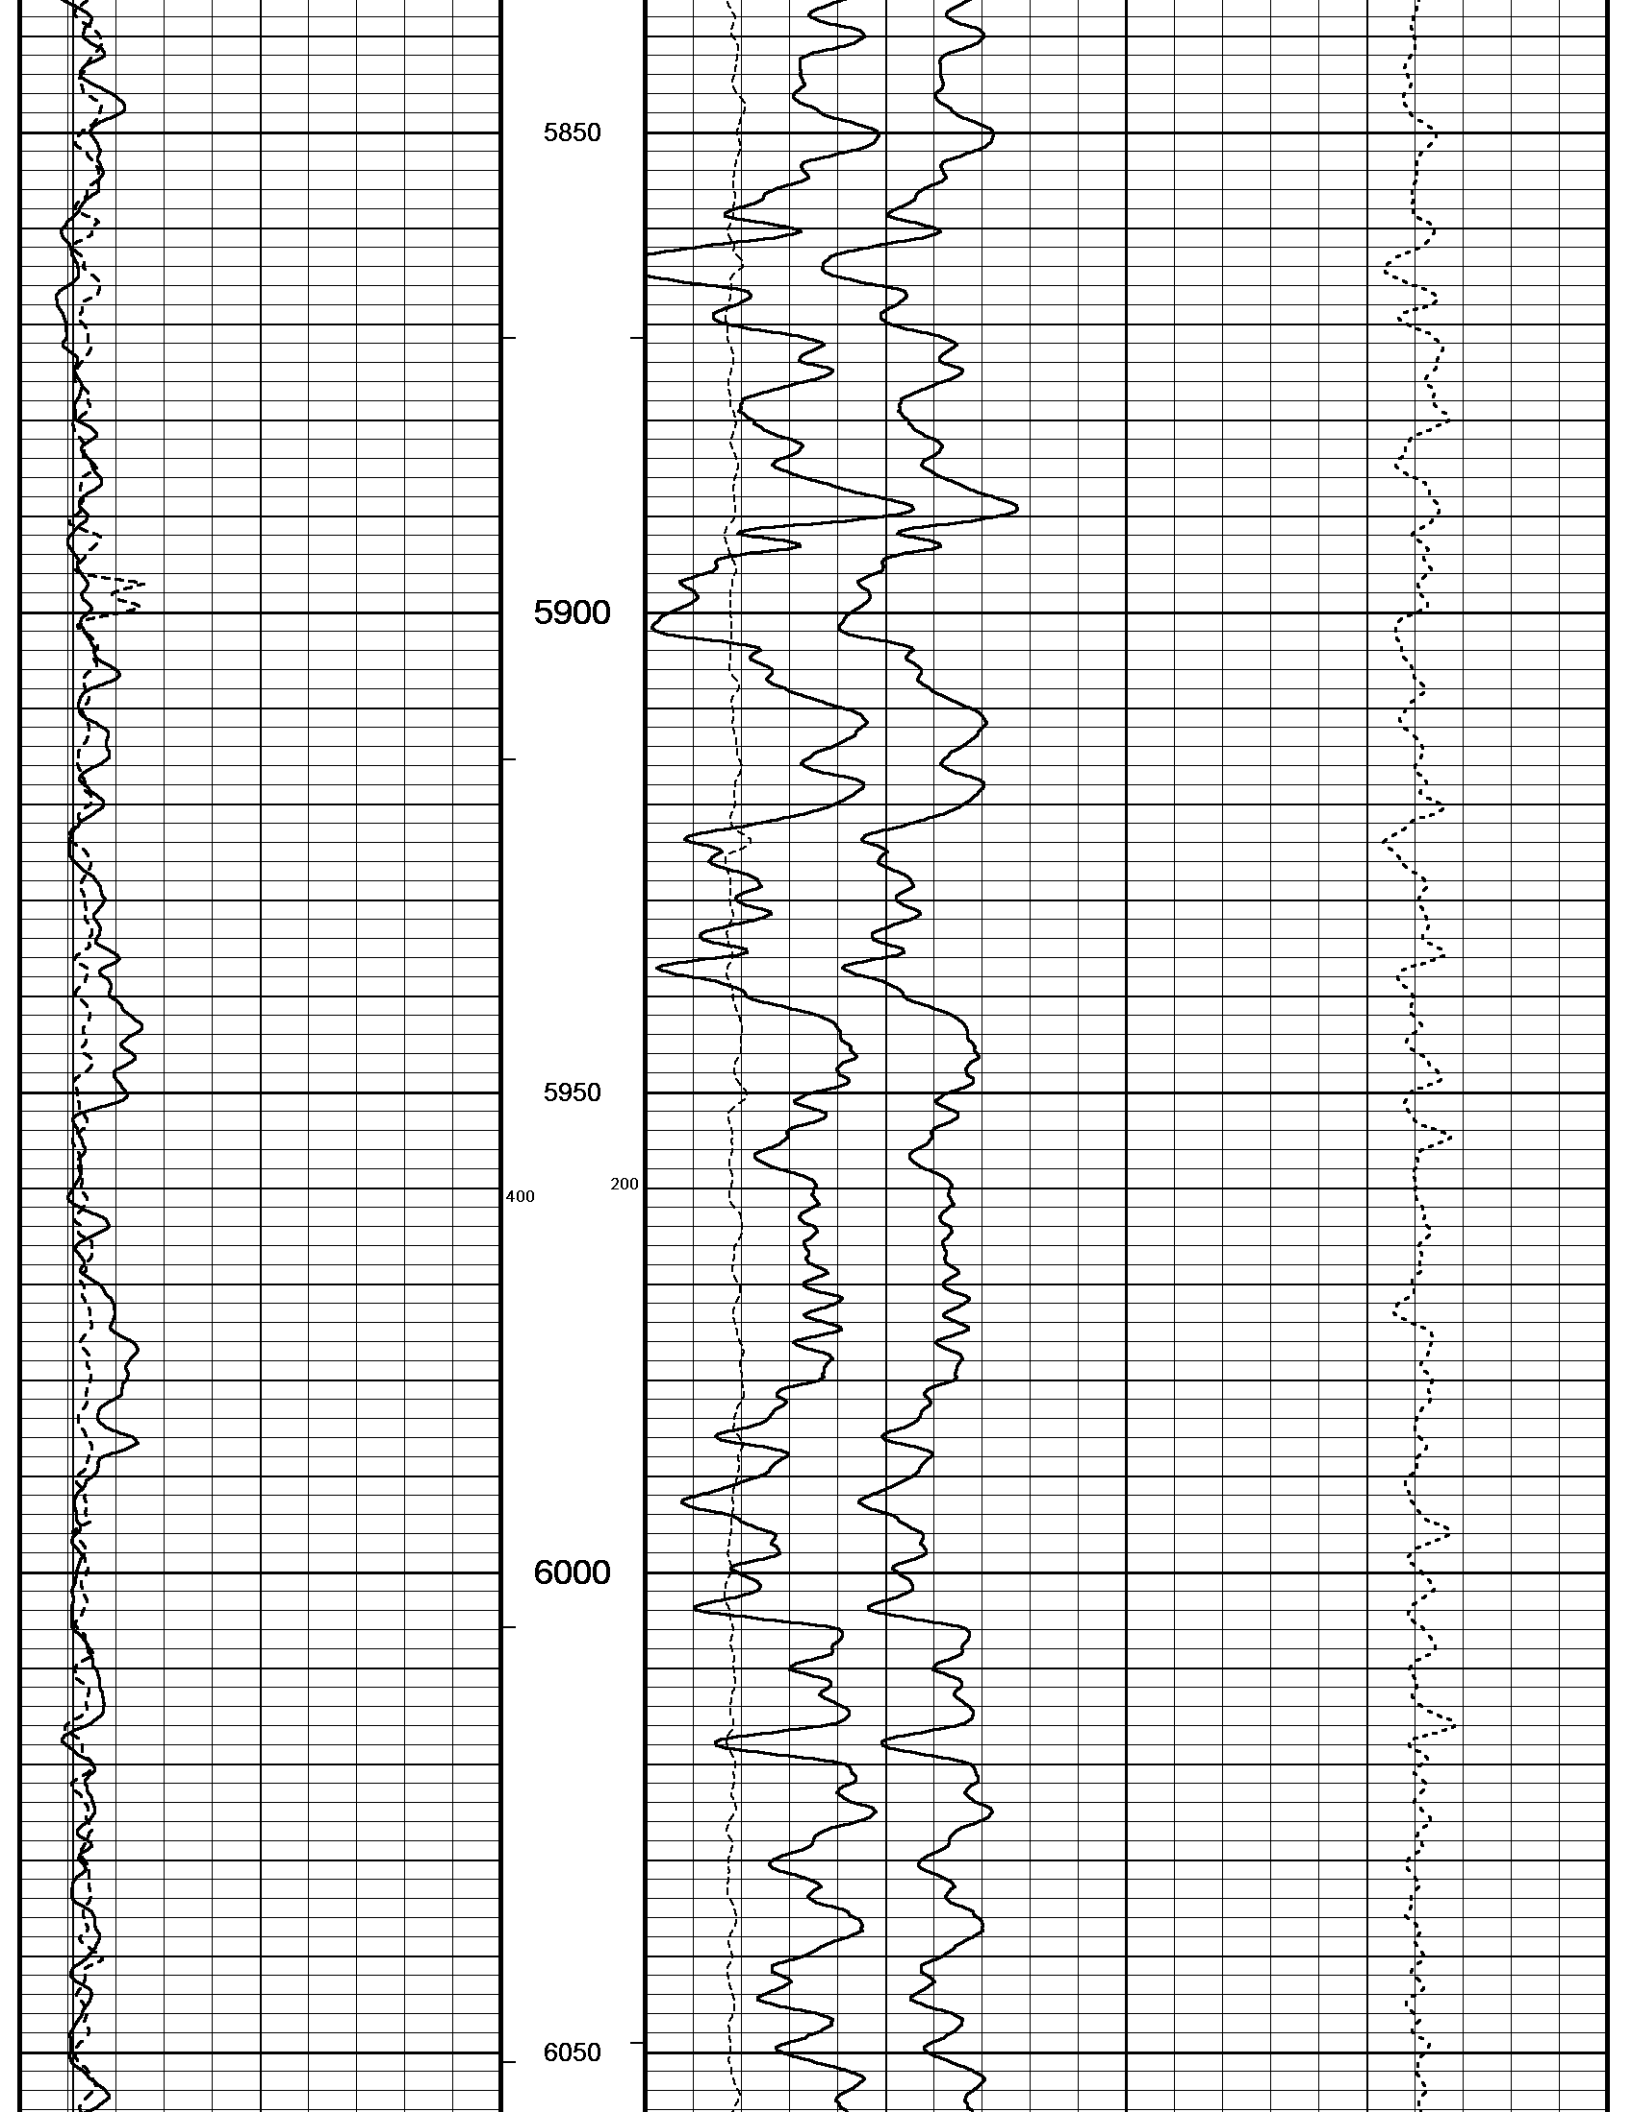


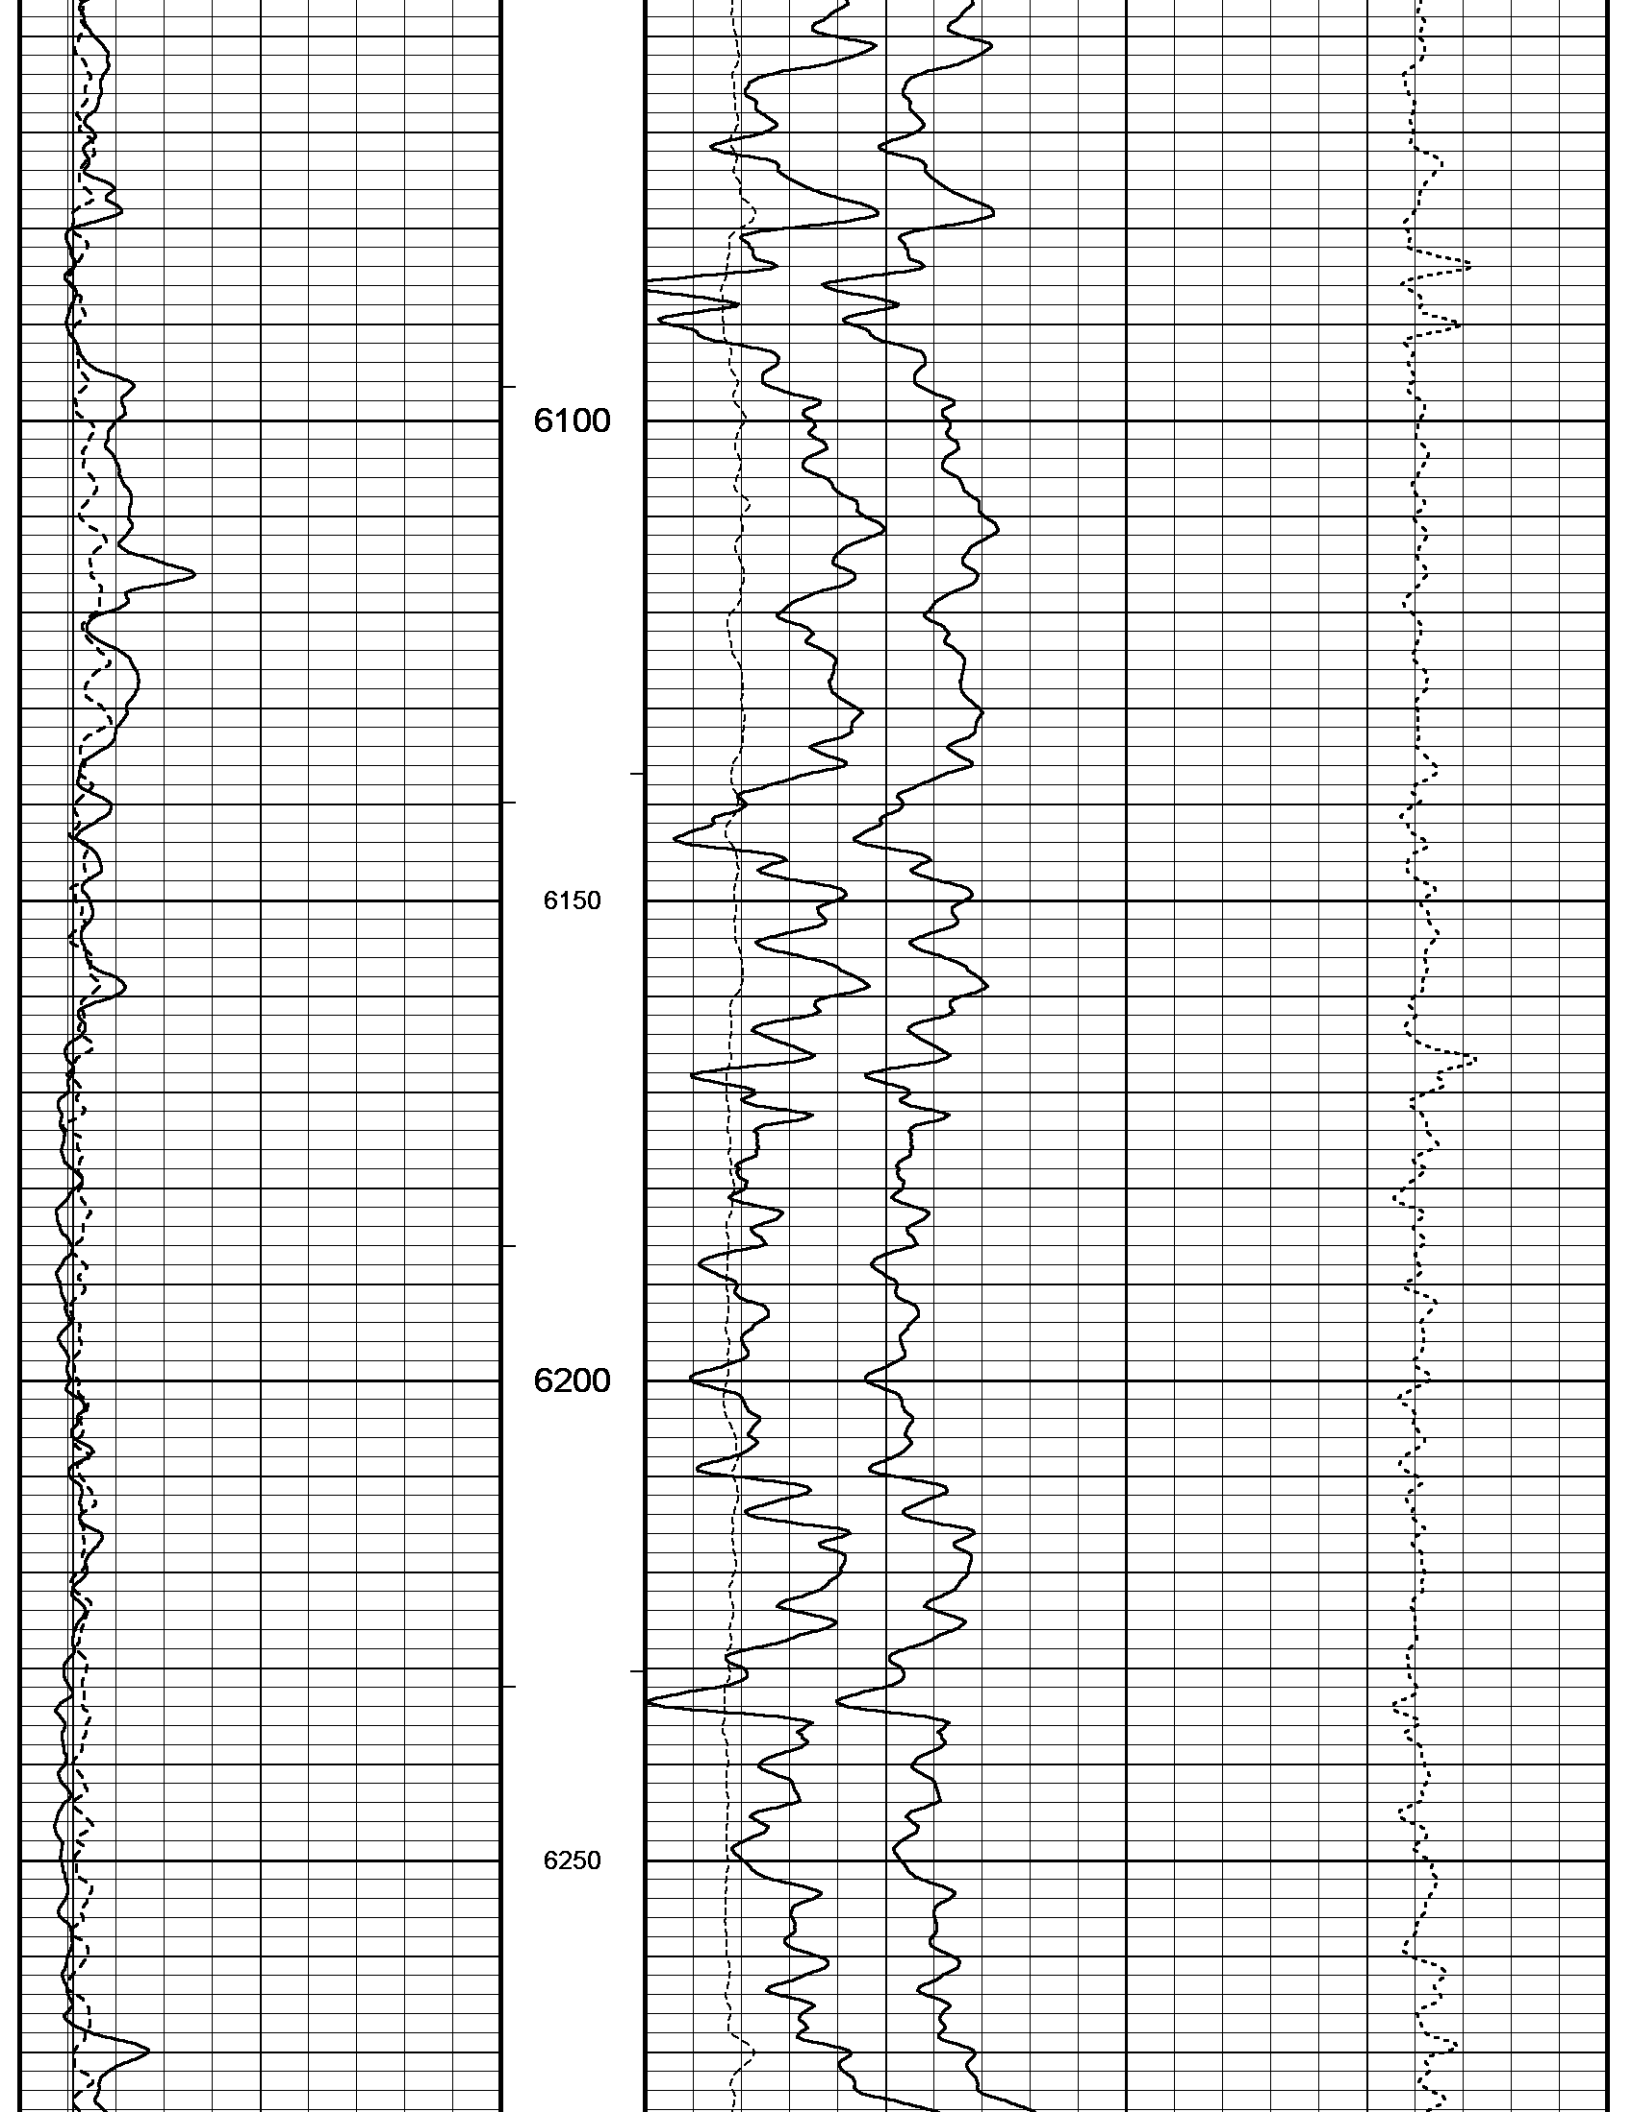


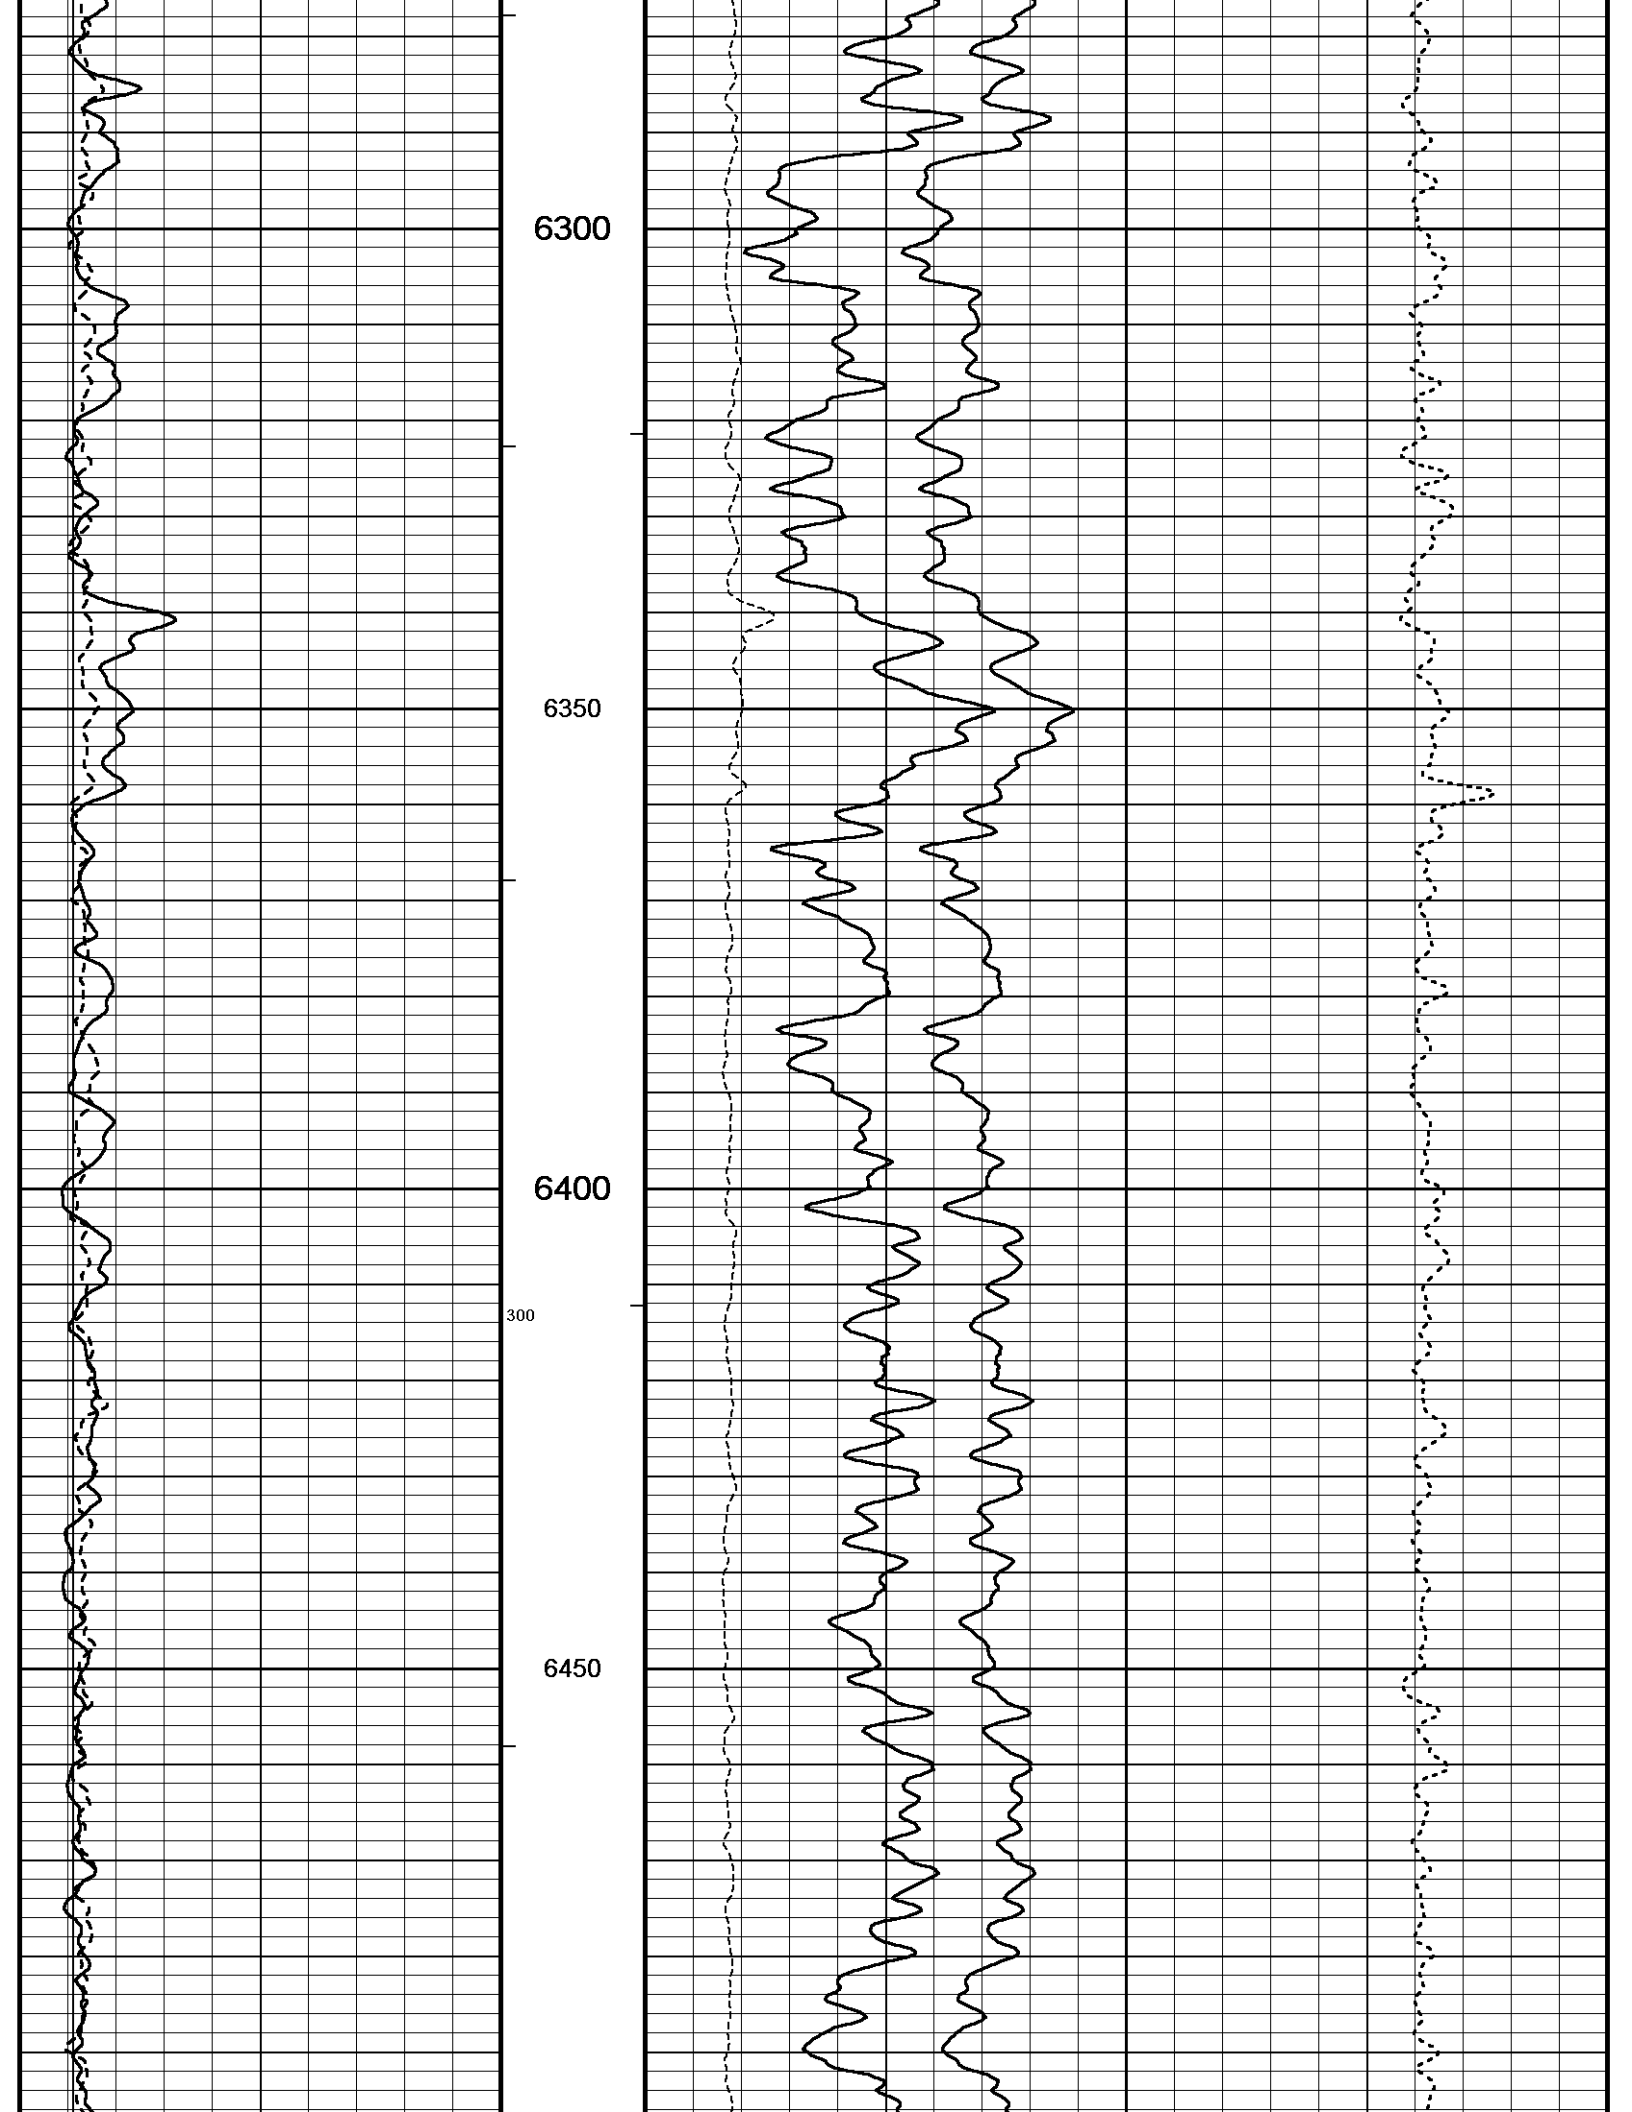


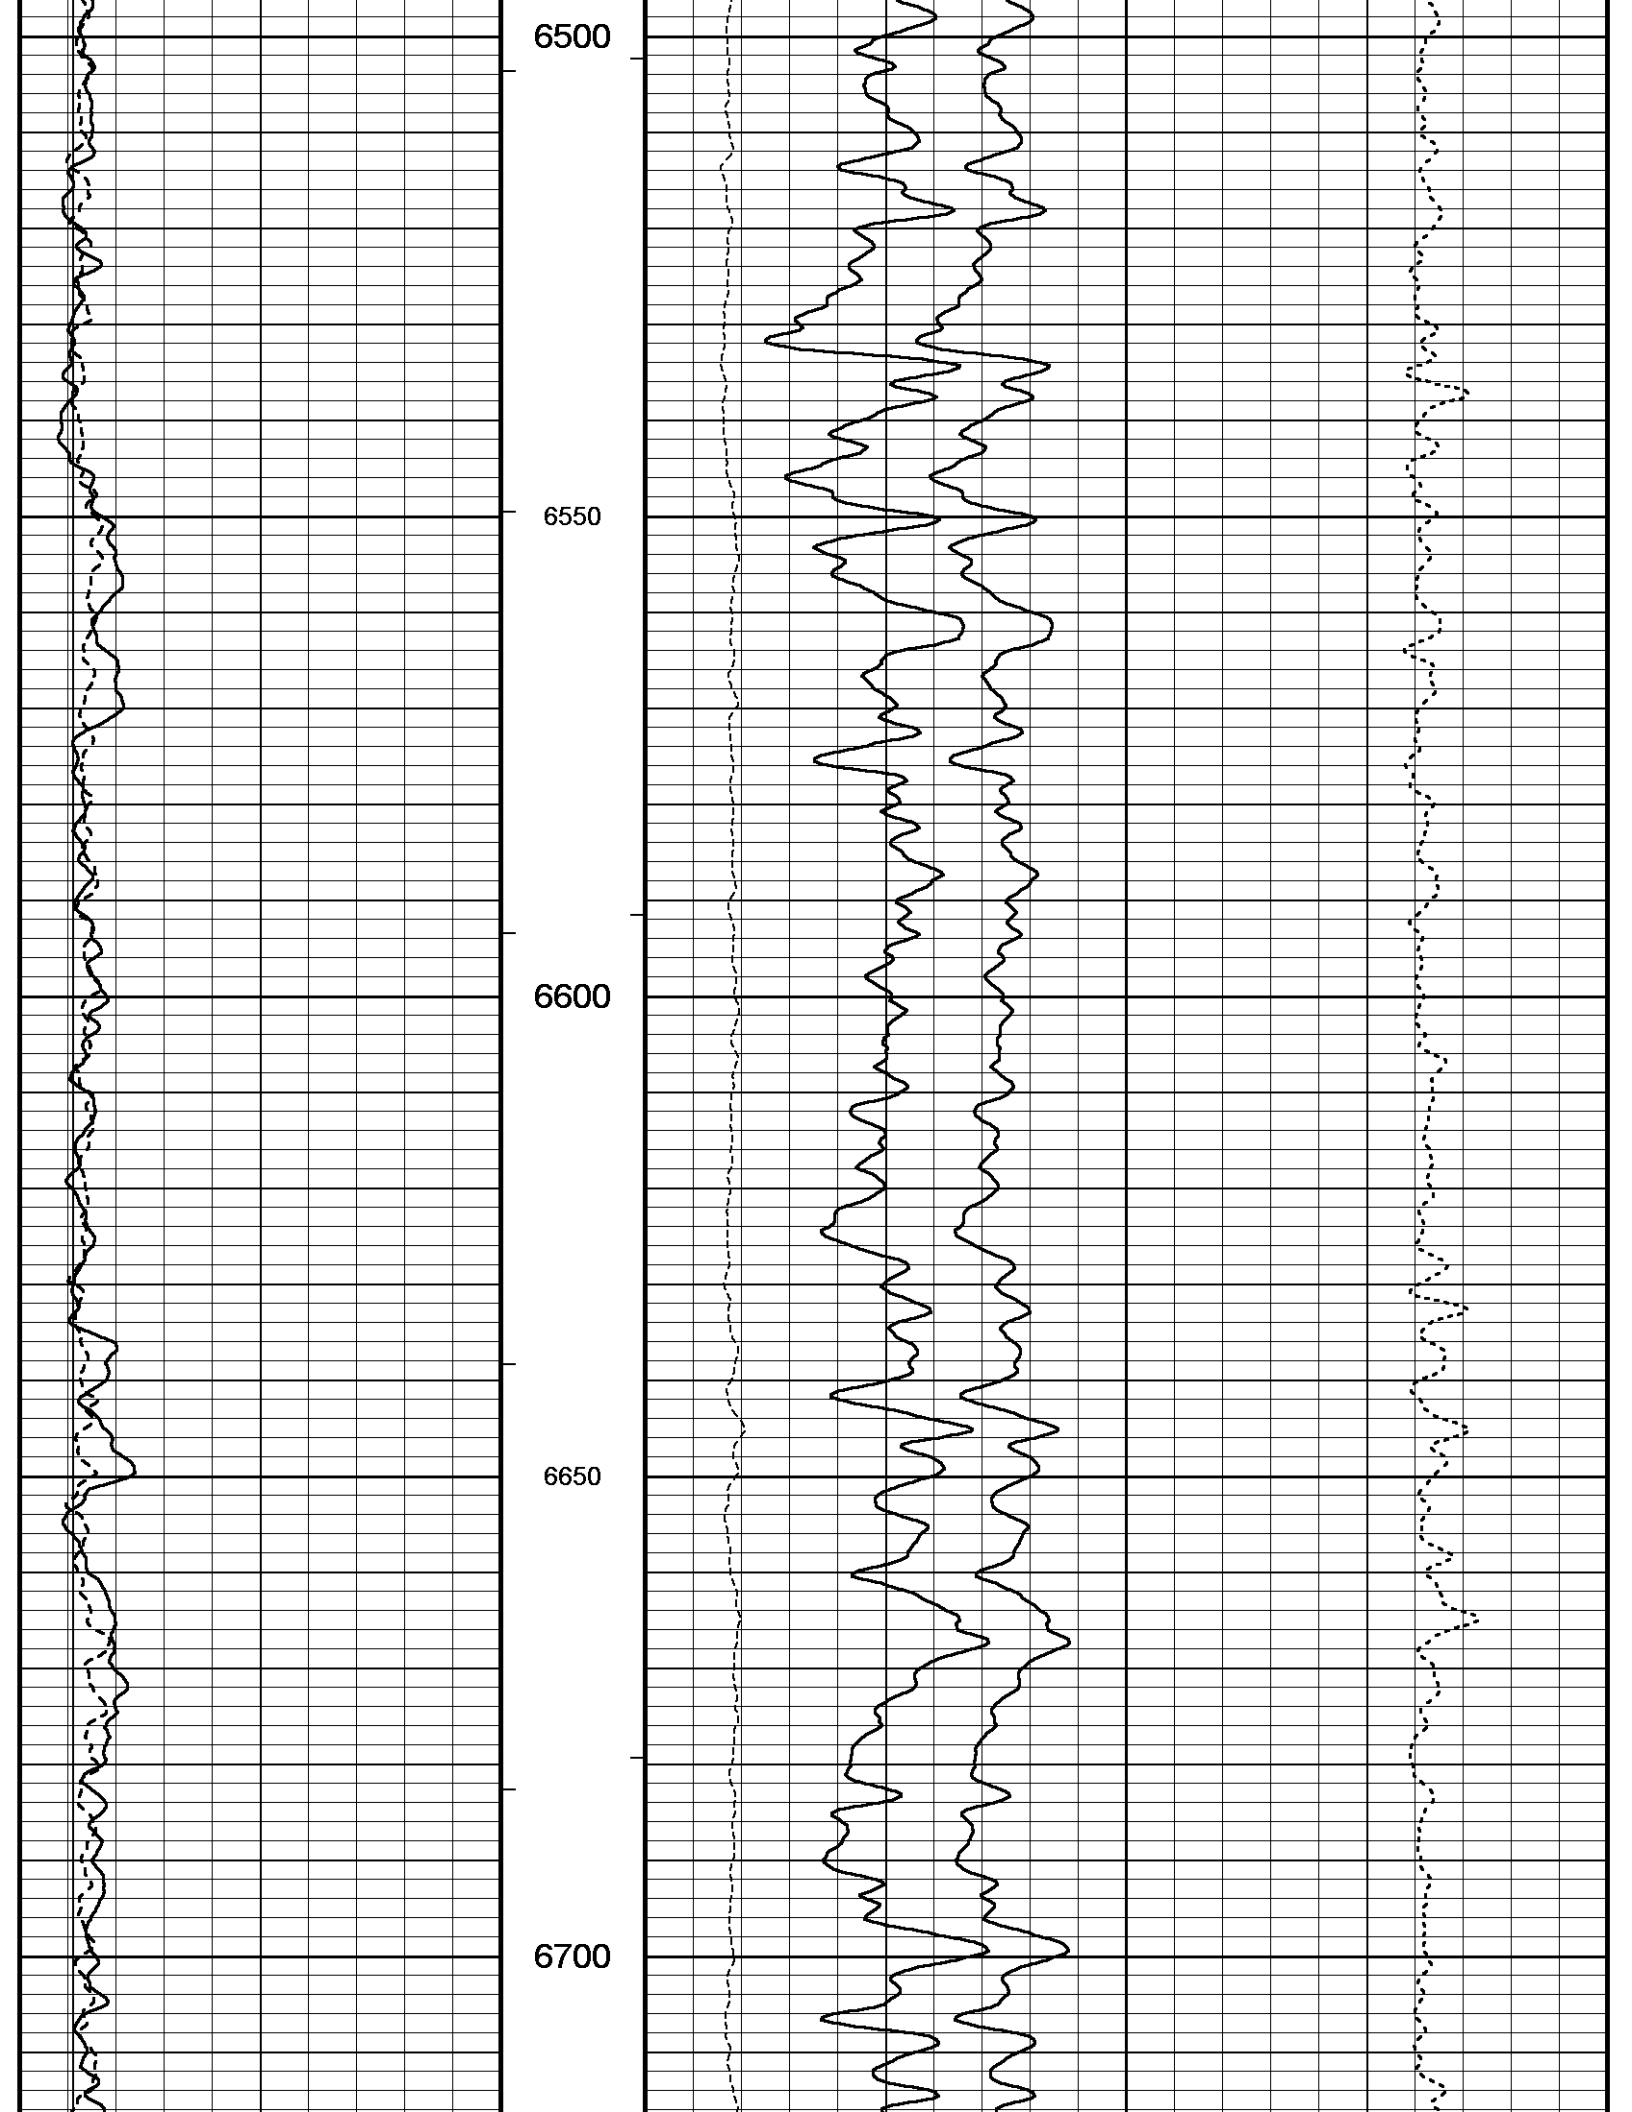


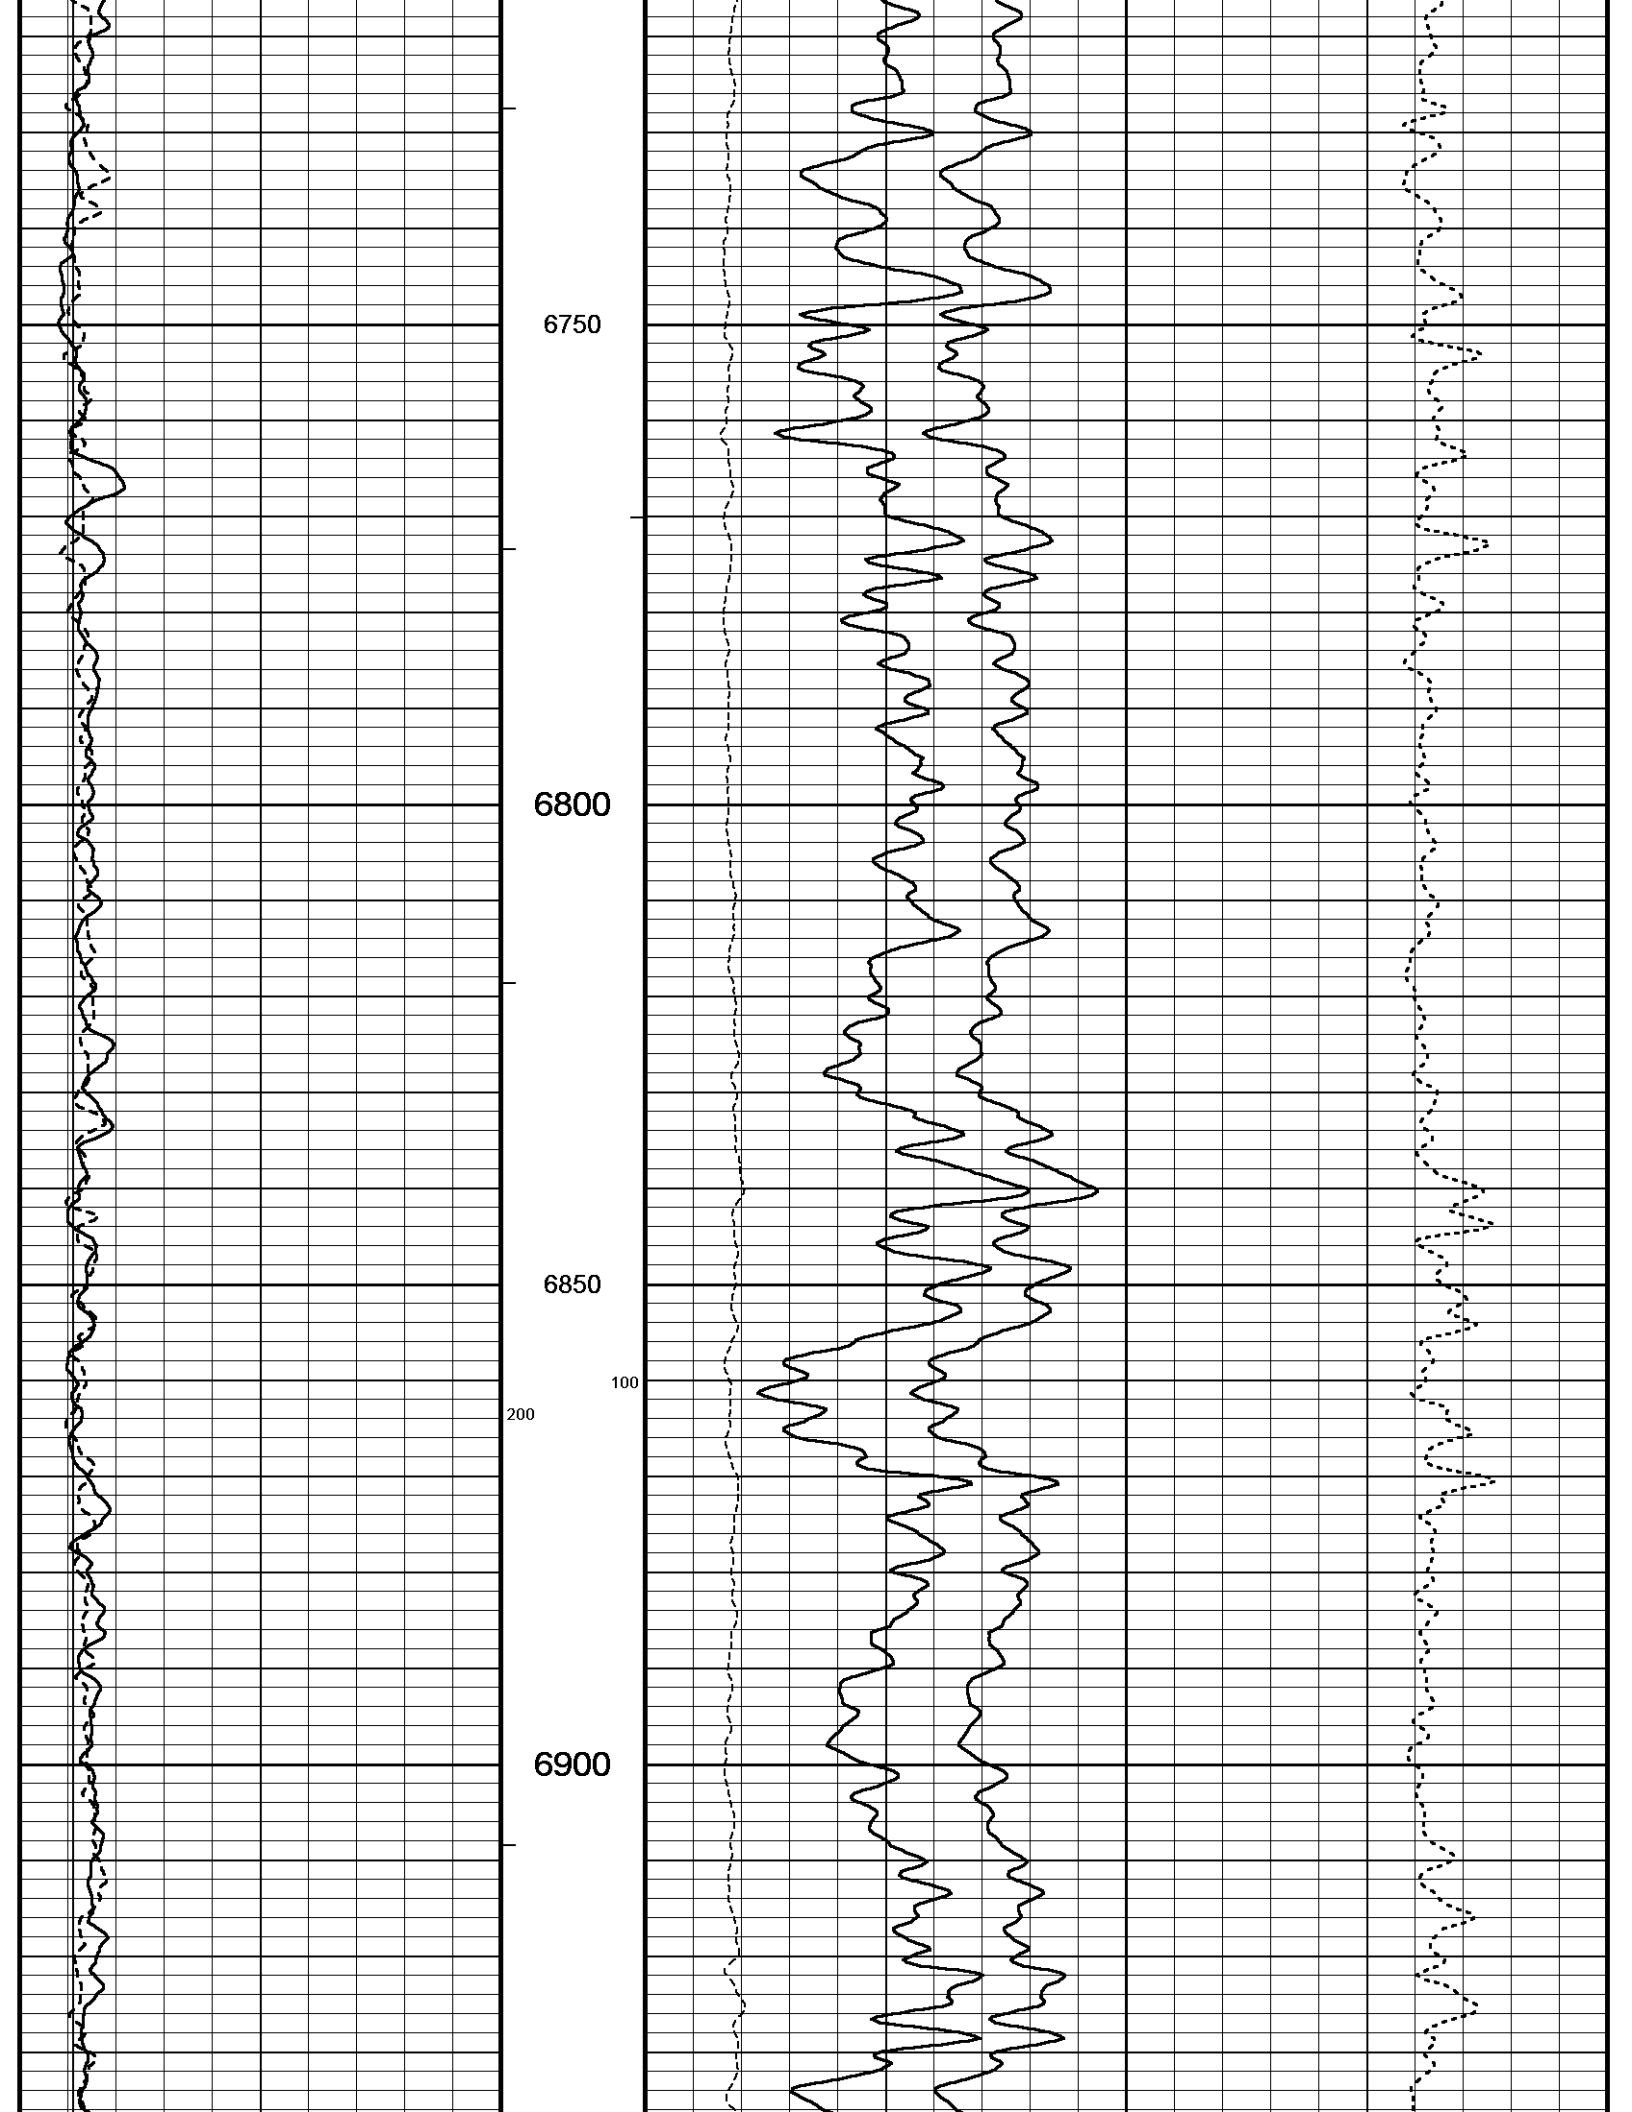


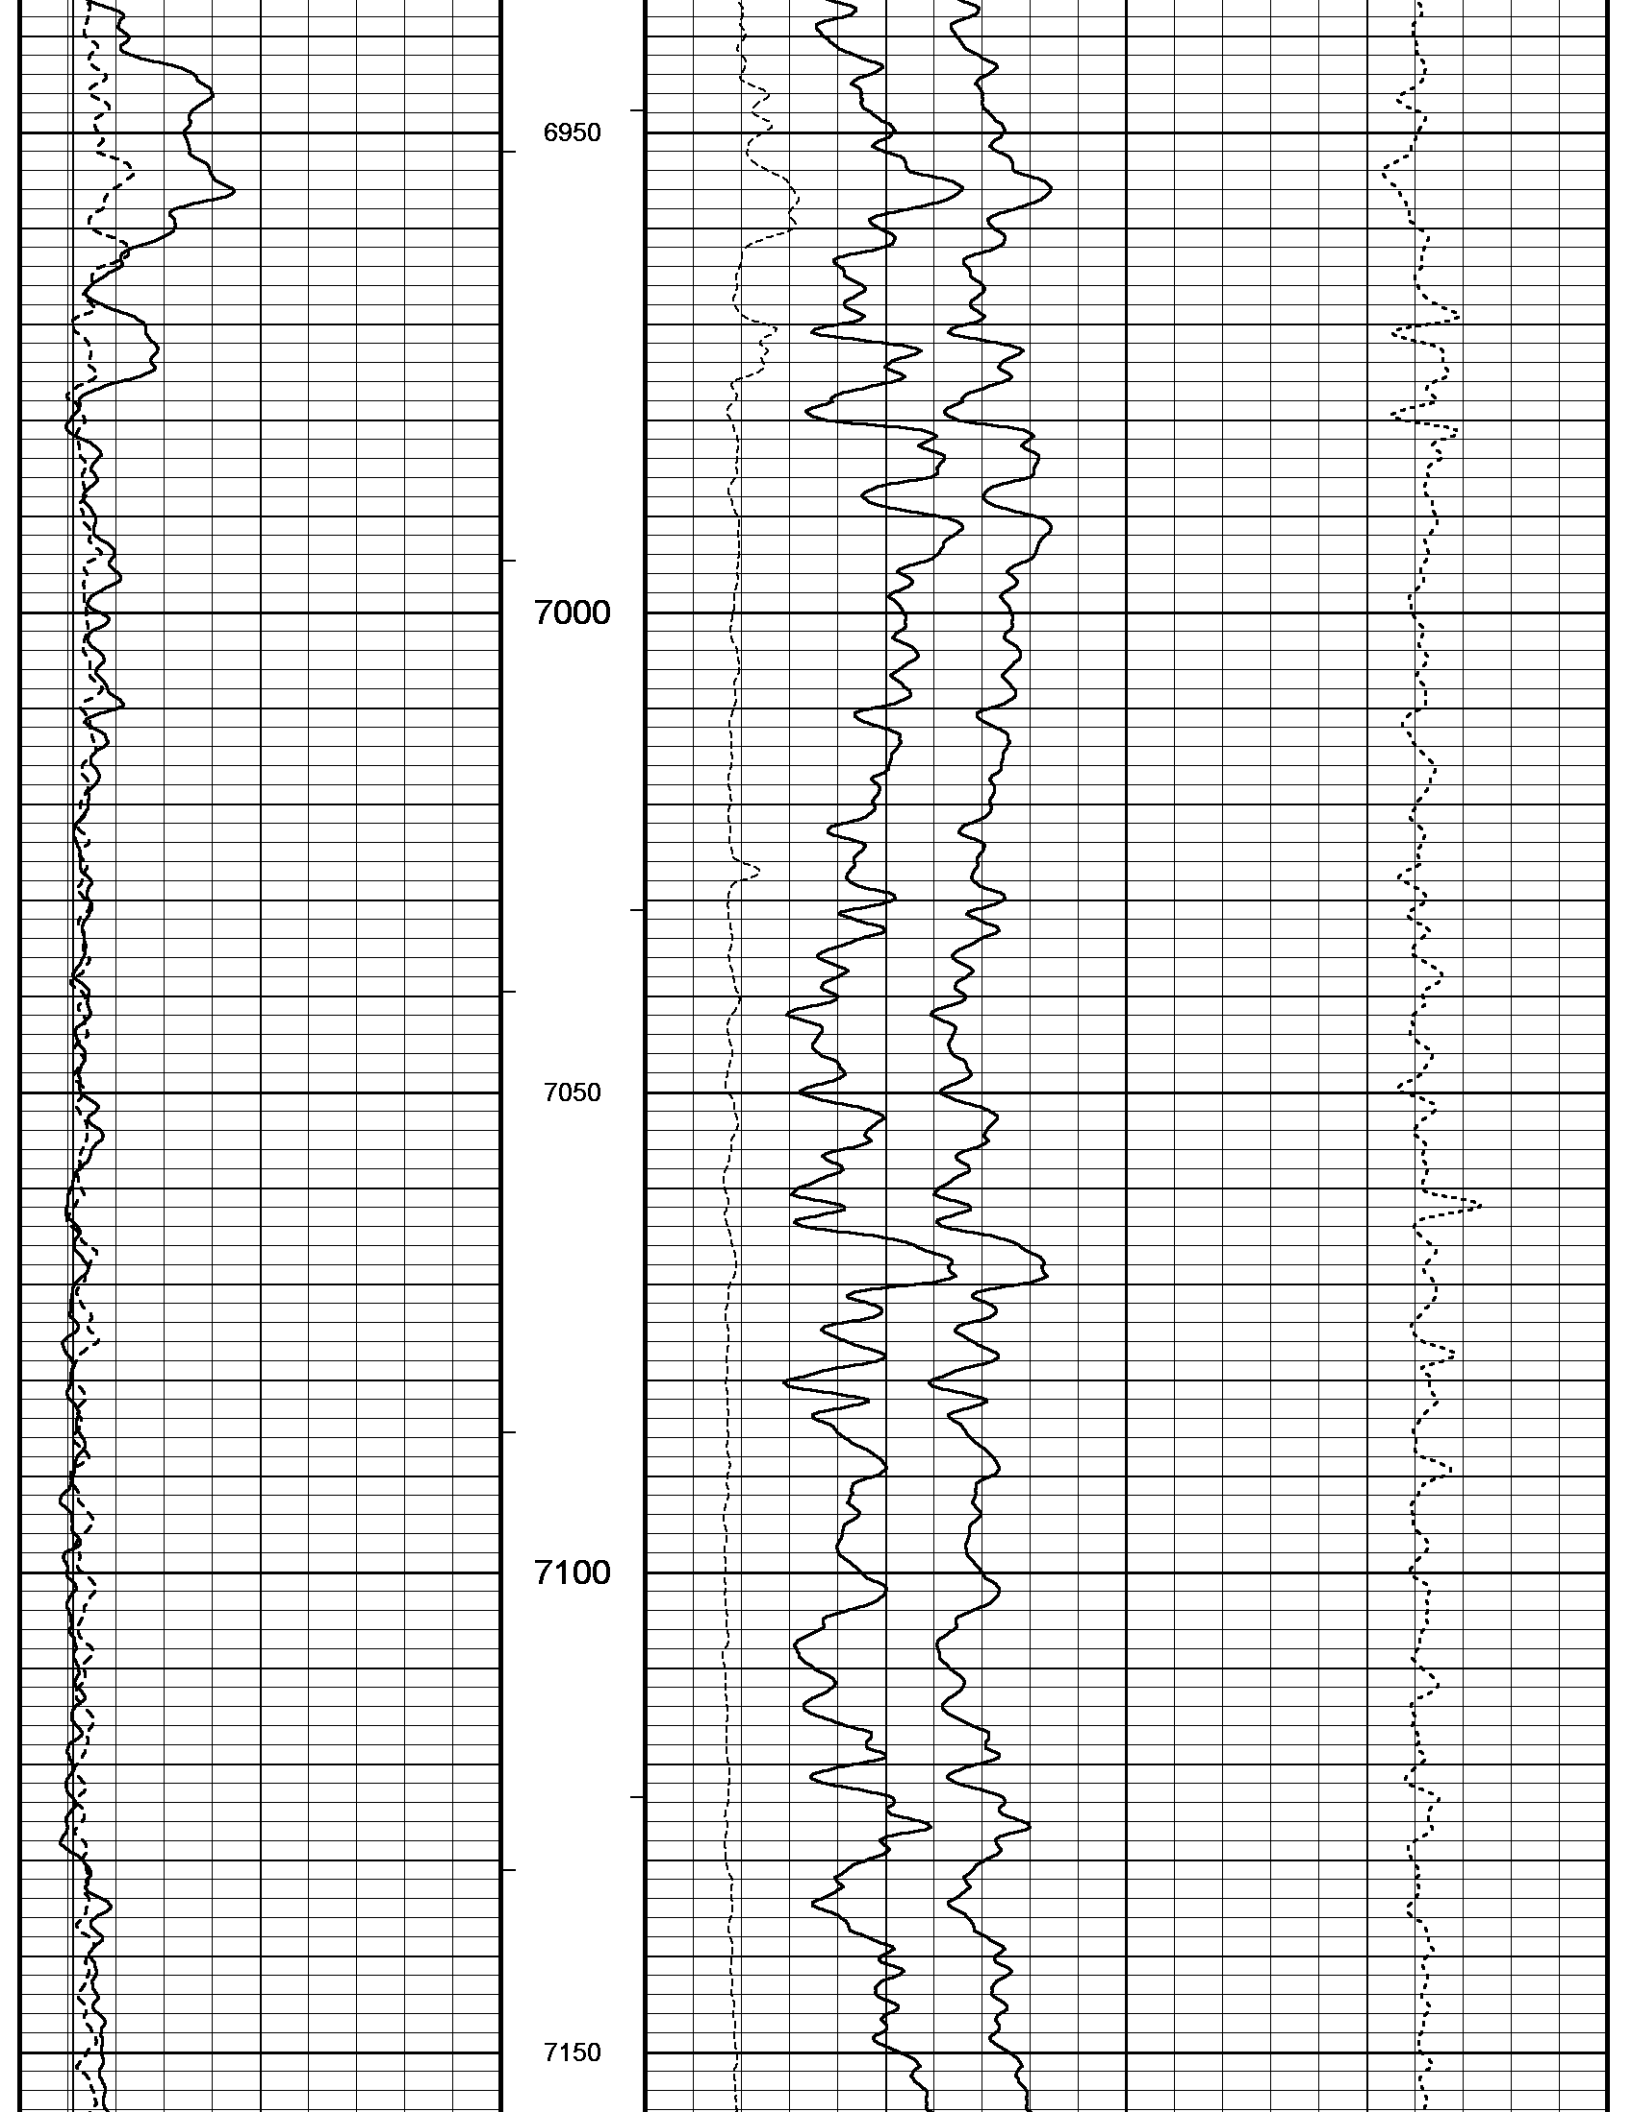

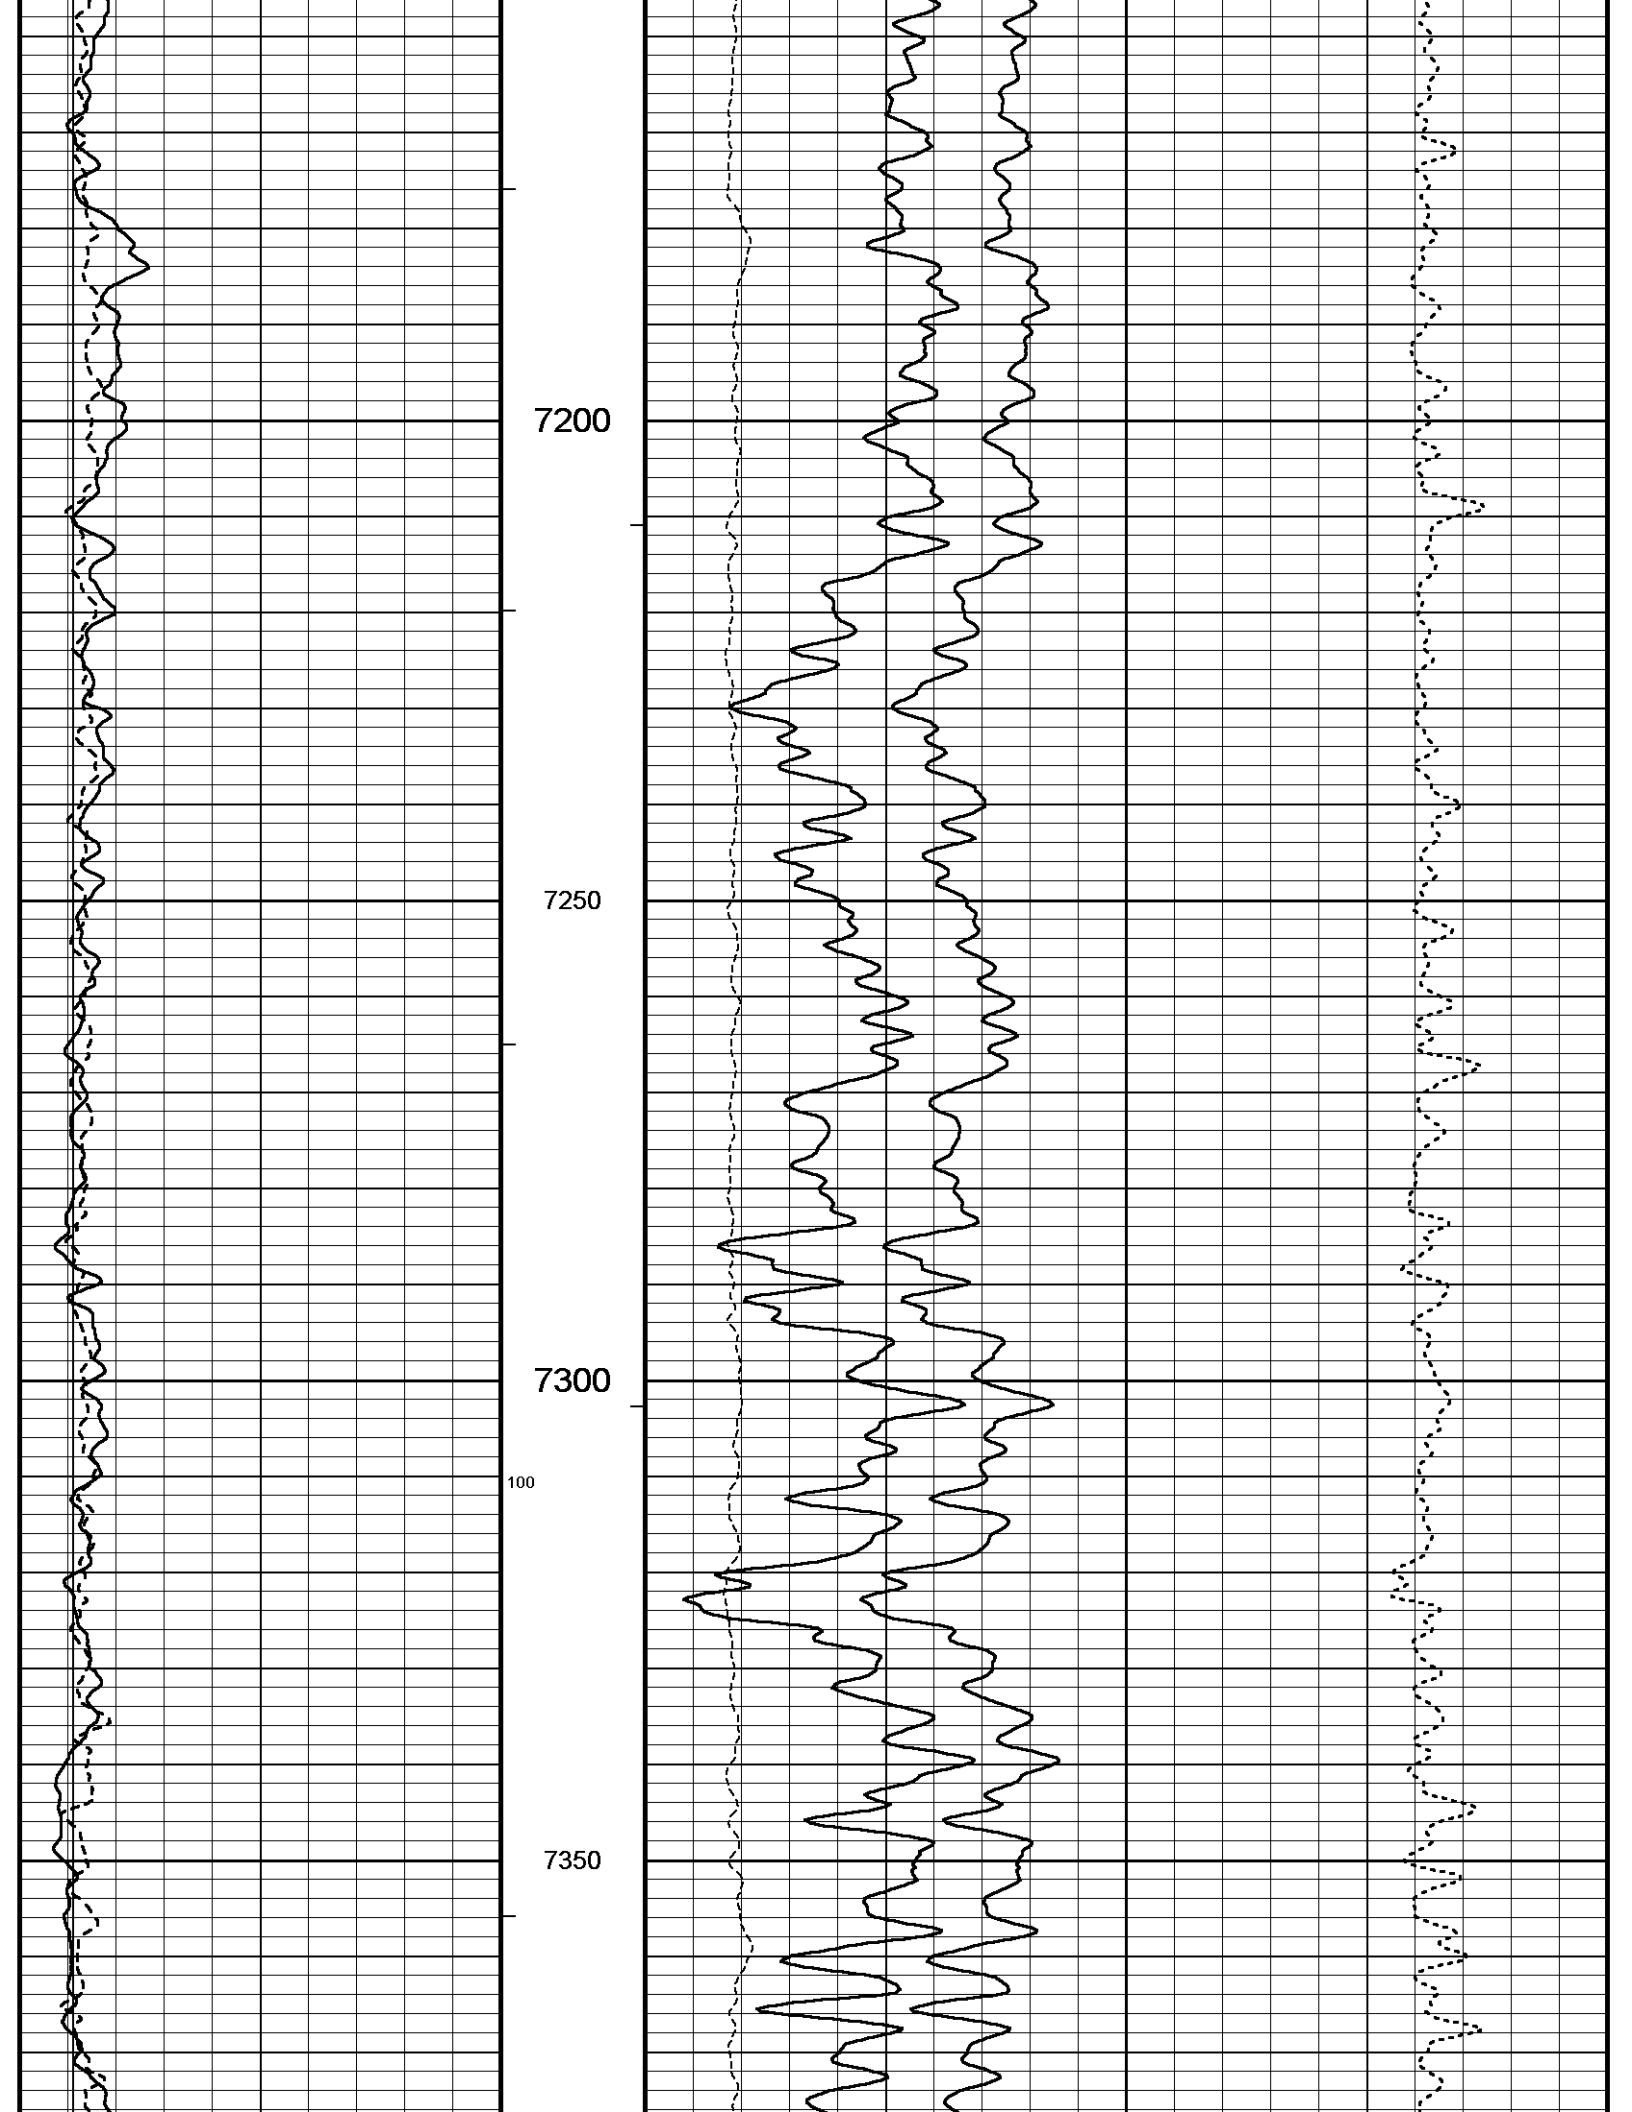

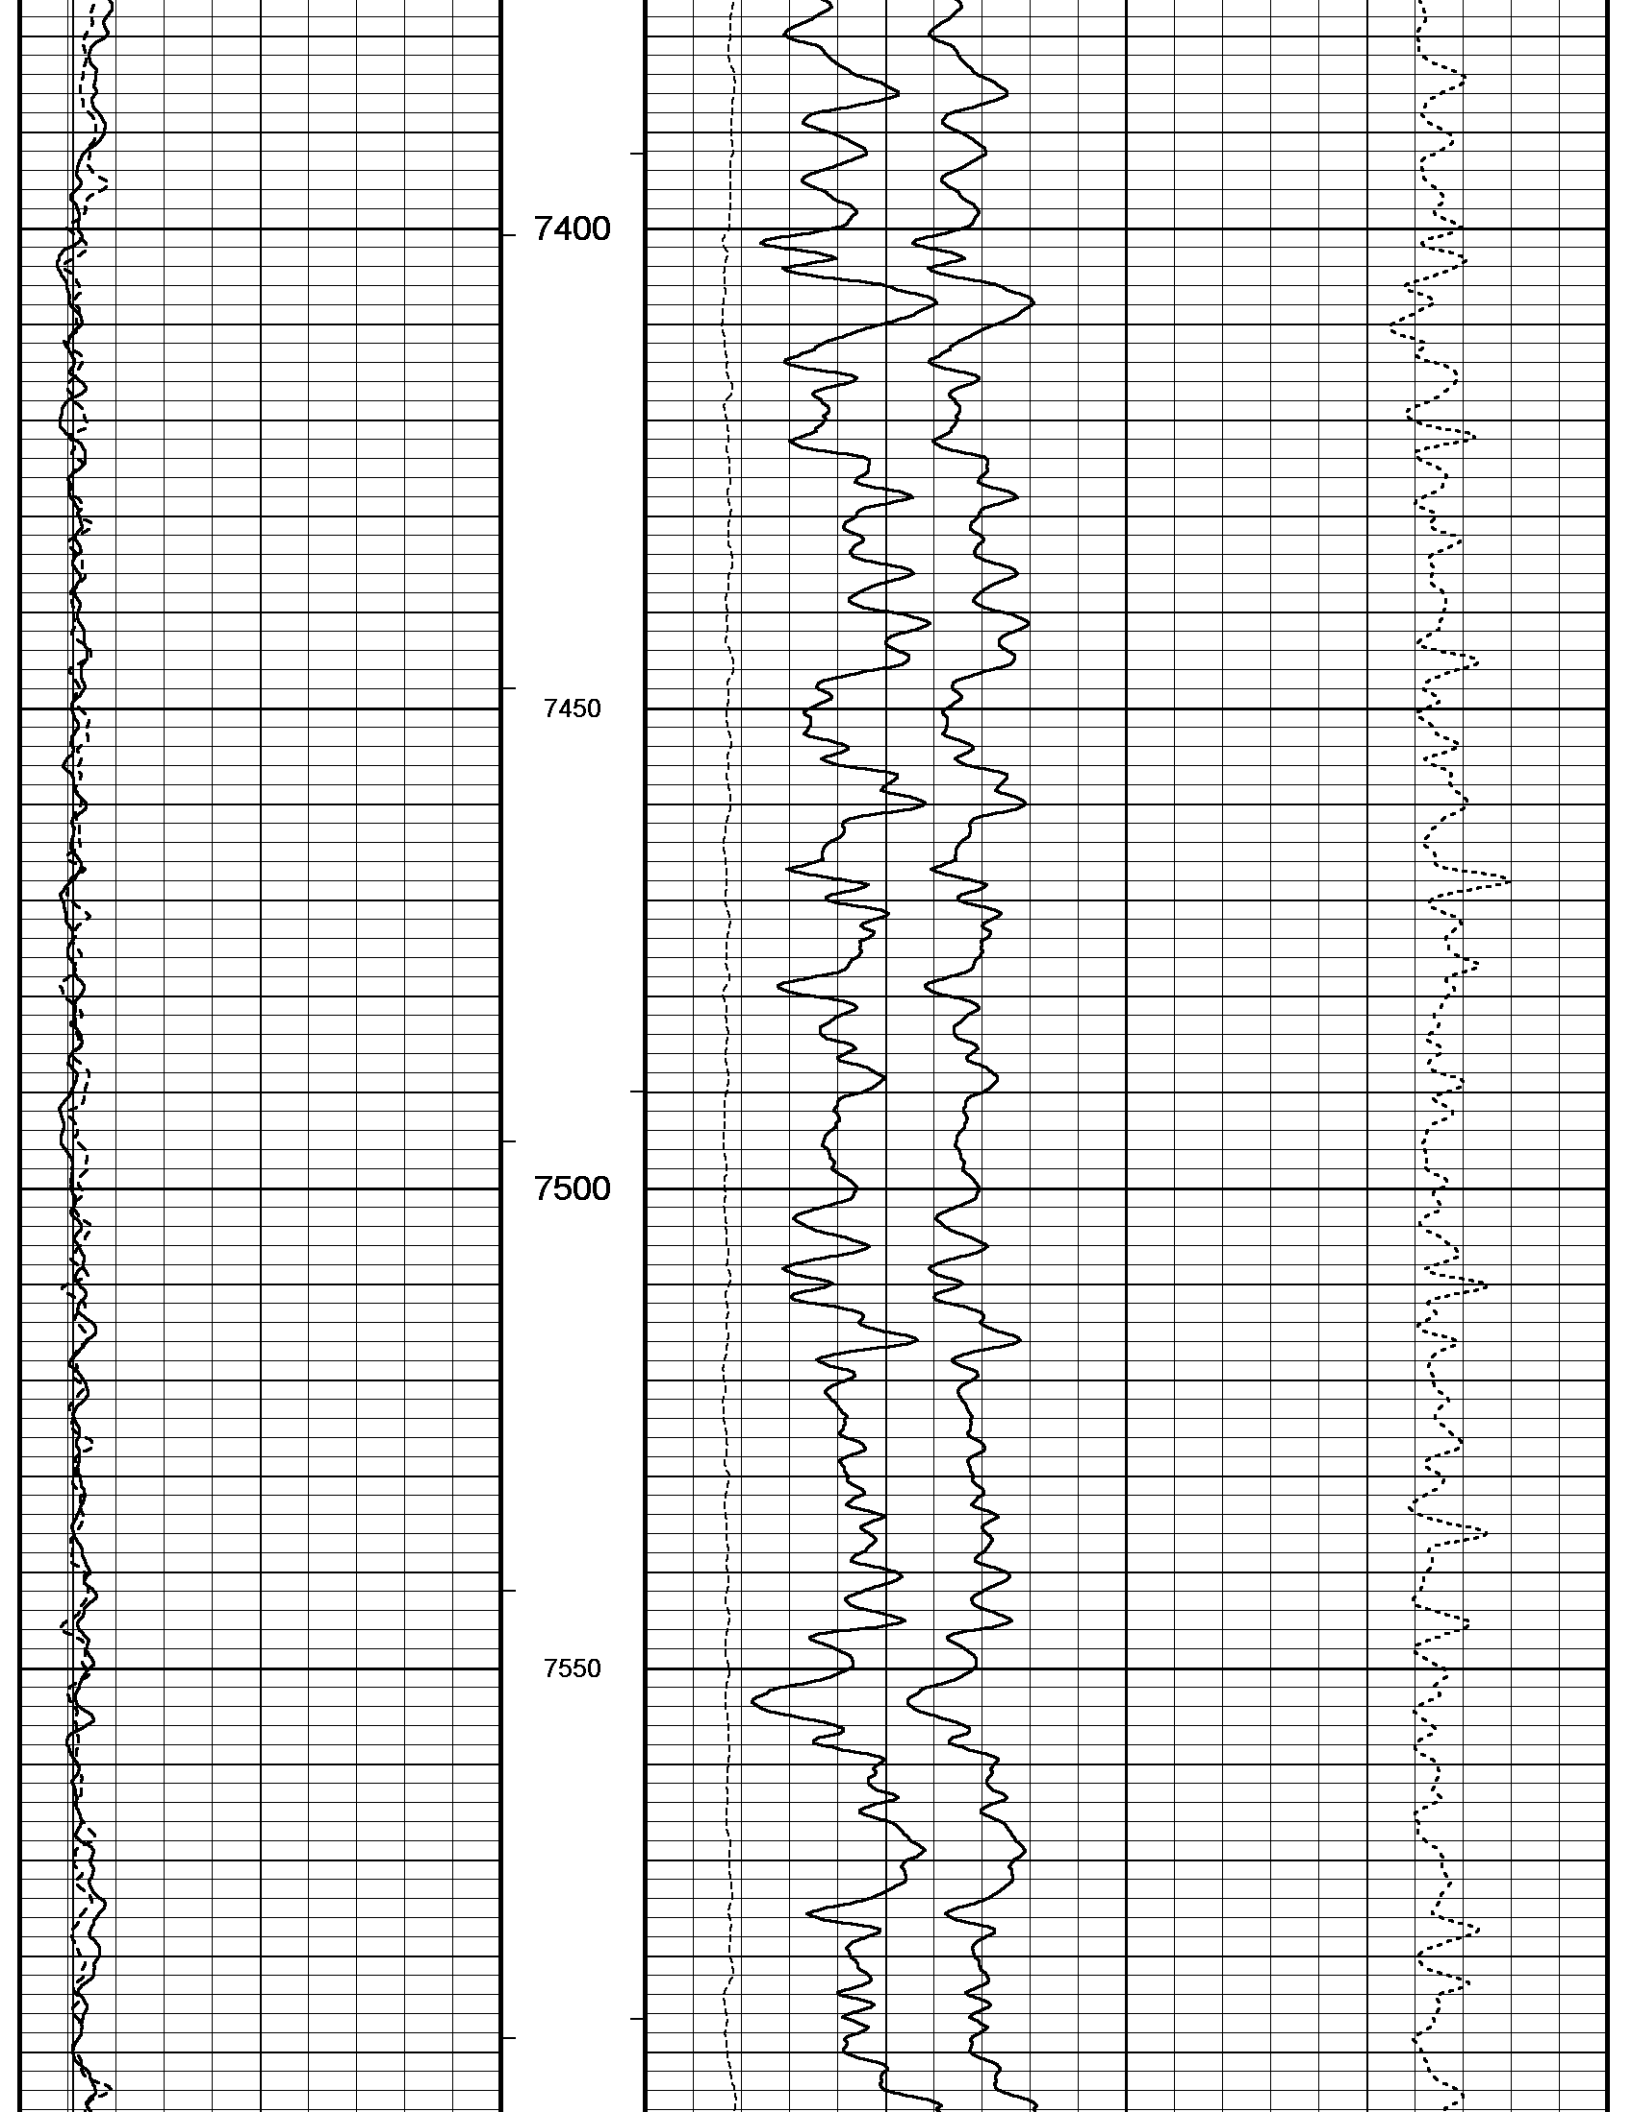

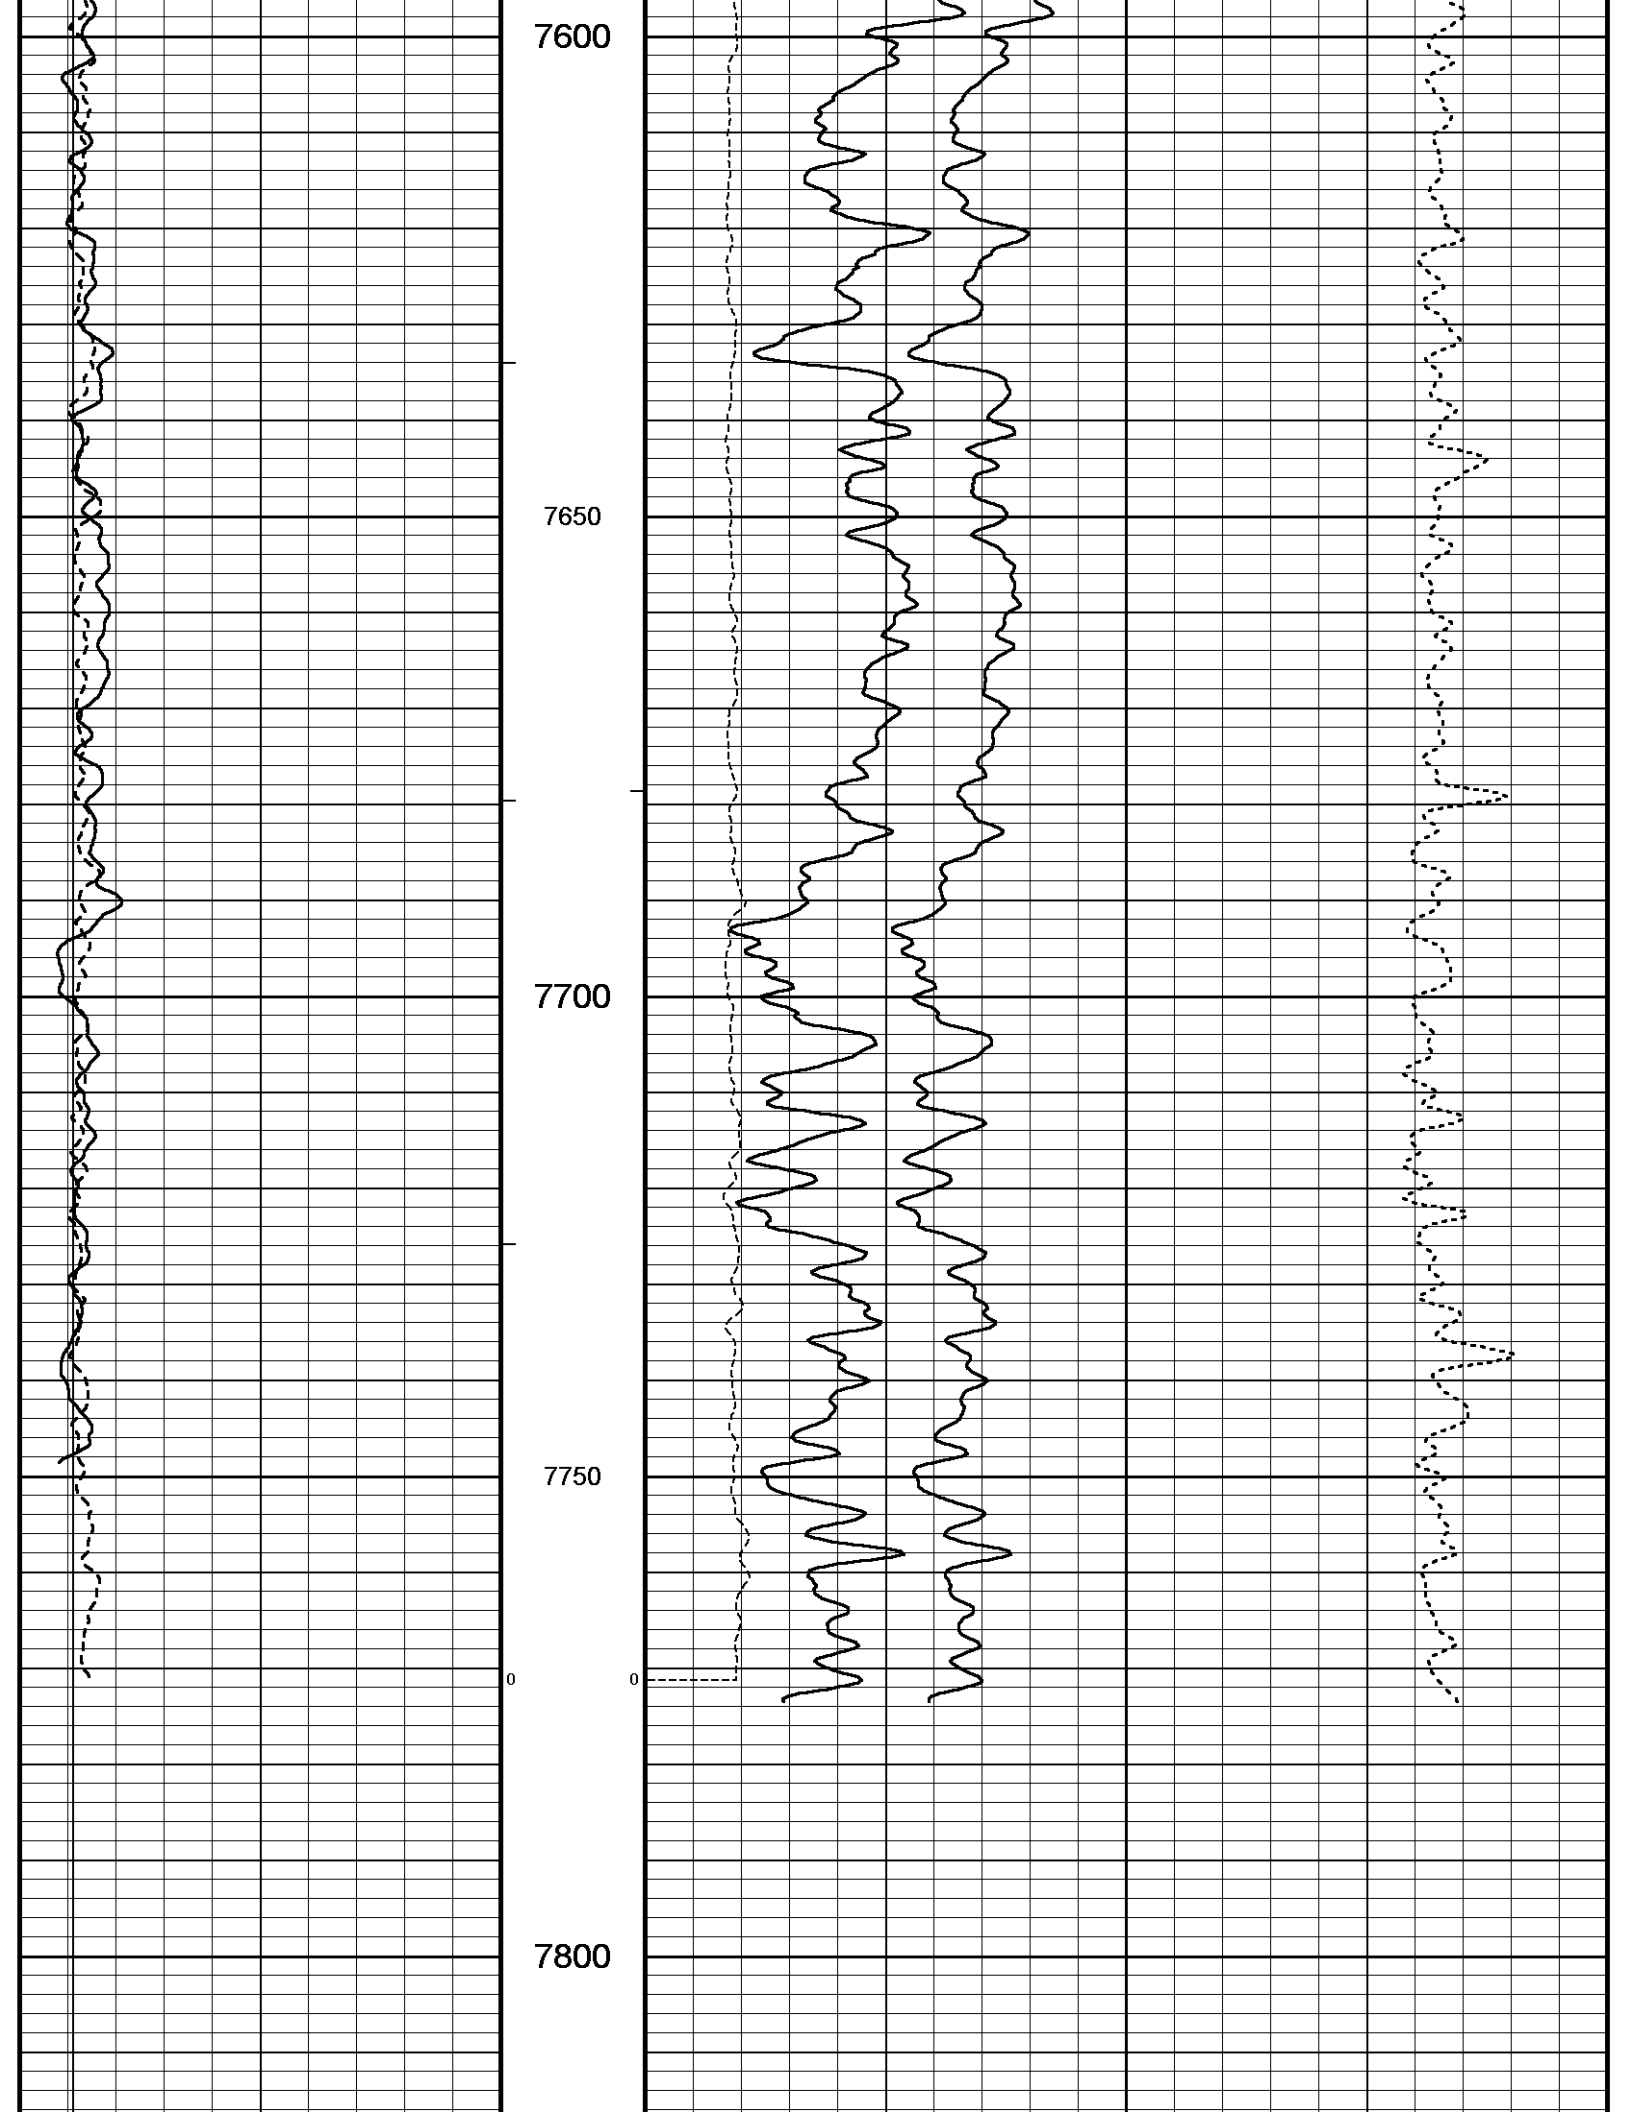

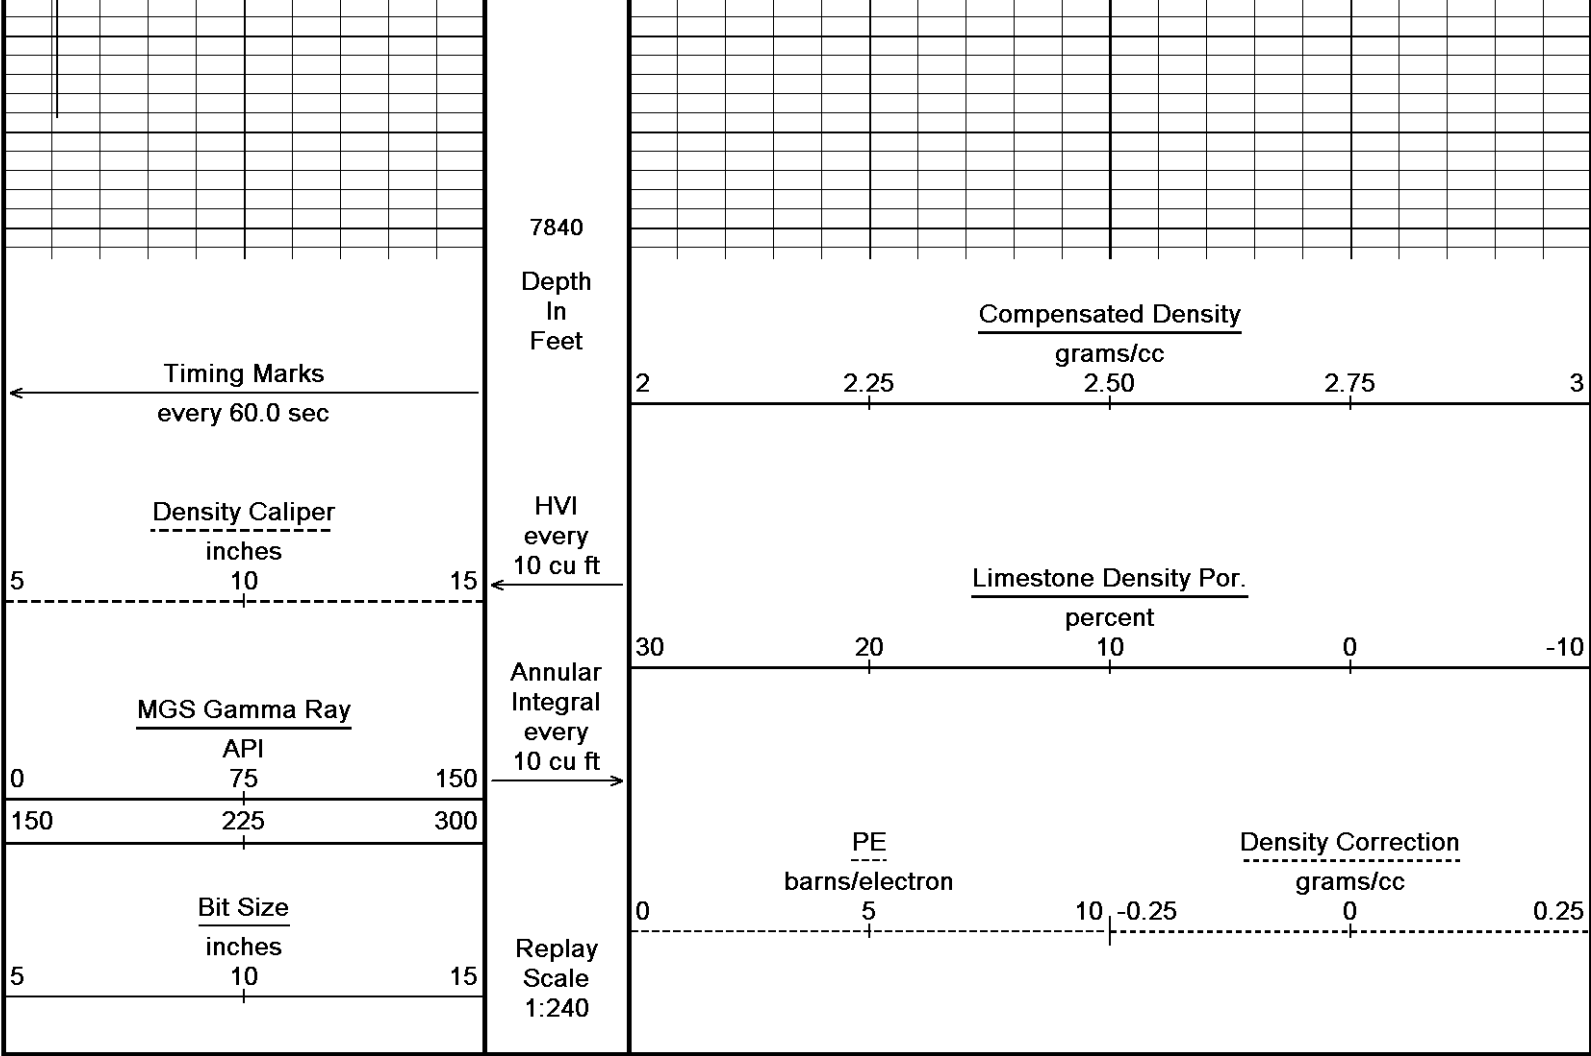

Depth Based Data - Maximum Sampling Increment 10.0cm
 Plotted on 20-JAN-2012 04:57
 Filename: C:\Data\CMX\CMX Socrates 1\MMS166 Depthlog.dta
 Recorded on 20-JAN-2012 03:46
 System Versions: Logged with 11.02.3186 Processed with 11.02.3186 Plotted with 11.02.3186

5 INCH BULK DENSITY DSC

BEFORE SURVEY CALIBRATION
 C:\Data\CMX\CMX Socrates 1\MMS166 Depthlog.dta

General Constants All 000 Last Edited on 20-JAN-2012,04:30

General Parameters

Mud Resistivity	1.340	ohm-metres
Mud Resistivity Temperature	76.000	degrees F
Water Level	0.000	feet
Density/Neutron Processing	Wet Hole	

Hole/Annular Volume and Differential Caliper Parameters

HVOL Method	Single Caliper	
HVOL Caliper 1	Density Caliper	
HVOL Caliper 2	N/A	
Annular Volume Diameter	4.500	inches
Caliper for Differential Caliper	Density Caliper	

Rwa Parameters

Porosity used	Base Density Porosity
Resistivity used	Deep Induction
RWA Constant A	0.610
RWA Constant M	2.150

Down-hole Tension Calibration SMS 0 Field Calibration on 27-APR-2009 11:57

Reading No	Measured	Calibrated (lbs)
1	15257.84	0.00

High Resolution Temperature Calibration MGS-C.J 138

Field Calibration on 22-DEC-2011,11:48

	Measured	Calibrated(Deg F)
Lower	50.00	50.00
Upper	100.00	100.00

High Resolution Temperature Constants MGS-C.J 138

Last Edited on

Pre-filter Length 11

SP Calibration MGS-C.J 138

Field Calibration on 22-DEC-2011,12:11

	Measured	Calibrated (mV)
Reference 1	100.0	100.0
Reference 2	-100.0	-100.0

Gamma Calibration MGS-C.J 138

Field Calibration on 19-JAN-2012,03:30

	Measured	Calibrated (API)
Background	56	33
Calibrator (Gross)	1482	890
Calibrator (Net)	1427	857

Gamma Constants MGS-C.J 138

Last Edited on 22-DEC-2011,12:11

Gamma Calibrator Number		
Mud Density	1.02	gm/cc
Caliper Source for Processing	Density Caliper	
Tool Position	Eccentred	
Concentration of KCl	0.00	kppm

Neutron Calibration MDN-B.J 389

Base Calibration on 31-OCT-2011,09:50

Field Check on 19-JAN-2012,03:29

Base Calibration

	Measured		Calibrated (cps)	
Ratio	Near	Far	Near	Far
	2849	86	3714	110
	33.085		33.764	

Field Calibrator at Base

	Calibrated (cps)	
Ratio	2236	3339
	0.670	

Field Check

	Calibrated (cps)	
Ratio	2246	3378
	0.665	

Neutron Constants MDN-B.J 389

Last Edited on 02-JAN-2012,13:16

Neutron Source Id	712b	
Neutron Jig Number	000	
Epithermal Neutron	No	
Caliper Source for Processing	Density Caliper	
Stand-off	0.00	inches
Mud Density	1.00	gm/cc
Limestone Sigma	7.10	cu
Sandstone Sigma	4.26	cu
Dolomite Sigma	4.70	cu
Formation Pressure Source	Constant Value	
Formation Pressure	0.00	kpsi
Temperature Source	None	
Temperature	N/A	degrees F
Mud Salinity	0.00	kppm
Formation Fluid Salinity Source	Constant Value	
Formation Fluid Salinity	0.00	kppm
Barite Mud Correction	Not Applied	

Imager Pad Check MIE-A.A 113

Field Check on 16-AUG-2008,11:45

Pad 1	Pad Not Tested	Pad 5	Pad Not Tested
Pad 2	Pad Not Tested	Pad 6	Pad Not Tested
Pad 3	Pad Not Tested	Pad 7	Pad Not Tested

Compact Micro Imager Constants MIE-A.A 113			Last Edited on 22-MAY-2010,05:16
Centre Pad 1 Rotational Offset	0.00	degrees	
Image/Borehole Ovality Reference	Relative Bearing		
Non Active Buttons	Omit		
Search Angle	0.00	degrees	
Correlation Interval	3.28	feet	
Correlation Step	1.64	feet	
Current Offset	0.0000	mAmp	
Squasher Start	0.0500	mAmp	
Image Processing	Enabled		

Navigation Constants MIE-A.A 113			Last Edited on 22-DEC-2011,12:01
Magnetic Declination	3.62	degrees	East

Magnetometer Parameters MIE-A.A 113				
Date Of Last Magnetometer Calibration	01-JAN-1998			
	X Magnetometer	Y Magnetometer	Z Magnetometer	
Slope	-1.000000	-1.016573	-1.003898	
Offset	0.006568	-0.015949	0.006438	

Magnetometer Constants MIE-A.A 113			Last Edited on
Magnetometer Calibrator Number	000		

Accelerometer Parameters MIE-A.A 113				
Date Of Last Accelerometer Calibration	01-JAN-1998			
	X Accelerometer	Y Accelerometer	Z Accelerometer	
Slope	-1.105490	-1.103970	-1.107420	
Offset	0.000458	0.006135	0.003353	

Accelerometer Constants MIE-A.A 113			Last Edited on 11-JUN-2009,17:18	
Accelerometer Calibrator Number	000			
Accelerometer Temperature Characterisation				
X Accelerometer				
Serial Number	282			
Calibration Date	18-Jul-2007			
	B0	B1	B2	B3
Bias(g)	0.00000e+000	3.41234e-005	-1.69705e-008	1.28660e-010
	SF0	SF1	SF2	SF3
Scale Factor(mA/g)	3.00000e+000	2.70372e-004	8.31146e-007	-1.22715e-009
Y Accelerometer				
Serial Number	284			
Calibration Date	18-Jul-2007			
	B0	B1	B2	B3
Bias(g)	0.00000e+000	1.41306e-005	-2.62559e-009	9.20272e-011
	SF0	SF1	SF2	SF3
Scale Factor(mA/g)	3.00000e+000	2.83655e-004	6.88154e-007	-5.98912e-010
Z Accelerometer				
Serial Number	287			
Calibration Date	20-Jul-2007			
	B0	B1	B2	B3
Bias(g)	0.00000e+000	2.30753e-005	-5.40650e-010	3.42223e-011
	SF0	SF1	SF2	SF3
Scale Factor(mA/g)	3.00000e+000	2.66160e-004	7.47858e-007	-1.03559e-009

Caliper Calibration MIE-A.A 113			Base Calibration on 23-JUN-2008,12:29	
			Field Calibration on	
Base Calibration				
Reading No	Pads 1-5 Meas.	Pads 3-7 Meas.	Calibrator Size (in)	
1	24856	25276	5.97	
2	35545	35312	7.99	
3	44370	44687	9.86	
4	55326	56381	11.93	

4	33320	0	0	0	0.00	11.53
5	0	0	0	0	0.00	0.00
Reading No	Pad 2 Meas.	Pad 4 Meas.	Pad 6 Meas.	Pad 8 Meas.	Calibrator Size (in)	
1	23517	25136	25351	23970	5.97	
2	32111	33147	34289	33287	7.99	
3	39601	41110	42395	41619	9.86	
4	49214	50836	52775	51339	11.93	
5	0	0	0	0	0.00	

Field Calibration					
	Measured Pads 1-5 Caliper(in)	Measured Pads 3-7 Caliper(in)	Actual Caliper(in)		
	0.00	0.00	0.00		
	Measured Pad 2 Caliper(in)	Measured Pad 4 Caliper(in)	Measured Pad 6 Caliper(in)	Measured Pad 8 Caliper(in)	Actual Caliper(in)
	0.00	0.00	0.00	0.00	0.00

Caliper Constants MIE-A.A 113 Last Edited on

Caliper Difference for BRKT 3.000 mm

High Resolution Temperature Calibration MAI-B.J 394			Field Calibration on 04-OCT-2010,19:11
	Measured	Calibrated(Deg C)	
Lower	10.00	10.00	
Upper	100.00	100.00	

High Resolution Temperature Constants MAI-B.J 394 Last Edited on

Pre-filter Length 11

Induction Calibration MAI-B.J 394			Base Calibration on 18-NOV-2011,14:19 Field Check on 19-JAN-2012 03:22		
Base Calibration					
Test Loop Calibration		Measured		Calibrated (mmho/m)	
Channel	Low	High	Low	High	
1	16.7	473.5	9.3	966.2	
2	5.6	368.9	7.6	821.4	
3	3.3	256.4	5.2	566.0	
4	1.8	133.4	2.6	279.2	
Array Temperature	71.8		Deg F		
Channel	Base Check (mmho/m)		Field Check (mmho/m)		
	Low	High	Low	High	
1	0.0	0.0	11.5	3832.2	
2	0.0	0.0	31.5	3652.4	
3	0.0	0.0	28.8	3084.6	
4	0.0	0.0	19.5	2069.2	
Deep	0.0	0.0	16.2	1912.2	
Medium	0.0	0.0	43.3	4146.2	
Shallow	0.0	0.0	49.0	5540.3	
Array Temperature	0.0		31.5 Deg F		

Induction Constants MAI-B.J 394 Last Edited on 20-JAN-2012,04:24

Induction Model RtAP-WBM

Caliper for Borehole Corr. Density Caliper

Hole Size for Borehole Correction N/A inches

Tool Centred No

Stand-off Type Fins

Stand-off 0.50 inches

Number of Fins on Stand-off 6.0000

Stand-off Fin Angle 60.00 degrees

Stand-off Fin Width 0.5000 inches

Borehole Corr. Rm Source Temperature Corr

Temp. for Rm Corr. MGS External Temperature

Squasher Start 0.0030 mhos/metre

Squasher Offset N/A mhos/metre

Borehole Normalisation

DRM1	0.0000	DRC1	0.0000
DRM2	0.0000	DRC2	0.0000
MRM1	0.0000	MRC1	0.0000
MRM2	0.0000	MRC2	0.0000
SRM1	0.0000	SRC1	0.0000
SRM2	0.0000	SRC2	0.0000

Calibration Site Corrections

Channel 1	0.00	mmhos/metre
Channel 2	0.00	mmhos/metre
Channel 3	0.00	mmhos/metre
Channel 4	0.00	mmhos/metre

Apparent Porosity and Water Saturation Constants

Archie Constant (A)	1.00	
Cementation Exponent (M)	2.00	
Saturation Exponent (N)	2.00	
Saturation of Water for Apor	100.00	percent
Resistivity of Water for Apor and Sw	0.05	ohm-m
Resistivity of Mud Filtrate for Sw	0.00	ohm-m
Source for Rt	0.00	
Source for Rxo	0.00	

Caliper Calibration MPD-C.J 395

Base Calibration on 23-APR-2011 16:36
Field Calibration on 19-JAN-2012,03:22

Base Calibration

Reading No	Measured	Calibrator Size (in)
1	15488	3.99
2	24960	5.97
3	34848	7.99
4	44224	9.86
5	55360	11.93
6	N/A	N/A

Field Calibration

Measured Caliper (in)	Actual Caliper (in)
5.90	5.97

Photo Density Calibration MPD-C.J 395

Base Calibration on 17-AUG-2011 10:29
Field Check on 19-JAN-2012 03:27

Density Calibration

Base Calibration	Measured		Calibrated (sdu)	
	Near	Far	Near	Far
Reference 1	54132	26425	60364	31945
Reference 2	22529	2716	25079	2547

Field Check at Base

1281.2	1499.3
--------	--------

Field Check

1251.3	1487.7
--------	--------

PE Calibration

Base Calibration	WS	Measured		Calibrated Ratio
		WH	Ratio	
Background	231	1150		
Reference 1	23934	53929	0.449	0.399
Reference 2	6456	22390	0.293	0.273

Field Check at Base

231.5	1150.1
-------	--------

Field Check

229.5	1123.2
-------	--------

Density Constants MPD-C.J 395

Last Edited on 28-AUG-2011,16:06

Density Source Id	246
Nylon Calibrator Number	DNCE603
Aluminium Calibrator Number	DACA509
Density Shoe Profile	4 inch
Caliner Source for Processing	Density Caliner

PE Correction to Density	Not Applied	
Mud Density	1.07	gm/cc
Mud Density Z/A Multiplier	1.11	
Mud Filtrate Density	1.00	gm/cc
Dry Hole Mud Filtrate Density	1.00	gm/cc
DNCT	0.00	gm/cc
CRCT	0.00	gm/cc
Density Z/A Correction	Hybrid	

Matrix Density (gm/cc)	Depth (ft)
2.71	
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00

DOWNHOLE EQUIPMENT

C:\Data\CMX\CMX Socrates 1\MMS166 Depthlog.dta

SRT Post Deployment
MLK-A 1 LG: 4.87 ft WT: 30.9 lb OD: 2.24 in

Empty Battery
MLK-A 2 LG: 14.17 ft WT: 30.9 lb OD: 2.24 in

Empty Battery
MLK-A 3 LG: 14.17 ft WT: 30.9 lb OD: 2.24 in

SKJ-D.A Compact Knuckle Joint
SKJ-D.A 166 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

MBS-F.A 200v Compact Battery Sub
MBS-F.A 119 LG: 17.06 ft WT: 123.5 lb OD: 2.24 in

Compact Memory Sub E.B
MMS-E.B 166 LG: 5.20 ft WT: 37.5 lb OD: 2.24 in

Compact Tool Isolator sub.
MTI-B.A 72 LG: 1.54 ft WT: 13.2 lb OD: 2.24 in

Compact Short Gamma
MGS-C.J 138 LG: 3.41 ft WT: 24.3 lb OD: 2.24 in

SKJ-E.B Compact Knuckle Joint
SKJ-E.B 471 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

SHA-J.A Compact Swivel Head Adaptor
SHA-J.A 450 LG: 2.30 ft WT: 22.0 lb OD: 2.24 in

MIS-D.A Compact Inline Bowspring sub
MIS-D.A 310 LG: 5.70 ft WT: 33.1 lb OD: 2.24 in

Compact Neutron
MDN-B.J 389 LG: 5.04 ft WT: 50.7 lb OD: 2.24 in

Compact Density/Caliper
MPD-C.J 395 LG: 9.59 ft WT: 90.4 lb OD: 2.24 in

MIS-D.A Compact Inline Bowspring sub
MIS-D.A 609 LG: 5.70 ft WT: 33.1 lb OD: 2.24 in



SHA-J.A Compact Swivel Head Adaptor
 SHA-J.A 454 LG: 2.30 ft WT: 22.0 lb OD: 2.24 in

SKJ-E.B Compact Knuckle Joint
 SKJ-E.B 456 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

MIS-E.A Compact Inline Standoff sub
 MIS-E.A 336 LG: 2.14 ft WT: 15.4 lb OD: 2.24 in

SKJ-D.A Compact Knuckle Joint
 SKJ-D.A 207 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

MIS-D.A Compact Inline Bowspring sub
 MIS-D.A 590 LG: 5.70 ft WT: 33.1 lb OD: 2.24 in

Compact MMI Memory Section
 MIM-A.A 205 LG: 4.65 ft WT: 26.5 lb OD: 2.24 in

Compact MMI Electrode Section
 MIE-A.A 113 LG: 13.96 ft WT: 99.2 lb OD: 4.10 in

MIS-E.B Compact Inline Standoff sub
 MIS-E.B 596 LG: 2.14 ft WT: 15.4 lb OD: 2.24 in

SKJ-E.B Compact Knuckle Joint
 SKJ-E.B 472 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

Compact Induction
 MAI-B.J 394 LG: 10.81 ft WT: 48.5 lb OD: 2.24 in

Total Length: 141.26 ft Weight: 901.7 lb



17.35 ft IECY - MIE Caliper Y
 17.35 ft IECX - MIE Caliper X
 16.83 ft IAP1 - Azimuth of Reference
 16.83 ft IMGR - MMI Image

Tool Zero (0.13ft from bottom)
 All measurements relative to tool zero.

COMPANY CMX INC.
WELL SOCRATES 1H
FIELD WHERRY
PROVINCE/COUNTY RICE
COUNTRY/STATE U.S.A. / KANSAS

Elevation Kelly Bushing	1614.00	feet	First Reading	7773.00	feet
Elevation Drill Floor	1614.00	feet	Depth Driller	7950.00	feet
Elevation Ground Level	1602.00	feet	Depth Logger	7828.00	feet



COMPACT WELL SHUTTLE
COMPACT PHOTO DENSITY
COMPENSATED DUAL NEUTRON LOG

