

13-065-00034-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

NORTH

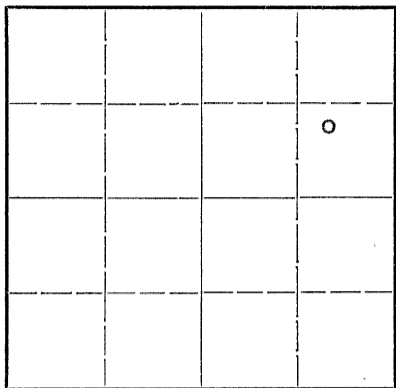

Locate well correctly on above
Section Plat

Graham County. Sec. 7 Twp. 6S Rge. 24 (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. NW SE NE
Lease Owner Potash Company of America
Lease Name Johnson Well No. 1
Office Address P. O. Box 31, Carlsbad, New Mexico
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed July 9 19 46
Application for plugging filed July 9 19 46
Application for plugging approved July 9 19 46
Plugging commenced July 9 19 46
Plugging completed July 9 19 46
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Kerr
Producing formation None Depth to top Bottom Total Depth of Well 4190 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8	283	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy mud - 4190 - 250
Wooden plug at 250 set with drill pipe
Cement plug 250 - 206 15 sax cement introduced into hole through drill pipe
Heavy mud - 206 - 15
Cement plug 15 - 0 10 sax cement mixed to a slurry and dumped into hole. Hole filled to top surface pipe in cellar.



7 6 24W
63 3

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Potash Company of America
Address P. O. Box 31, Carlsbad, New Mexico

STATE OF Kansas, COUNTY OF Sedgwick, ss.
The Palmer Oil Corporation, Contractor (employee of owner or owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) THE PALMER OIL CORPORATION
By J.P.M. Kerr
415 Union National Bank Bldg., Wichita (Address) Kansas

SUBSCRIBED AND SWORN to before me this 19th day of July, 19 46

Bonnie Durall
Notary Public.

My commiss. expires 3/21/49