



**MIDWEST SURVEYS**  
LOGGING - PERFORATING - CONSULTING SERVICES  
P.O. Box 68, Osawatomie, KS 66064  
913 / 755 - 2128

**GAMMA RAY / NEUTRON / CCL**

File No.

Company **Allavista Energy, Inc.**

Well **Mary Bell No. A-20**

Field **Baldwin**

County **Douglas** State **Kansas**

Location **2420' FSL & 3120' FEL**

**NW-NE-NE-SW**

Other Services  
Perforate

Sec. 1 Twp. 15s Rge. 20e

Permanent Datum GL Elevation NA

Log Measured From GL

Drilling Measured From GL NA

API # 15-045-21,804

Date

09-05-2012

Run Number

One

Depth Driller

900.0

Depth Logger

820.2

Bottom Logged Interval

819.2

Top Log Interval

200.0

Fluid Level

Full

Type Fluid

Water

Density / Viscosity

NA

Salinity - PPM Cl

NA

Max Recorded Temp

NA

Estimated Cement Top

0.0

Equipment No.

107

Location

Osawatomie

Recorded By

Steve Windisch

Witnessed By

Doug Evans

BORE-HOLE RECORD

TO

BIT

FROM

SIZE

WGT.

FROM

TO

One

9.875"

44.5

7.00"

19.0 #

0.0

44.7

Two

5.625"

44.5

2.875"

6.5 #

0.0

868.50

827.05

Bit

Set

At

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Drilling Contractor :  
Town Oilfield Services, Inc.

Database File: mary/bell20.db  
Dataset Pathname: pass1  
Presentation Format: gr-n-ccl  
Dataset Creation: Wed Sep 05 13:39:38 2012 by Log SCH 111116  
Charted by: Depth in Feet scaled 1:240

0 Gamma Ray (cps) 150 10 Neutron (cps) 2100

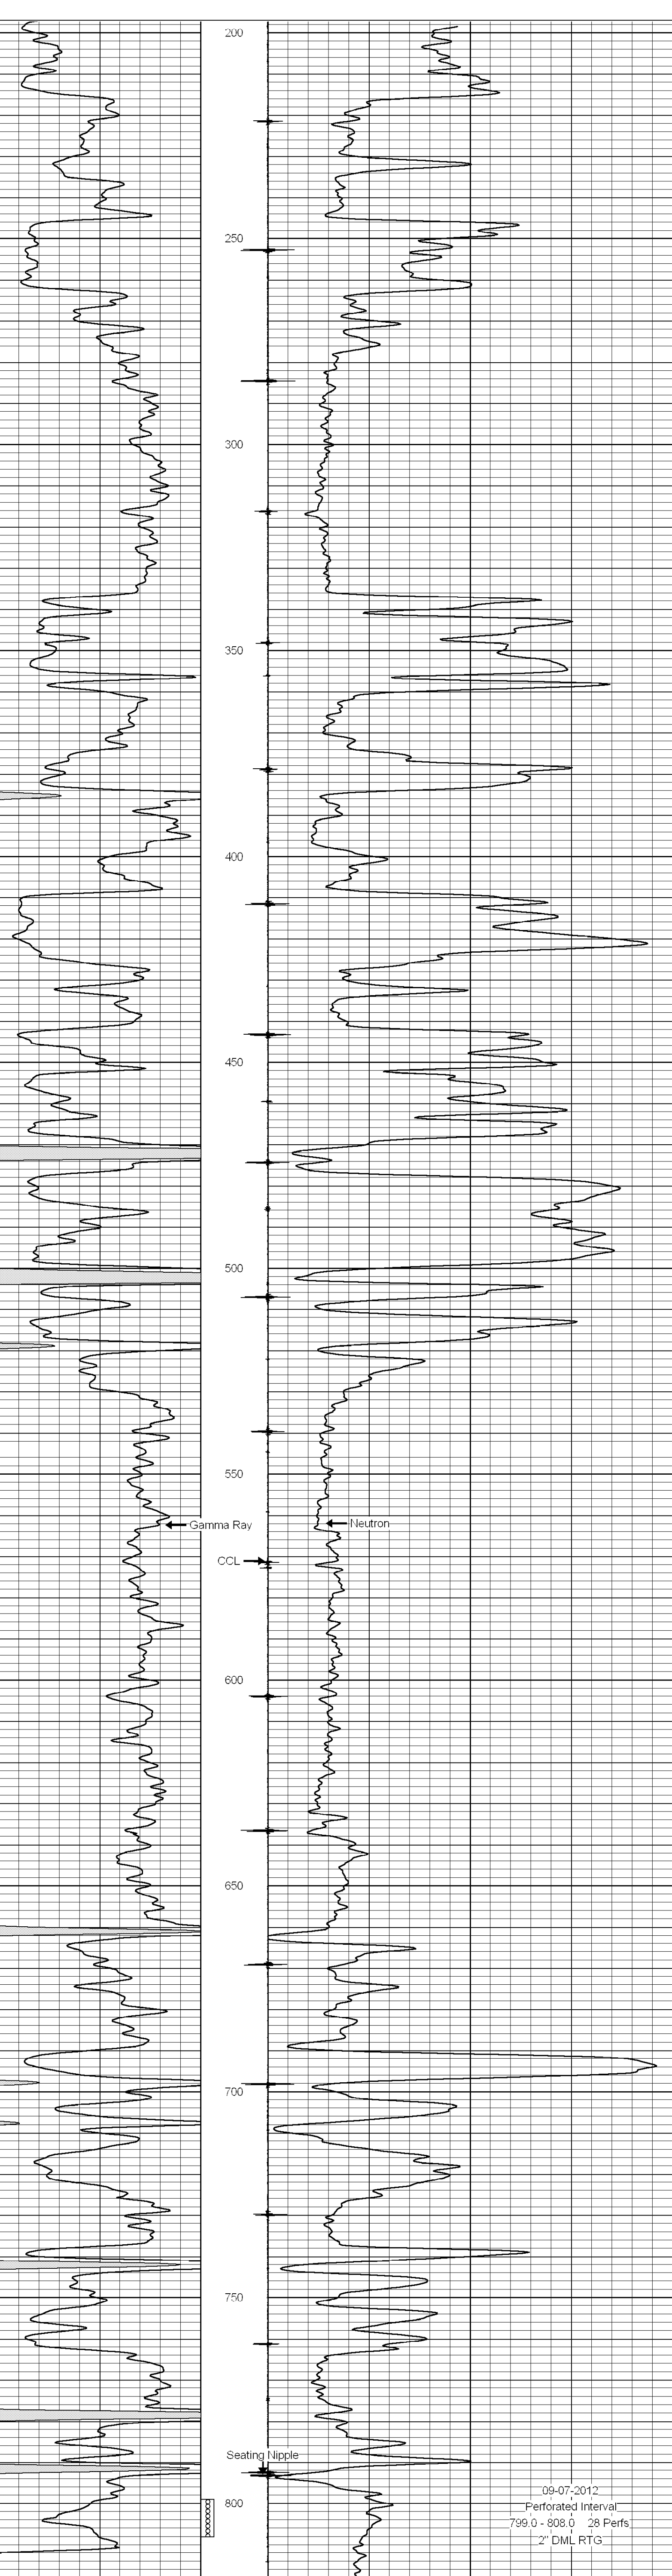

09-07-2012  
Perforated Interval  
799.0 - 808.0 28 Perfs  
2" DML RTG