


15-179-05277-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

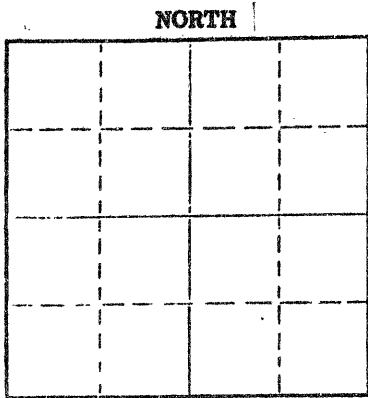

Locate well correctly on above Section Plat

Sheridan County, Sec. 2 Twp. 6 Rge. (E) 27 (W)  
Location as "NE/CNW&SW" or footage from lines 990' FSL & 1650' FWL  
Lease Owner Continental Oil Company  
Lease Name Adell L-KC Unit Well No. 401  
Office Address Box 267, Great Bend, Kansas 67530  
Character of Well (completed as Oil, Gas or Dry Hole) oil  
Date well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced July 2 1975  
Plugging completed July 8 1975  
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols  
Producing formation Depth to top Bottom Total Depth of Well 3815 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
			247'	10 3/4"	247'	none
			379 1/4'	6"	379 1/4'	758.93

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded back to 3500' and dumped 5 sacks of cement.  
Sun Cementing Company plugged well pumping in 5 sacks of hulls, 10 sacks of gel and 200 sacks of cement.

Name of Plugging Contractor PIPE PULLERS, INC. (If additional description is necessary, use BACK of this sheet)  
Address Box 128, Ellinwood, Kansas 67526

STATE OF KANSAS COUNTY OF BARTON ss.  
Evelyn Roth (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.  
(Signature) Evelyn Roth  
Ellinwood, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 10th day of July 1975

JENNY KASSELMAN  
NOTARY PUBLIC  
BARTON COUNTY, KANSAS  
MY COMM. EXP. JULY 16, 1978

Jenny Kasselmann  
Notary Public

RECEIVED  
STATE CORPORATION COMMISSION  
JUL 11 1975  
CONSERVATION DIVISION  
Wichita, Kansas

~~15-065-00-7-00-00~~  
15-179-05277-00-00

W E L L R E C O R D  
W. C. Carlton Well No. 1

Date Spudded: November 4, 1944  
Drlg. Completed: January 1, 1945  
Temporary Potential: December 29, 1944

Loc: 990'N and 990'E of SW  
corner of Sec. 2, T6S, R27W,  
Sheridan County, Kansas

FROM	TO	FORMATION	FROM	TO	FORMATION
0	250	Sand & shale	2327	2727	Broken lime
250	1360	Shale and shells	2727	2956	Lime
1360	1707	Broken lime	2956	3011	Broken lime
1707	2082	Salt, shale and shells	3011	3815	Lime
2082	2327	Shale and shells			

Elevation 2563'

Top of Lansing Lime 3543'

Ran 242'5" of 10 3/4"OD 32.75# SRT Grade "H-40" Seamless casing; set at 241'; cemented with 240 sacks of Portland Lone Star (Halliburton method).

Ran 3817'4" of 6"OD SRT Grade "H-40" Electric Weld casing; ran 6"OD SRT "bakblu" male and female float collar and guide shoe; set at 3794'; cemented with 300 sacks of Portland Lone Star (Halliburton method).

12-22-44 - Drilled out cement to 3784'; ran radioactivity log; perforated 6"OD casing with Lane-Wells gun perforator as follows: 3609'-3624' with 48 shots; 3650'-3658' with 24 shots; 3702'-3710' with 24 shots; 3735'-3753' with 58 shots; hole filled 1850' with oil in 8 hours.

12-23-44 - Swabbed 15 bbls. oil per hour for 4 hours off bottom.

12-27-44 - Ripped 6"OD casing 3579'-3606'; hole filled 3700' with oil.

12-28-44 - Swabbed 19 bbls. oil per hour for 4 hours off bottom.

12-29-44 - Swabbed 50 bbls oil in 2 hours to establish a 25 bbl. minimum temporary potential.

P.B.T.D. 3784' in Lansing Lime.

Note: Footages calculated from pumping derrick floor level, except formations.

I, the undersigned, being first duly sworn upon oath, state that this Well Record is true, correct and complete according to the records of this office, and to the best of my knowledge and belief.

F. P. O.  
District Superintendent

Subscribed and sworn to before me this 18th day of April, 1946.

Ernest M. Gure  
Notary Public

My commission expires October 21st, 1948.

FLD-EHD  
4-18-46  
Corp. Comm.

PLUICKING  
FILE 3 6 27W  
BOOK PAGE 33 40

4-20-46