



# Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-051-26,320-00-00

Company DaMar Resources, Inc.

Well Anita No. 1

Field Wildcat

County Ellis State

Kansas

Location

NW SE NW NW  
695' FNL & 850' FWL

Other Services  
CNL/CDL  
DIL

Sec: 11 Twp: 13S Rge: 18W

Permanent Datum Ground Level Elevation 2162  
Log Measured From Kelly Bushing 5 Ft. Above Perm. Datum  
Drilling Measured From Kelly Bushing

Elevation

K.B. 2167  
D.F.  
G.L. 2162

Date

6/16/2012

Run Number

Two

Depth Driller

3775

Depth Logger

3776

Bottom Logged Interval

3775

Top Log Interval

3100

Casing Driller

8.625 @ 261

Casing Logger

260

Bit Size

7.875

Type Fluid in Hole

Chemical

Salinity, ppm CL

8000

Density / Viscosity

9.2 52

pH / Fluid Loss

10.0 9.2

Source of Sample

Flowline

Rm @ Meas. Temp

.48 @ 79

Rmf @ Meas. Temp

.36 @ 79

Rmc @ Meas. Temp

.65 @ 79

Source of Rmf / Rmc

Charts

Rm @ BHT

.33 @ 114

Operating Rig Time

4 Hours

Max Rec. Temp. F

114

Equipment Number

108

Location

Hays

Recorded By

J. Long

Witnessed By

Randy Kilian

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


## Comments

Thank you for using Log-Tech, Inc.  
(785) 625-3858

Hays, North to Feedlot Road, 1 1/4 East, South Into

Database File: c:\warrior\data\damar\_anita no. 1\damar\_anita\_1hd.db  
Dataset Pathname: dil/damstck  
Presentation Format: micro  
Dataset Creation: Sat Jun 16 15:48:43 2012  
Charted by: Depth in Feet scaled 1:240

|      |                          |     |
|------|--------------------------|-----|
| 0    | Gamma Ray                | 150 |
| 6    | Micro Log Caliper (GAPI) | 16  |
| -200 | SP (mV)                  | 0   |

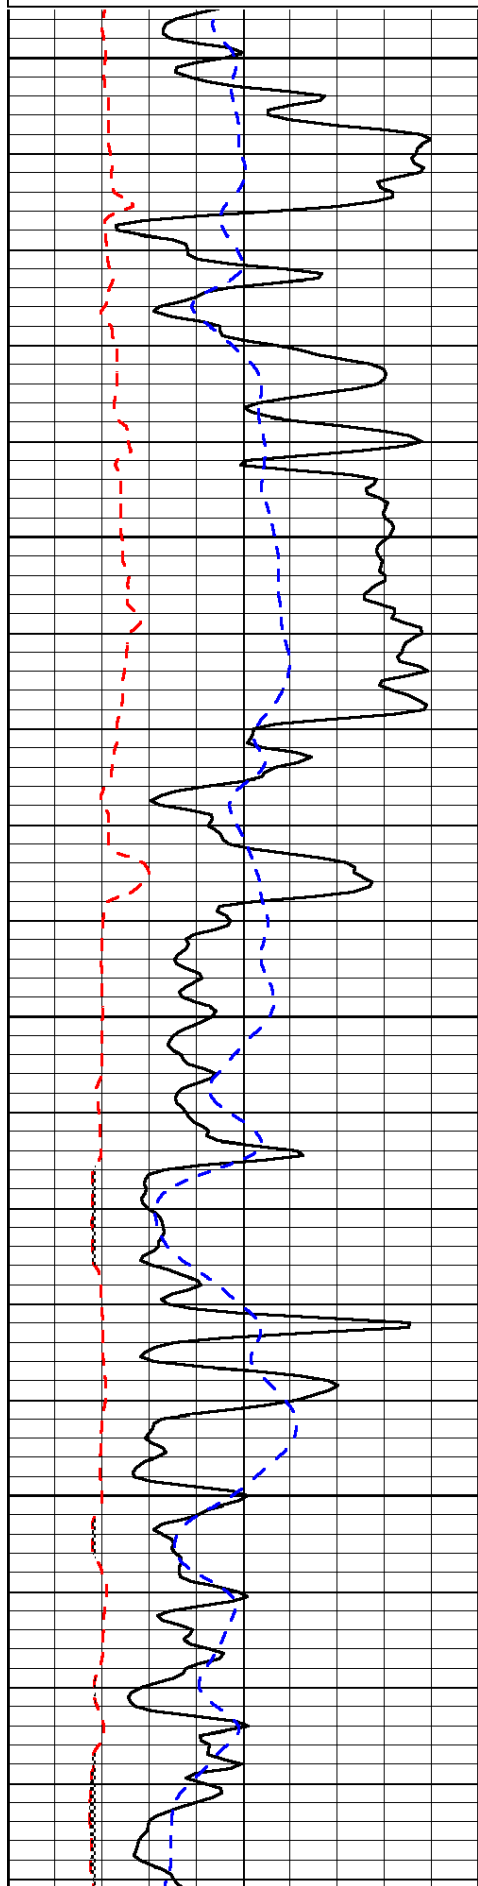


3100


3150

3200

3250

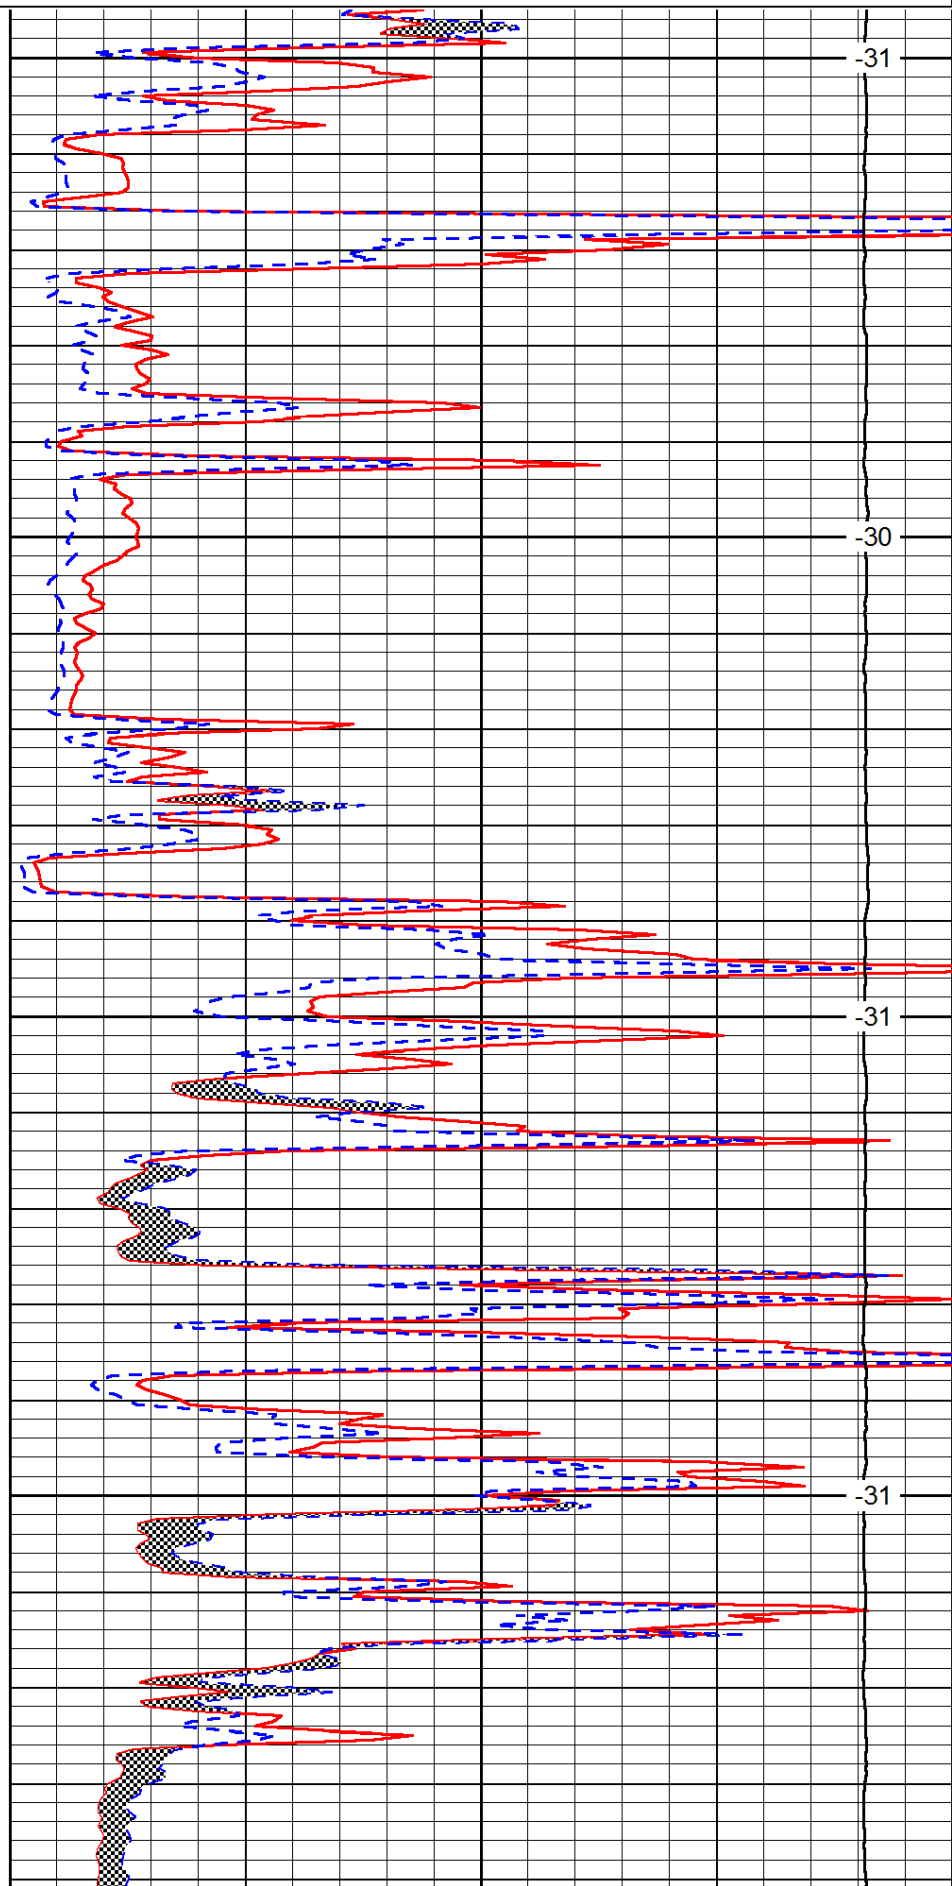

LSPD

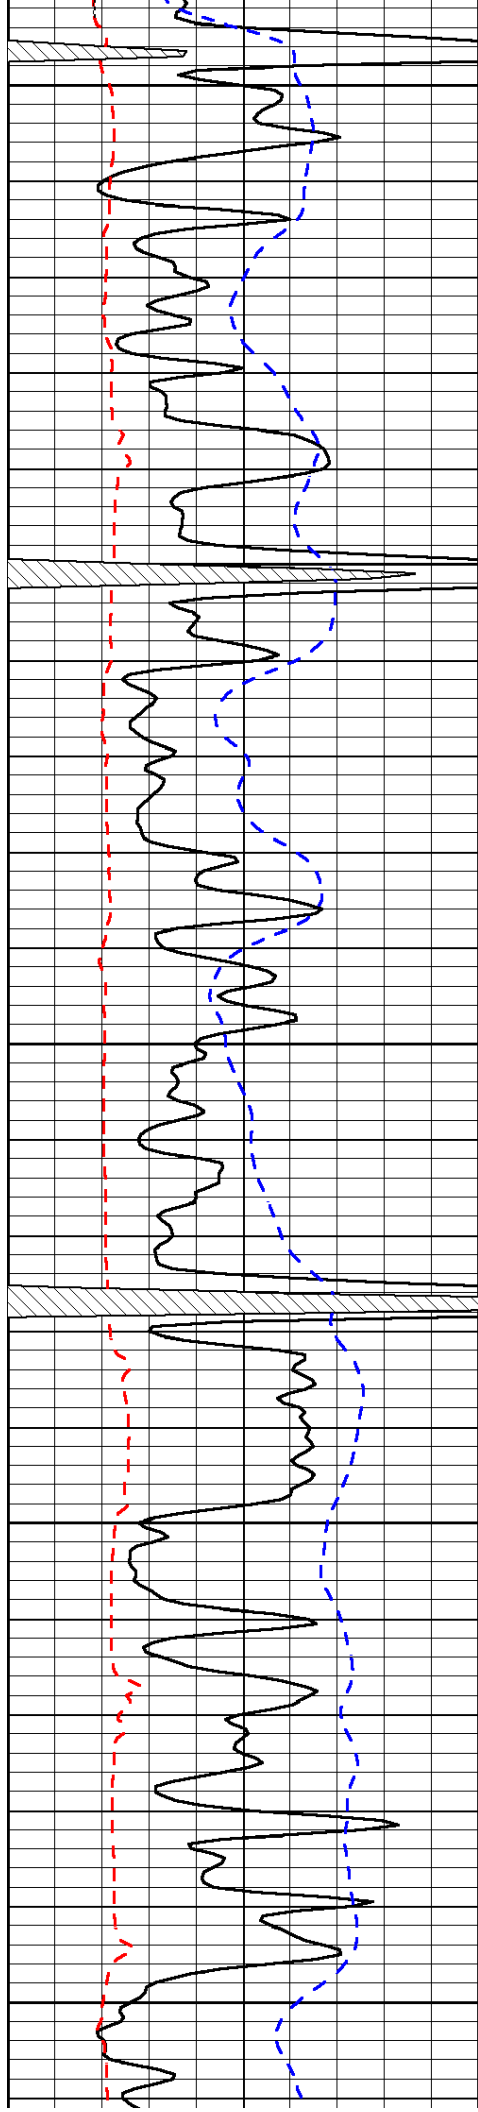


3300

3350

3400

3450

3500

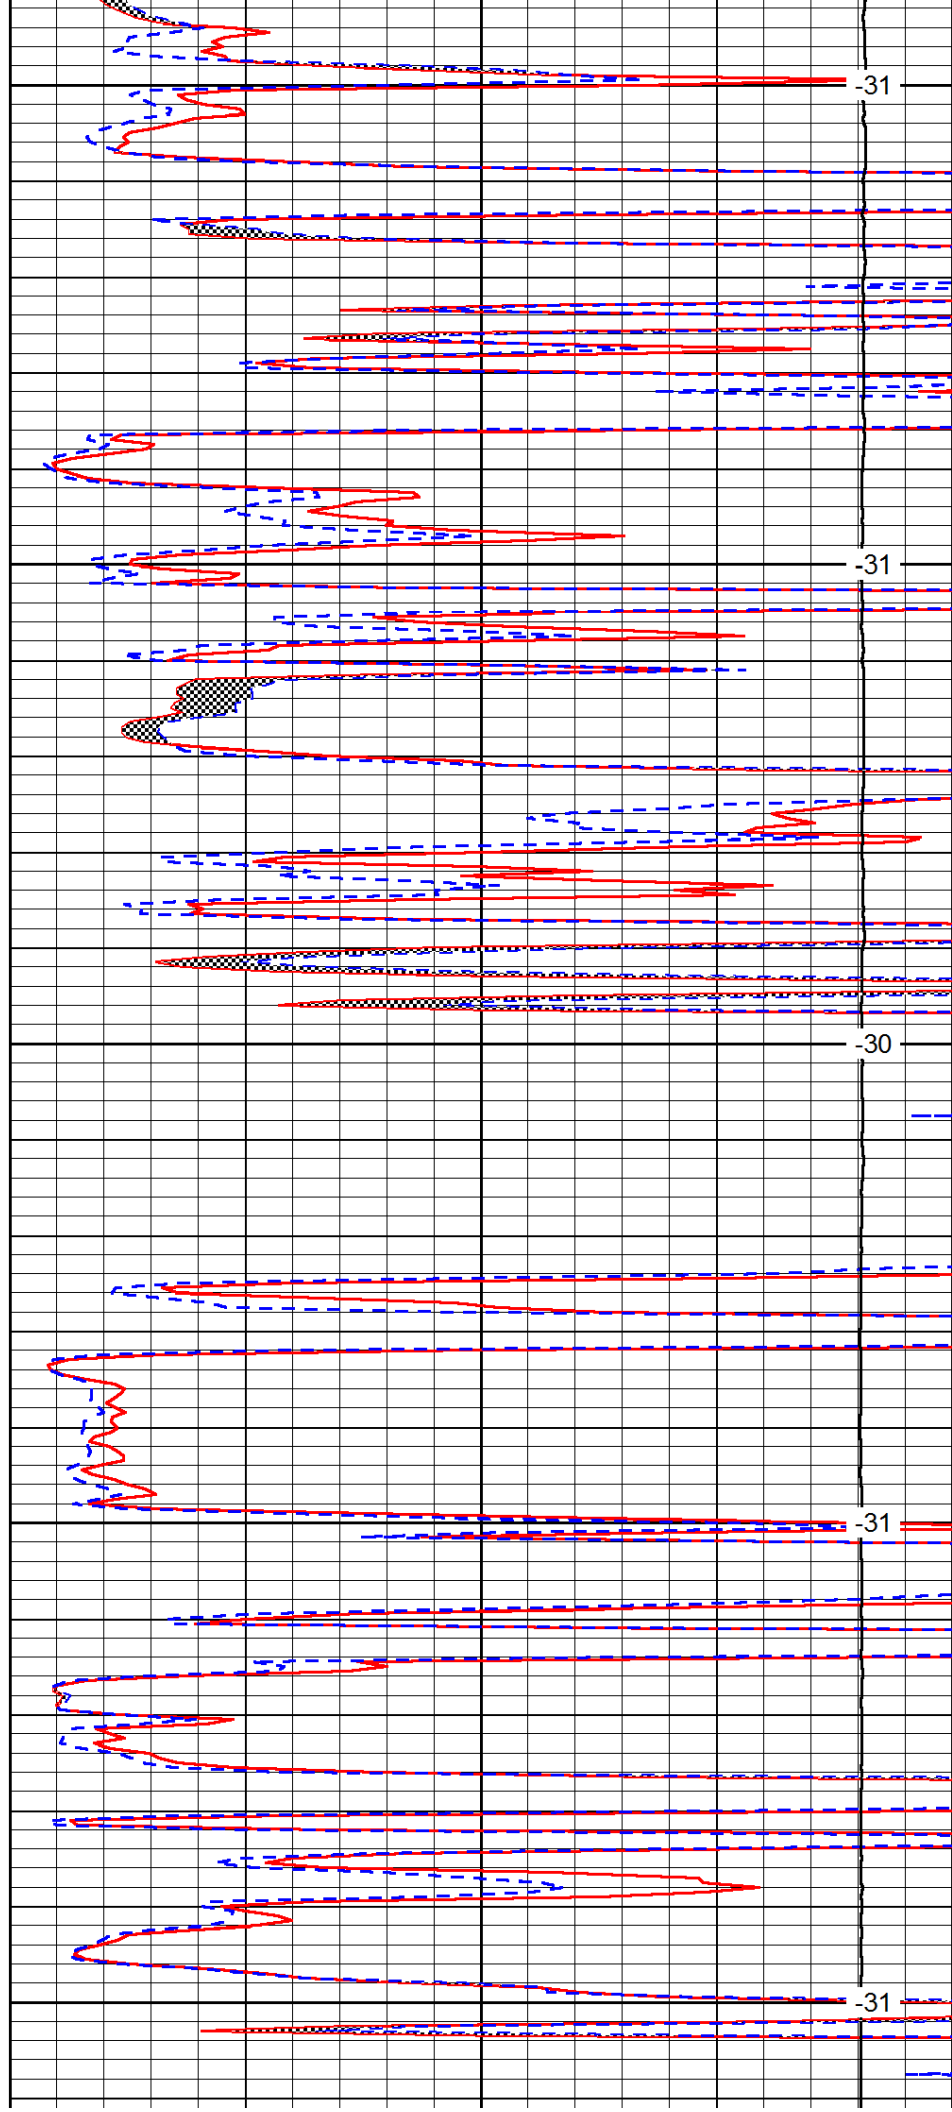


-31

-31

-30

-31

-31

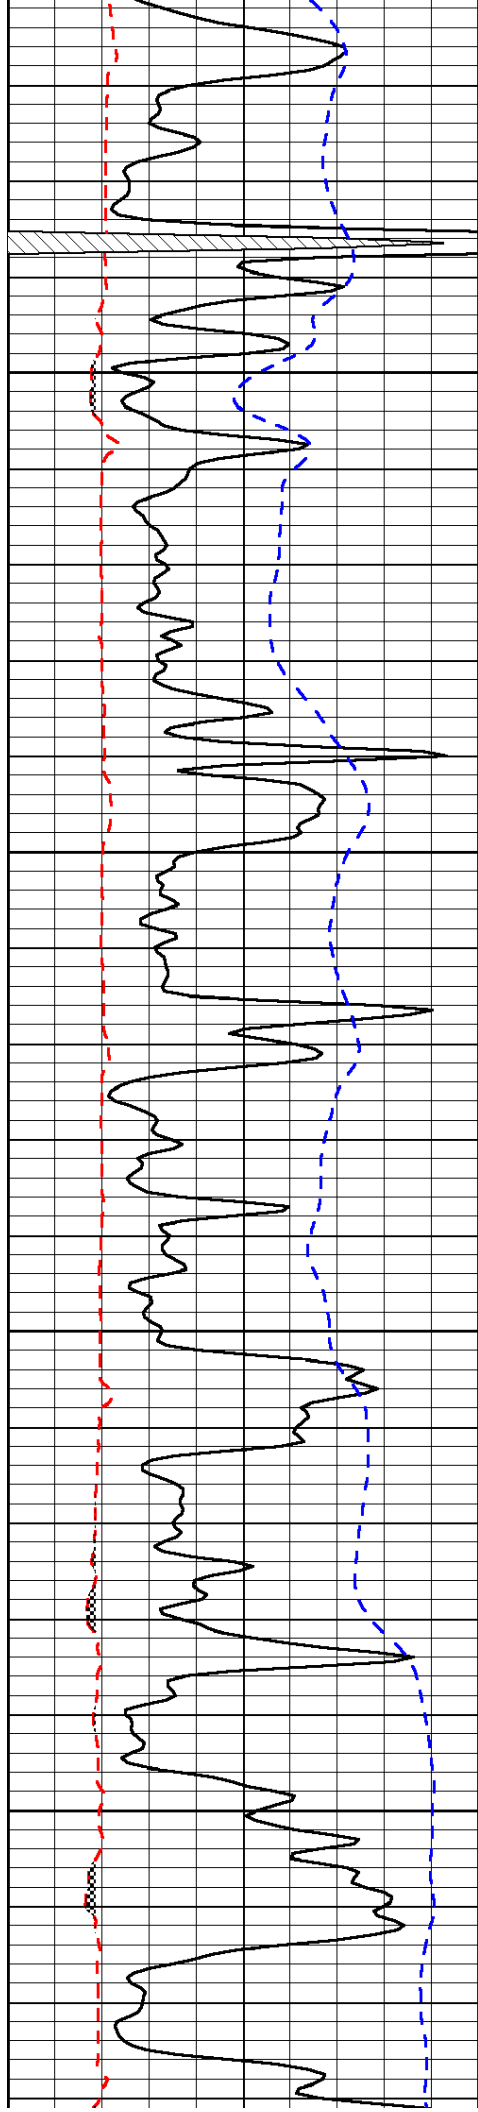



3550

3600


3650

3700

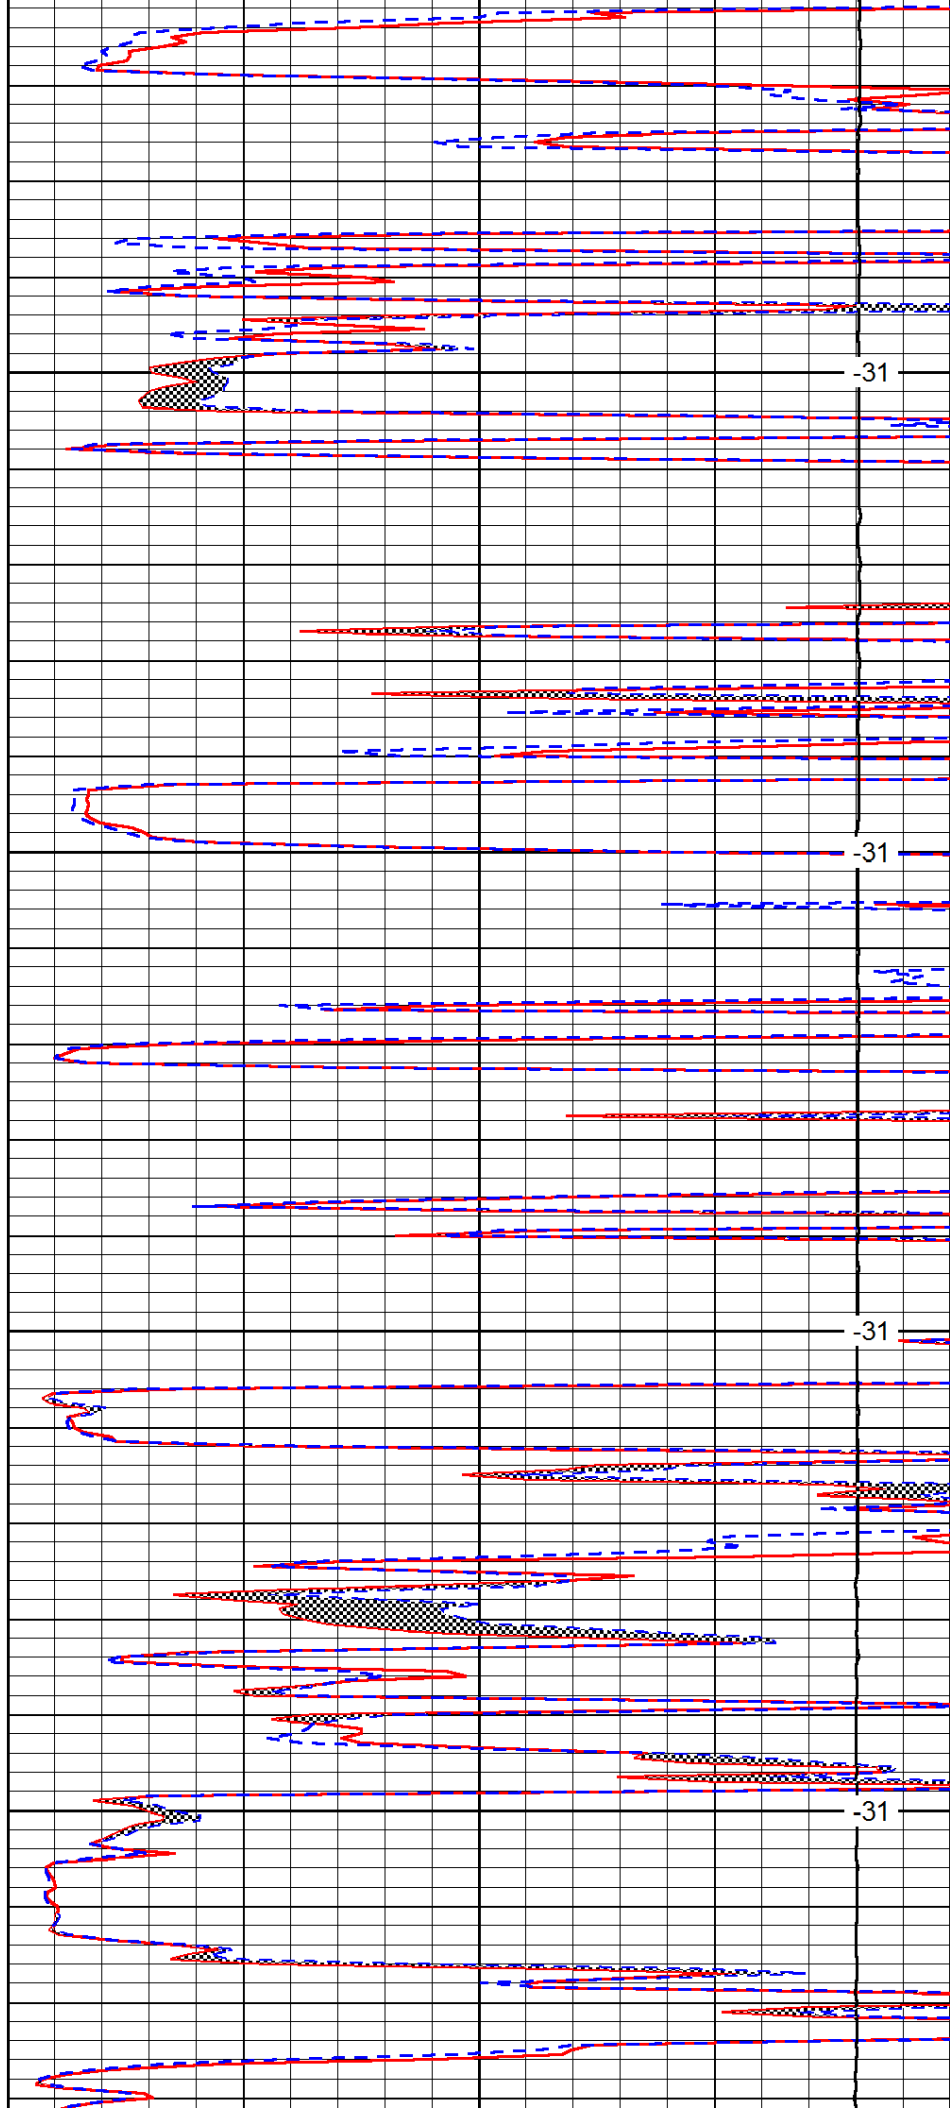

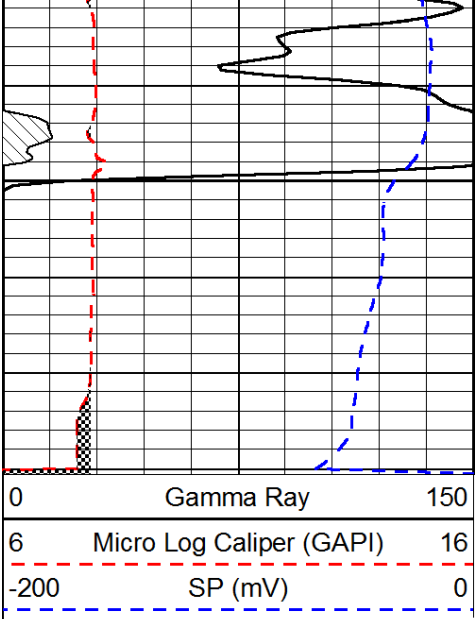

3750

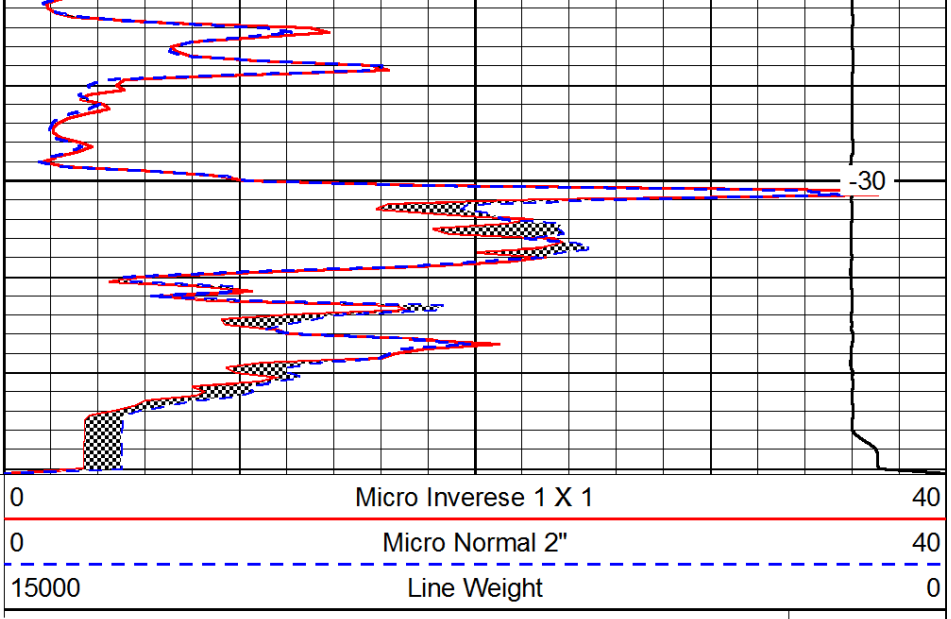

-30

LSPD