

To:

STATE CORPORATION COMMISSION

Wichita State Office Bldg. - PLUGGING SECTION

130 S. Market, Room 2078

Wichita, Kansas 67202

TECHNICIAN'S PLUGGING REPORT

Operator License # 33074Operator: Dart Cherokee Basin OperatingName & 3541 County Road 54000Address Independence, KS 67301AB oil well ~~XXXXXX~~ Gas Well _____

Other well as hereinafter indicated: _____

Plugging Contractor: K W Oil Well ServiceAddress: 19540 Ford Road, Chanute, KS 66720Company to plug at: _____ Hour: _____ Day: 7 Month: 3 2005Plugging proposal received from: Tony WilliamsCompany Name: Dart Cherokedd Basin Operating Phone: 620-779-1028

Were: _____

API NUMBER 15-125-01125-00-01NE NE SW Sec/Twp/Rge Sec 27 T32S R15E1992 GPS feet from south section line3297 GPS feet from east section lineLease/Well# 27-OW1County MGWell Total Depth 1025 feetProduction Pipe: N/A Size Feet N/ASurface Casing: N/A Size Feet N/ASWD Well/ Input Well _____ D & A XXXKCC
Bem
4-28-05
Per RBDMS
CP-4Lic. # 3097Plugging Proposal Received by: Tom BilyeuPlugging attended by Agent: All _____ Part _____ None XXXXXX

TECHNICIAN

Operations Completed: Hour: _____ Day: 7 Month: 3 2005Actual Plugging Report: A raw bore hole was located without surface casing. Contractor setapproximately 13 ft of 12 inch surface casing. The drilling rig was set on location and the well drilled thruwood plugs to 1025 ft. 1 inch cement string was run to 1025 ft and the well plugged from bottom to topusing 335 sacks of portland cement. The well was cut off below plow depth and the location restored.

RECEIVED

APR 21 2005

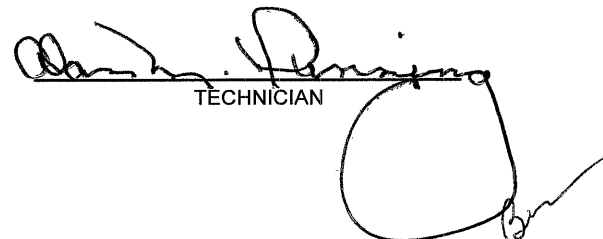
Remarks: Could not find any record of well in RBDMS or District 3 files.

(If additional description is necessary, use BACK of this form.)

KCC WICHITA

I did not observe this plugging.

Signed:


 TECHNICIAN