



DIGITAL LOG (785) 625-3858

Microresistivity Log

API No.		Company C G Oil, LLC			
15-009-25667-00-00		Well		MJR #2	
		Field		Trapp	
		County		Barton	
		State		Kansas	
Location		W/2 W/2 E/2 SW/4 1320' FSL / 1485' FWL		Other Services CNL / CDL DIL	
Sec: 20		Twp: 16S		Rge: 13W	
Permanent Datum		Ground Level		Elevation 1950	
Log Measured From		Kelly Bushing		8 Ft. Above Perm. Datum	
Drilling Measured From		Kelly Bushing		K.B. 1958 D.F. 1950 G.L. 1950	
Date		3/12/2012			
Run Number		Two			
Depth Driller		3450			
Depth Logger		3450			
Bottom Logged Interval		3449			
Top Log Interval		2750			
Casing Driller		8.625 @ 902			
Casing Logger		898			
Bit Size		7.875			
Type Fluid in Hole		Chemical			
Salinity, ppm CL		9000			
Density / Viscosity		9.1 53			
pH / Fluid Loss		10.5 8.8			
Source of Sample		Flowline			
Rm @ Meas. Temp		1.50 @ 70			
Rmf @ Meas. Temp		1.13 @ 70			
Rmc @ Meas. Temp		2.03 @ 70			
Source of Rmf / Rmc		Charts			
Rm @ BHT		0.95 @ 111			
Operating Rig Time		4 Hours			
Max Rec. Temp. F		111			
Equipment Number		15			
Location		Hays			
Recorded By		R. Barnhart			
Witnessed By		Roger Fisher		Ron Schmidtberger	

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Susank, KS:
1W, 1/2N, E into

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

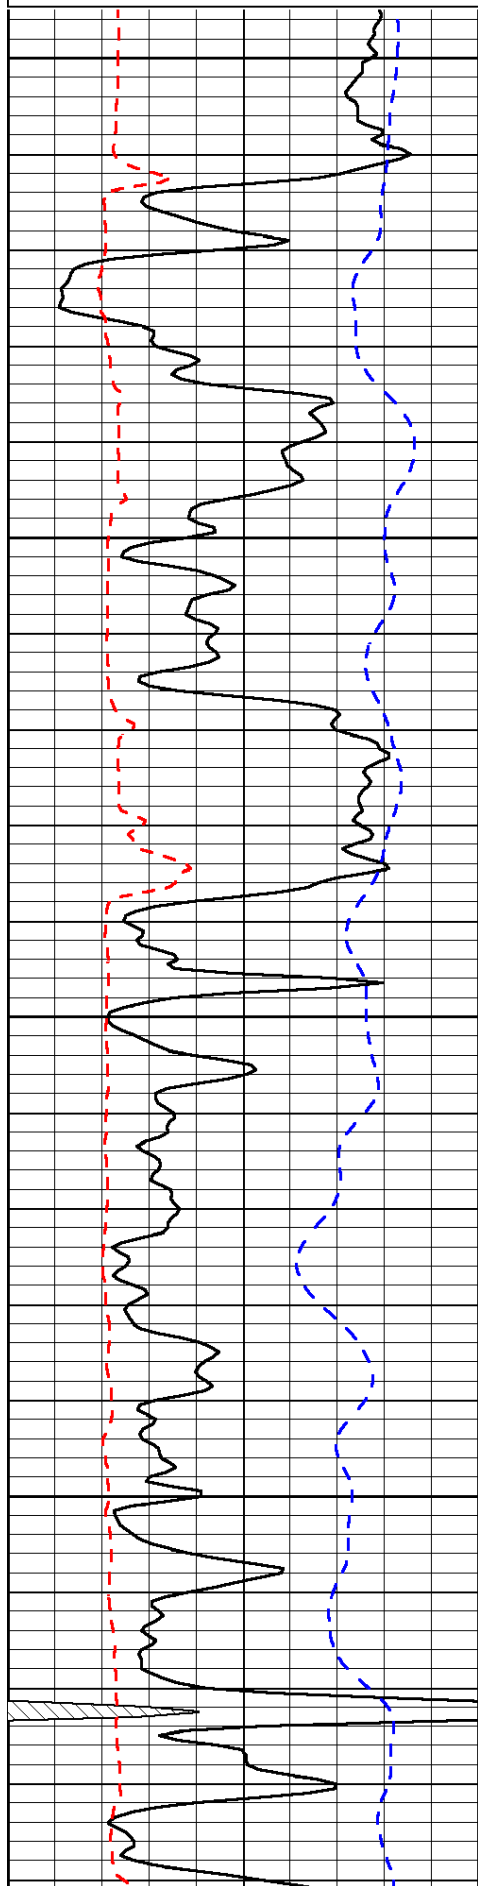


2750

2800

2850

2900

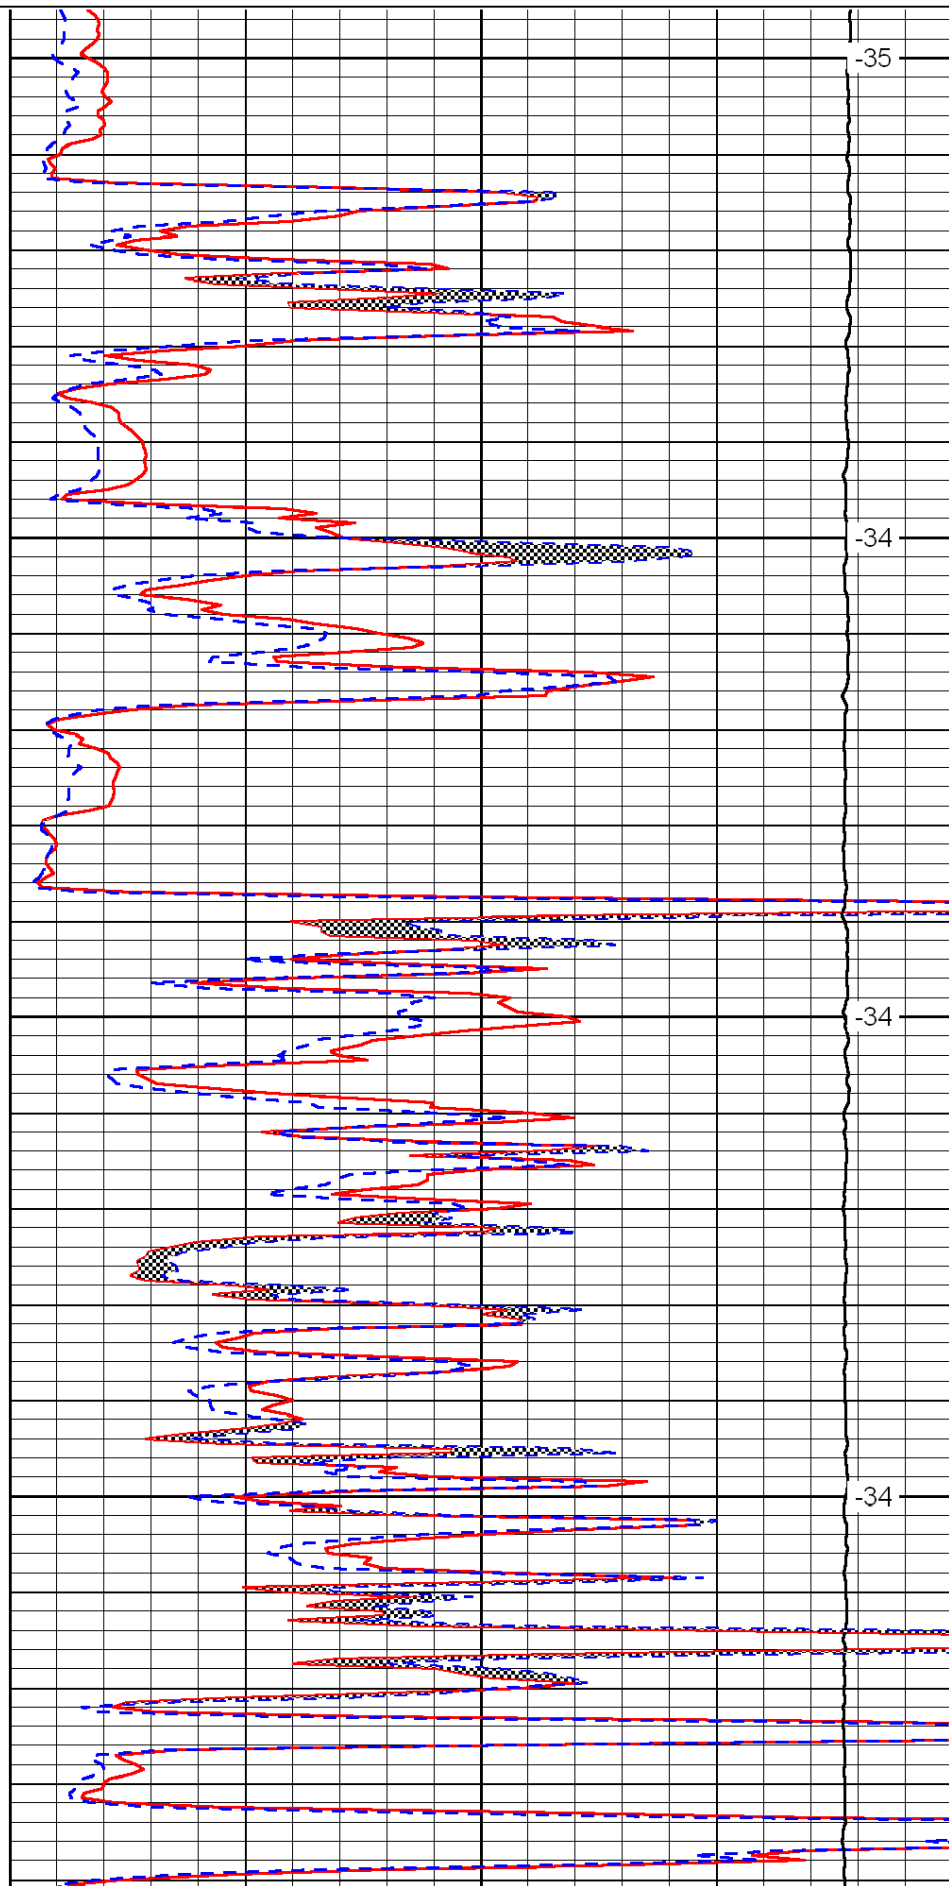


LSPD

-35

-34

-34

-34

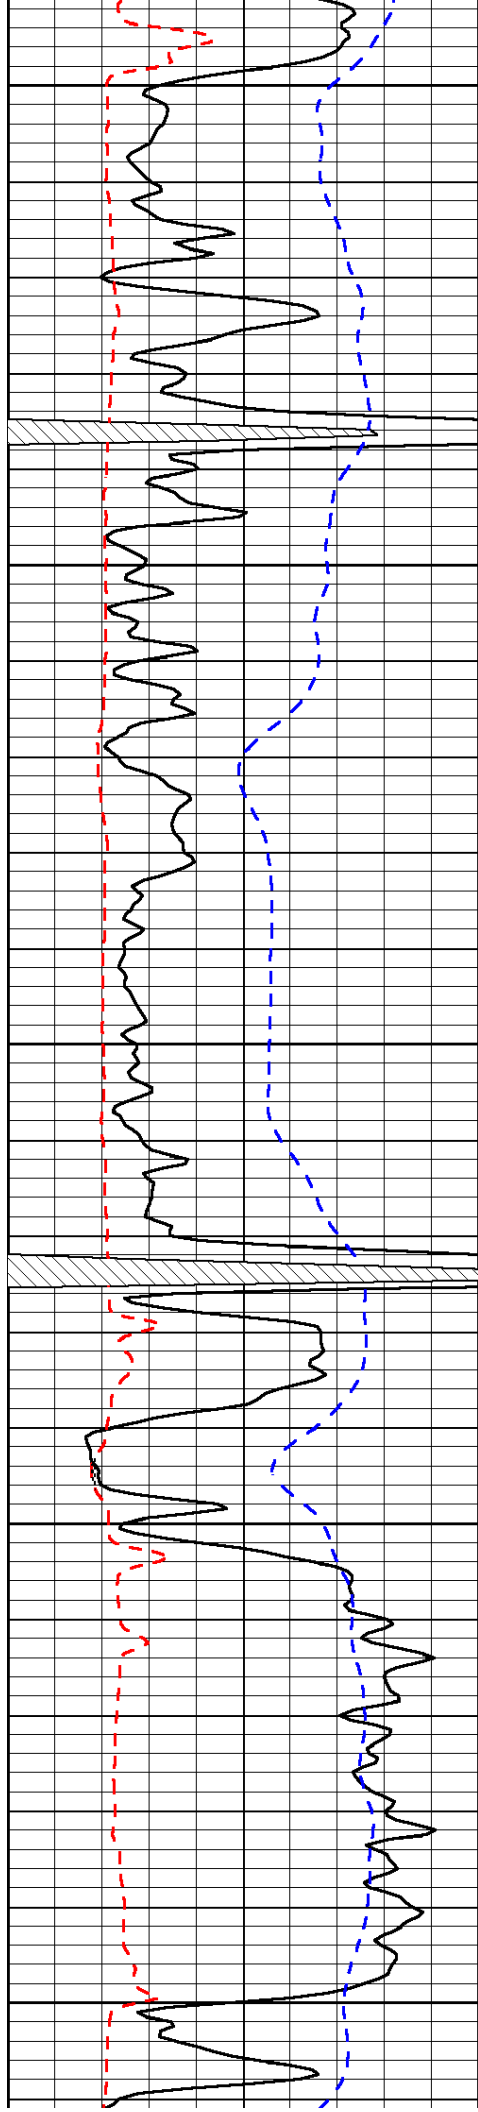


2950

3000

3050

3100

3150

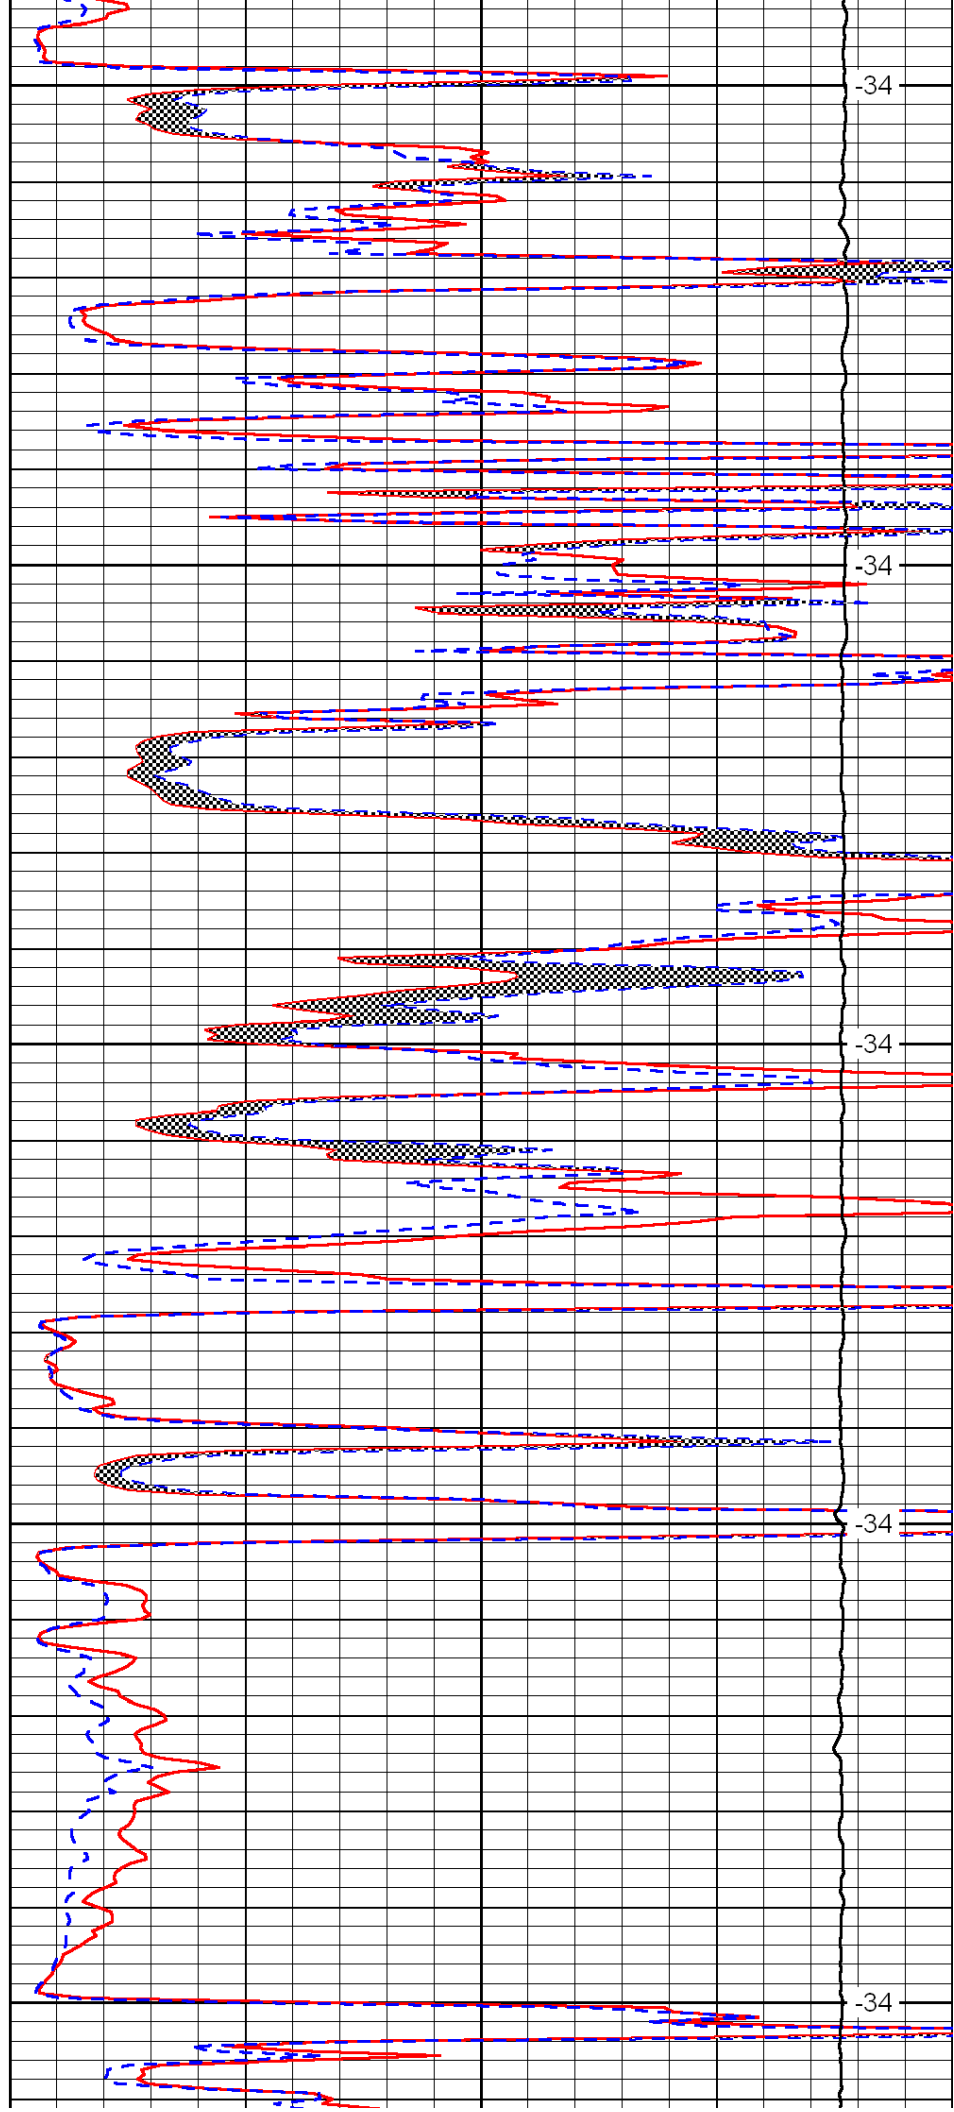


-34

-34

-34

-34

-34

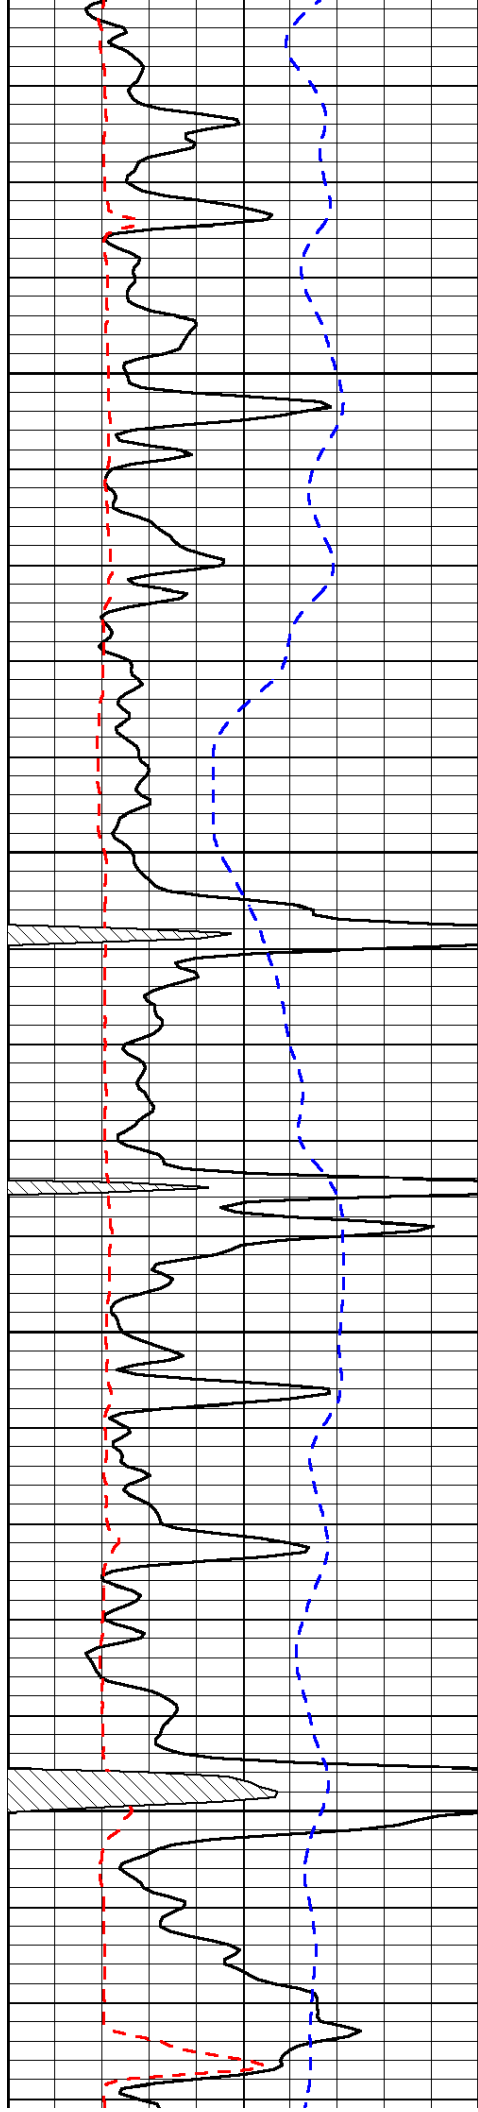



3200

3250

3300


3350

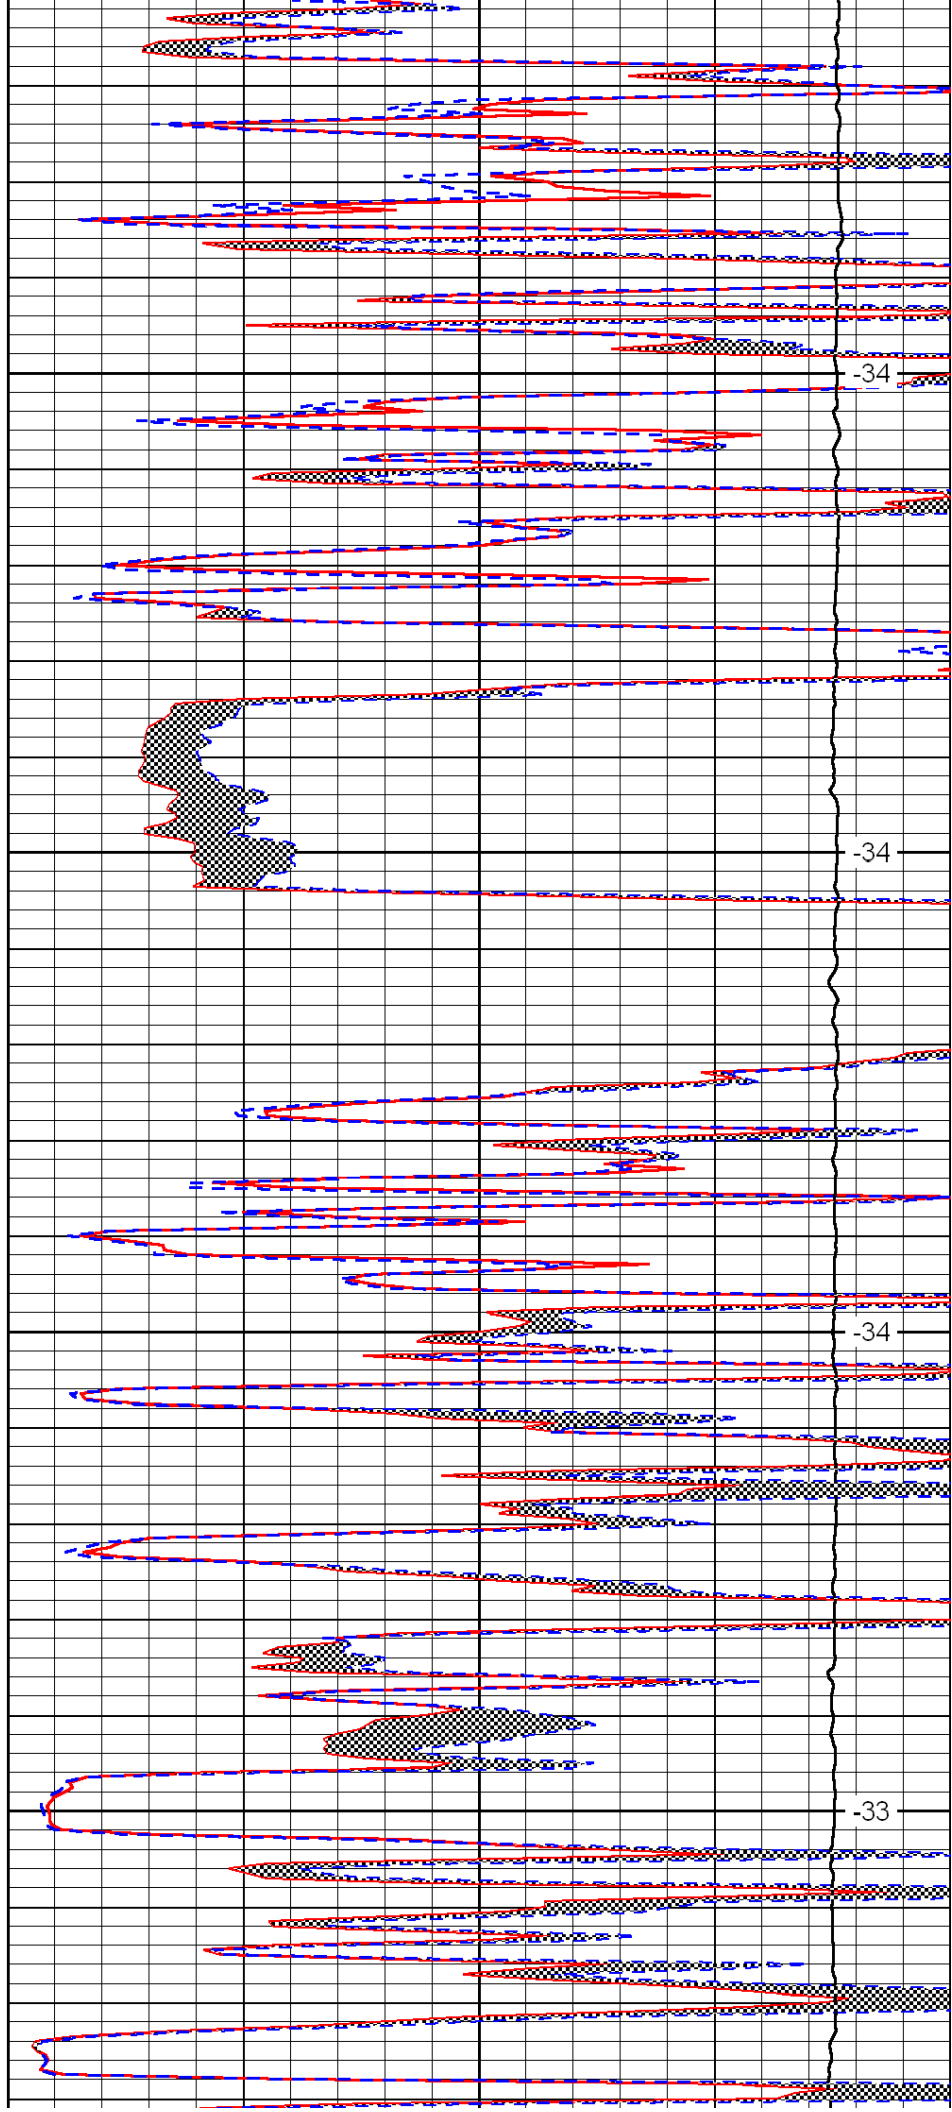

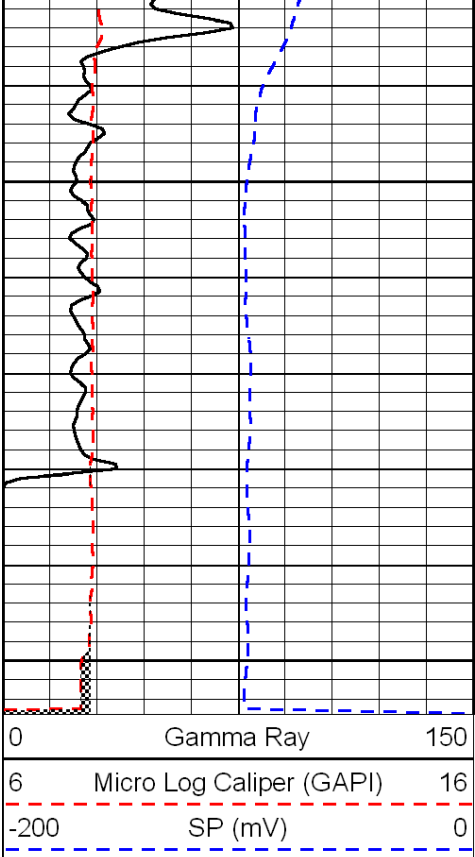

3400

3450

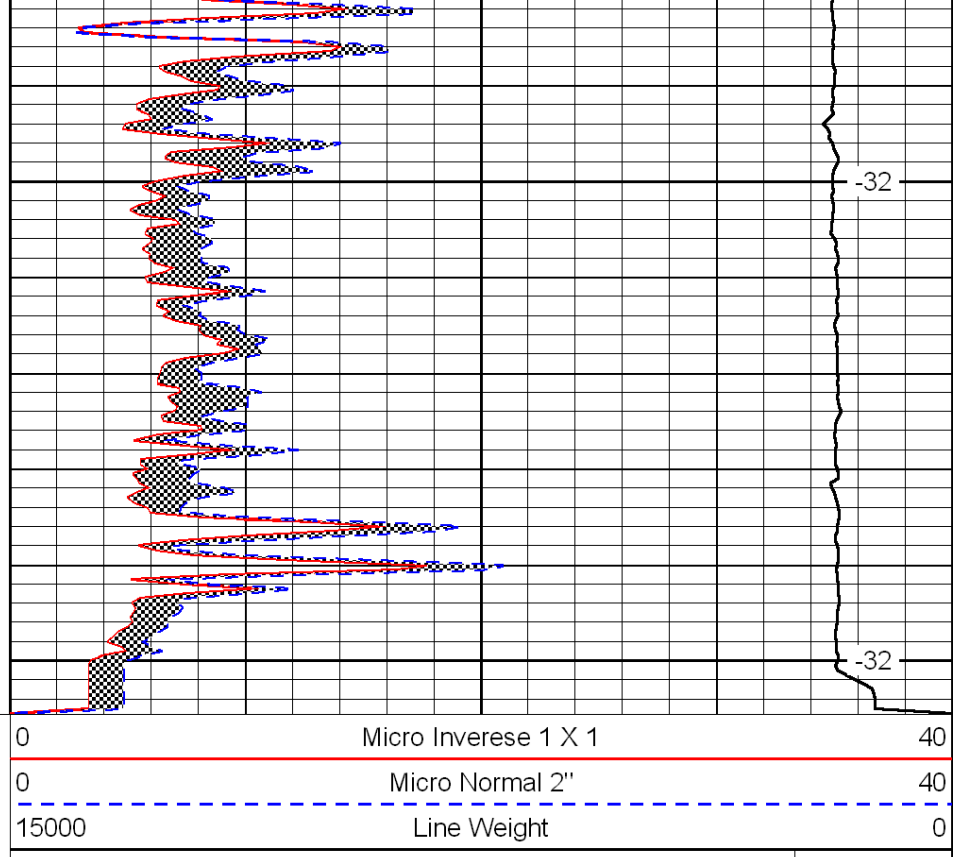

-32

-32

LSPD