

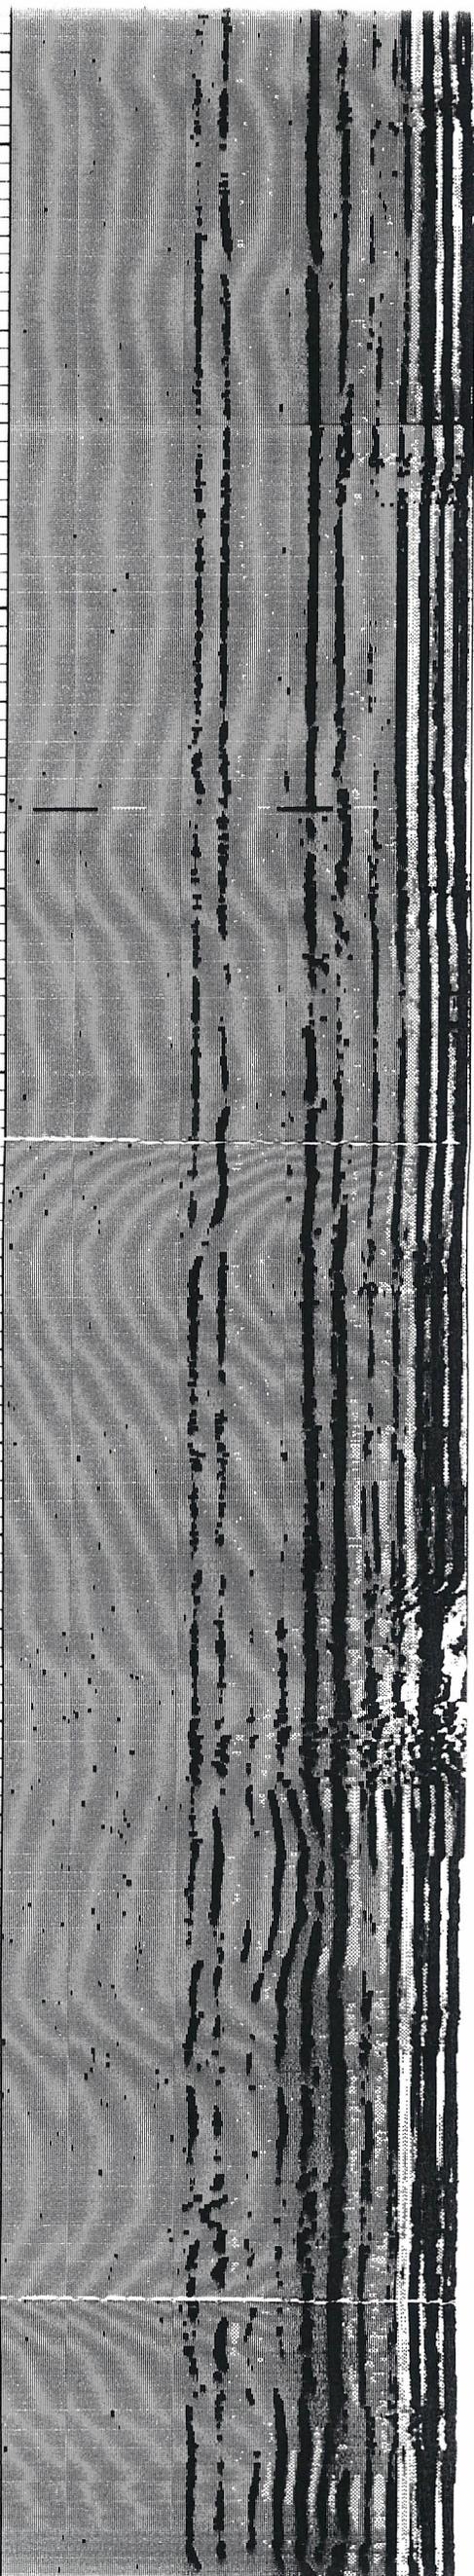


250
300
350
400
450
500

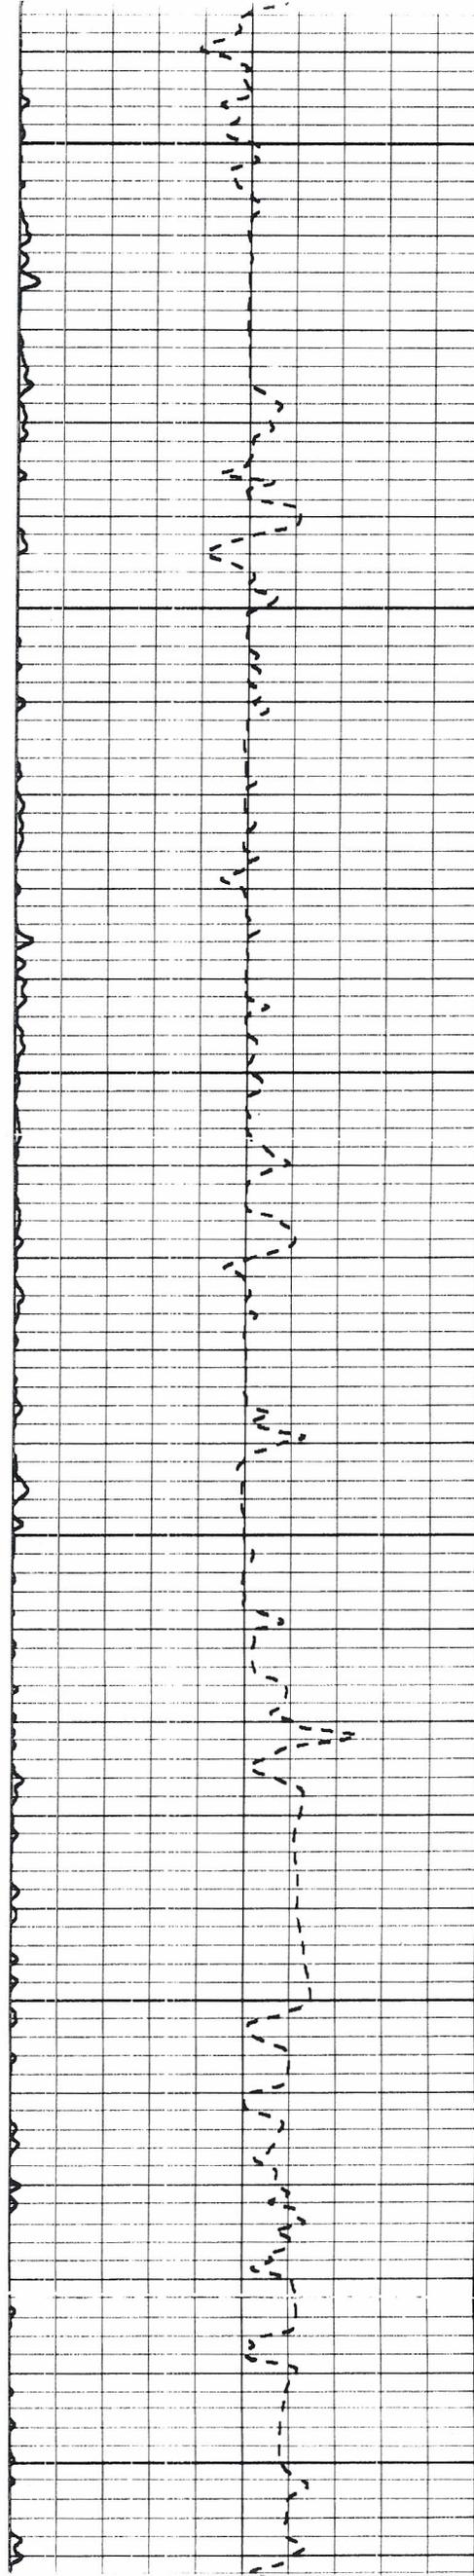

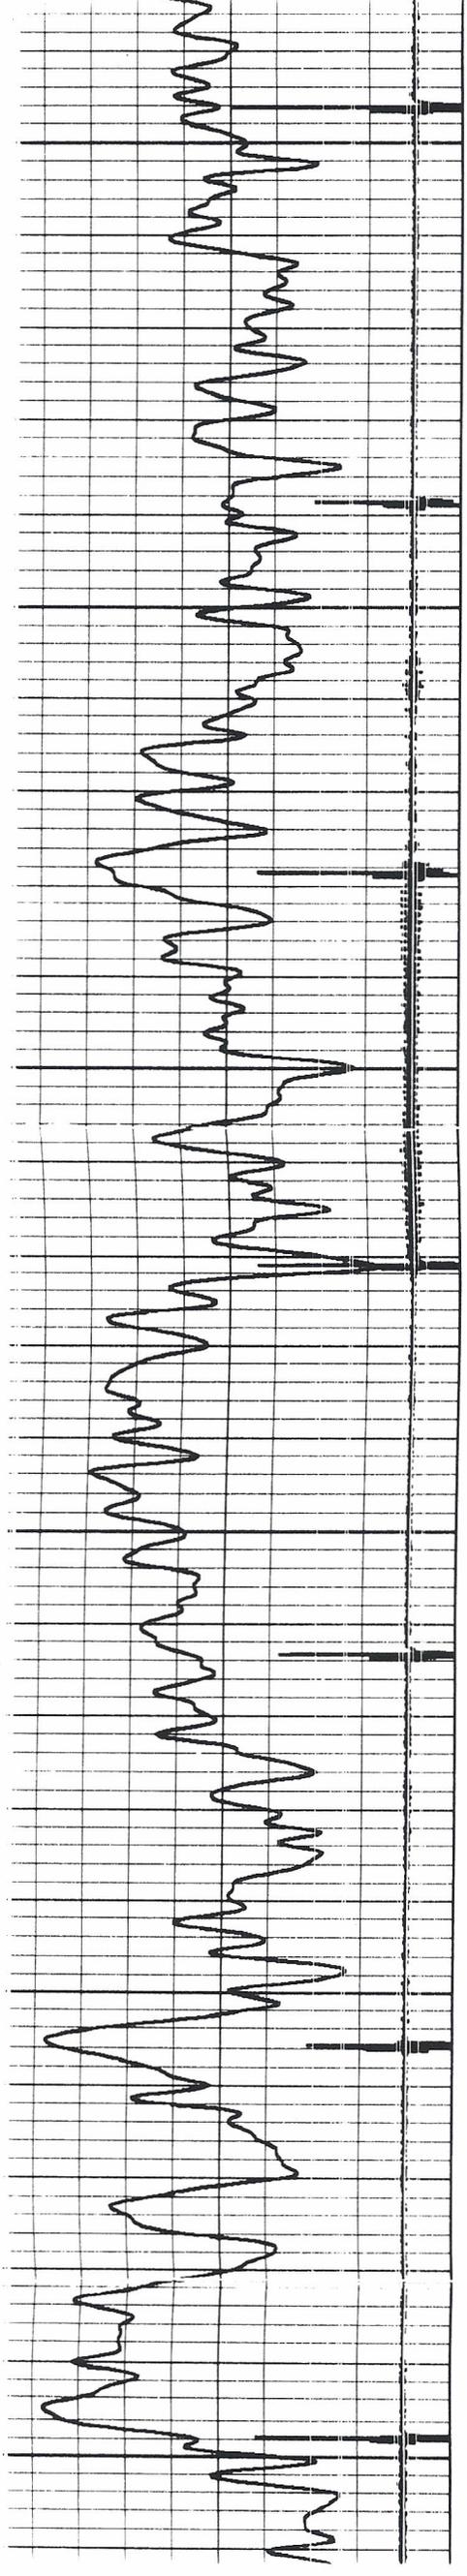

500



550


600

650



700


750

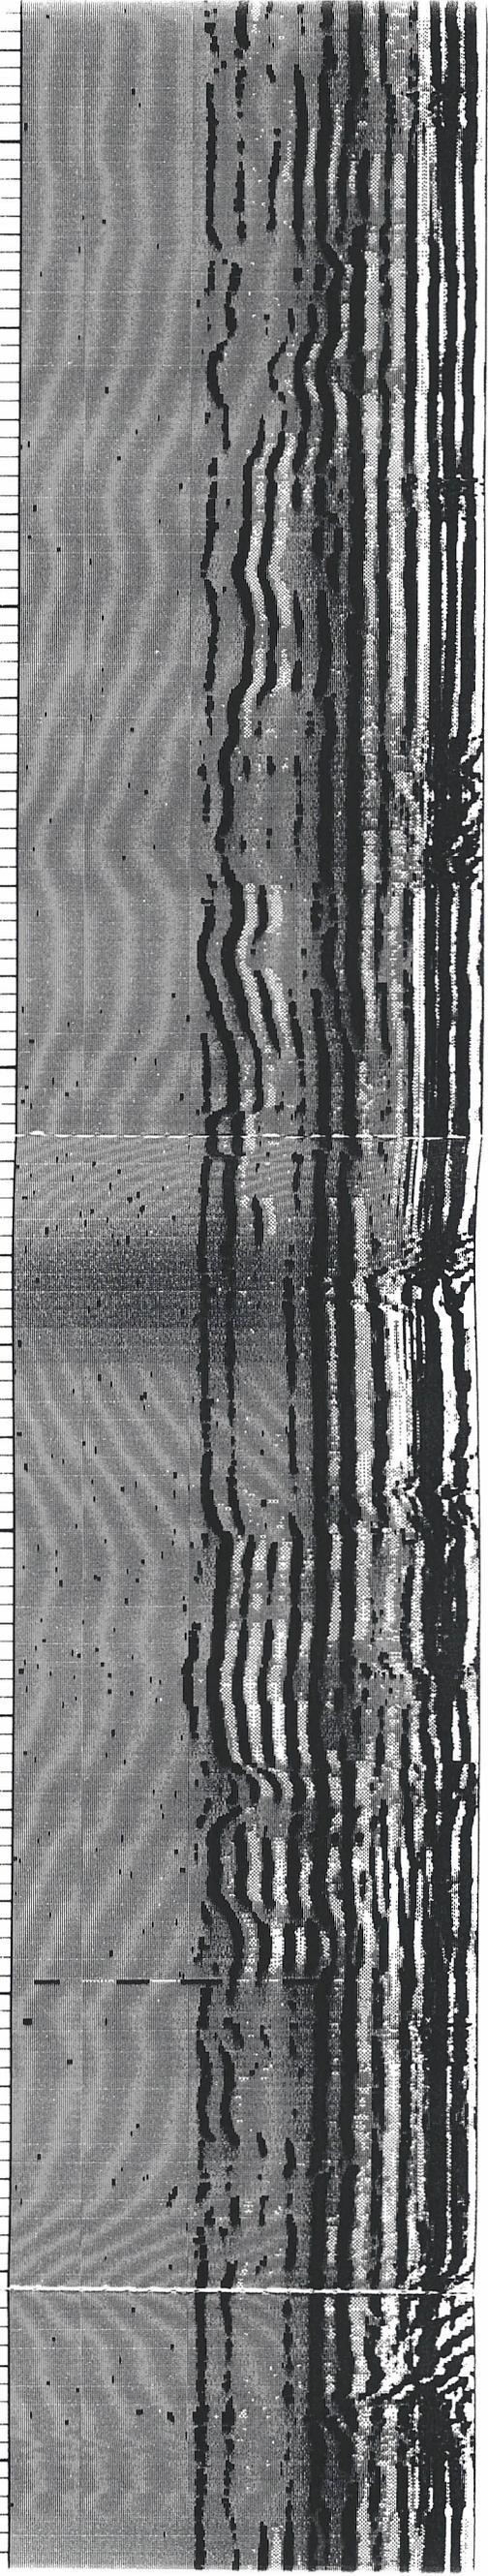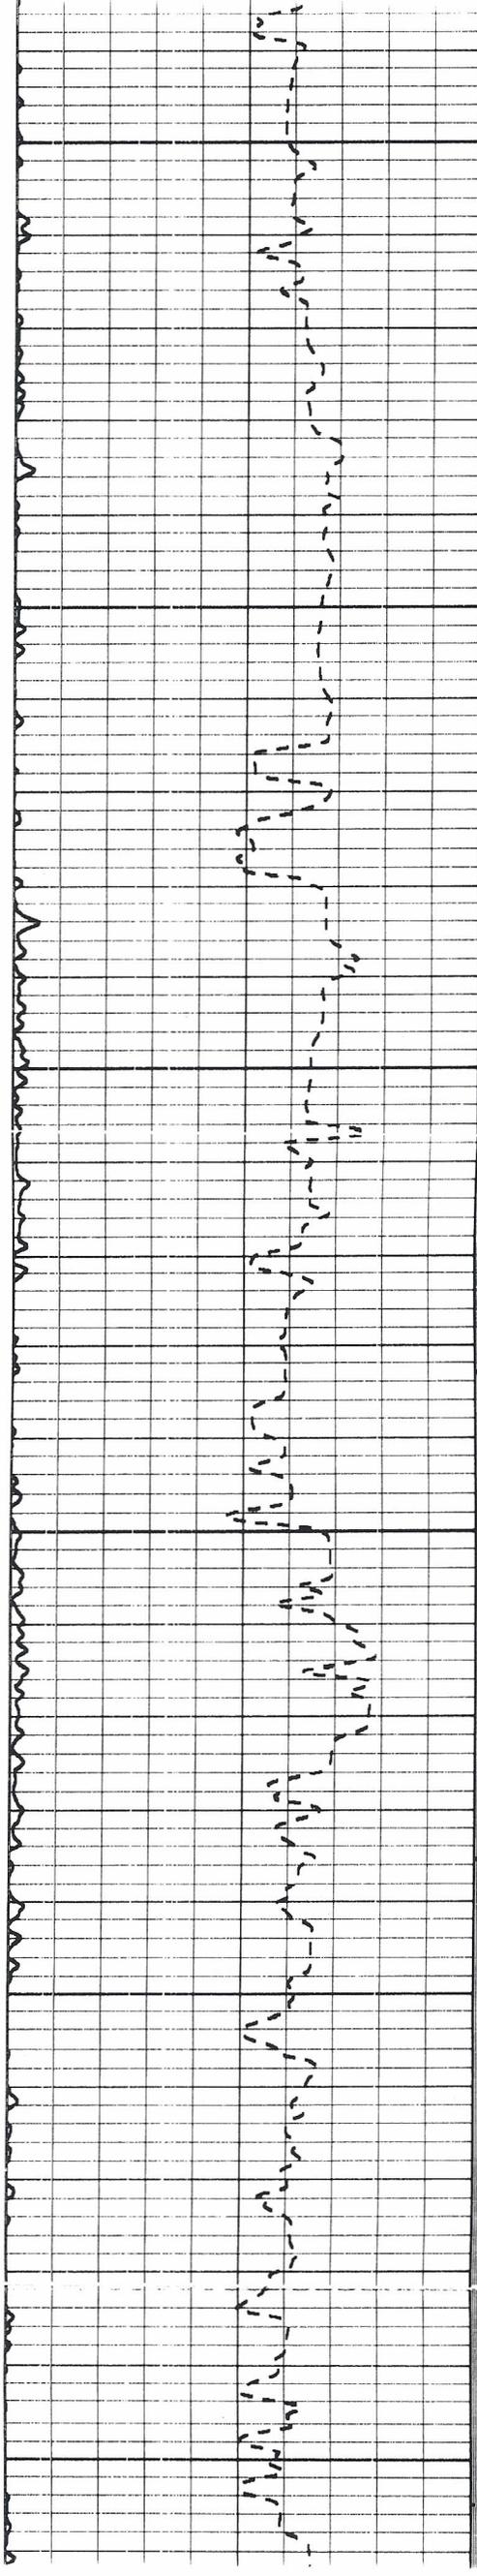

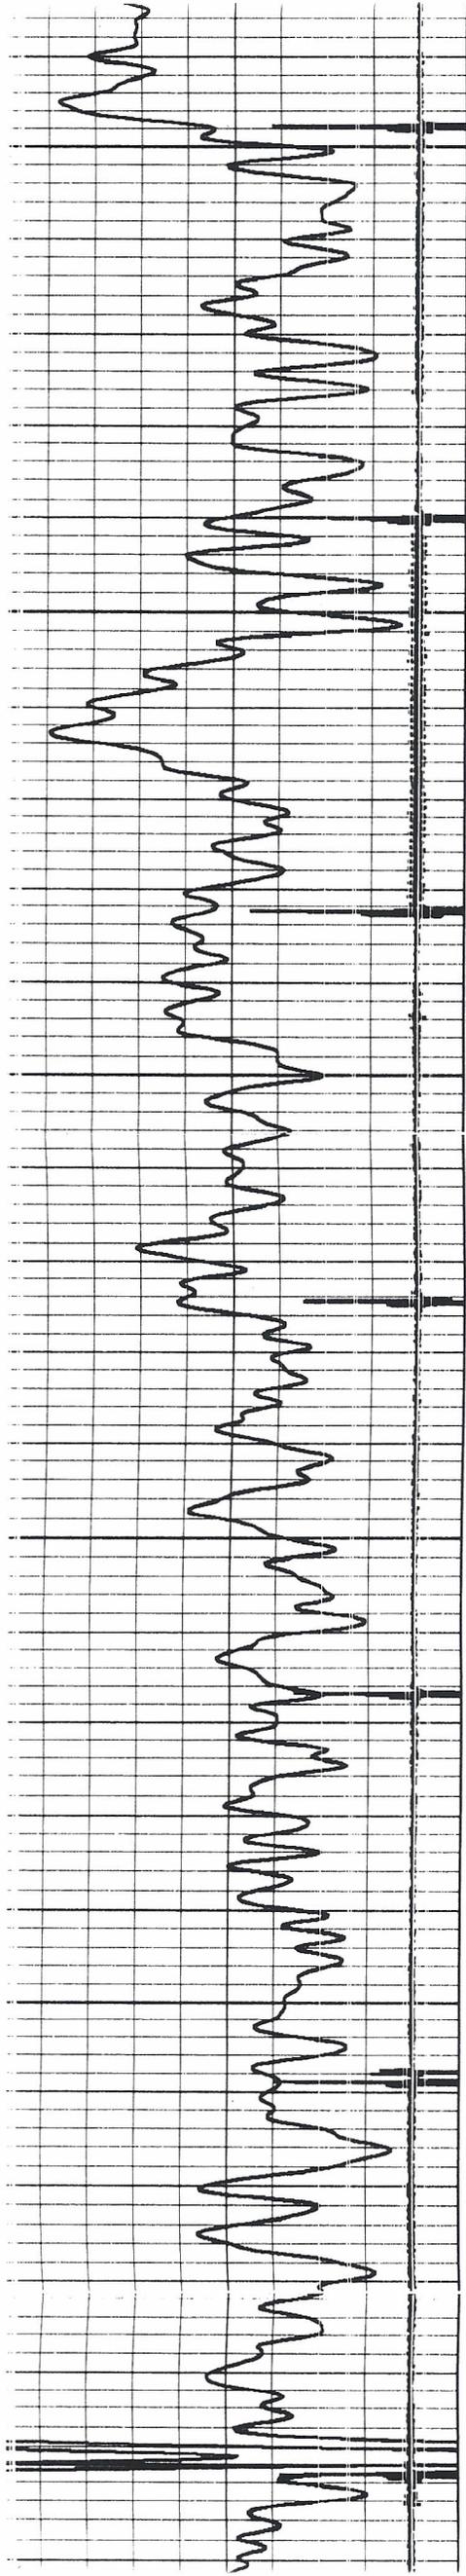

750
800
850
900
950
1000

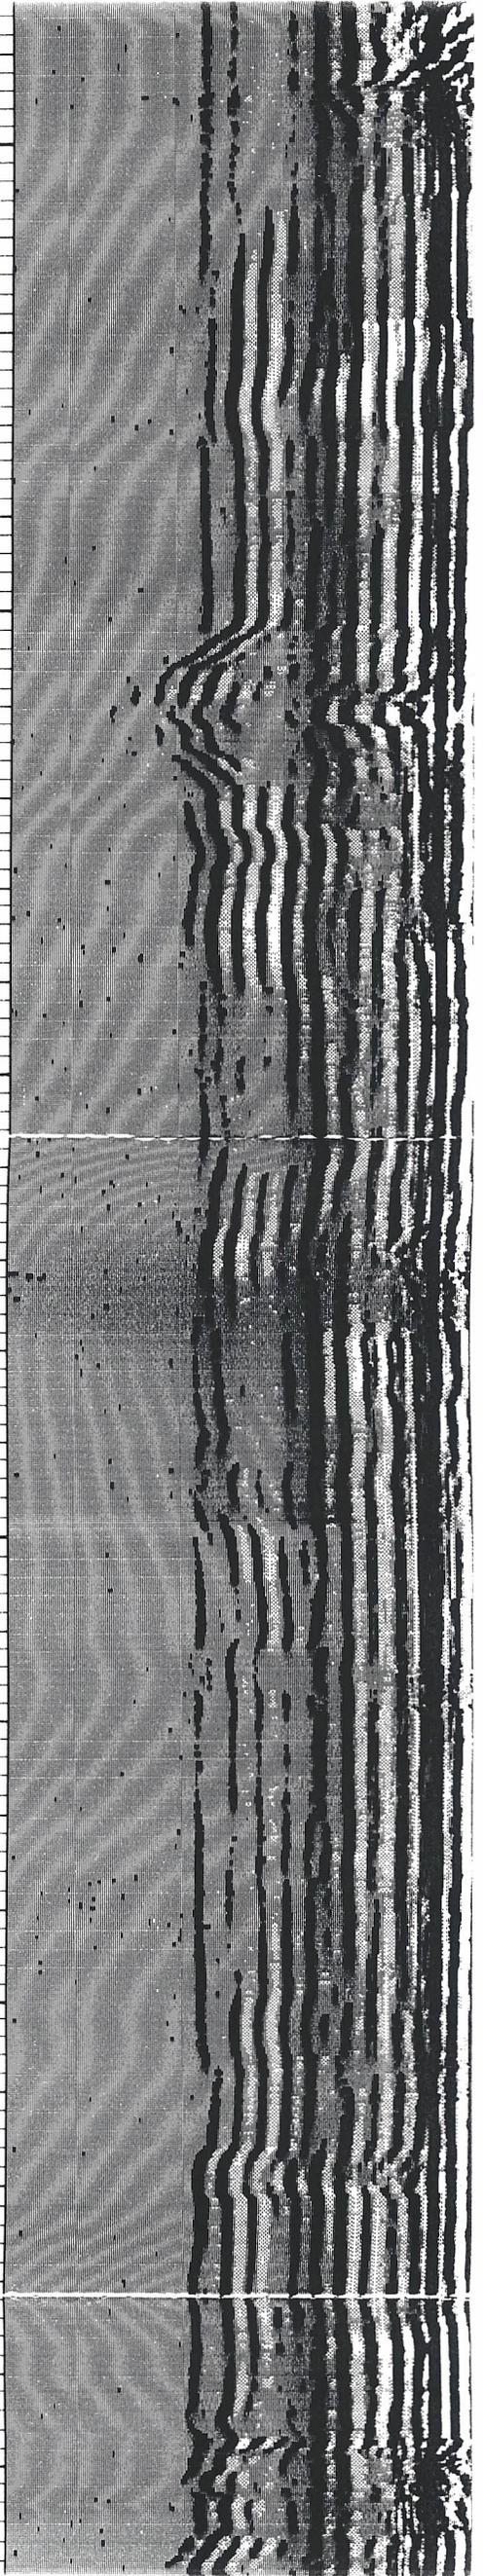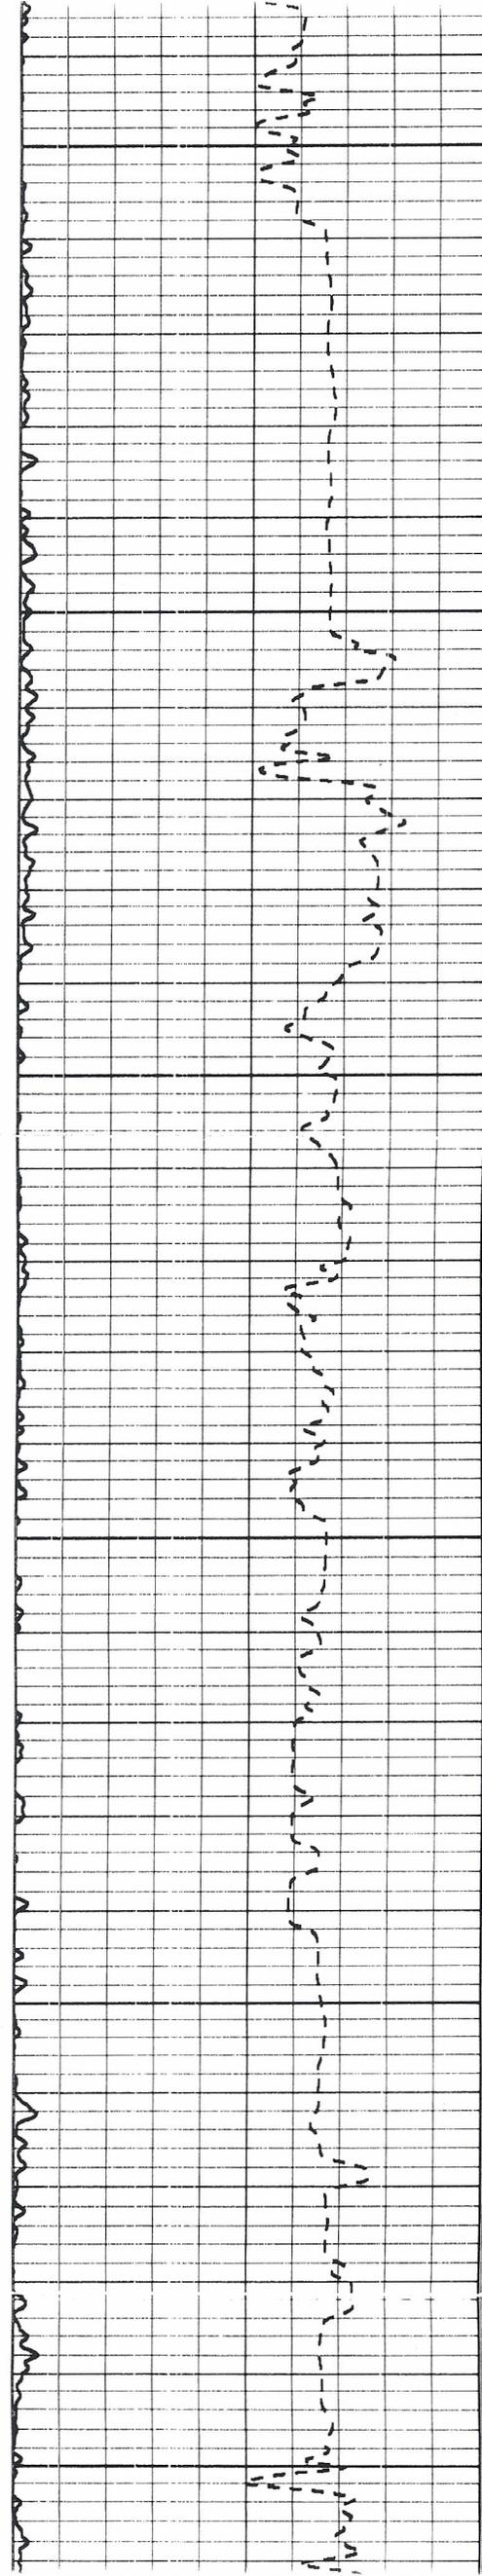


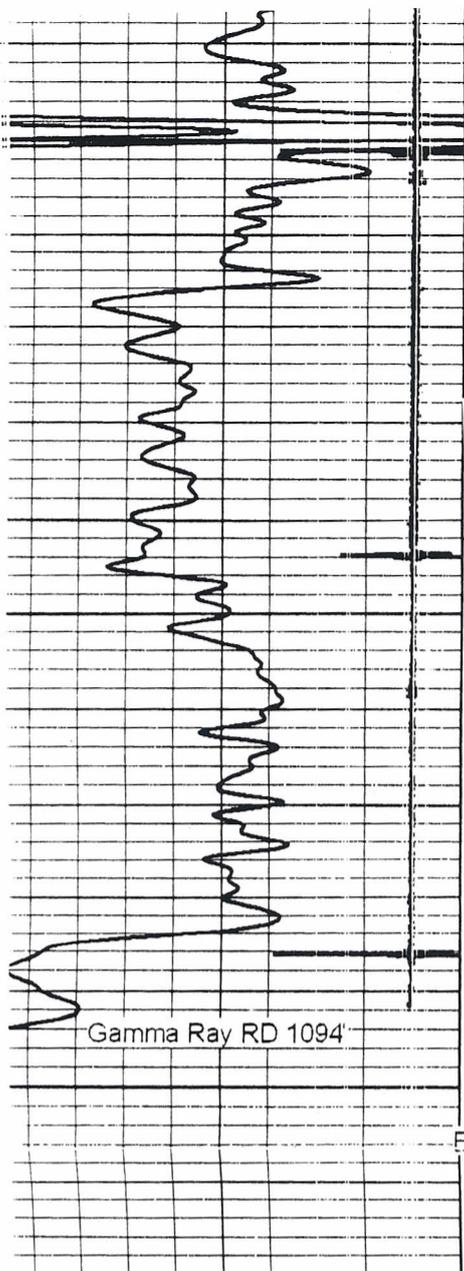


1000

1050

1100

BP # KEC 6-6A

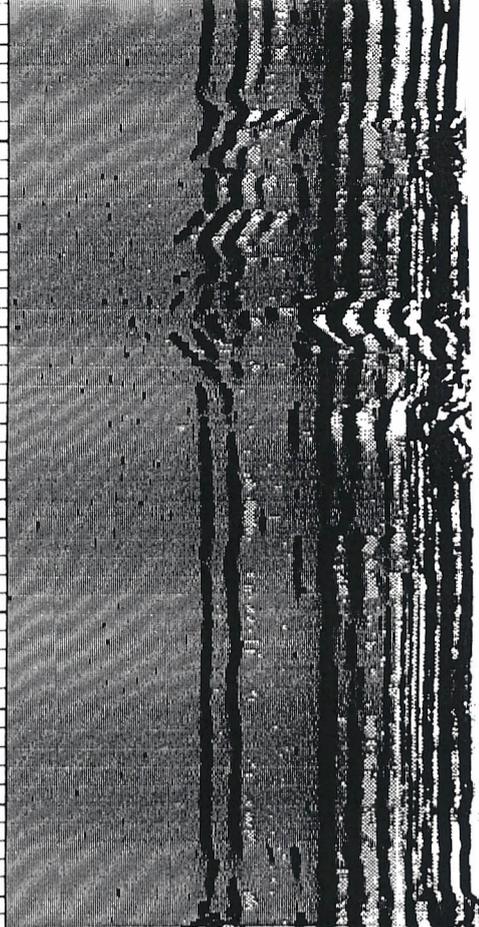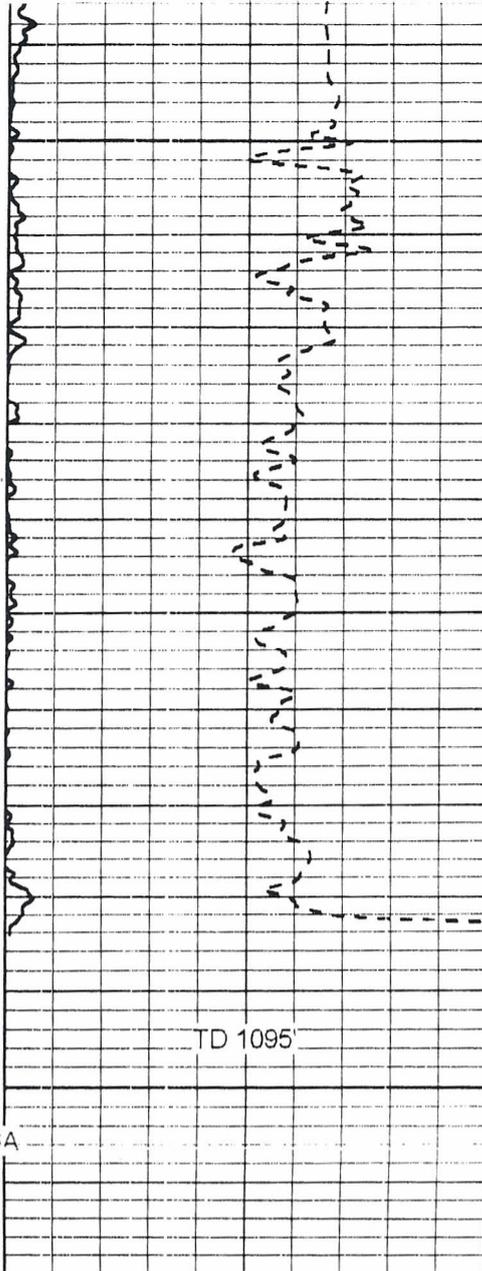

CBL RD 1083'

| | | | | | | | |
|-------------------------|----|------|--------------------|-----|-----|------------------|------|
| Collar Locator | -1 | -1 | Amplitude (mV) | 100 | 200 | Variable Density | 1200 |
| Gamma Ray (GAPI) (GAPI) | 60 | 1000 | Travel Time (usec) | 250 | | | |