



SUPERIOR
Hays,
Kansas

**COMPENSATED
DENSITY / NEUTRON
LOG**

Company DEUTSCH OIL COMPANY
Well SCHAFFER TRUST #1-6
Field WILDCAT
County HODGEMAN
State KANSAS

Company DEUTSCH OIL COMPANY
Well SCHAFFER TRUST #1-6
Field WILDCAT
County HODGEMAN State KANSAS

Location: API # : 15-083-21766-0000
450' FNL & 1220' FWL
SEC 6 TWP 24S RGE 23W
Permanent Datum GROUND LEVEL Elevation 2460
Log Measured From KELLY BUSHING 10' A.G.L.
Drilling Measured From KELLY BUSHING
Other Services
DIL/MEL
SONIC
Elevation
K.B. 2470
D.F. 2468
G.L. 2460

Date	4/25/12		
Run Number	ONE		
Depth Driller	4900		
Depth Logger	4905		
Bottom Logged Interval	4881		
Top Log Interval	3800	2500-2900	
Casing Driller	8 5/8"@264'		
Casing Logger	267		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3,900 PPM	
Density / Viscosity	9.3/47		
pH / Fluid Loss	10.5/9.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.850@80F		
Rmt @ Meas. Temp	.636@80F		
Rmc @ Meas. Temp	1.02@80F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.548@124F		
Time Circulation Stopped	2.5 HOURS		
Time Logger on Bottom	11:00 A.M.		
Maximum Recorded Temperature	124F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	KENT DEUTSCH		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING SUPERIOR WELL SERVICE HAYS, KANSAS (785) 628-6395
DIRECTIONS
JETMORE, KS. (HWY 156 & 283) 6S. ON HWY 283, 1/2E., S. INTO





SUPERIOR
Hays,
Kansas


UPPER SECTION

Database File: 408754ddn.db
 Dataset Pathname: pass3.7
 Presentation Format: den_neu
 Dataset Creation: Wed Apr 25 12:20:06 2012 by Calc Open-Cased 110302
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3)	10		

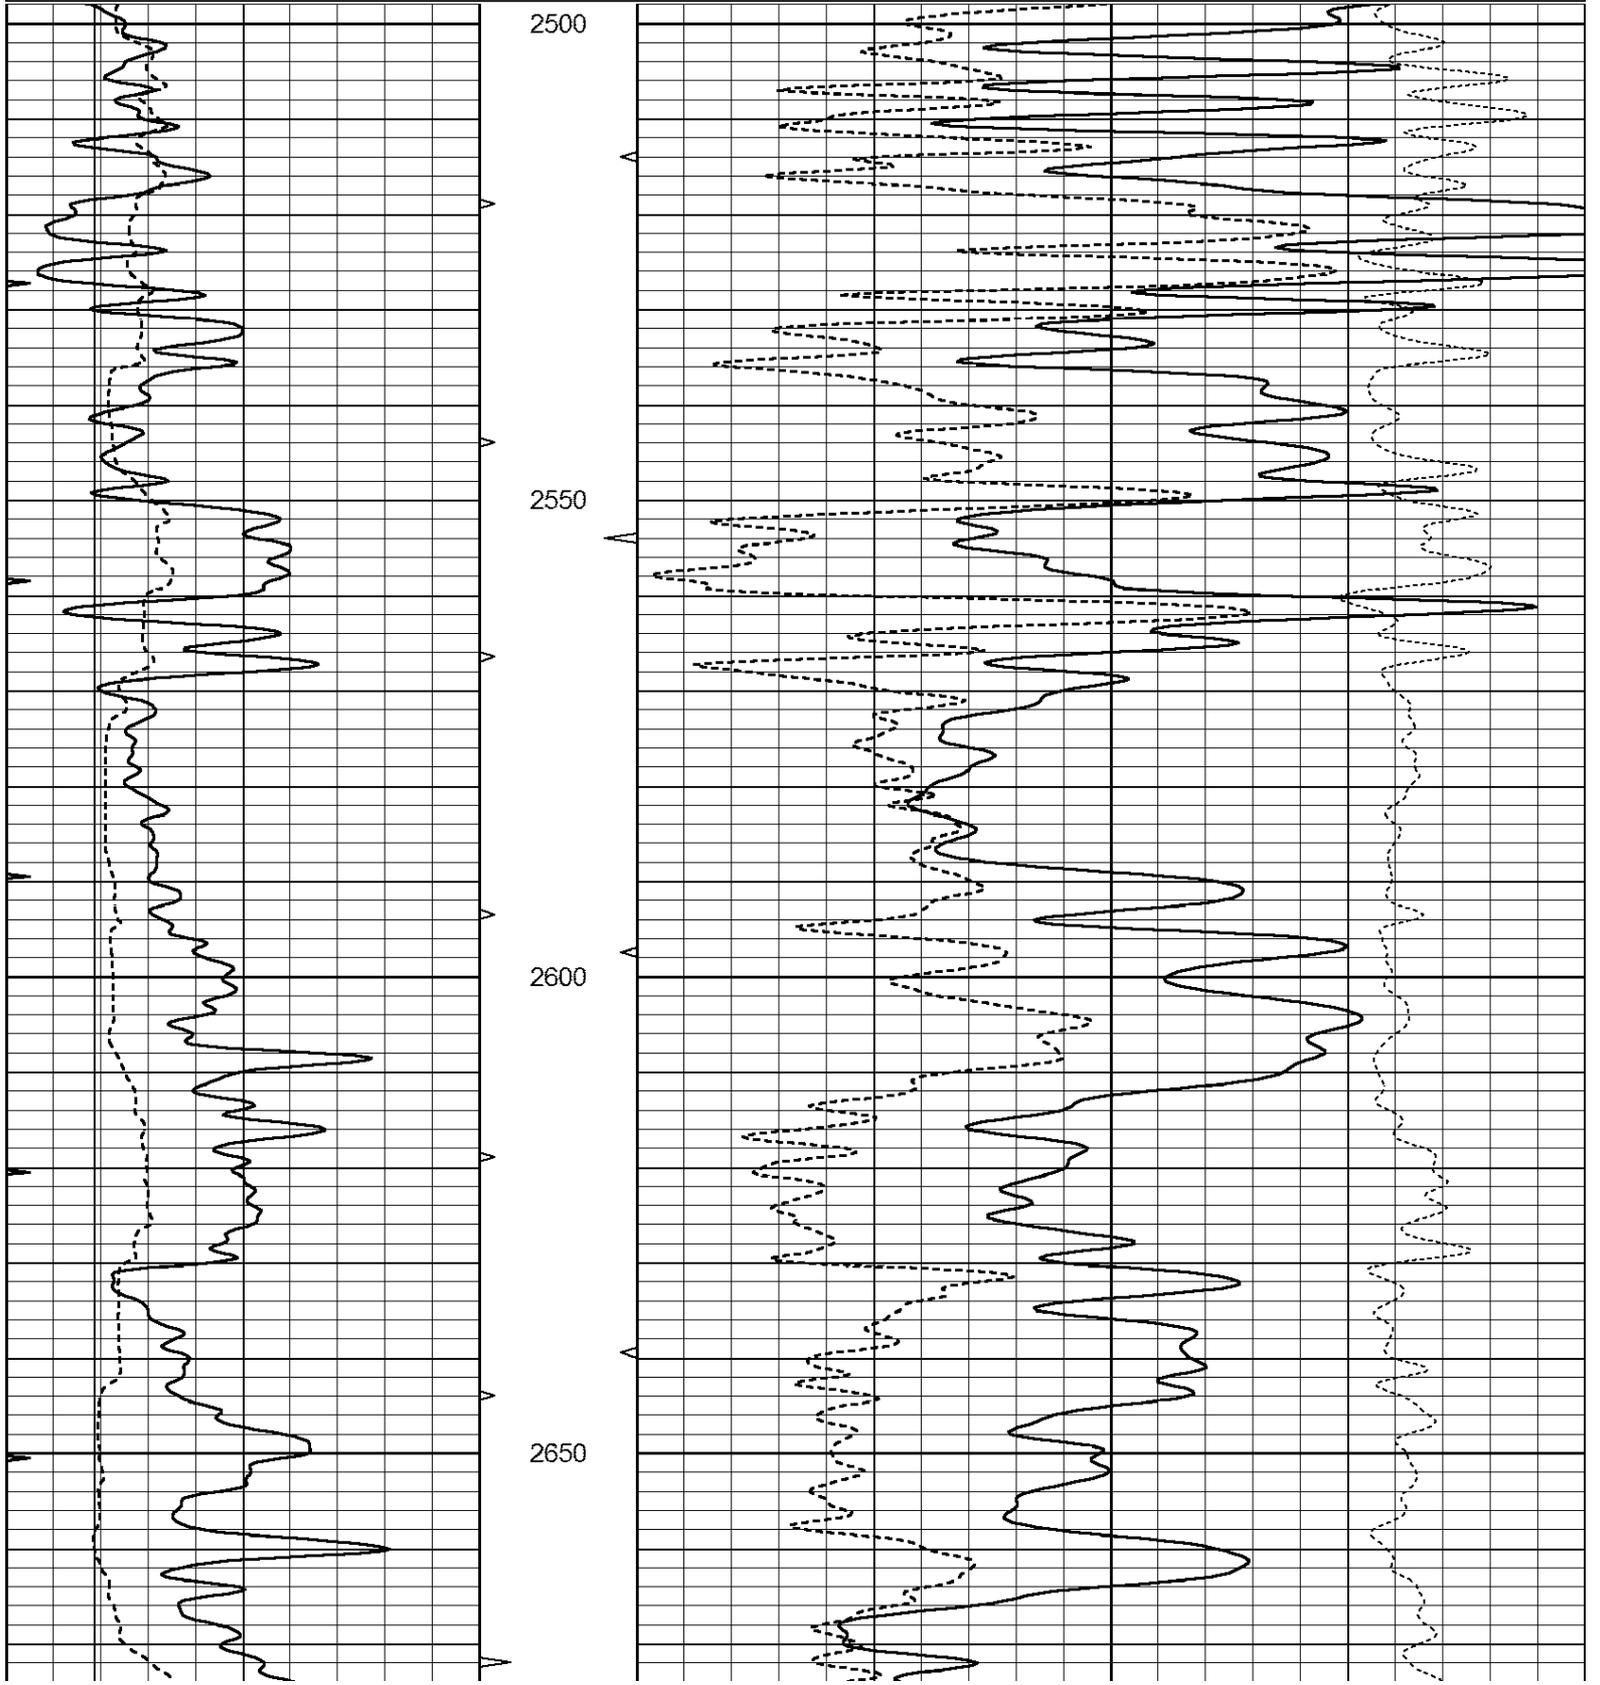


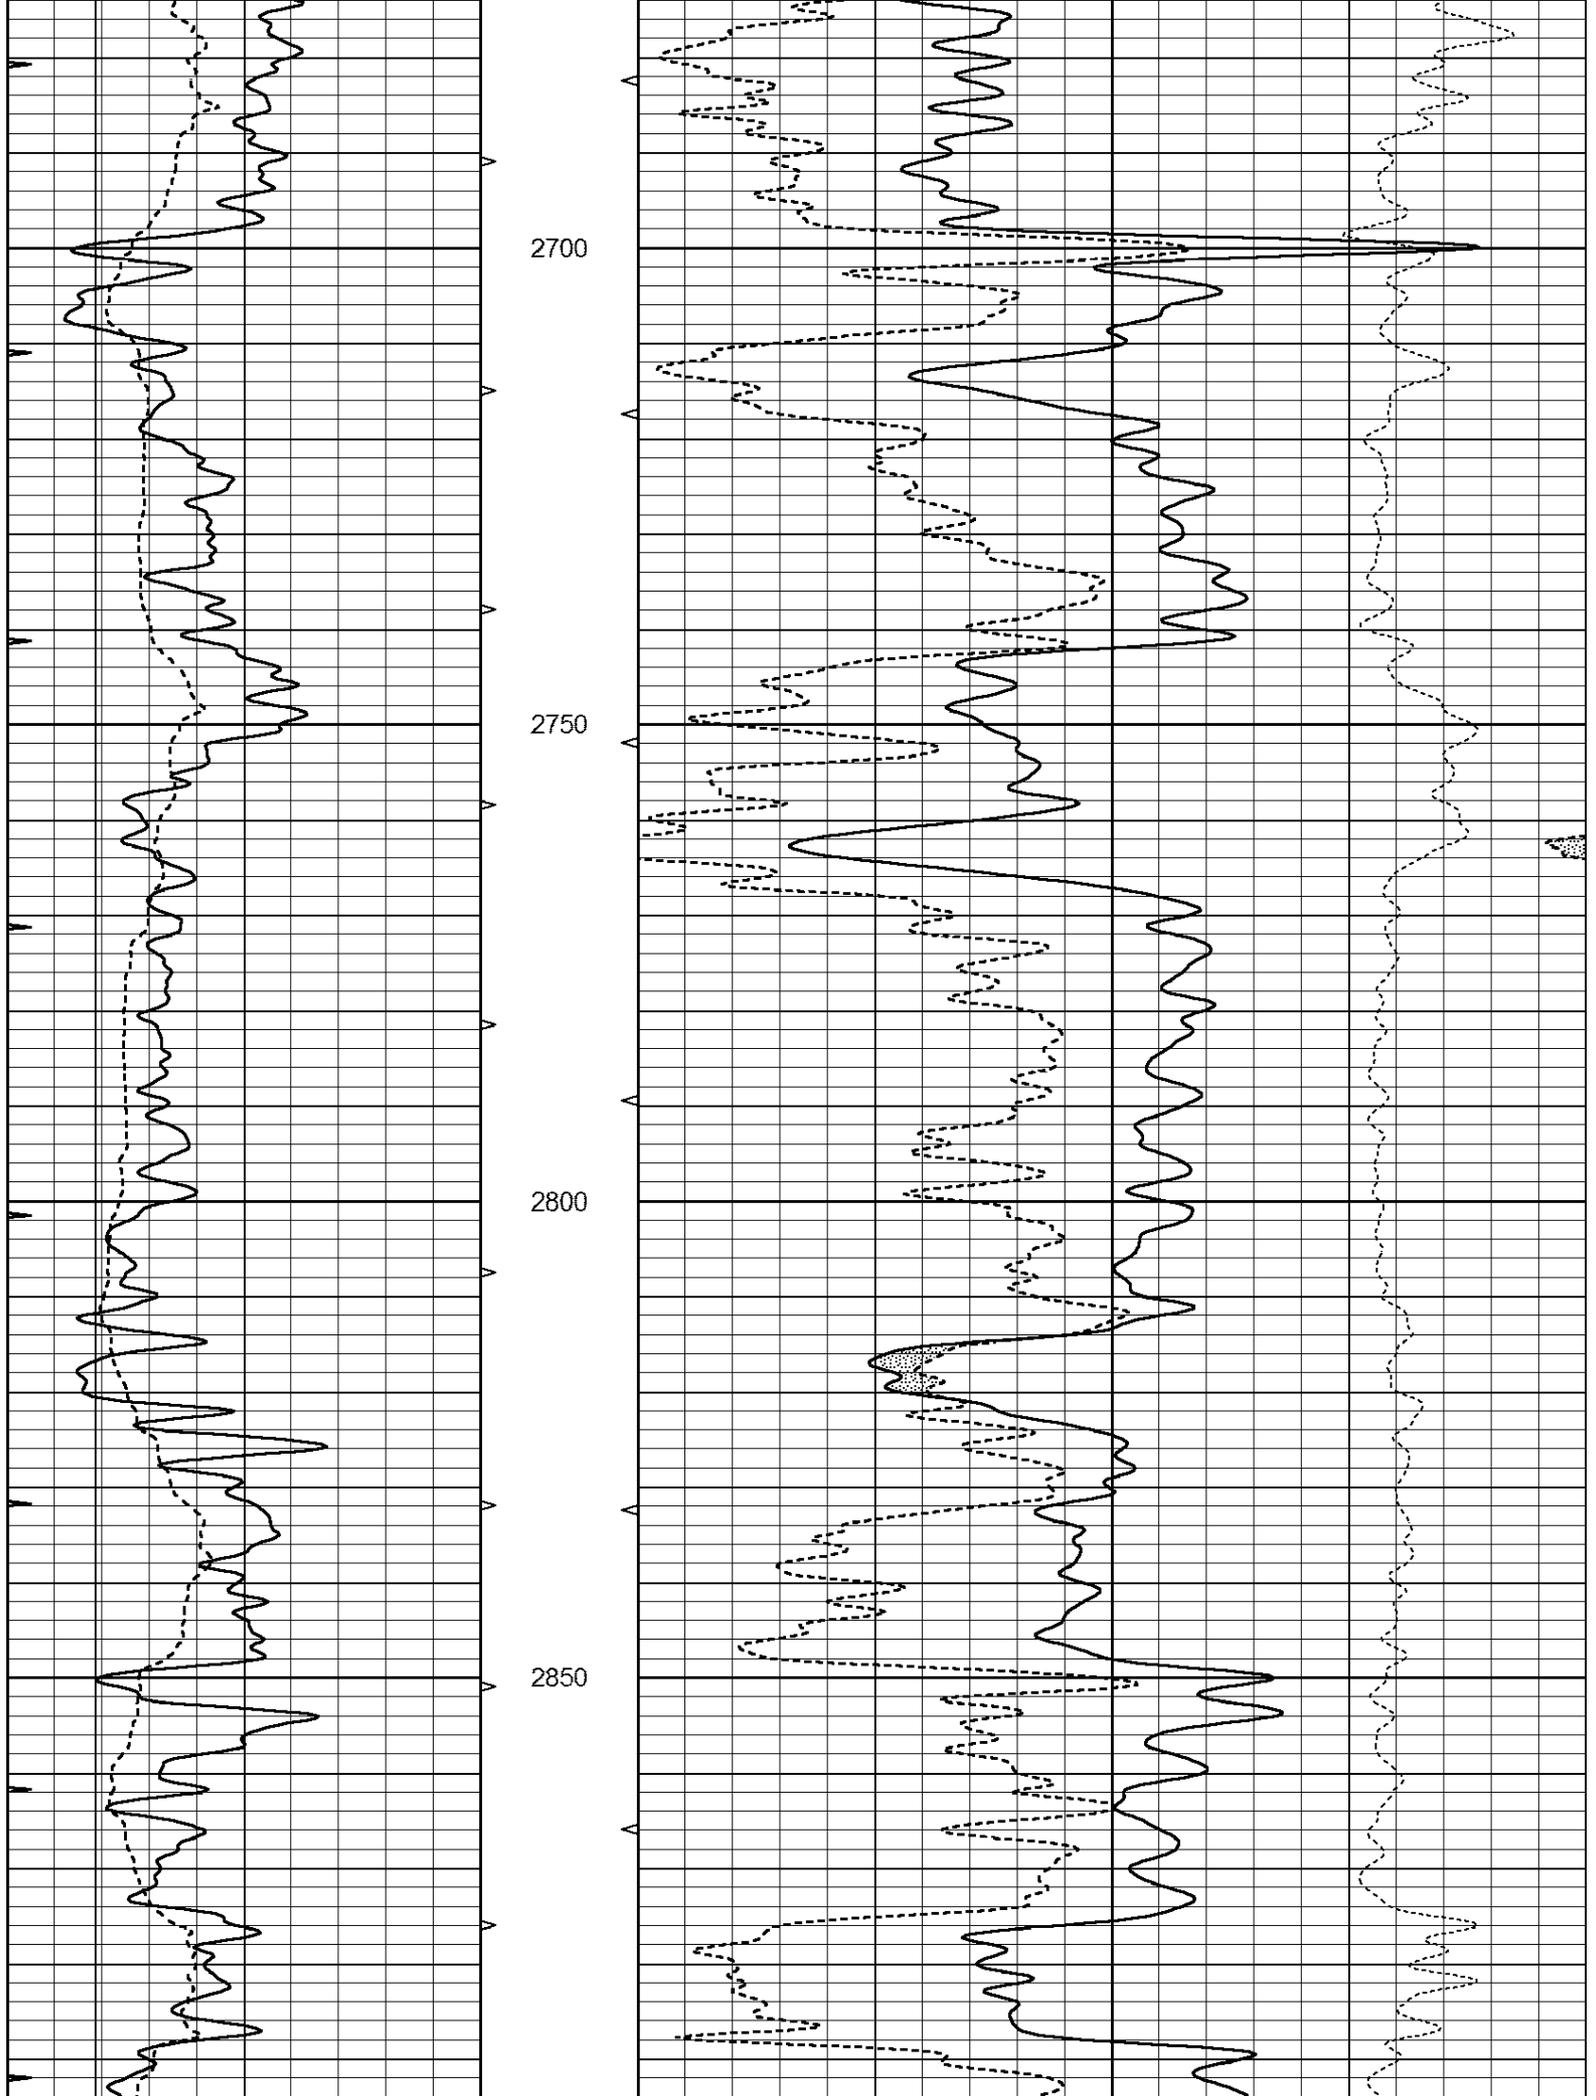


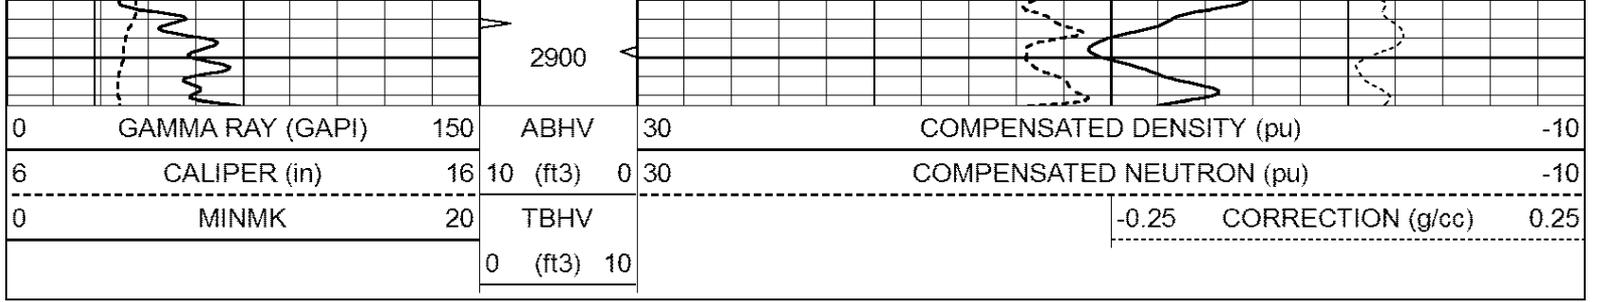



SUPERIOR
Hays,
Kansas


MAIN SECTION


Database File: 408754ddn.db
 Dataset Pathname: pass3.5
 Presentation Format: den_neu
 Dataset Creation: Wed Apr 25 12:01:38 2012 by Calc Open-Cased 110302
 Charted by: Depth in Feet scaled 1:240

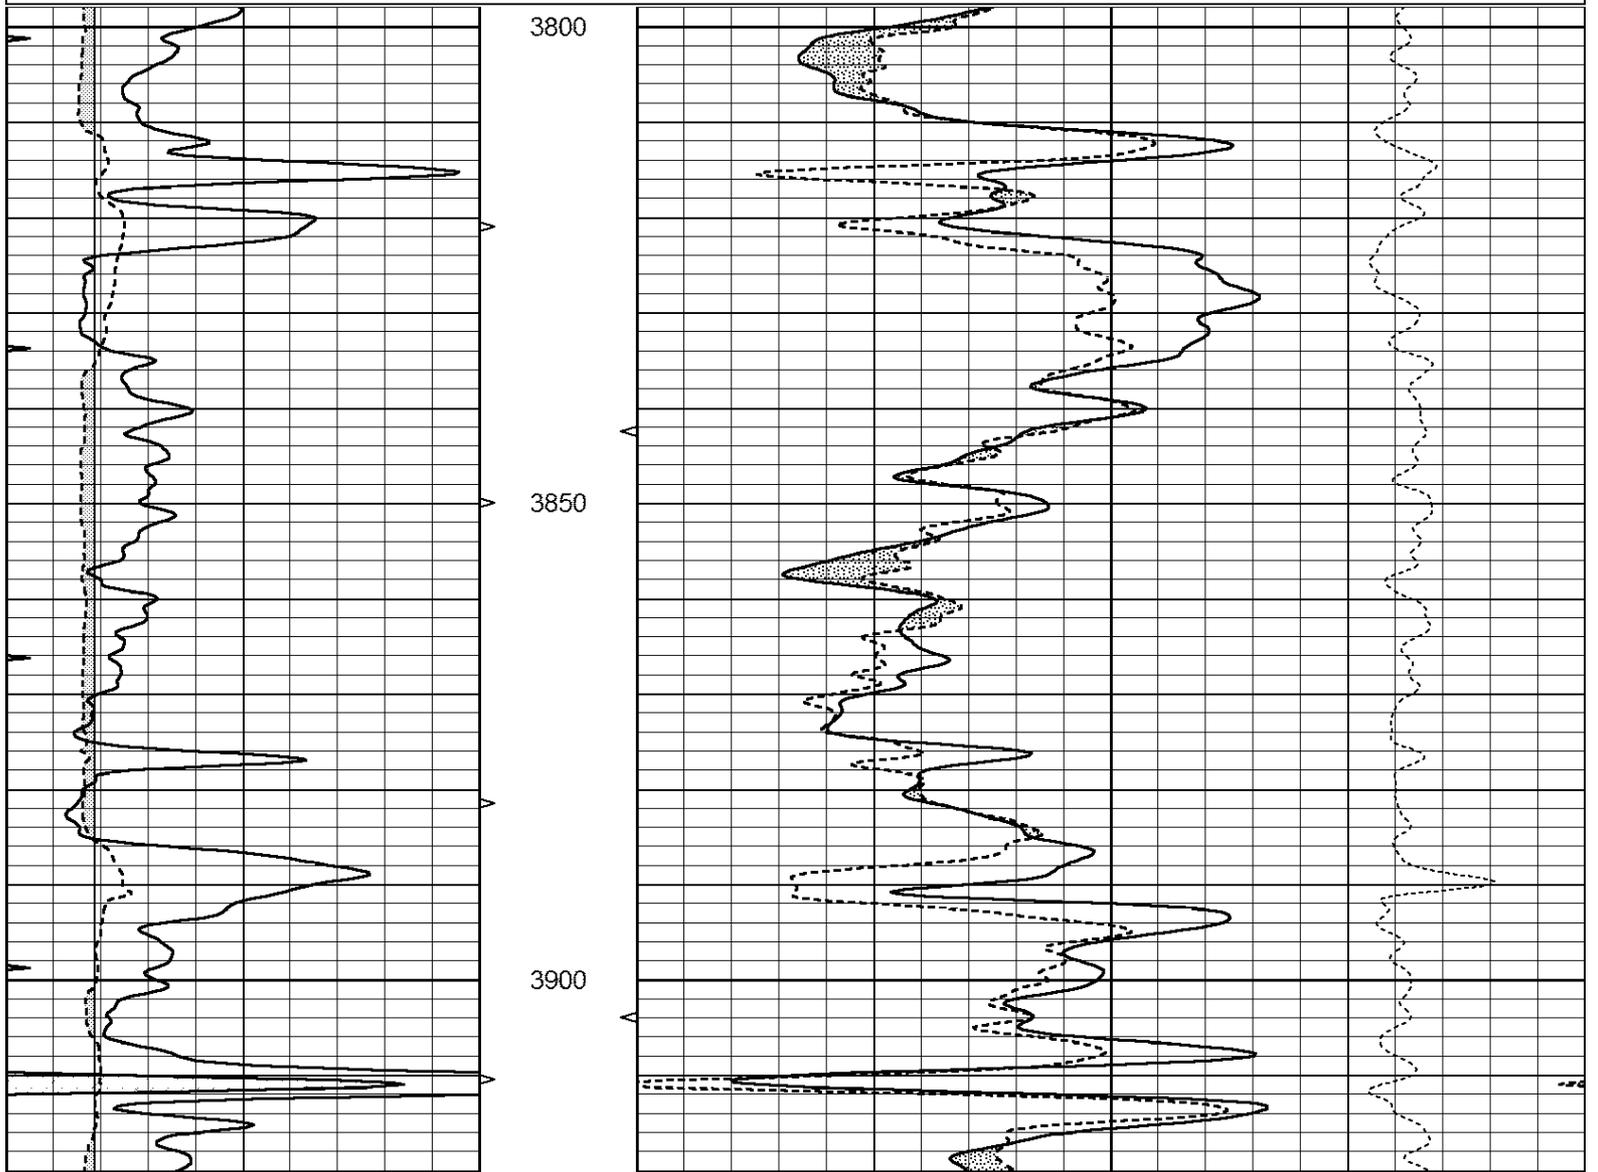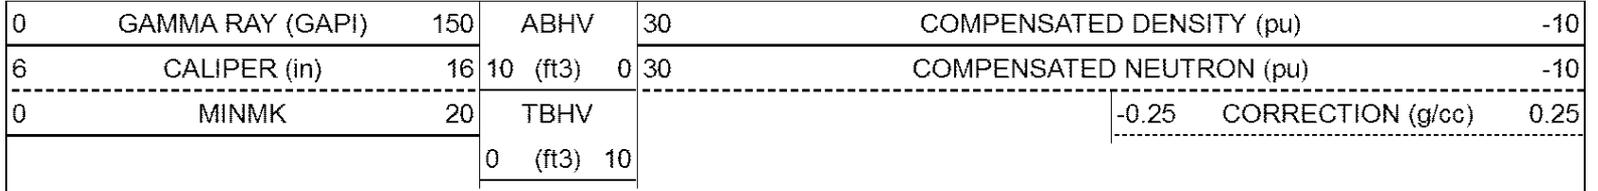


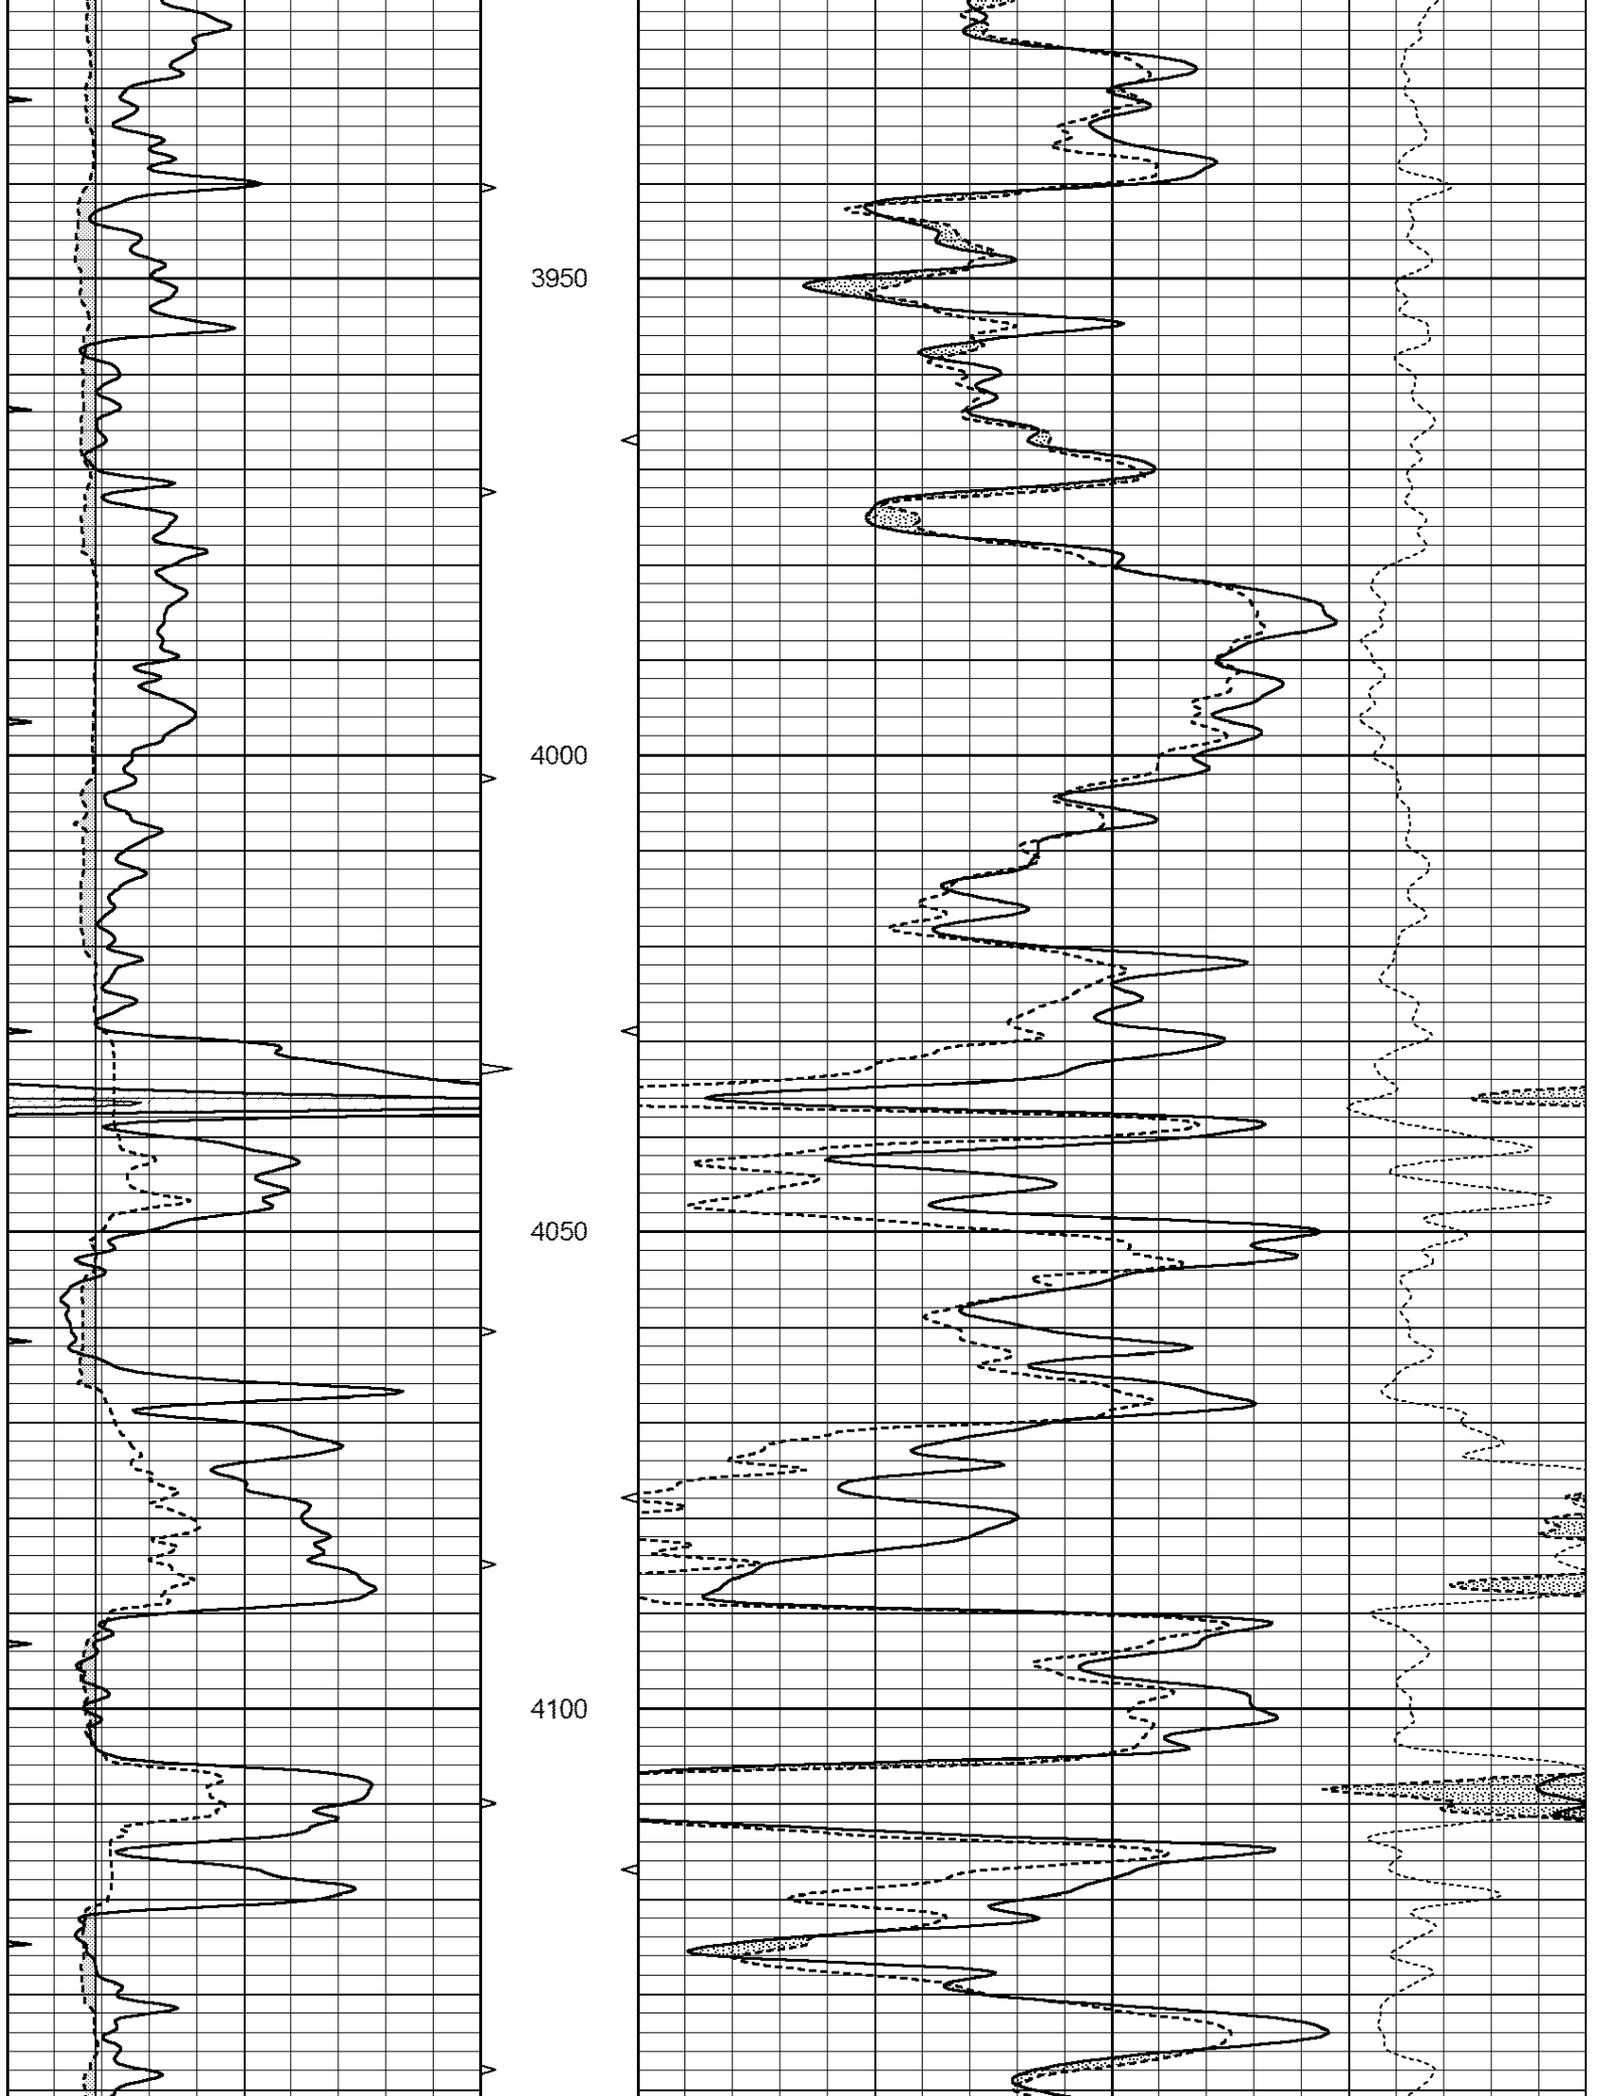

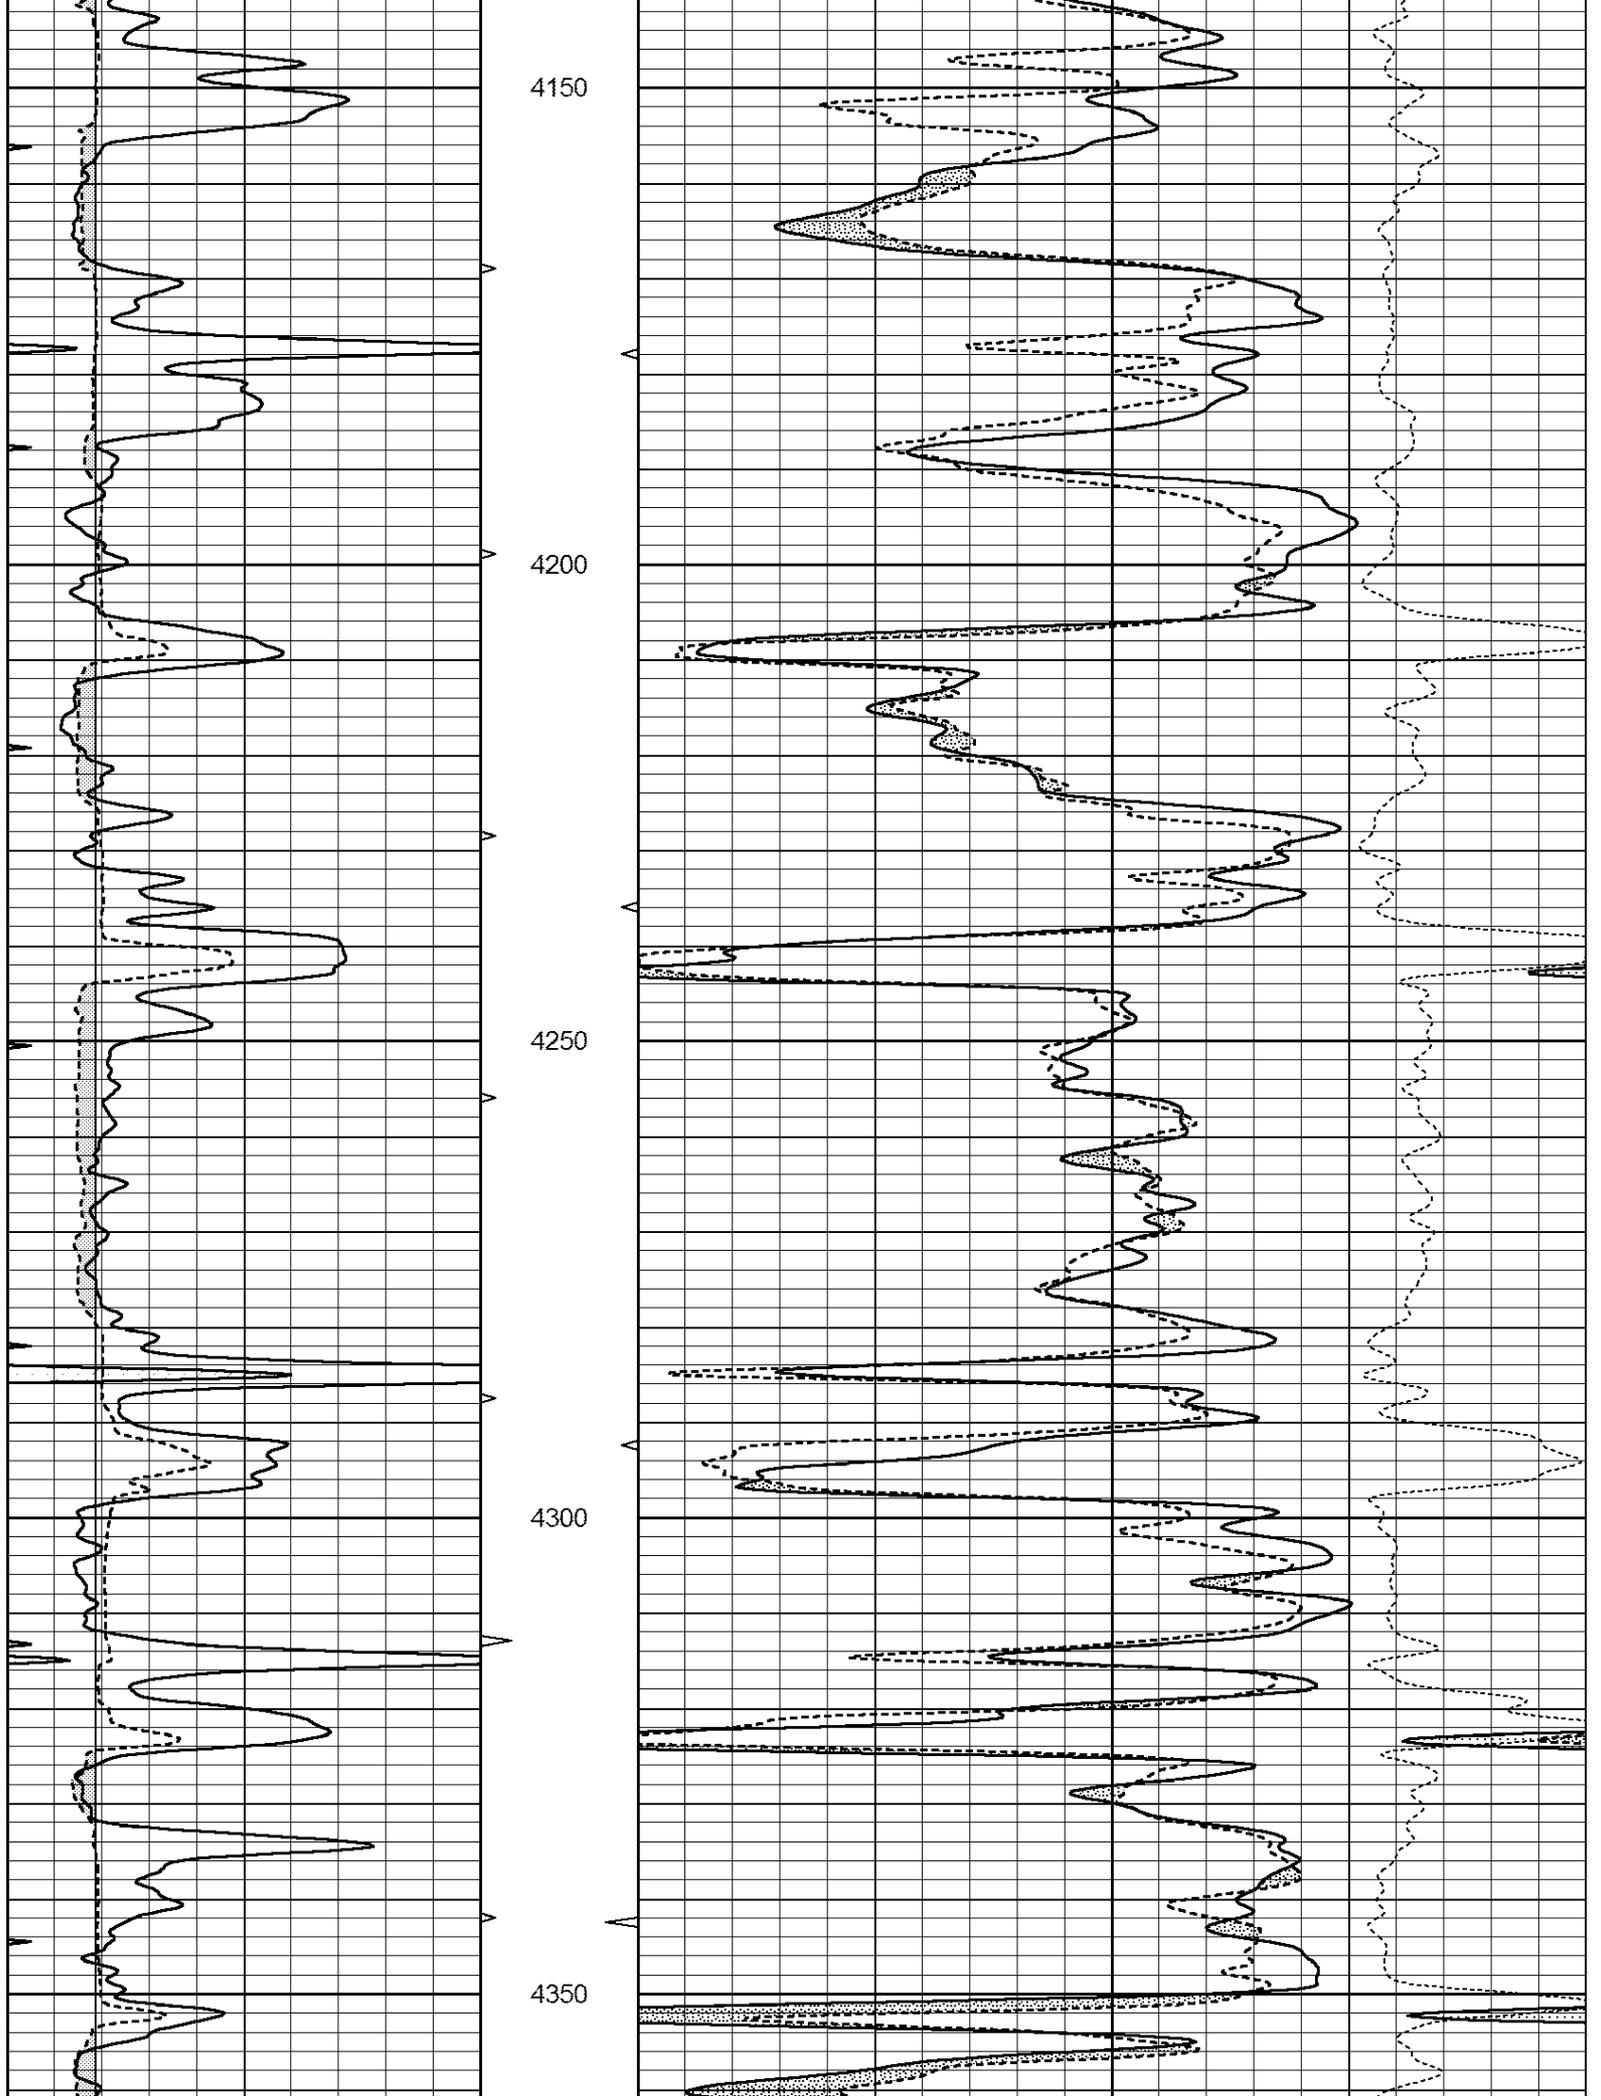

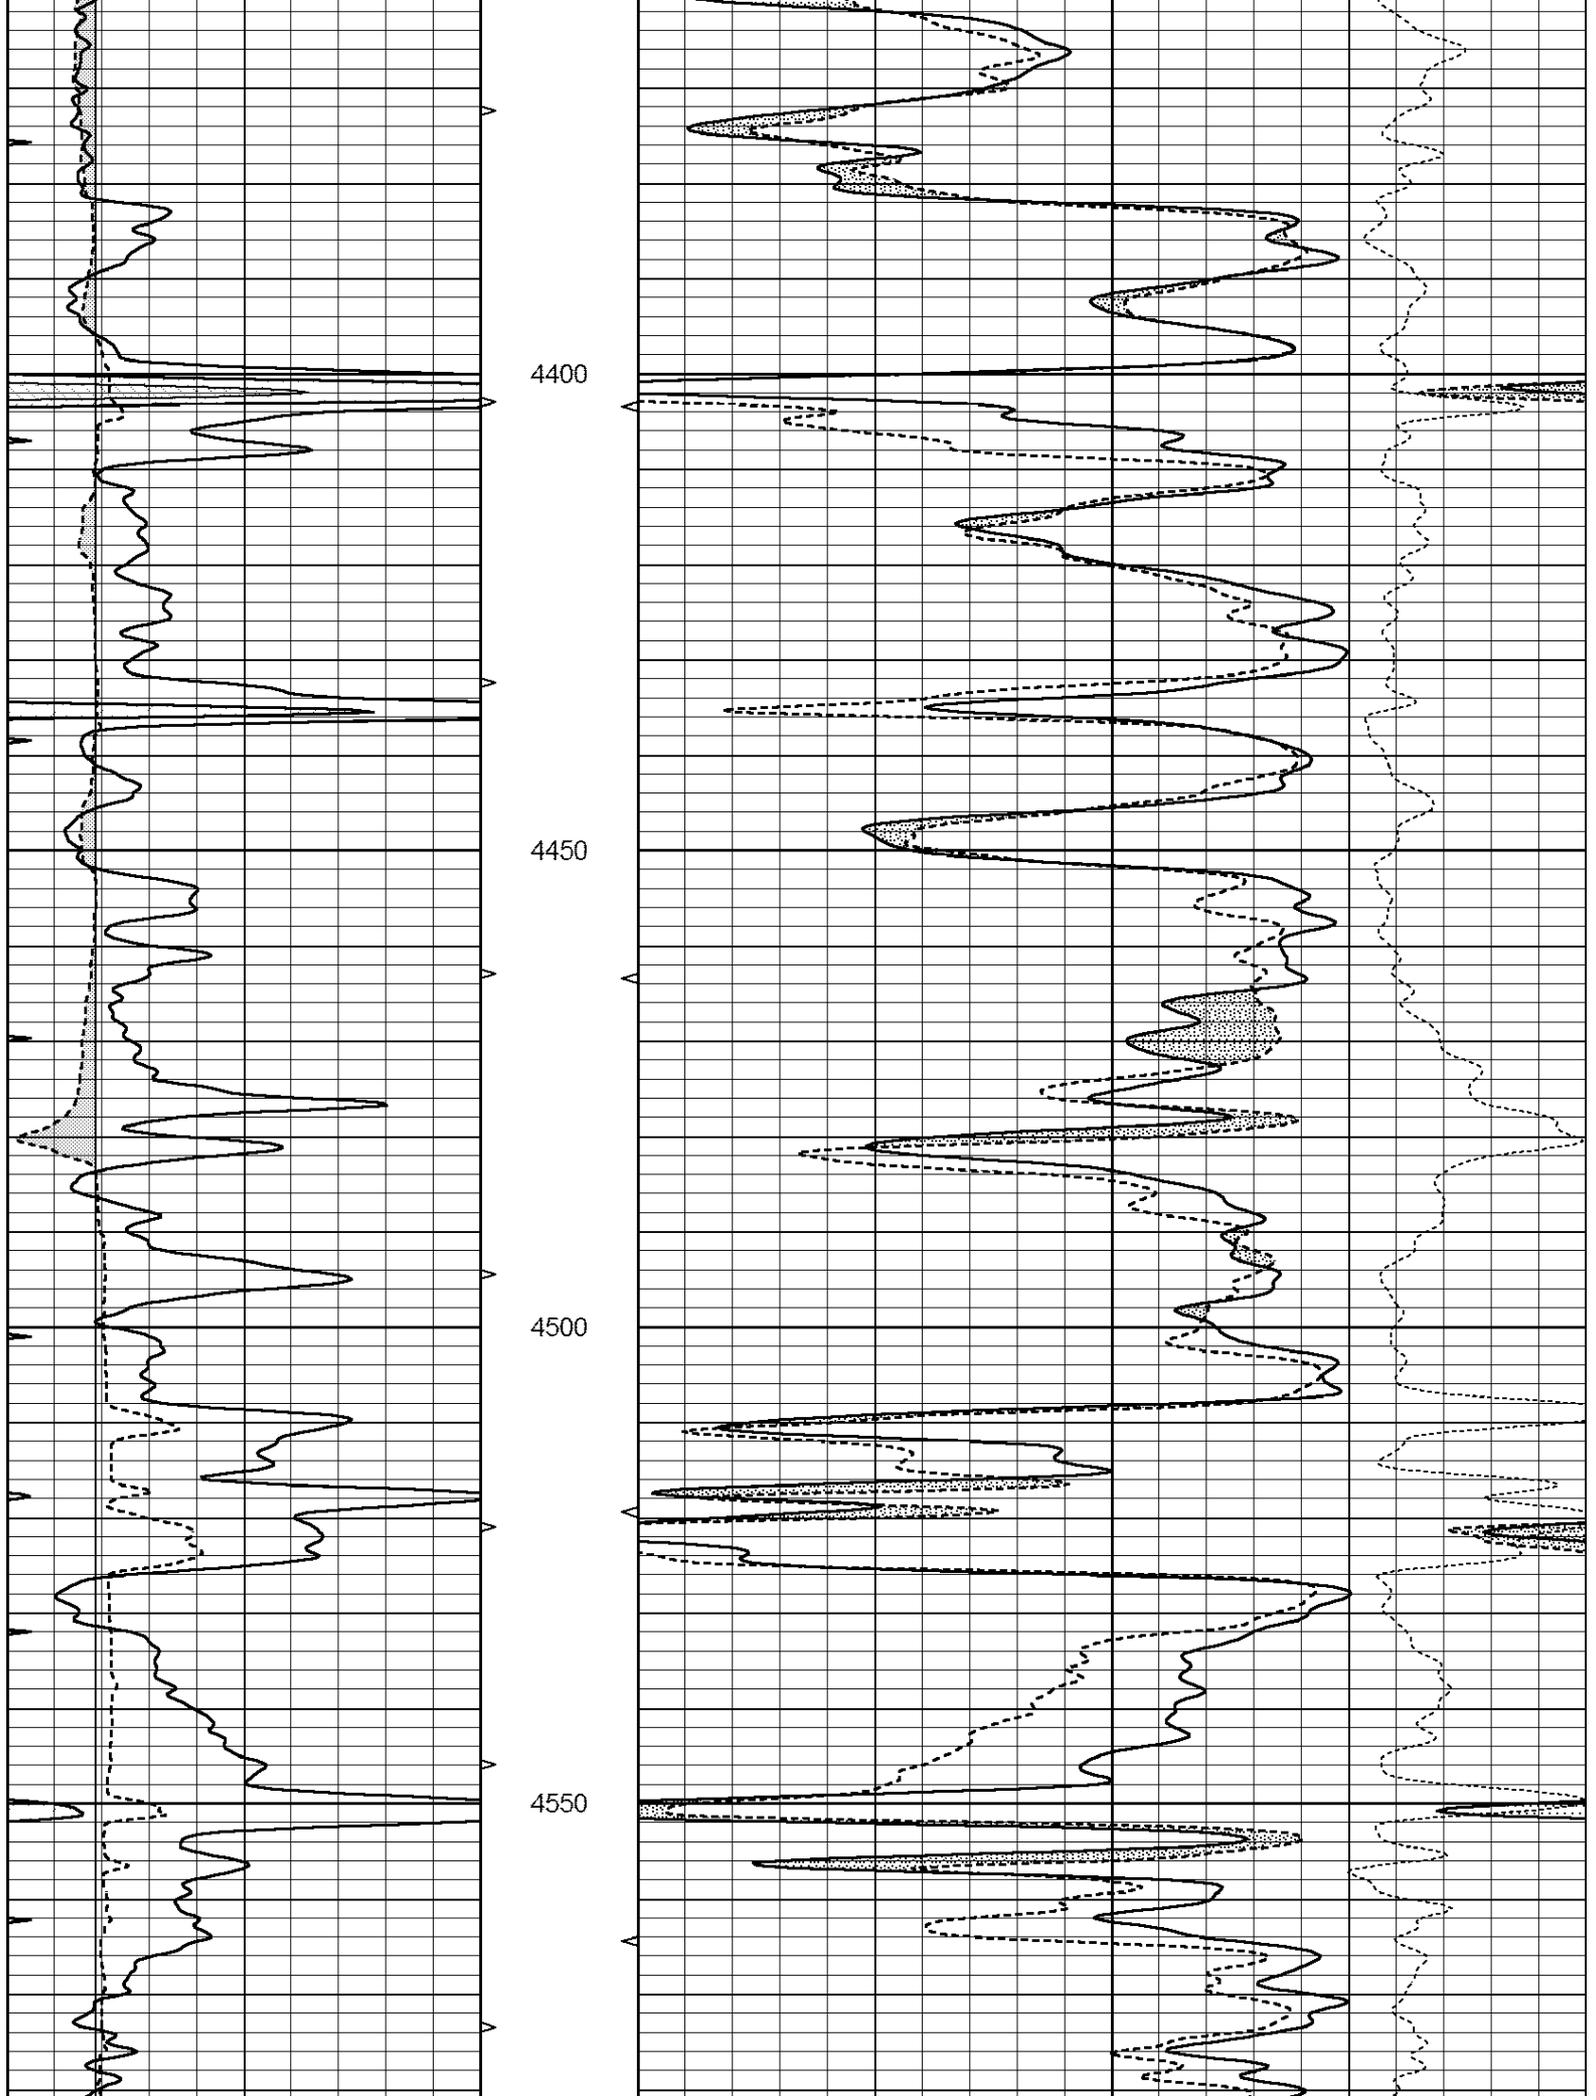

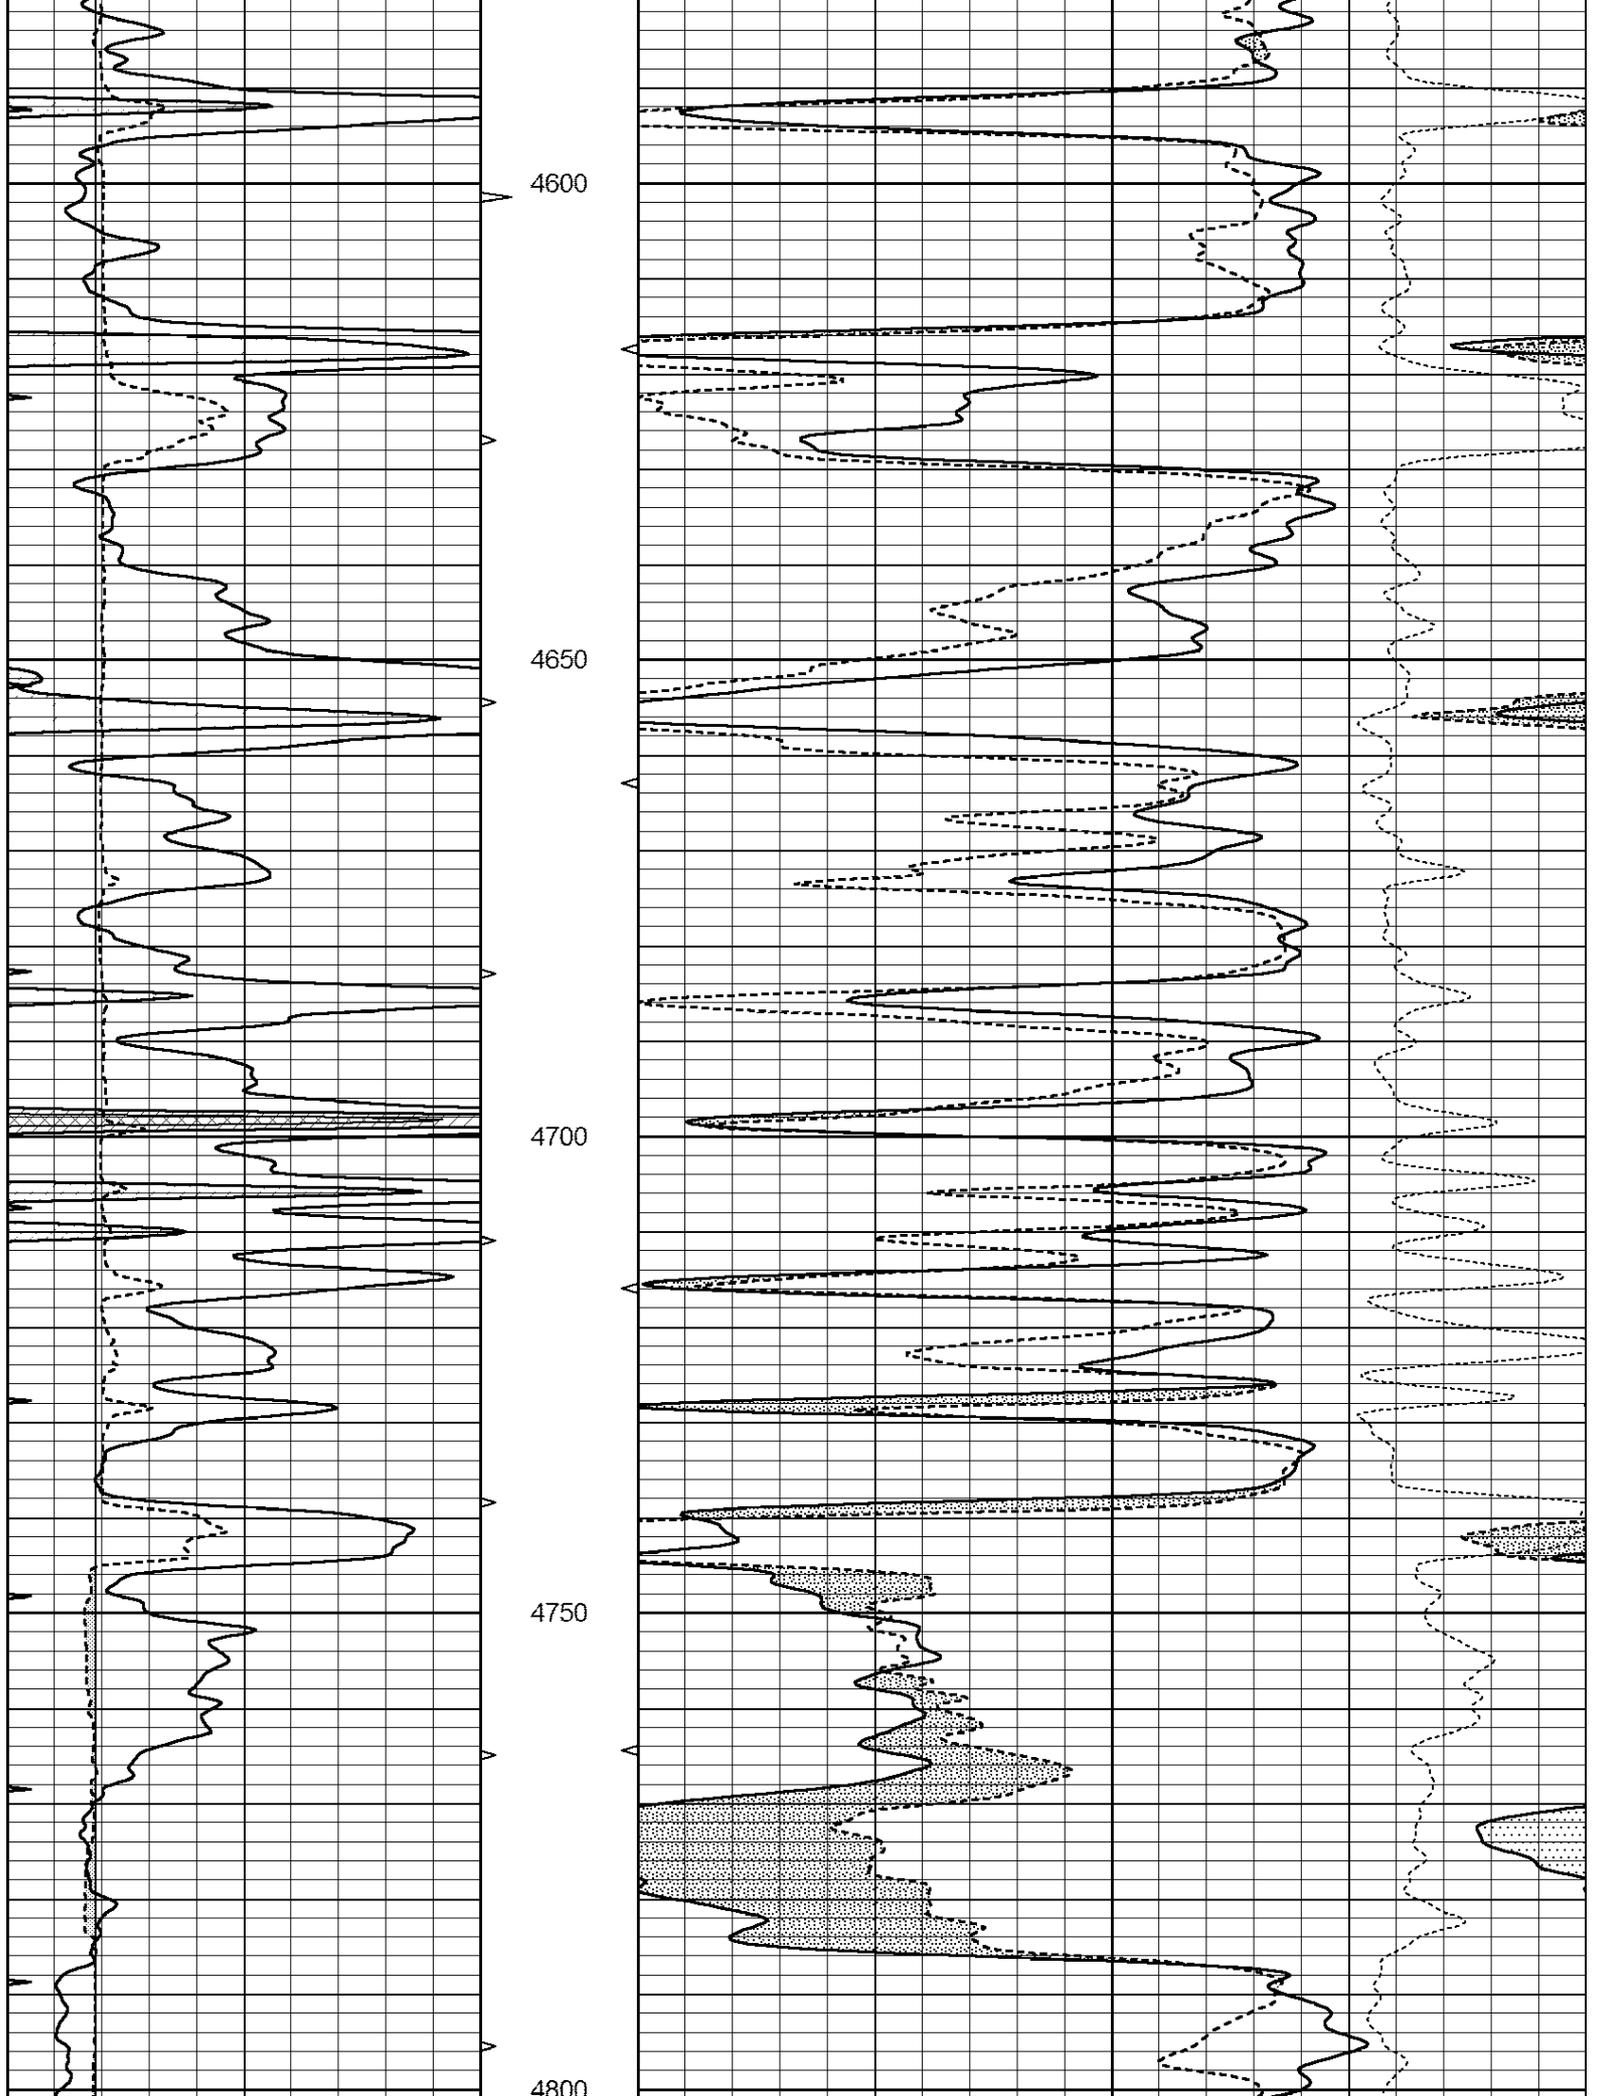

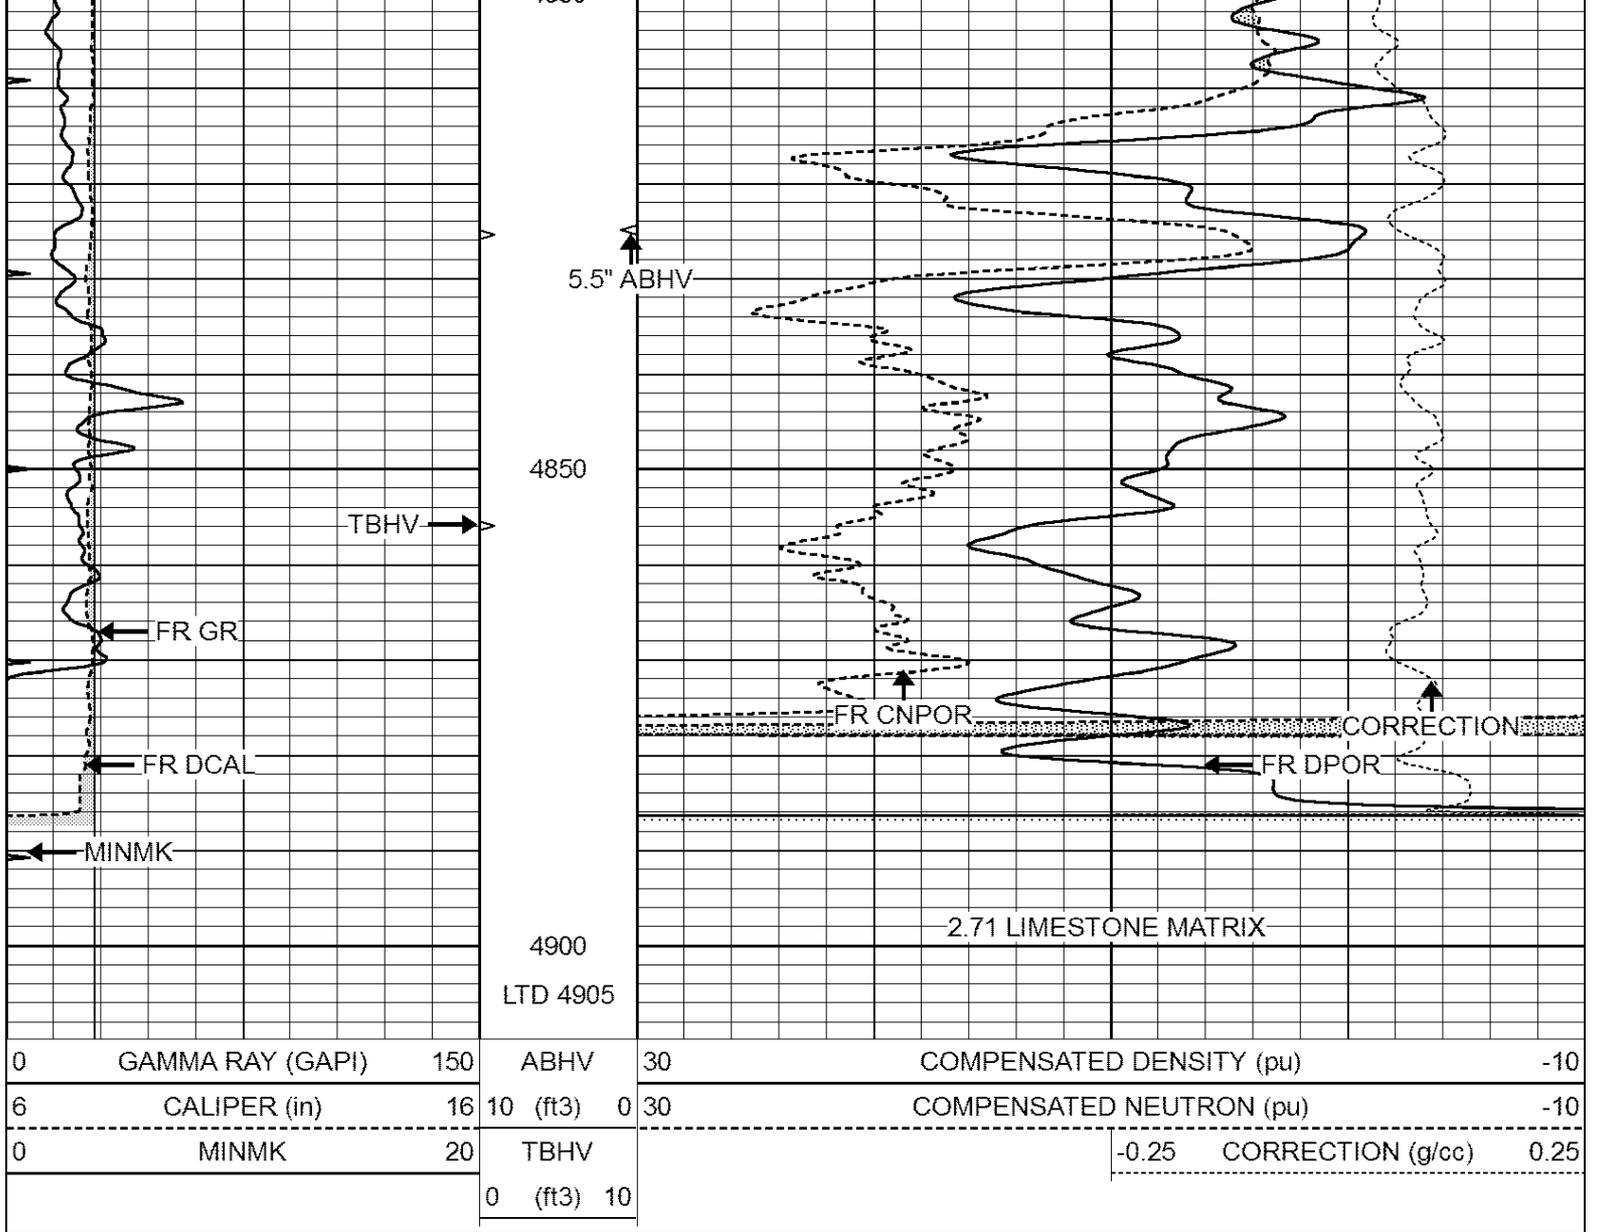



SUPERIOR
Hays,
Kansas

REPEAT SECTION

Database File: 408754ddn.db
 Dataset Pathname: pass2.6
 Presentation Format: den_neu
 Dataset Creation: Wed Apr 25 12:45:11 2012 by Calc Open-Cased 110302
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25	CORRECTION (g/cc) 0.25
			0 (ft3)	10		

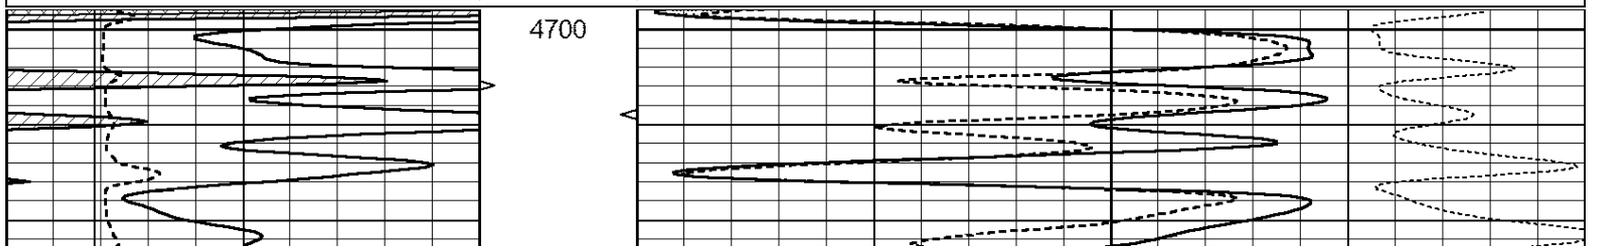

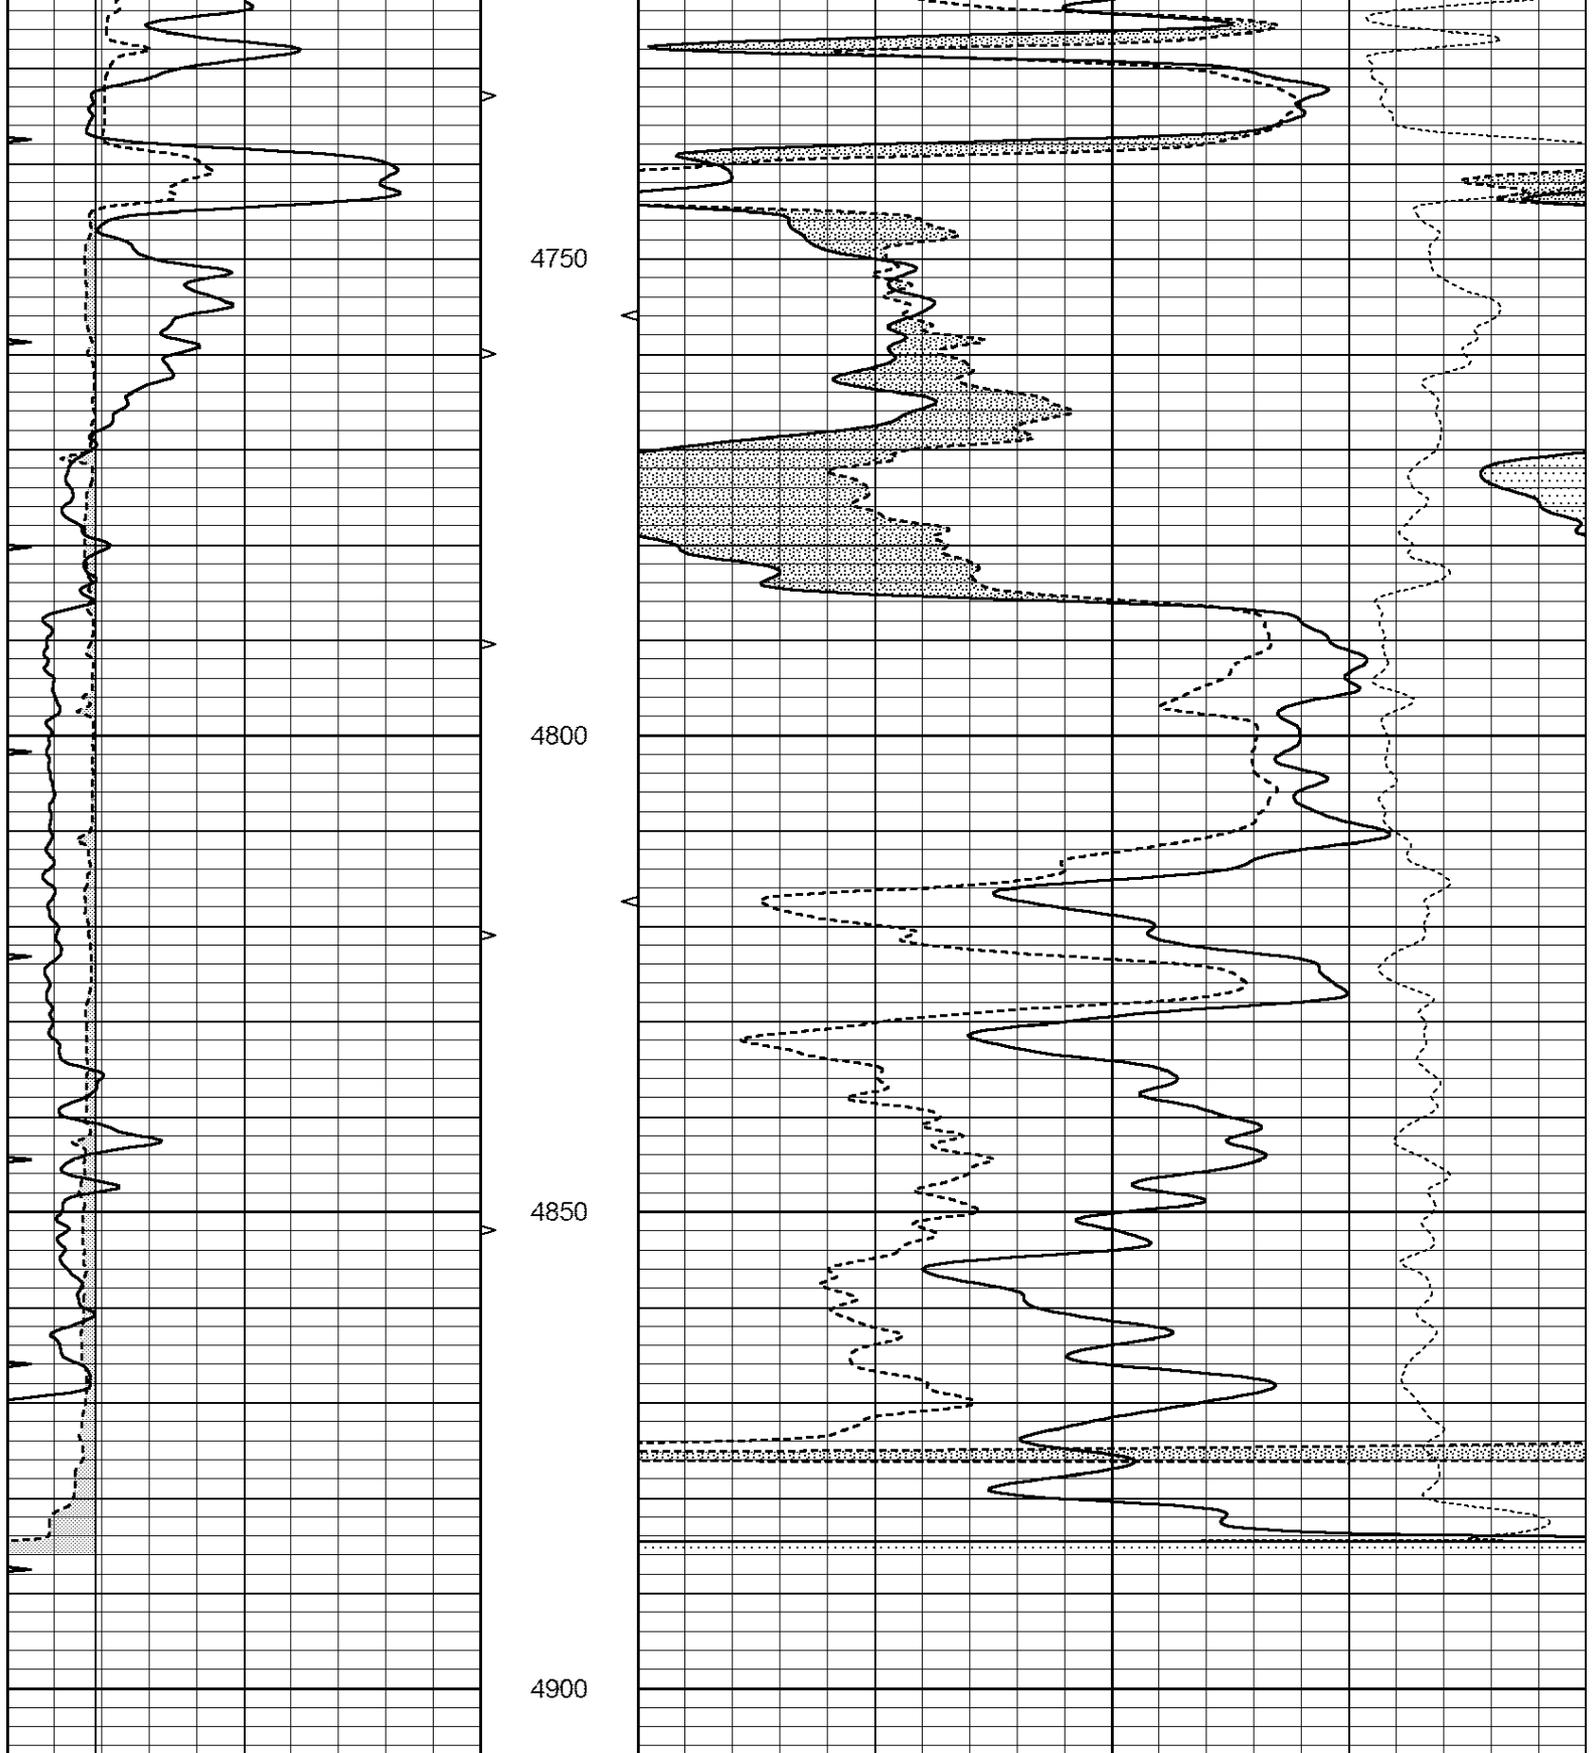

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10	
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10	
0	MINMK	20	TBHV		-0.25	CORRECTION (g/cc)	0.25
			0 (ft3)	10			

Calibration Report

Dual Induction Calibration Report

Serial-Model: DIL4-GEAR
 Performed: Wed Apr 25 11:11:15 2012

Loop:	Readings			References			Results	
	Air	Loop		Air	Loop		m	b
Deep	0.008	0.666	V	0.000	400.000	mmho/m	570.000	2.000
Medium	-0.003	0.769	V	0.000	462.500	mmho/m	560.000	3.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.013	0.651	V	0.000	400.000	mmho/m	627.541	-8.365
Medium	0.020	0.754	V	0.000	462.500	mmho/m	630.311	-12.549

Litho Density Calibration Report
 Serial: 003N Model: PRB
 Performed Tue Sep 08 14:14:44 2009

Litho Density Calibration

	Background	Magnesium	Aluminum	Sandstone	
Window 1	2042.6	12312.8	4225.8	13758.4	cps
Window 2	1855.8	10134.7	3624.2	11113.1	cps
Window 3	1639.4	6760.2	2716.3	7260.3	cps
Window 4	466.4	469.2	466.1	476.5	cps
Long Space	0.0	8278.9	1768.4	9257.4	cps
Short Space	2.2	2377.3	1544.1	2574.2	cps
Rho		1.7100	2.5900	1.3800	g/cc
Pe			2.5700	1.5500	
Rib Angle	: 44.4	Rib Slope	: 0.979	Density/Spine Ratio	: 0.549
Spine Angle	: 74.4	Spine Slope	: 3.577	Spine Intercept	: -18.8

Caliper

	Readings	Reference	
Low Ref	2.0	7.5	
High Ref	4.0	15.0	
	Gain: 3.7		Offset: 0.3

Compensated Neutron Calibration Report

Serial Number: 070808
 Tool Model: Probe

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number: 070559
 Tool Model: OPEN GR

Performed: Mon Apr 16 22:08:41 2012

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps

Calibrator Reading: 1.0 cps

Sensitivity: 0.3000 GAPI/cps