



MIDWEST SURVEYS

LOGGING - PERFORATING - CONSULTING SERVICES
 P.O. Box 68, Osawatomie, KS 66064
 913 / 755 - 2128

GAMMA RAY / NEUTRON / CCL

API # 15-003-25,199

File No.

Company **Haas Petroleum, LLC**
 Well **Foster No. 3-I-HP**
 Field **Colony - Welda**
 County **Anderson** State **Kansas**

Location			Other Services
880' FSL & 440' FWL SE-NW-SW-SW			Perforate
Sec. 11	Twp. 23s	Rge. 19e	Elevation
Permanent Datum	GL	Elevation	NA
Log Measured From	GL	K.B.	NA
Drilling Measured From	GL	D.F.	NA
		G.L.	NA

Date	05-18-2012
Run Number	One
Depth Driller	833.0
Depth Logger	823.0
Bottom Logged Interval	822.0
Top Log Interval	20.0
Fluid Level	Full
Type Fluid	Water
Density / Viscosity	NA
Salinity - PPM Cl	NA
Max Recorded Temp	NA
Estimated Cement Top	0.0
Equipment No.	107
Location	Osawatomie
Recorded By	Steve Windisch
Witnessed By	Mark Haas

BORE-HOLE RECORD				CASING RECORD			
RUN No.	BIT	FROM	TO	SIZE	WGT.	FROM	TO
One	9.875"	0.0	21.0	7.00"		0.0	21.0
Two	5.625"	21.0	833.0	2.875"		0.0	828.0

Fold Here

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Drilling Contractor :
 John Leis Oilfield Services

Database File: foster3ihp.db
 Dataset Pathname: pass1
 Presentation Format: gr-n-cc
 Dataset Creation: Fri May 18 12:13:07 2012 by Log SCH 111116
 Charted by: Depth in Feet scaled 1:240

2100


Neutron (cps)



10



150


Gamma Ray (cps)

0

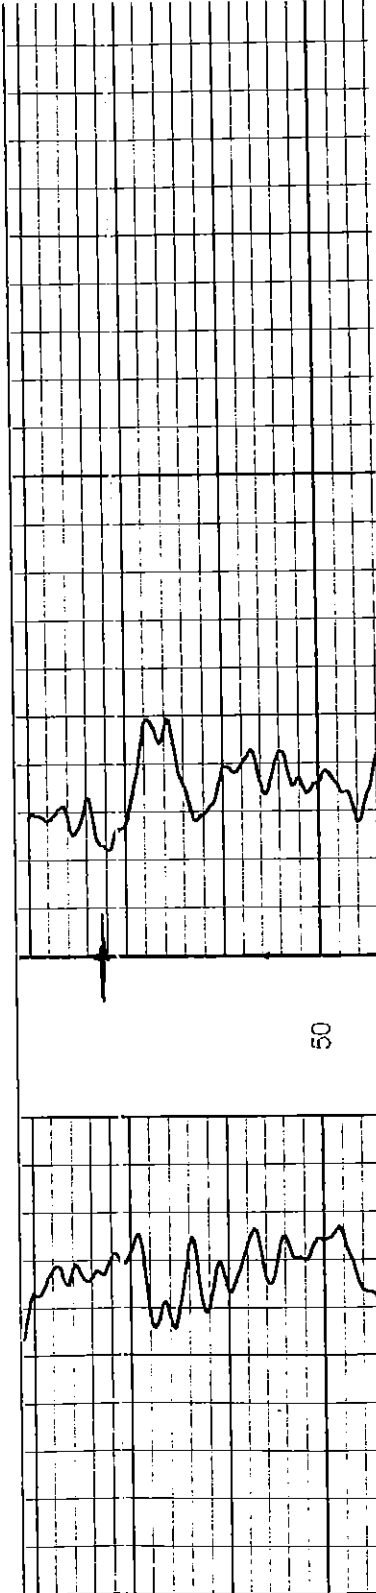


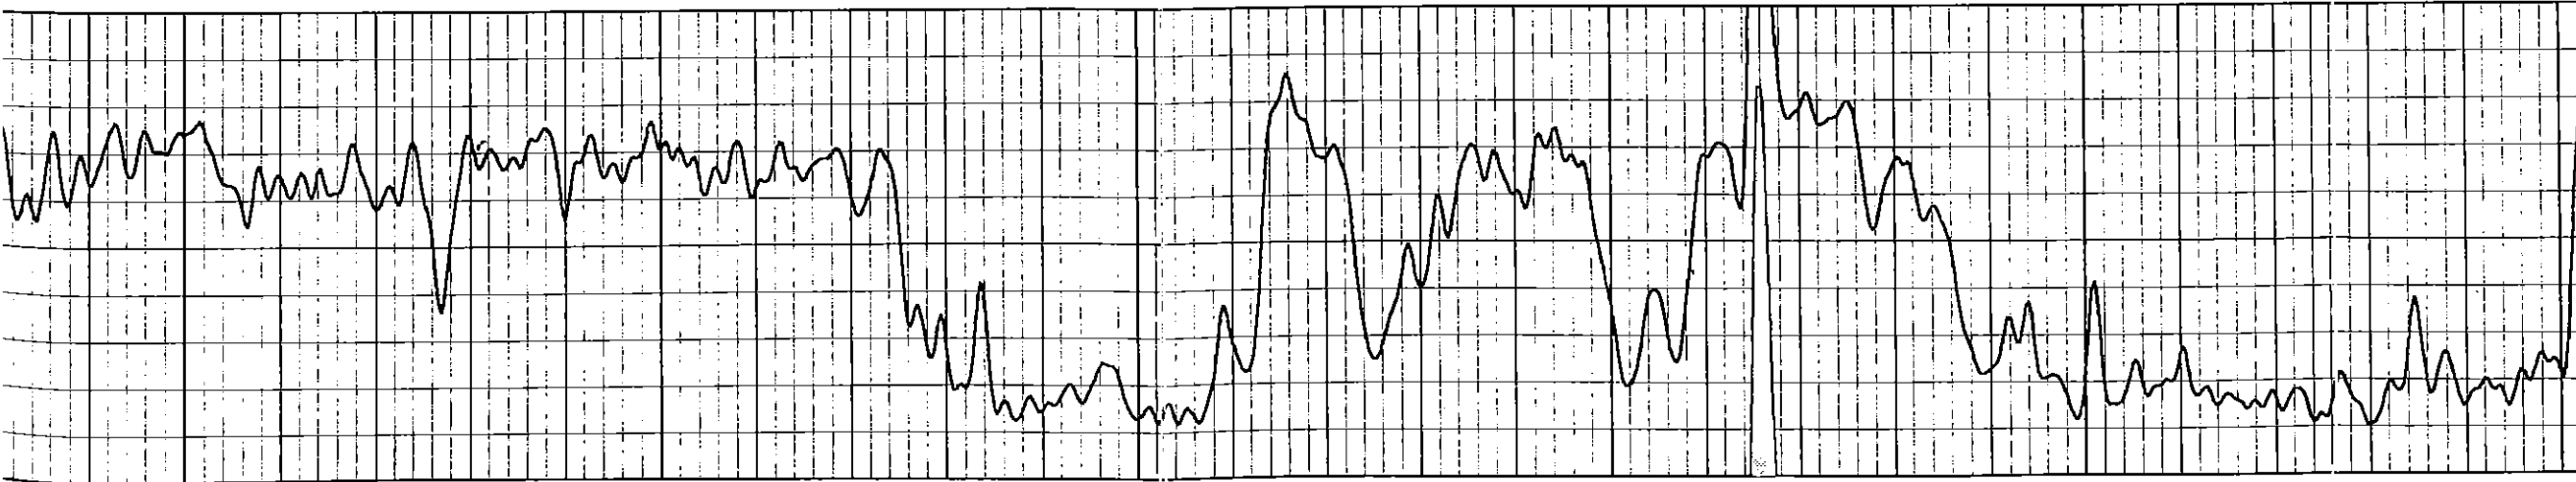
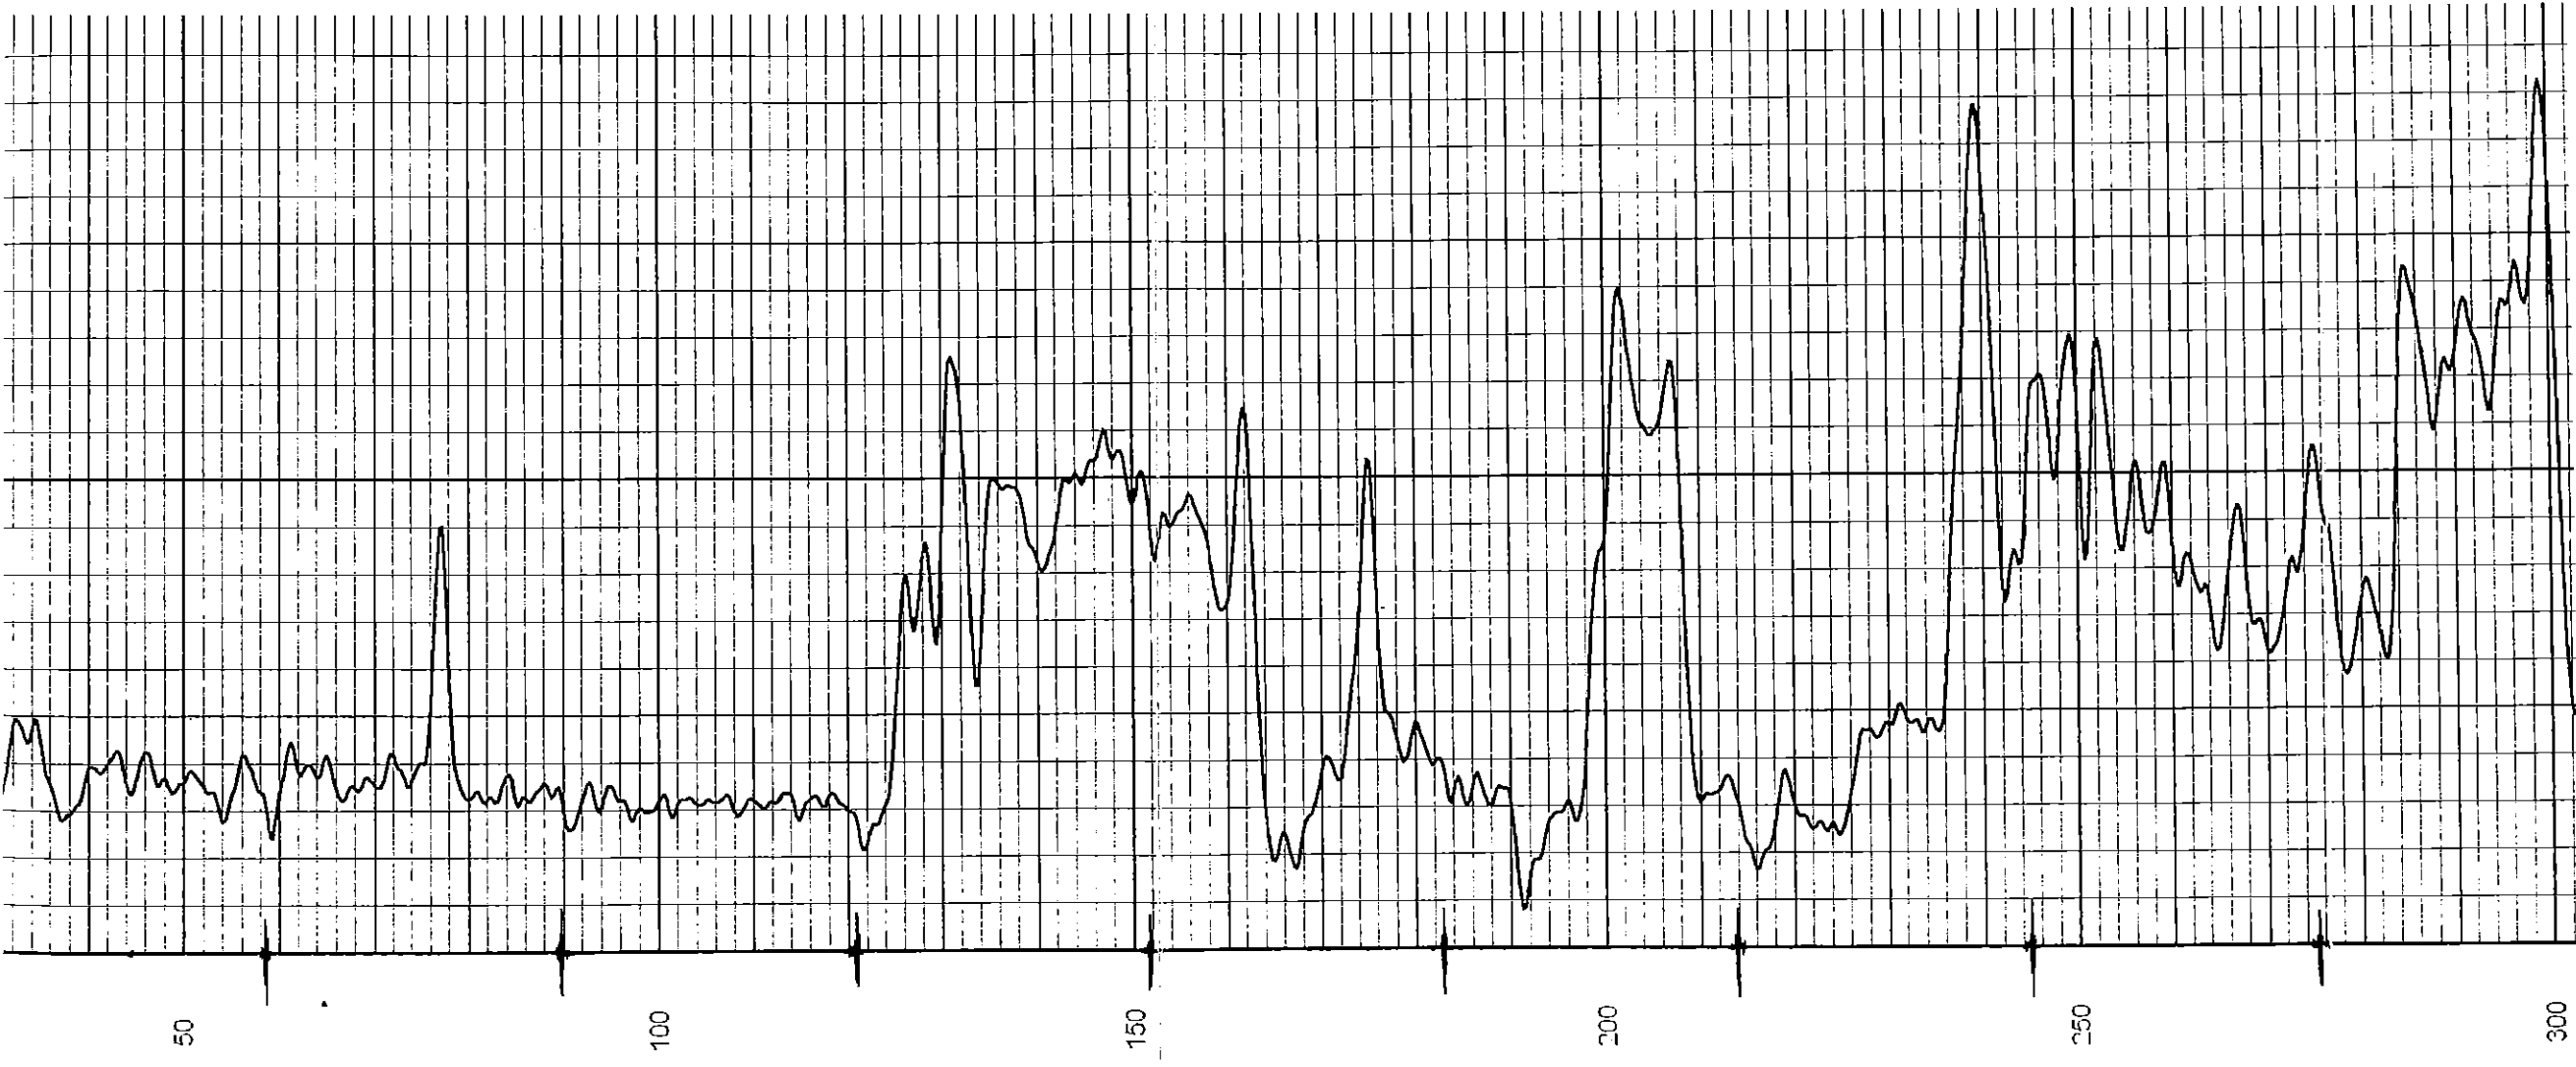


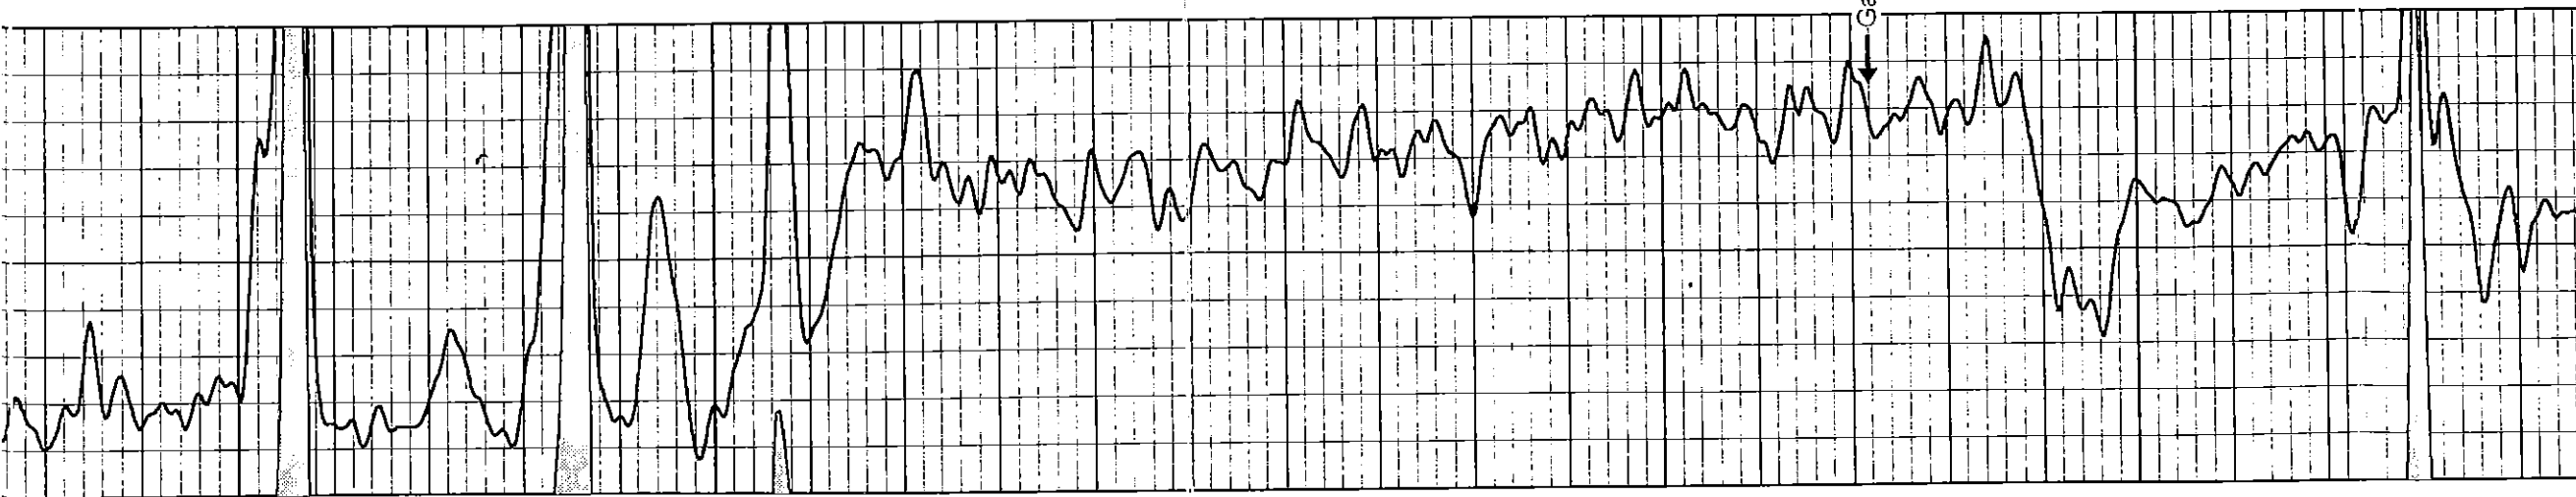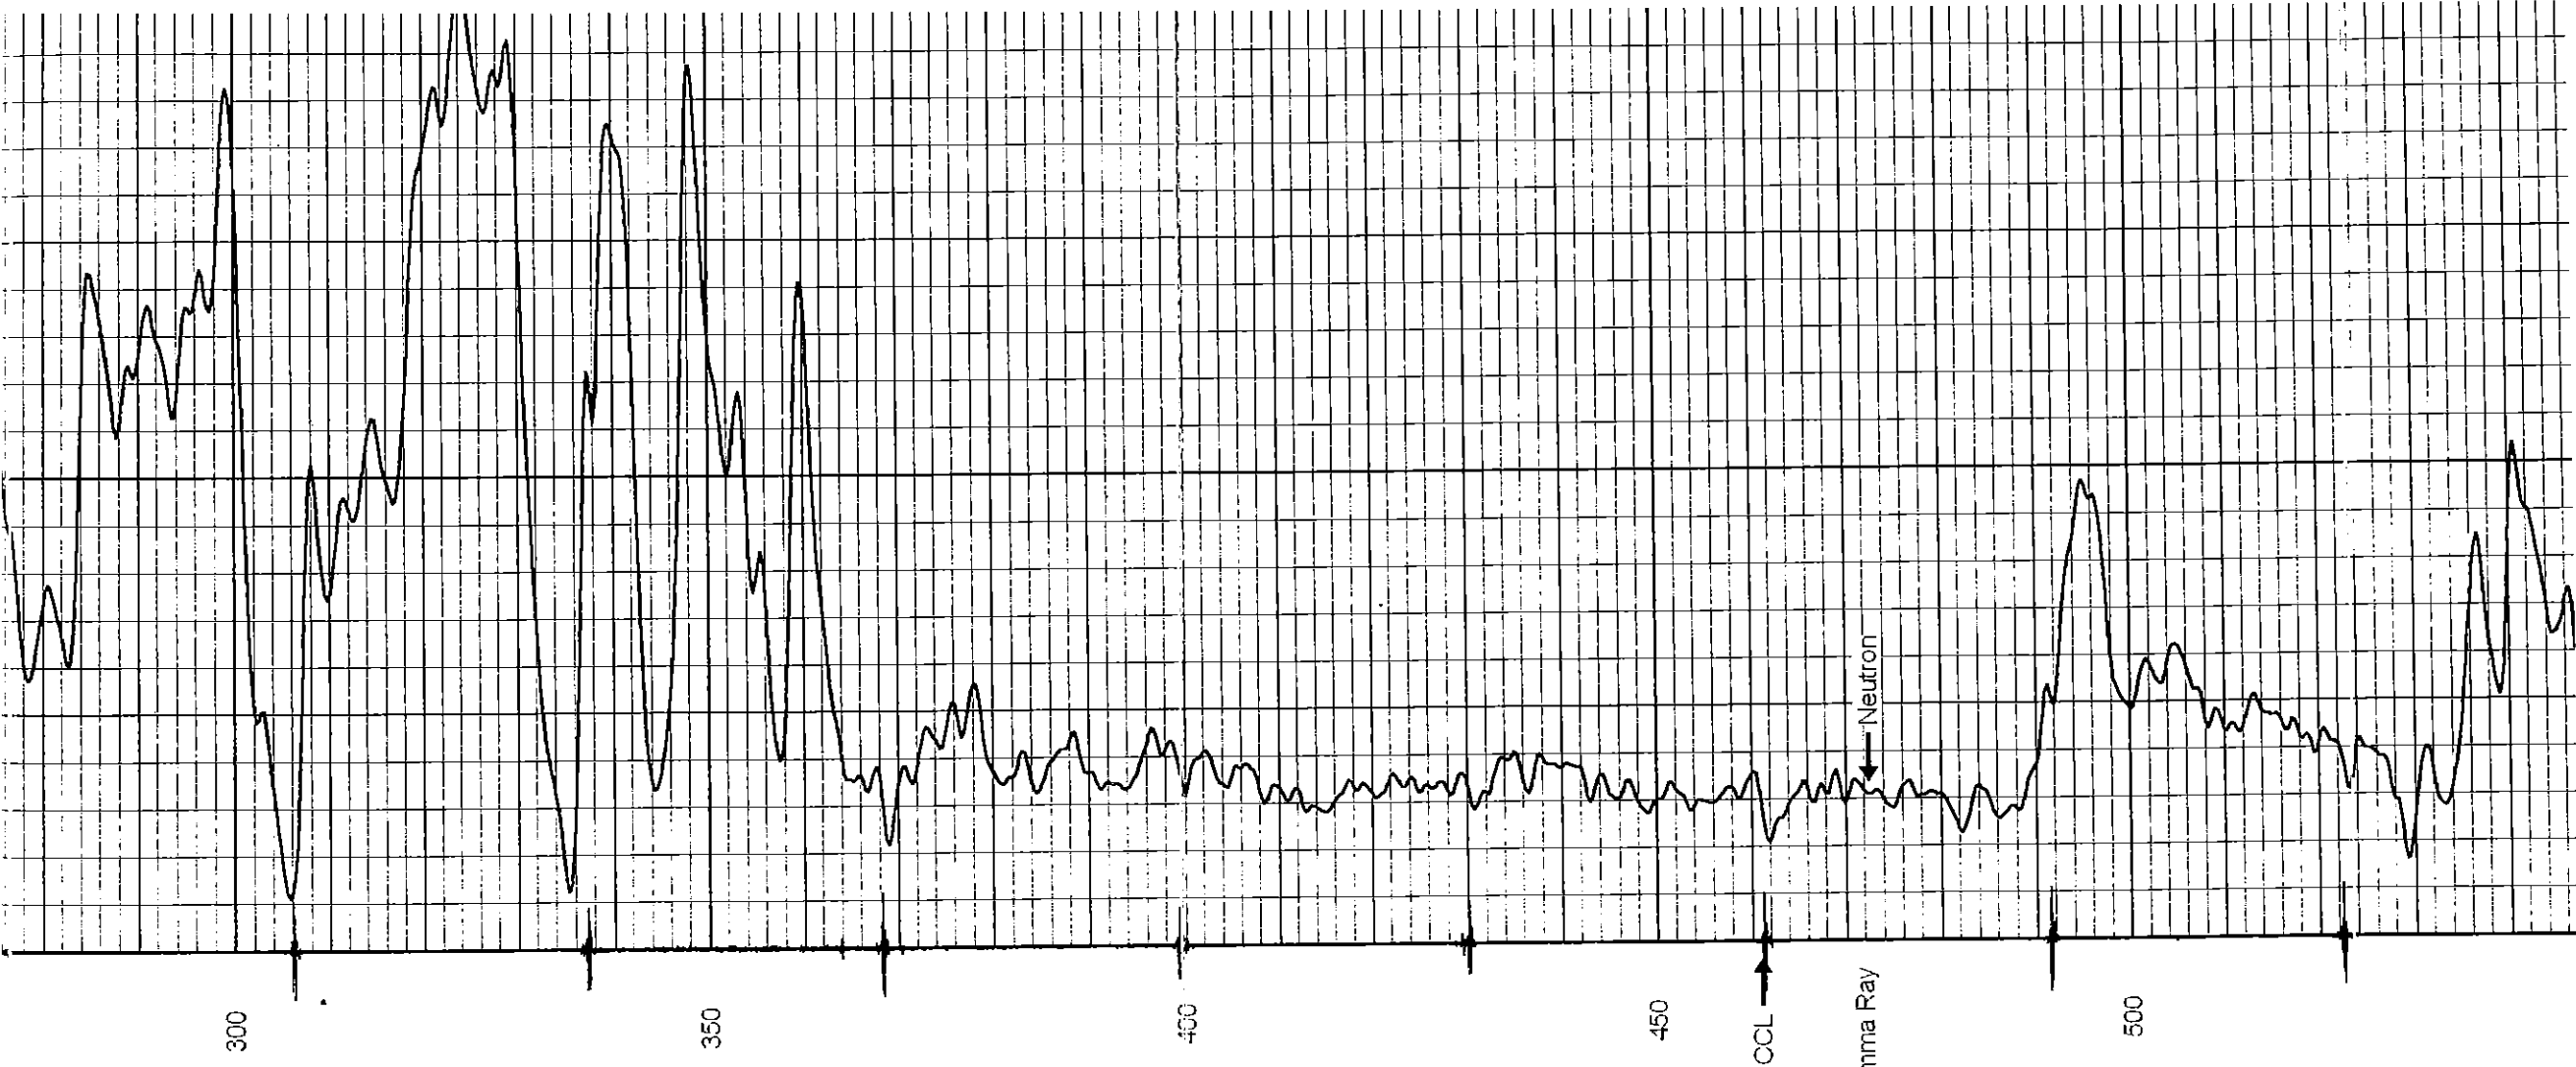

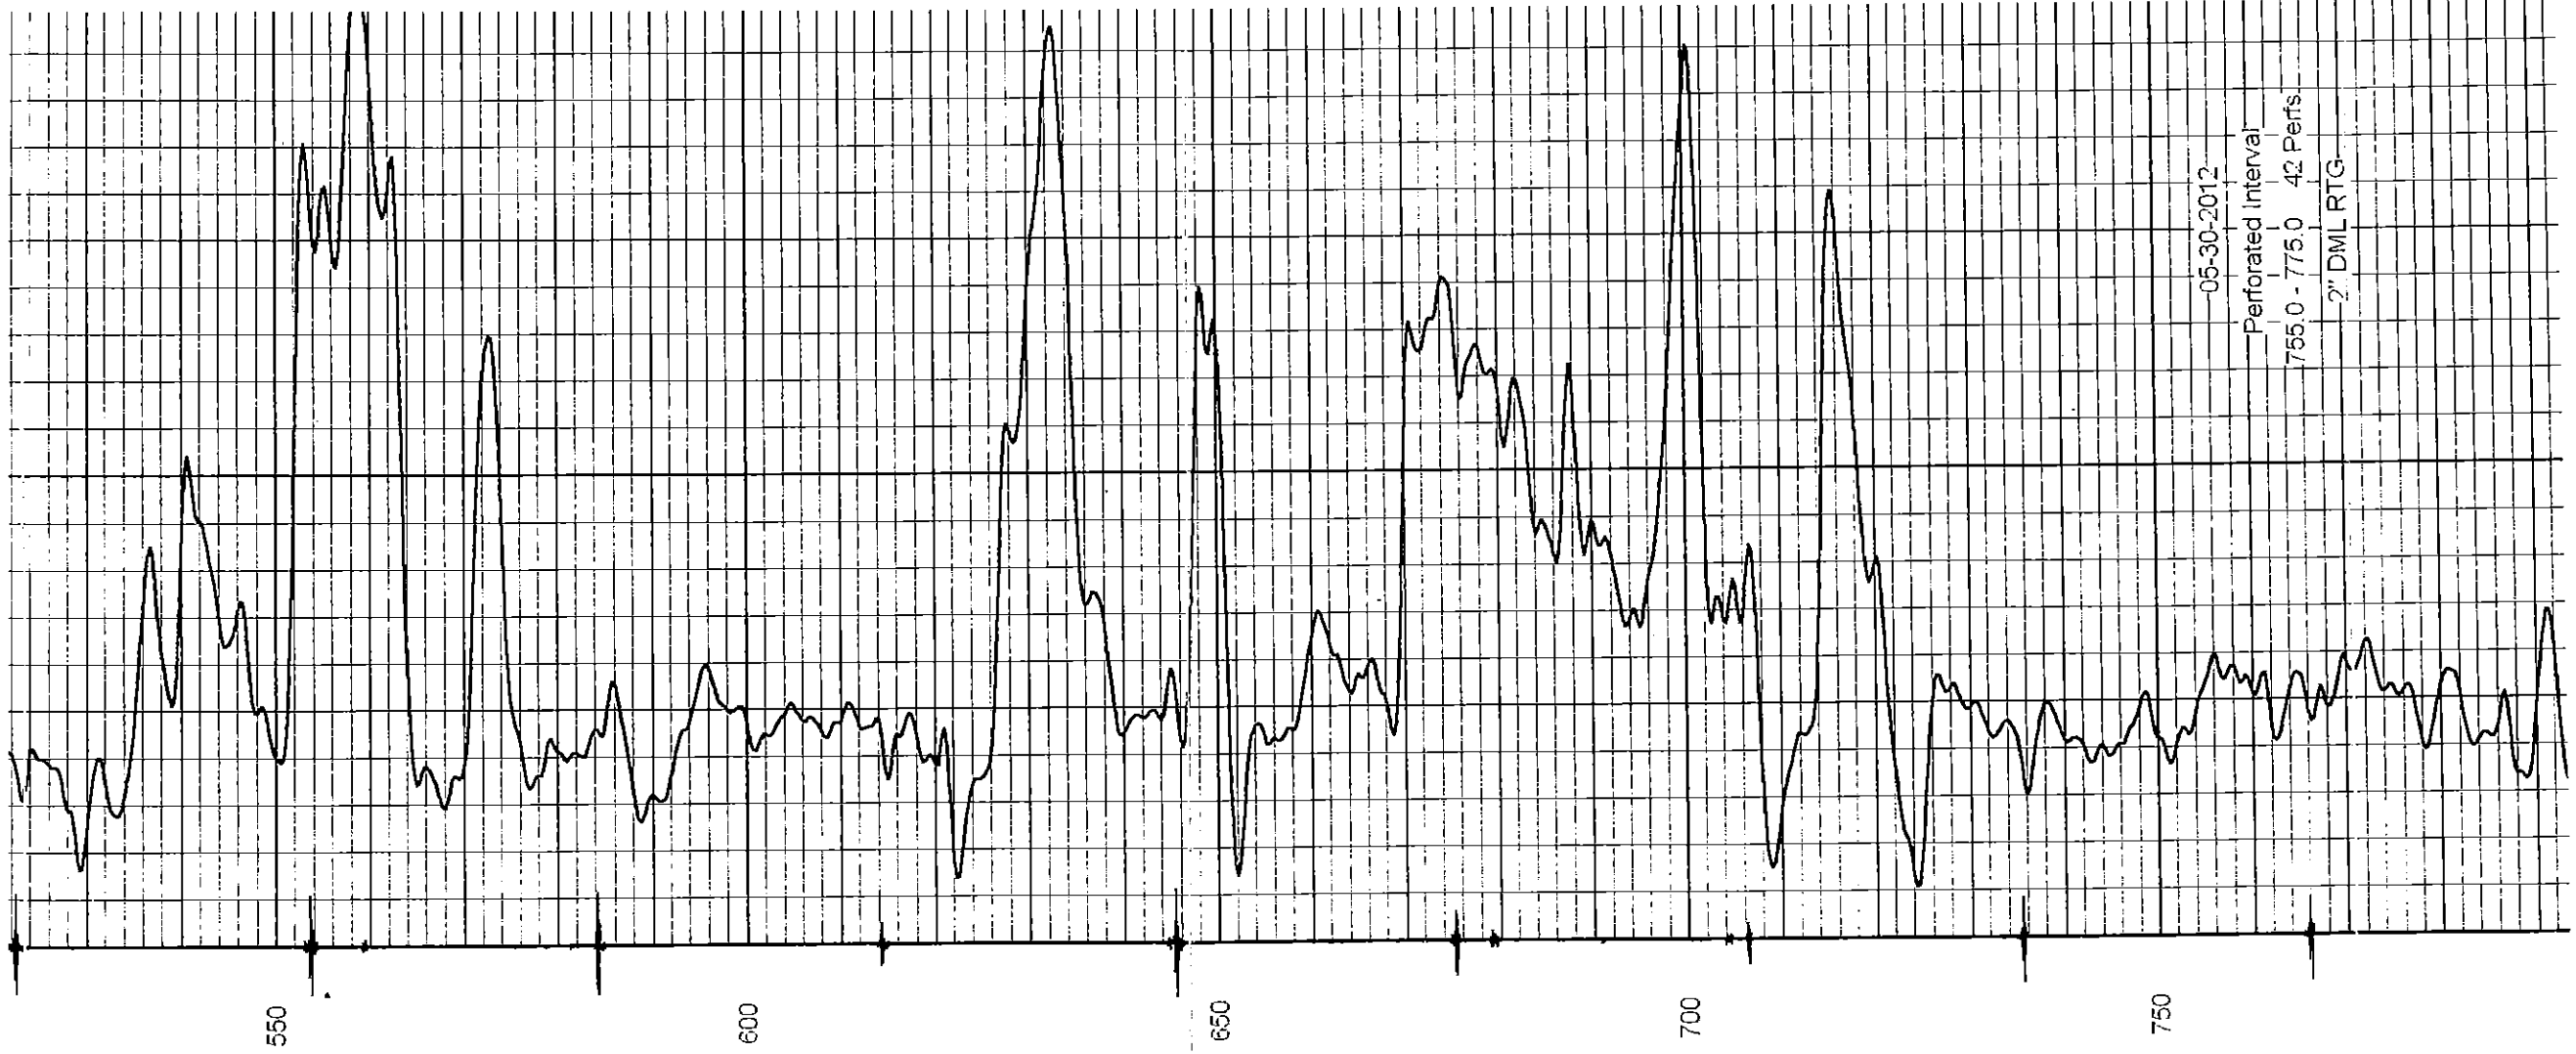

05-30-2012
Perforated Interval
755.0 - 775.0 42 Perfs
2" DML RTG

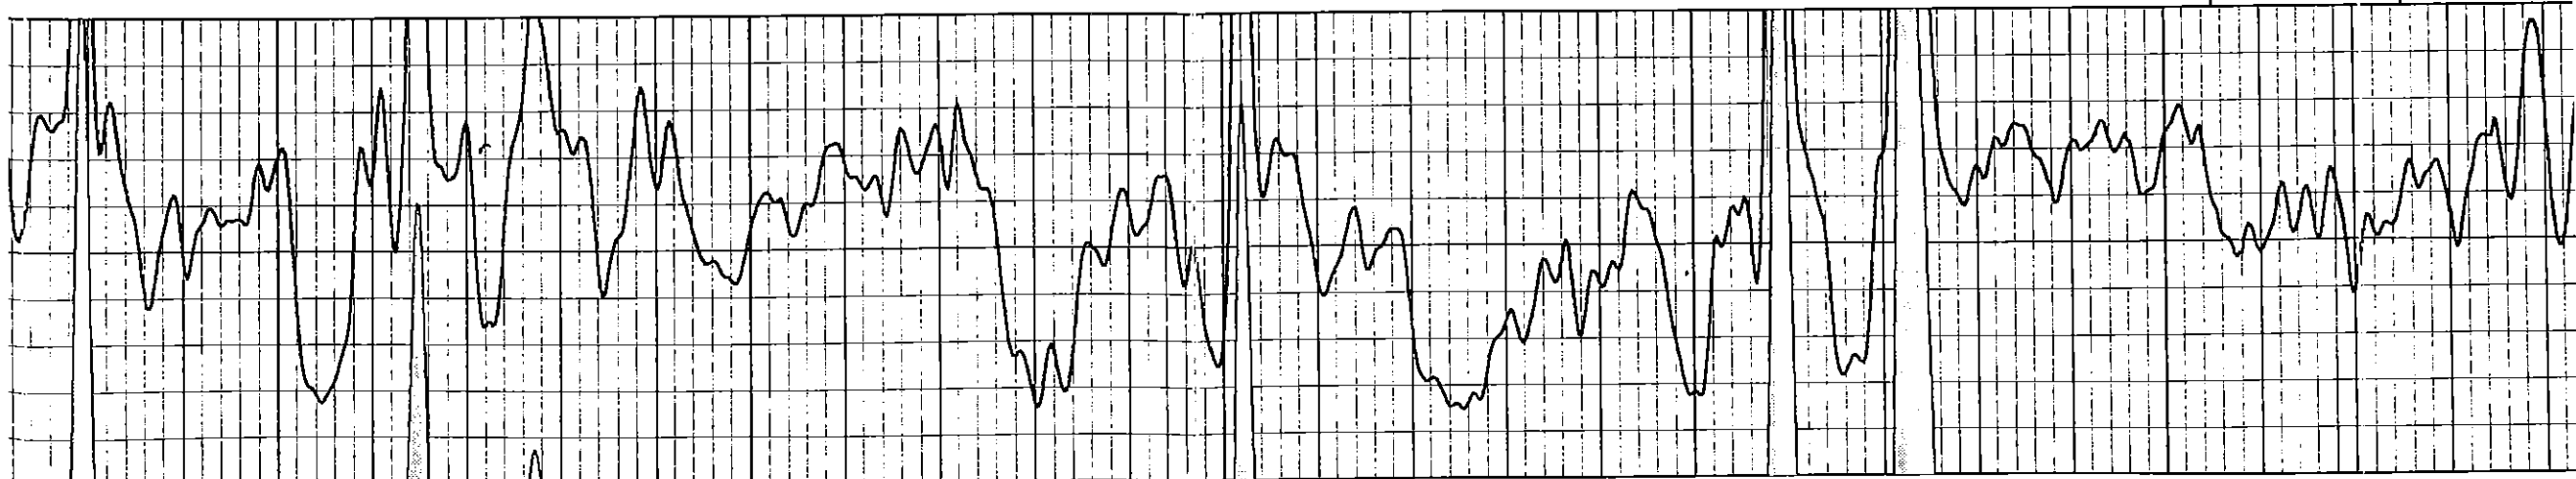

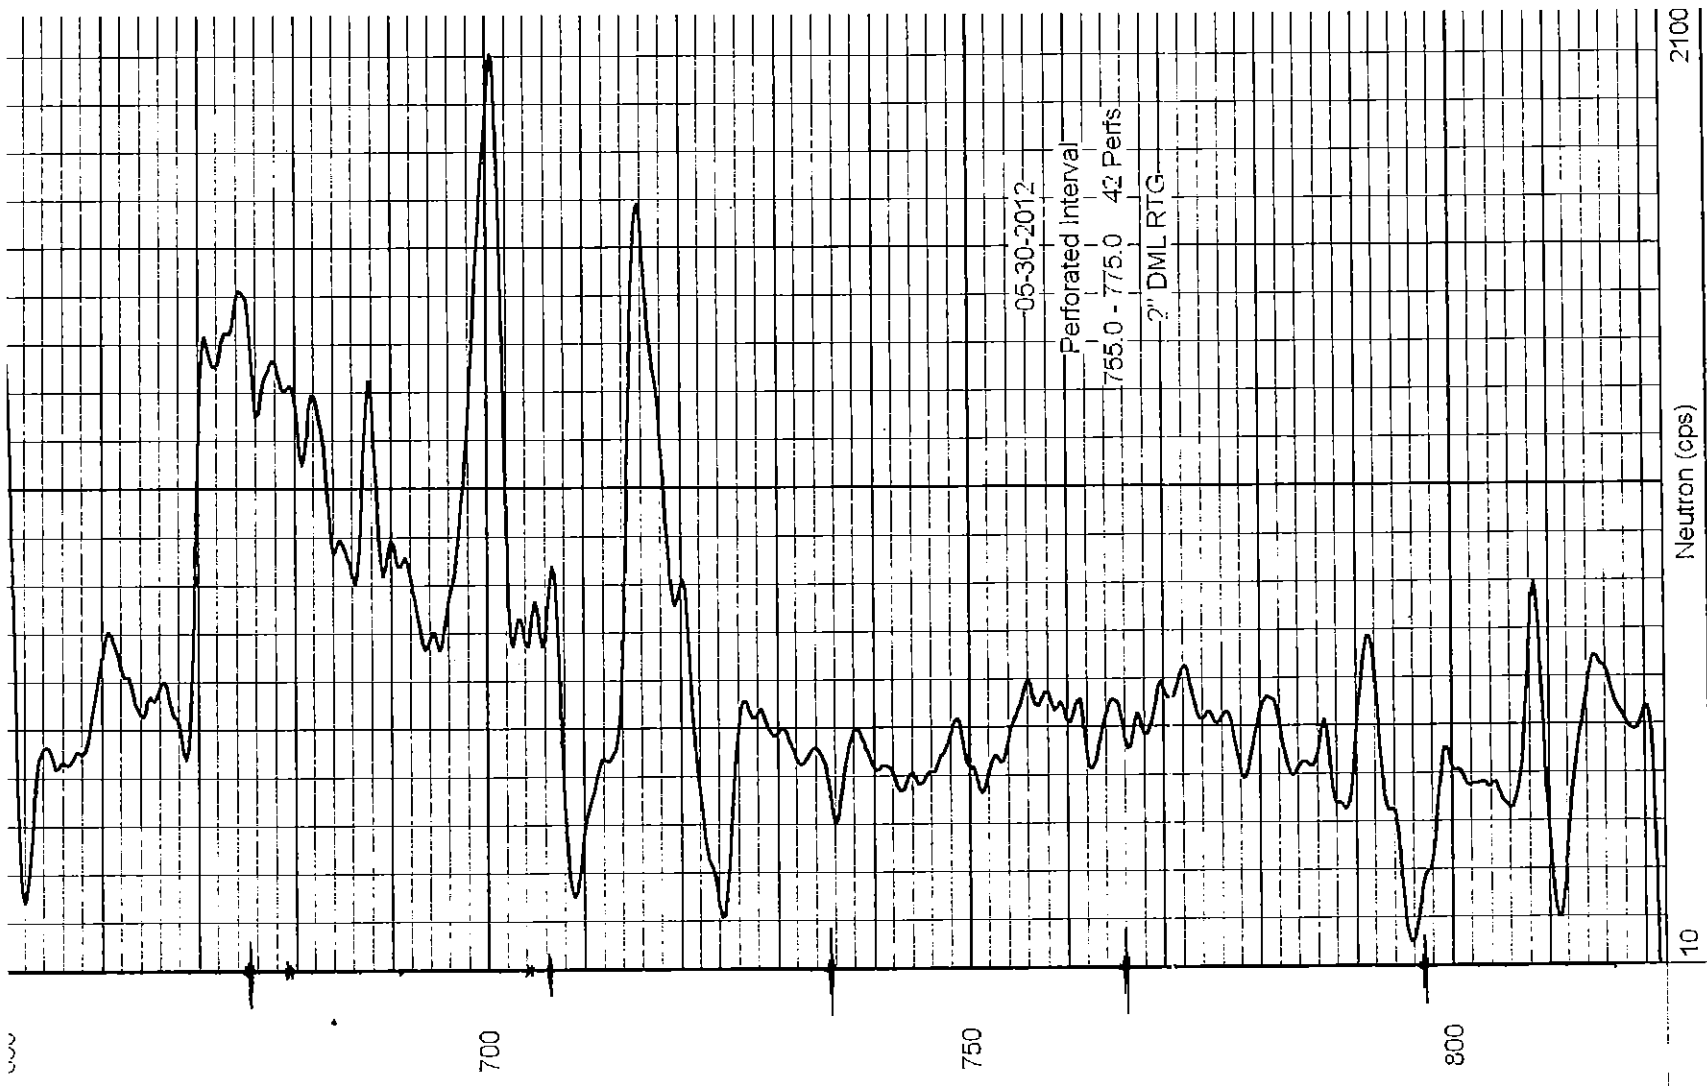

-06-30-2012
Perforated Interval
755.0 - 775.0 42 Perfs
?" DML RTG