


15-179-05260-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Sheridan County. Sec. 11 Twp. 6 Rge. (E) 27 (W)

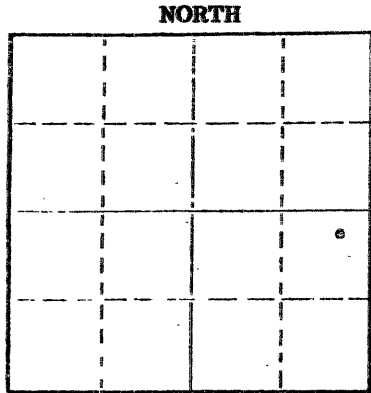

Locate well correctly on above Section Plat

Location as "NE/CNW/SW" or footage from lines NE NE SE  
Lease Owner Continental Oil Company  
Lease Name Adell LKC Unit Well No. 101  
Office Address 3535 NW 58th, Oklahoma City, Oklahoma 73112  
Character of Well (completed as Oil, Gas or Dry Hole) oil  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed October 21 19 74  
Application for plugging approved October 22 19 74  
Plugging commenced November 19 19 74  
Plugging completed December 2 19 74  
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well W. L. Nichols  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3885 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	RECEIVED		240'	10 3/4"	240'	none
	STATE CORPORATION COMMISSION		3883'	6"	3883'	1007.83
	DEC 10 1974					
	CONSERVATION DIVISION					
	Wichita, Kansas					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Sanded back to 3590' and dumped 5 sacks of cement.  
Sun Cementing Company plugged well pumping in 5 sacks of hulls, 18 sacks of gel and 135 cu. feet of 50/50 poz. cement; 21 sacks of gel and 40 cu. feet of 50/50 poz. cement; 6 sacks of gel and 10 cu. feet of 50/50 poz. cement.

Name of Plugging Contractor PIPE PULLERS, INC. (If additional description is necessary, use BACK of this sheet)  
Address Box 128, Ellinwood, Kansas 67526

STATE OF KANSAS COUNTY OF BARTON ss.  
Evelyn Roth

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Evelyn Roth  
Ellinwood, Kansas

SUBSCRIBED AND SWORN TO before me this 9th day of December, 1974

My commission expires \_\_\_\_\_  
JENNY KASSELMAN  
NOTARY PUBLIC  
BARTON COUNTY, KANSAS  
MY COMM. EXP. JULY 16, 1978

Jenny Kasselmann  
Notary Public.