


HALLIBURTON


MICROLOG

HALLIBURTON										MICROLOG									
COMPANY										EVANS ENERGY LLC.									
WELL										ANGELL #4-6									
FIELD										ANGELL									
COUNTY										MEADE									
STATE										KANSAS									
Permanent Datum										GL									
Log measured from										KB									
Drilling measured from										KB									
Date										18-Nov-12									
Run No.										ONE									
Depth - Driller										6200.00 ft									
Depth - Logger										6197.0 ft									
Bottom - Logged Interval										6175									
Top - Logged Interval										2500									
Casing - Driller										8.625 in @ 1620.0 ft									
Casing - Logger										1619.0 ft									
Bit Size										7.875 in									
Type Fluid in Hole										WATER BASED MUD									
Density										9.2 ppg									
Viscosity										58.00 s/qt									
PH										9.50 pH									
Fluid Loss										10.4 cpm									
Source of Sample										MUD PIT									
Rm @ Meas. Temperature										1.300 ohmm @ 80.00 degF									
Rmf @ Meas. Temperature										1.00 ohmm @ 72.00 degF									
Rmc @ Meas. Temperature										1.700 ohmm @ 72.00 degF									
Source Rmf										MEASURED									
Rm @ BHT										0.84 ohmm @ 127.0 degF									
Time Since Circulation										5.0 hr									
Time on Bottom										18-Nov-12 13:05									
Max. Rec. Temperature										127.0 degF @ 6197.0 ft									
Equipment										10546696									
Recorded By										S. INGERSOLL									
Witnessed By										E. GRIEVES									

Fold here


Service Ticket No.: 900009270						API Serial No.: 15-119-21326						PGM Version: WL INSITE R3.6.0 (Build 3)															
CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE												RESISTIVITY SCALE CHANGES															
Date		Sample No.										Type Log		Depth		Scale Up Hole				Scale Down Hole							
Depth-Driller																											
Type Fluid in Hole																											
Density		Viscosity																									
Ph		Fluid Loss																									
Source of Sample												RESISTIVITY EQUIPMENT DATA															
Rm @ Meas. Temp				@				@				Run No.		Tool Type & No.		Pad Type				Tool Pos.				Other			
Rmf @ Meas. Temp.				@				@				ONE		ACRT		N/A				1.5" S.O.							
Rmc @ Meas. Temp.				@				@						11005909													
Source Rmf		Rmc																									
Rm @ BHT				@				@																			
Rmf @ BHT				@				@																			
Rmc @ BHT				@				@																			
EQUIPMENT DATA																											
GAMMA						ACOUSTIC						DENSITY						NEUTRON									
Run No.		ONE				Run No.						Run No.		ONE				Run No.		ONE							
Serial No.		11039640				Serial No.						Serial No.		11014296				Serial No.		11055304							
Model No.		GTET				Model No.						Model No.		SDLT				Model No.		DSNT							
Diameter		3.625"				No. of Cent.						Diameter		4.5"				Diameter		3.625"							
Detector Model No.		GTET				Spacing						Log Type		GAM-GAM				Log Type		NEU-NEU							
Type		SCINT										Source Type		CS-137				Source Type		AM-241BE							
Length		8"				LSA [Y/N]						Serial No.		5168GW				Serial No.		DSN-424							
Distance to Source		NA				FWDA [Y/N]						Strength		1.5 CI				Strength		15 CI							

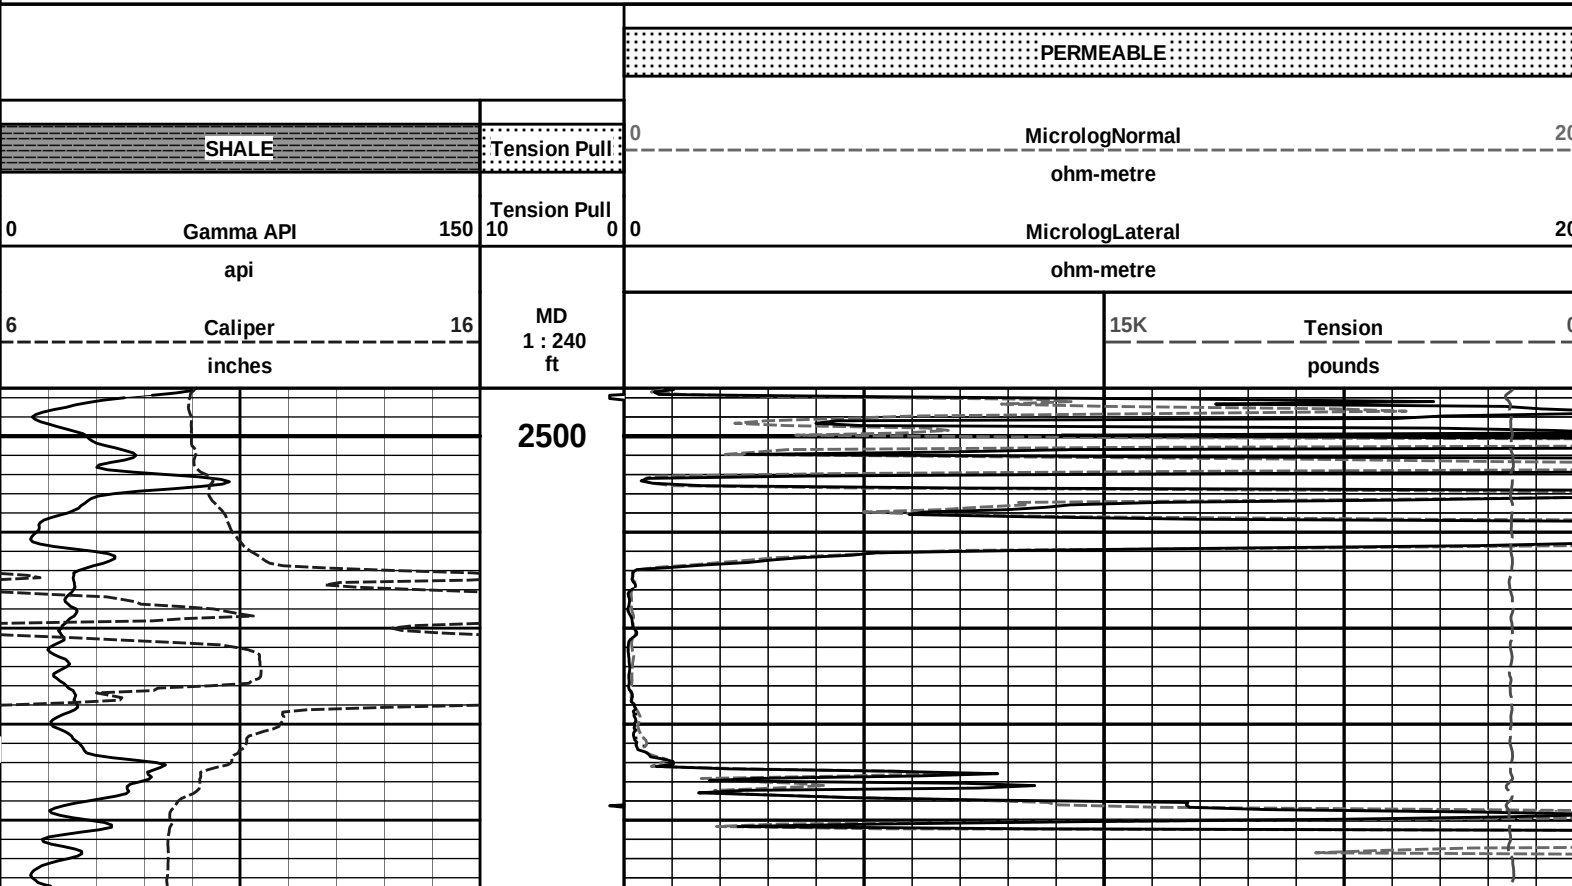
[illegible]

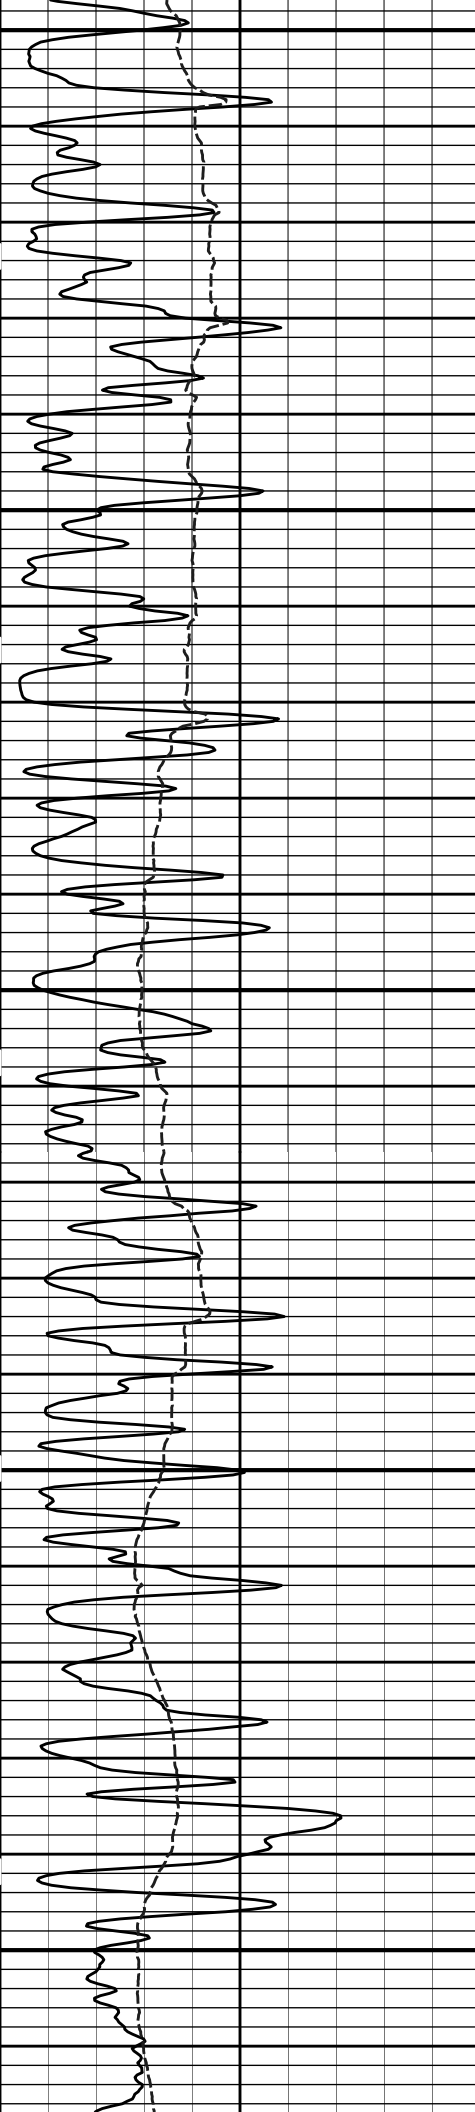

2600


2700

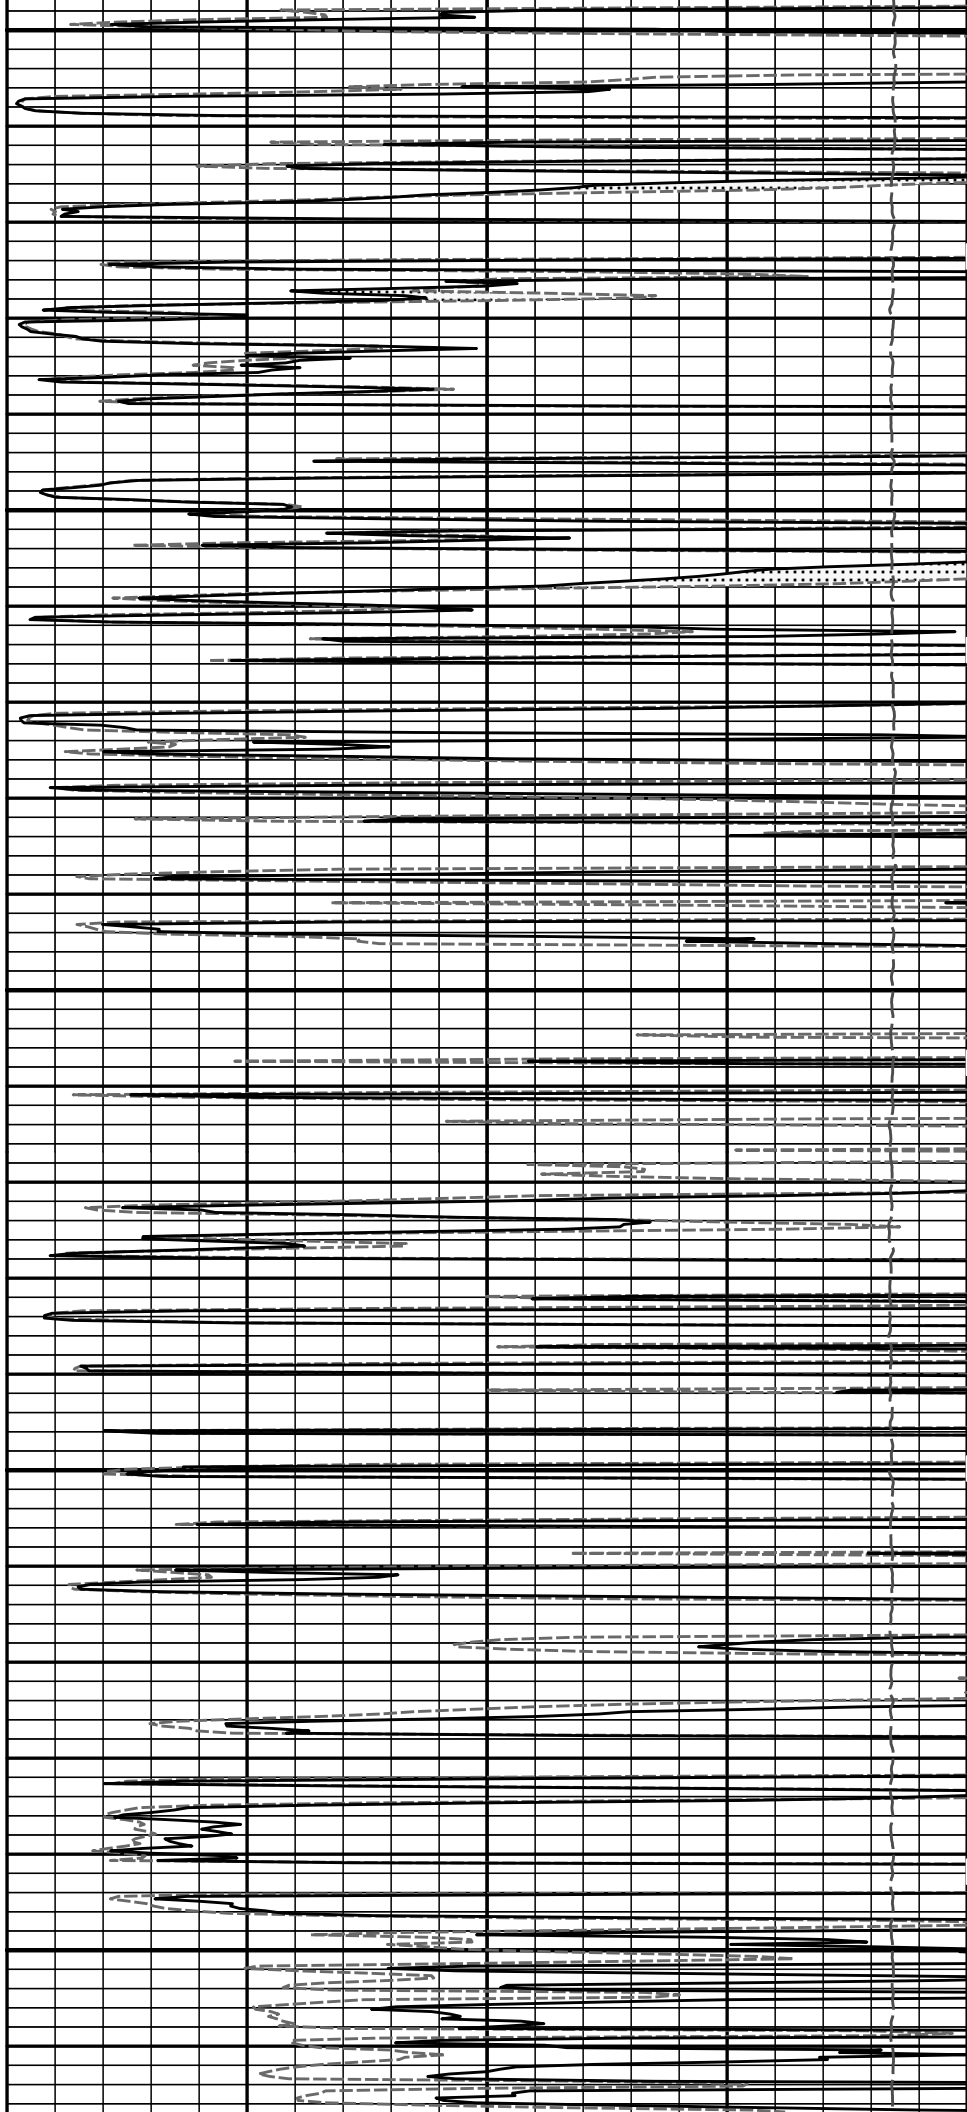


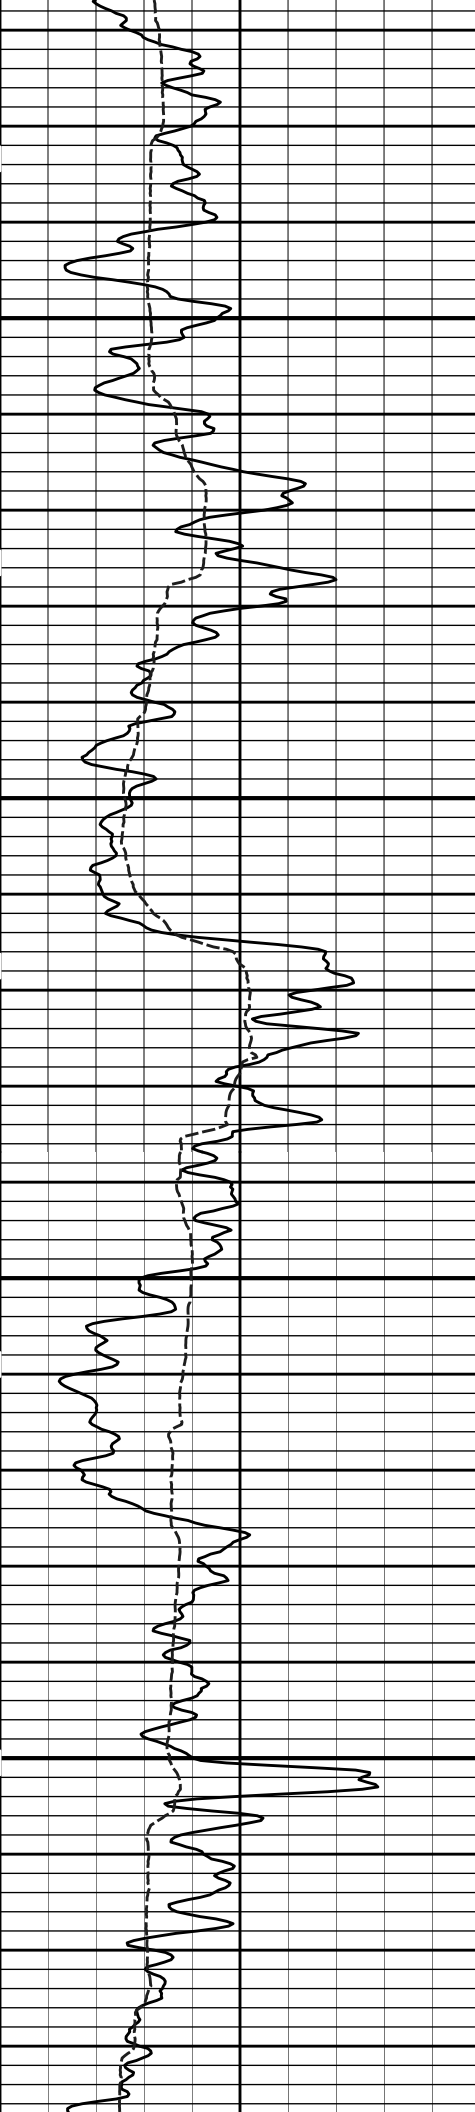

2800

2900

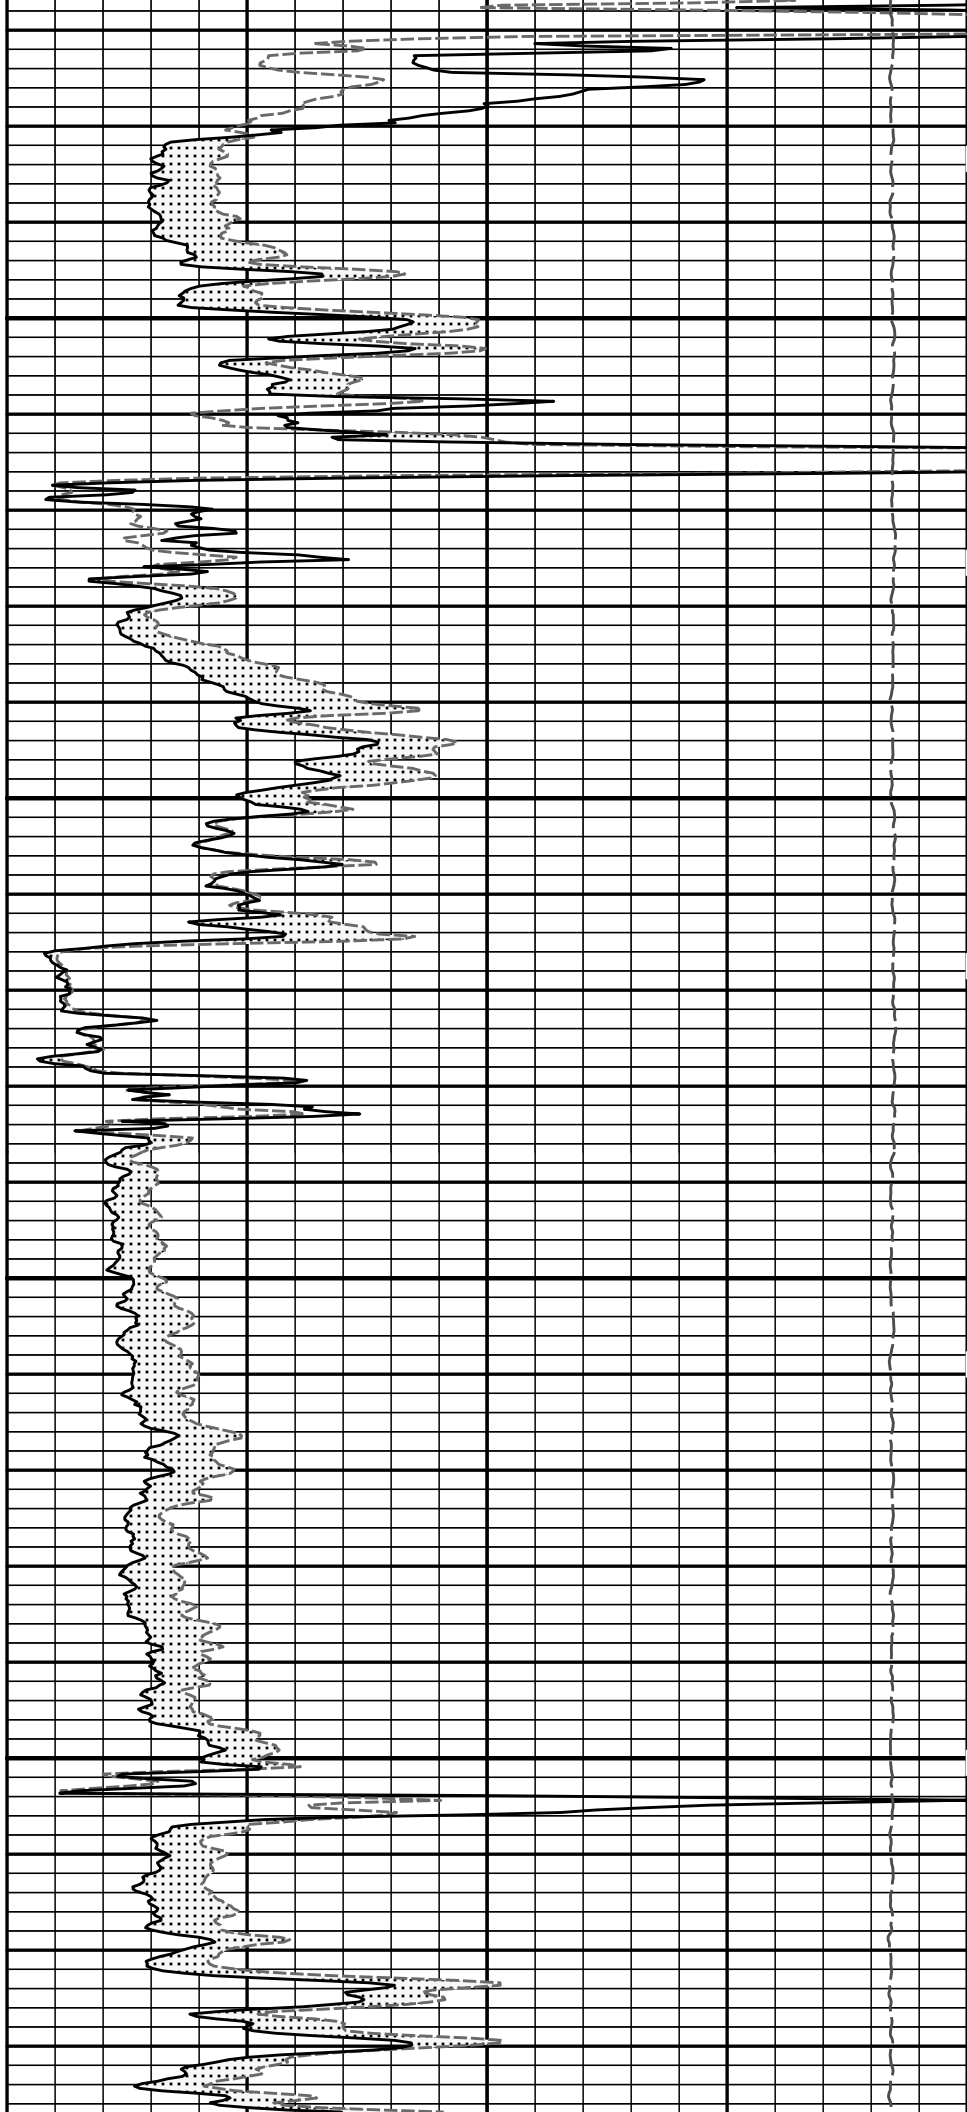


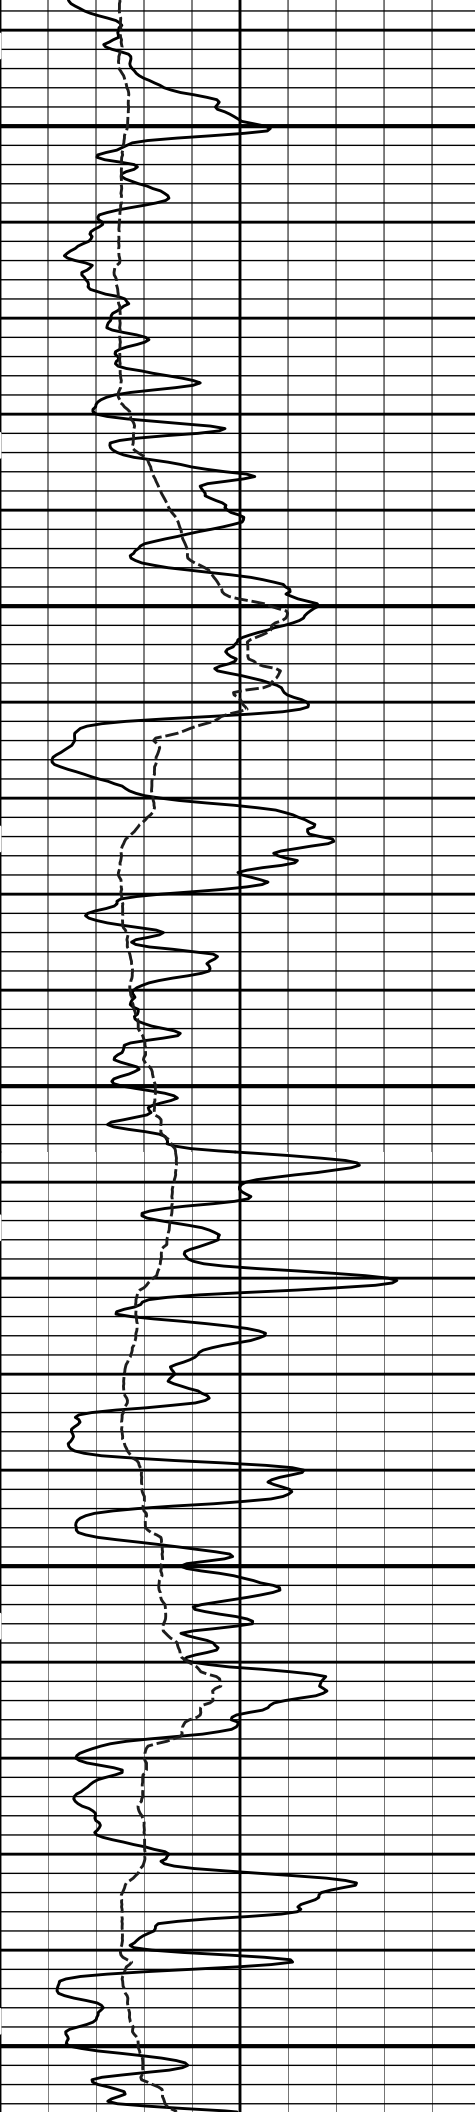


3000

3100


3200

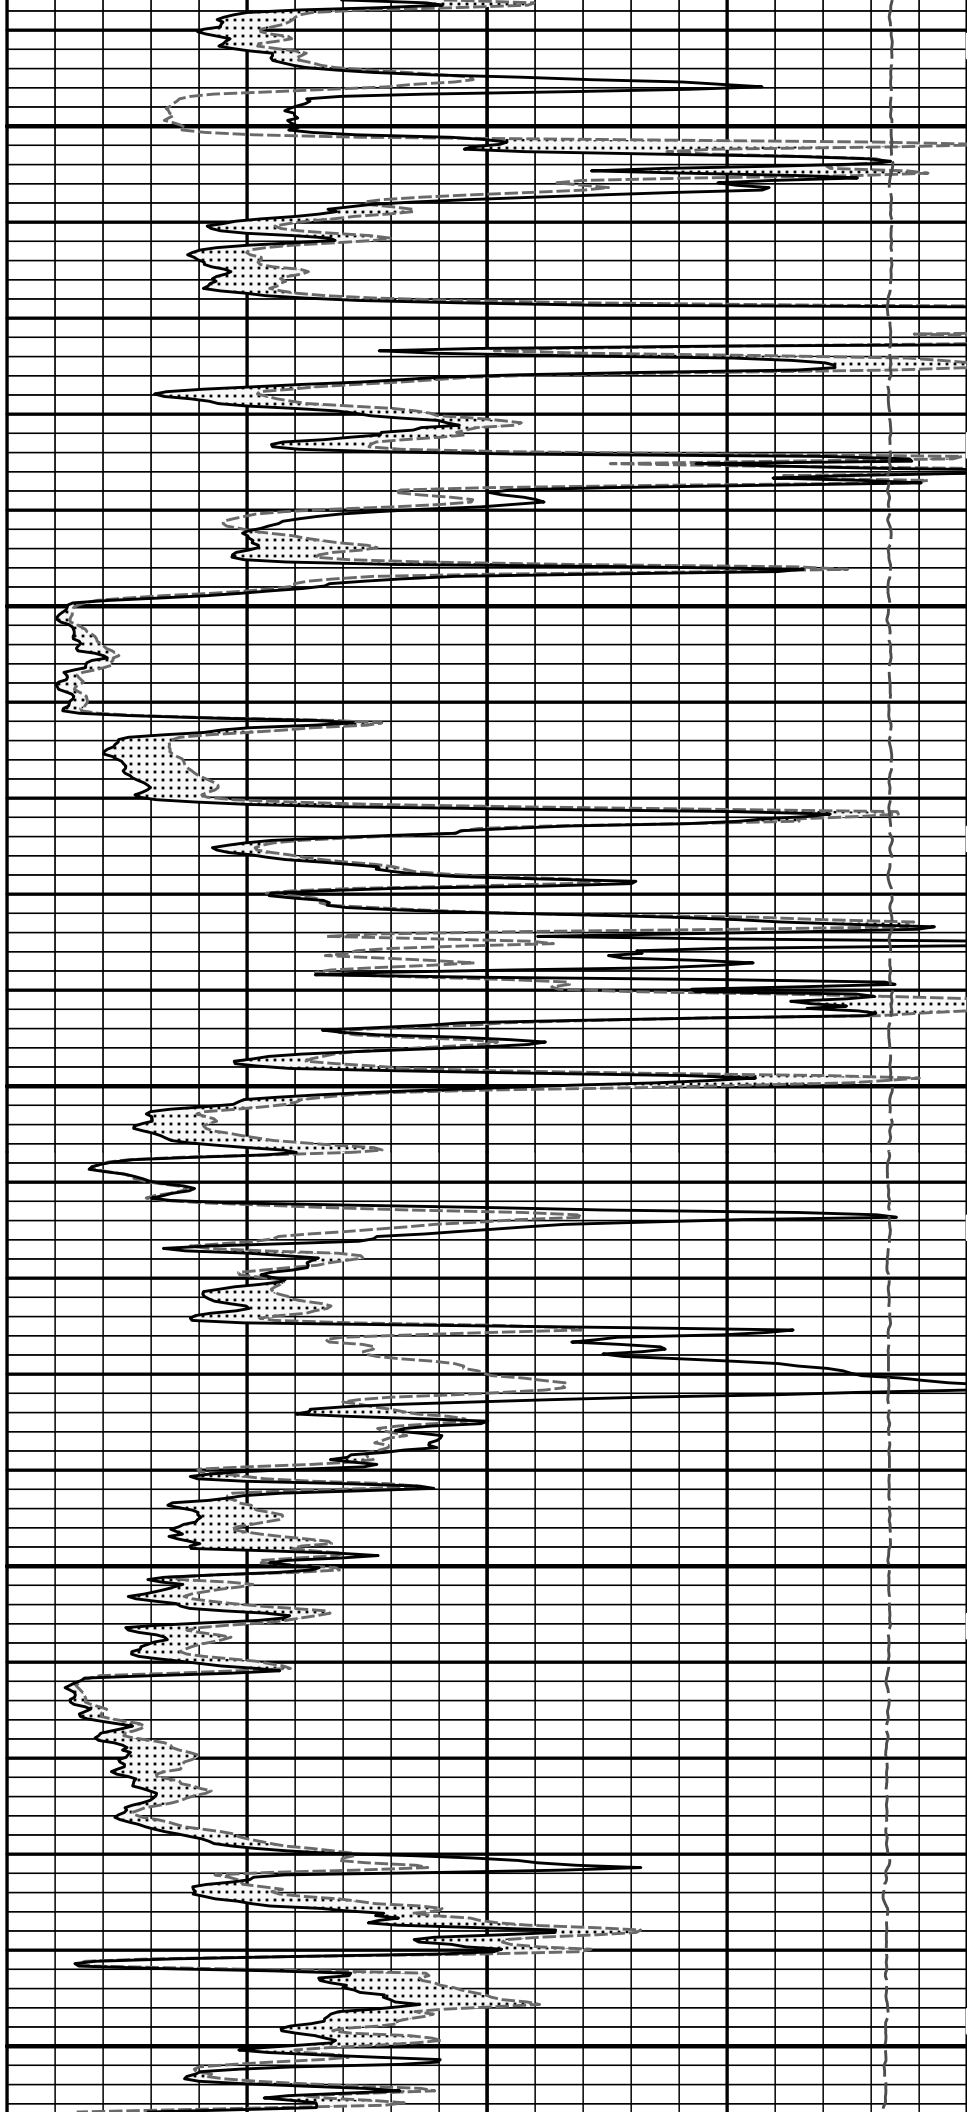


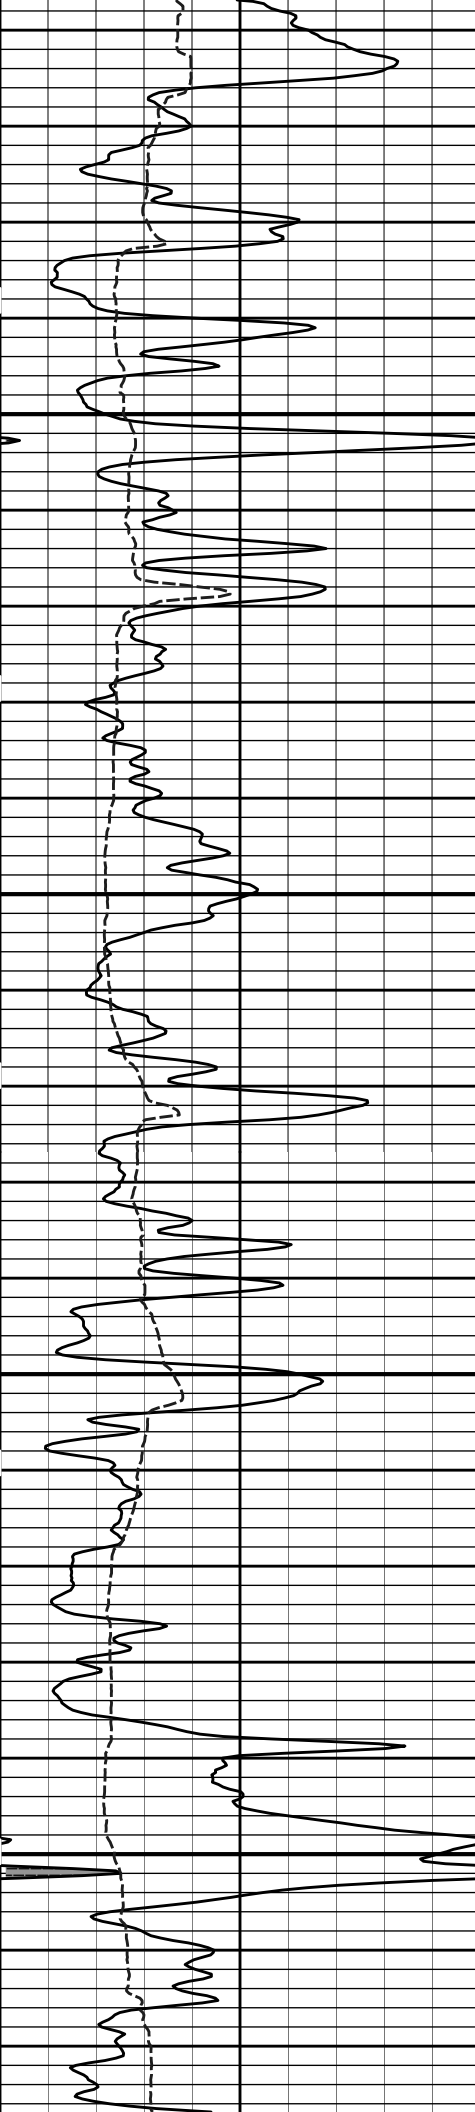

3300


3400

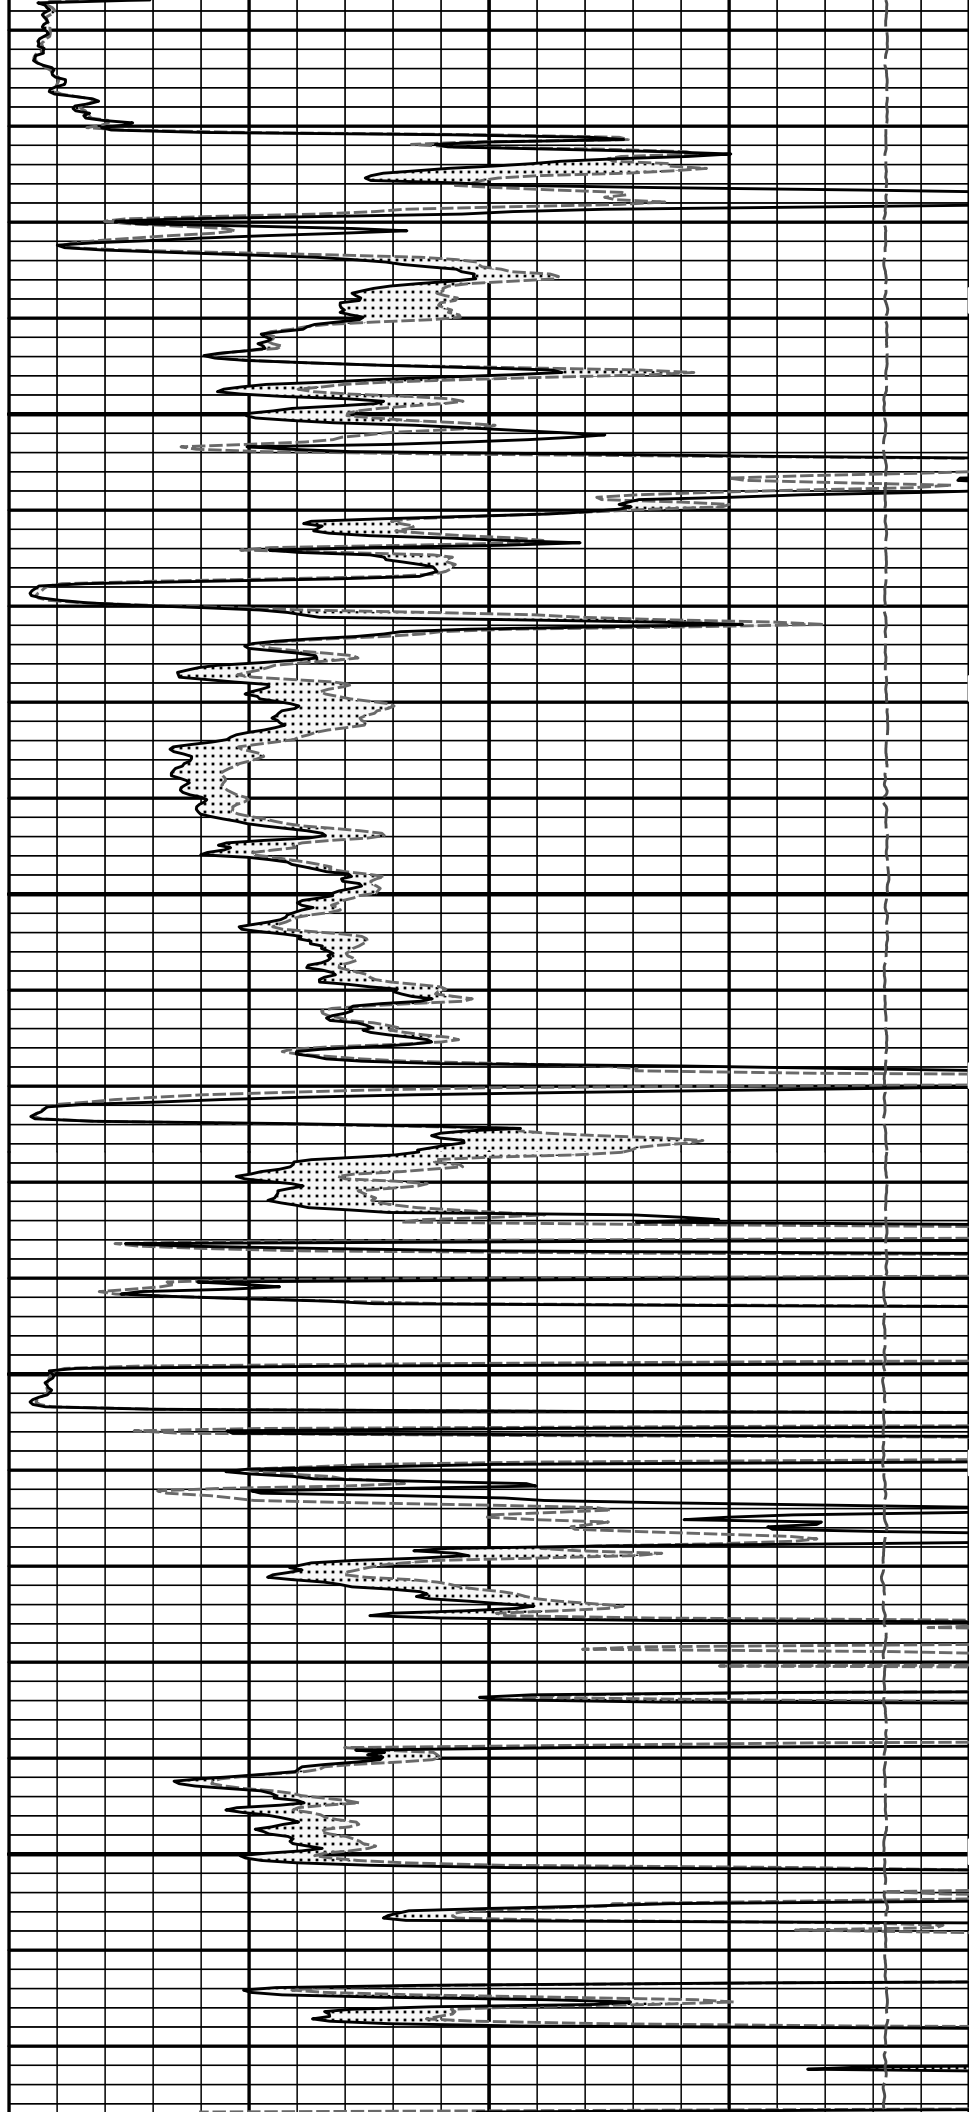


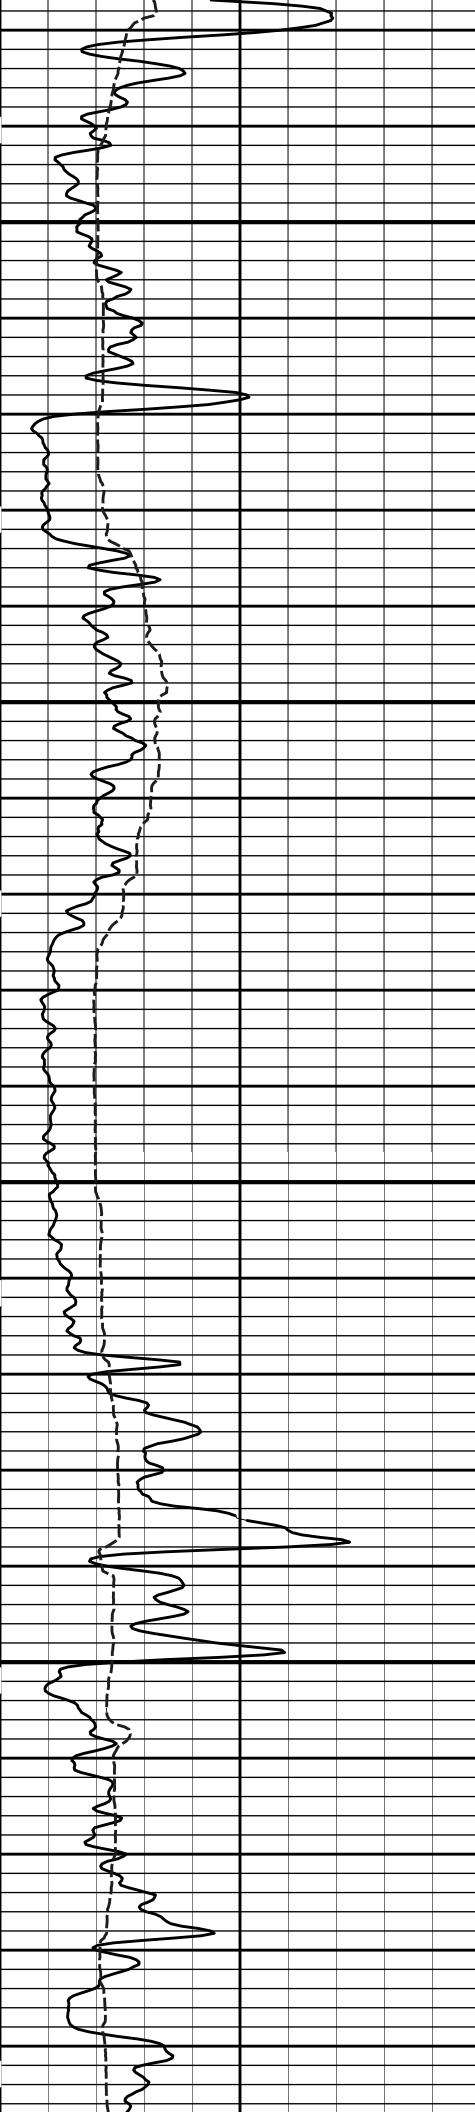

3500


3600

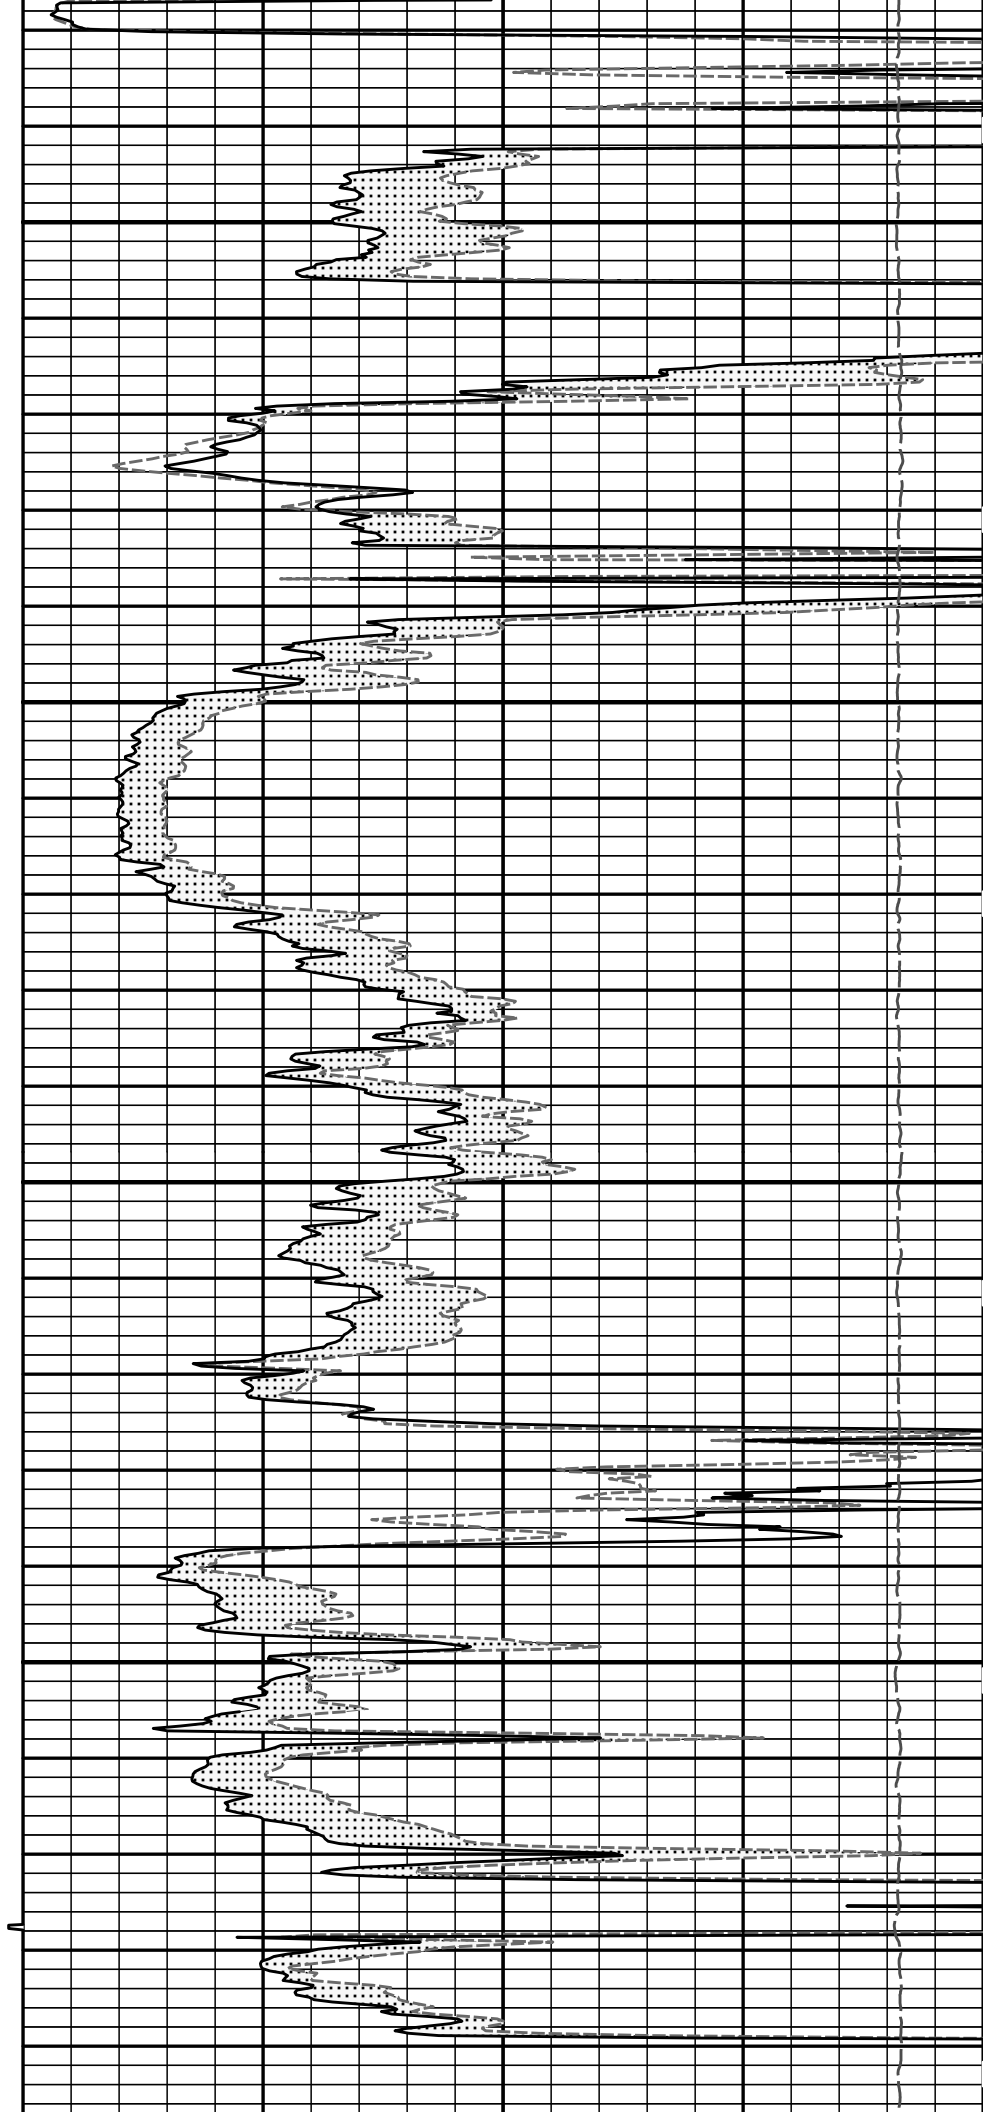


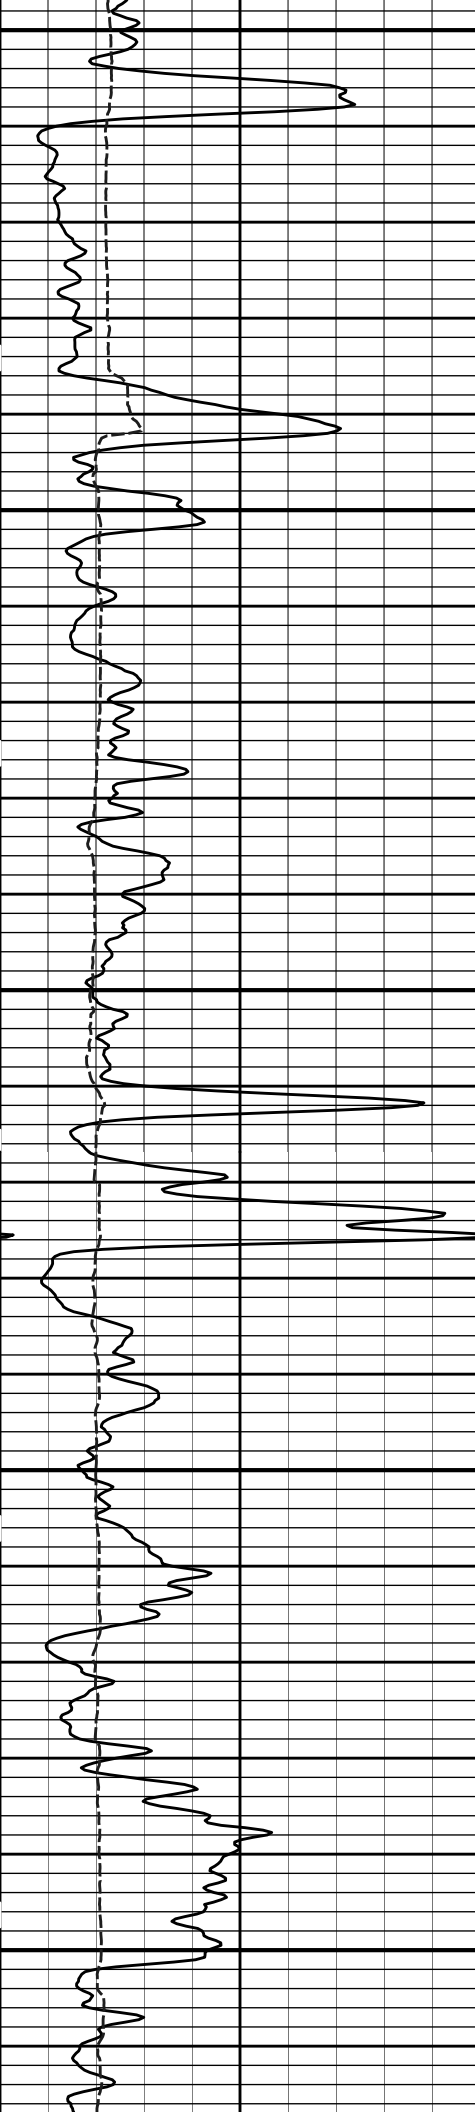

3700


3800

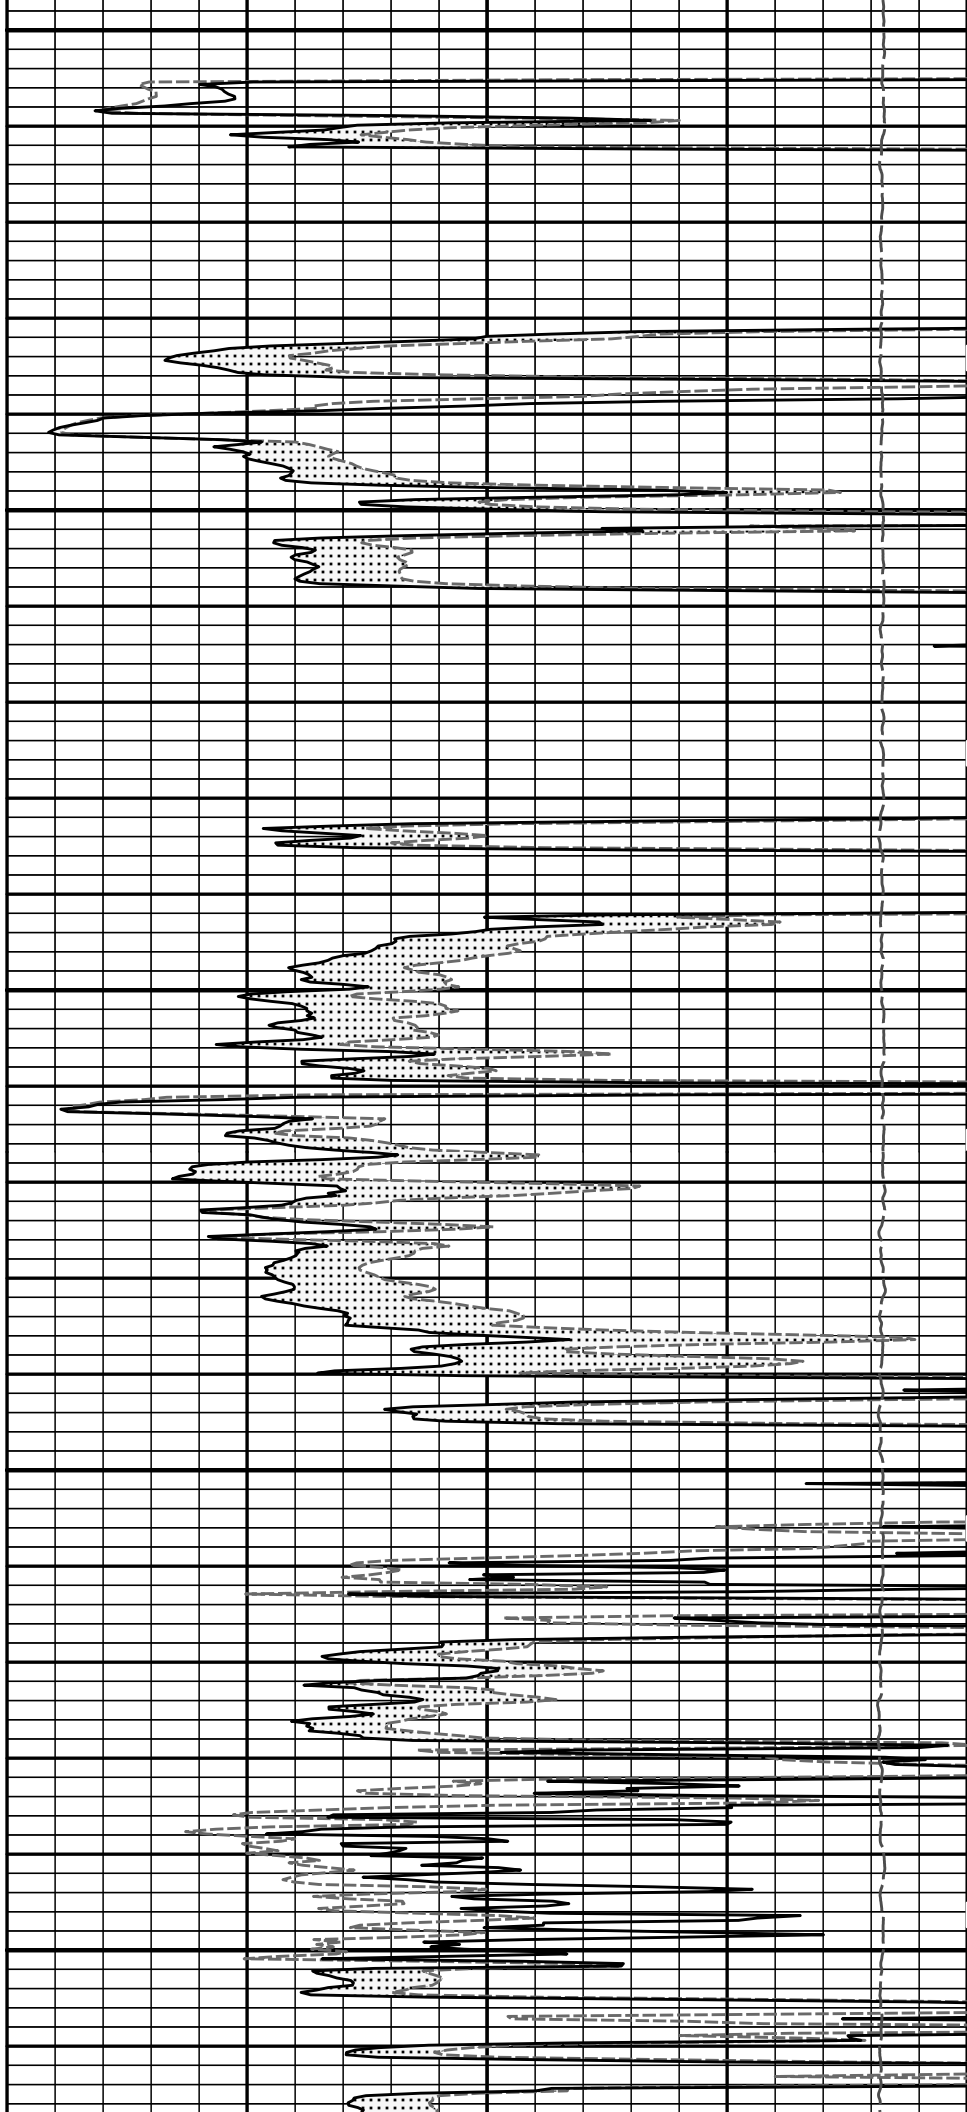


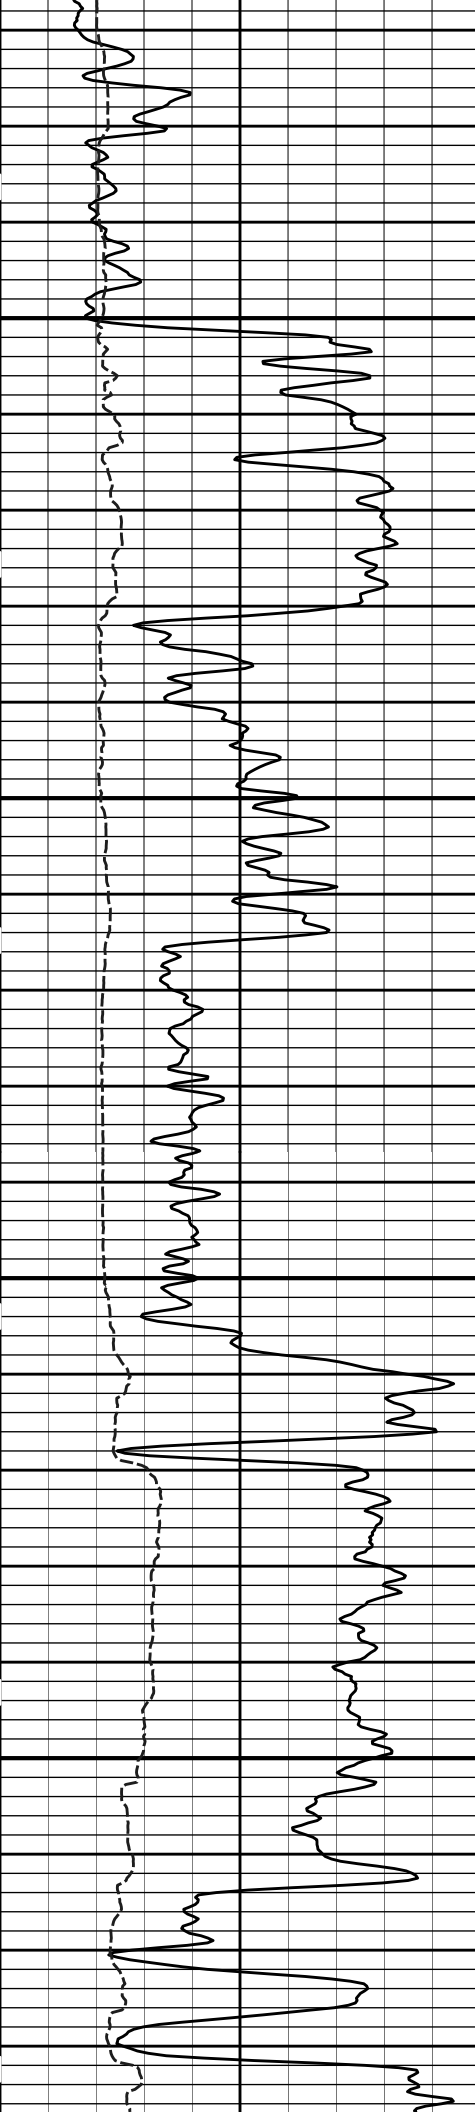

3900

4000

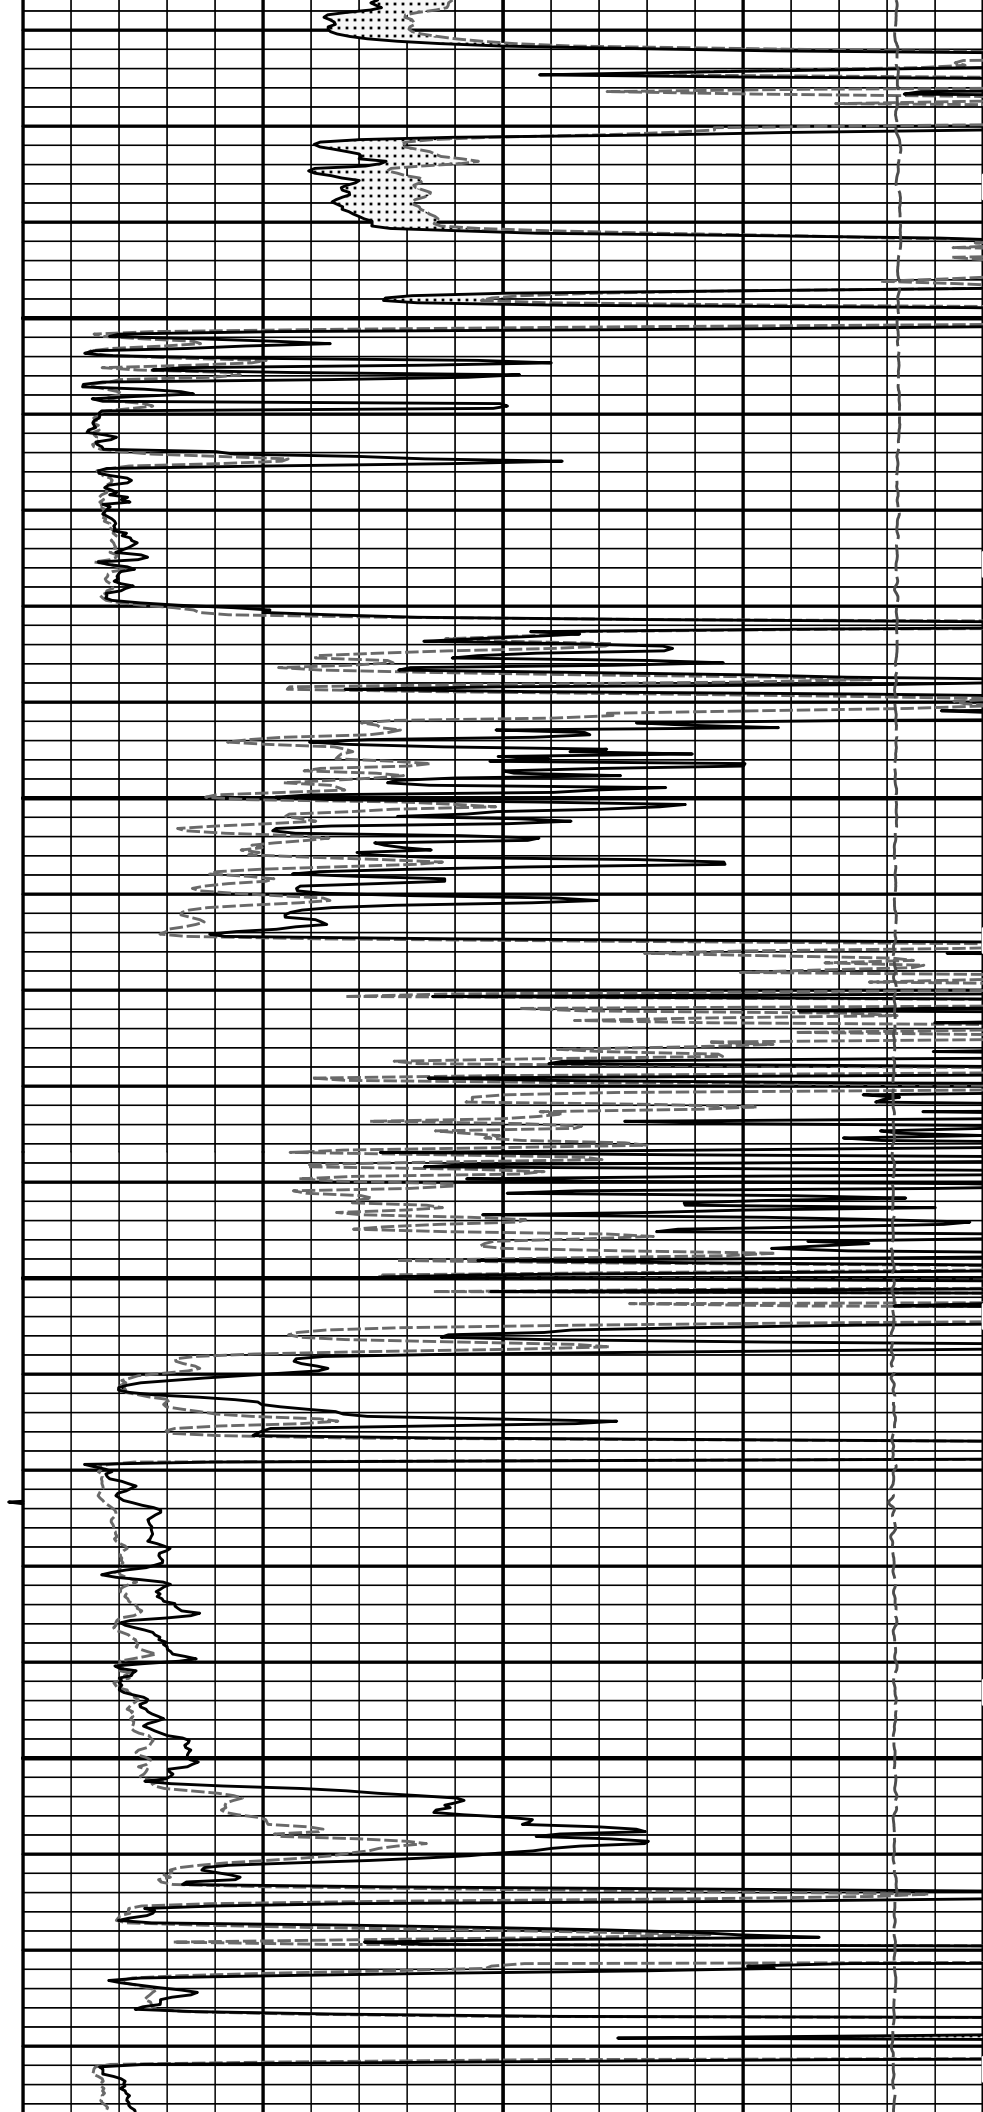


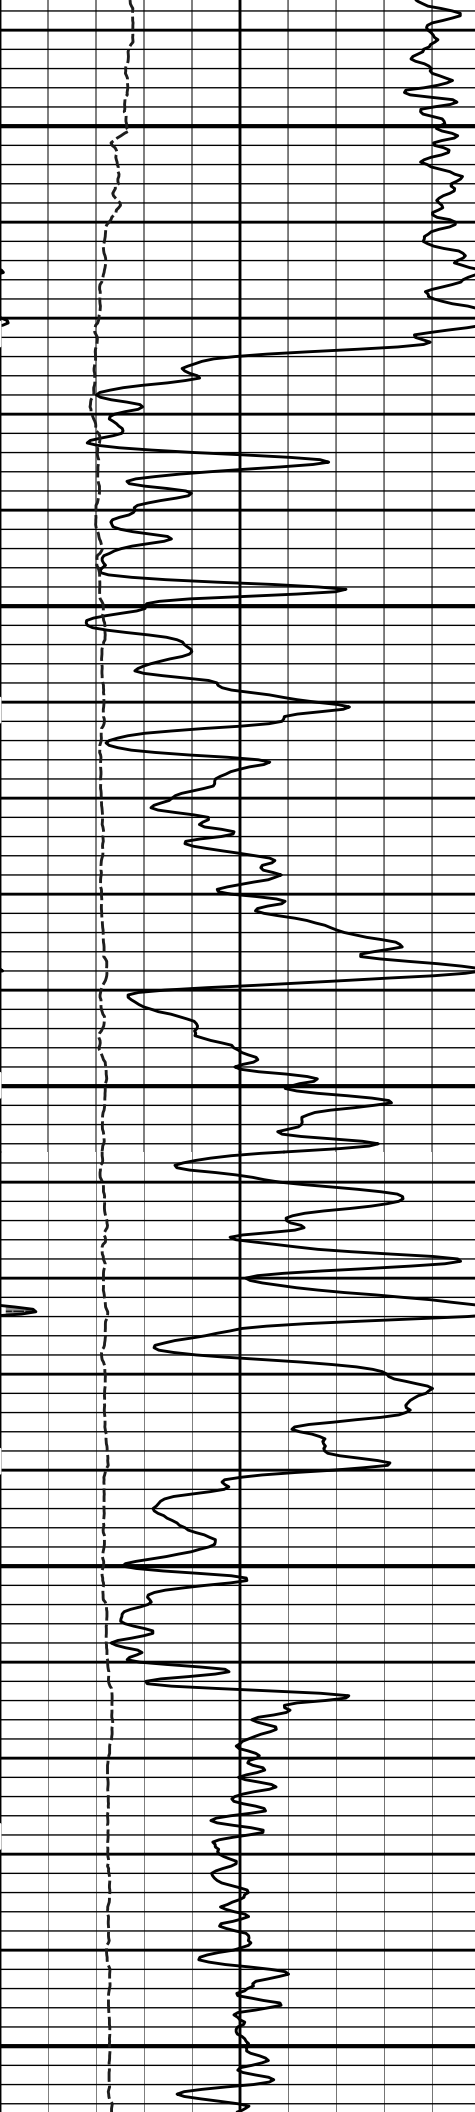


4100

4200


4300

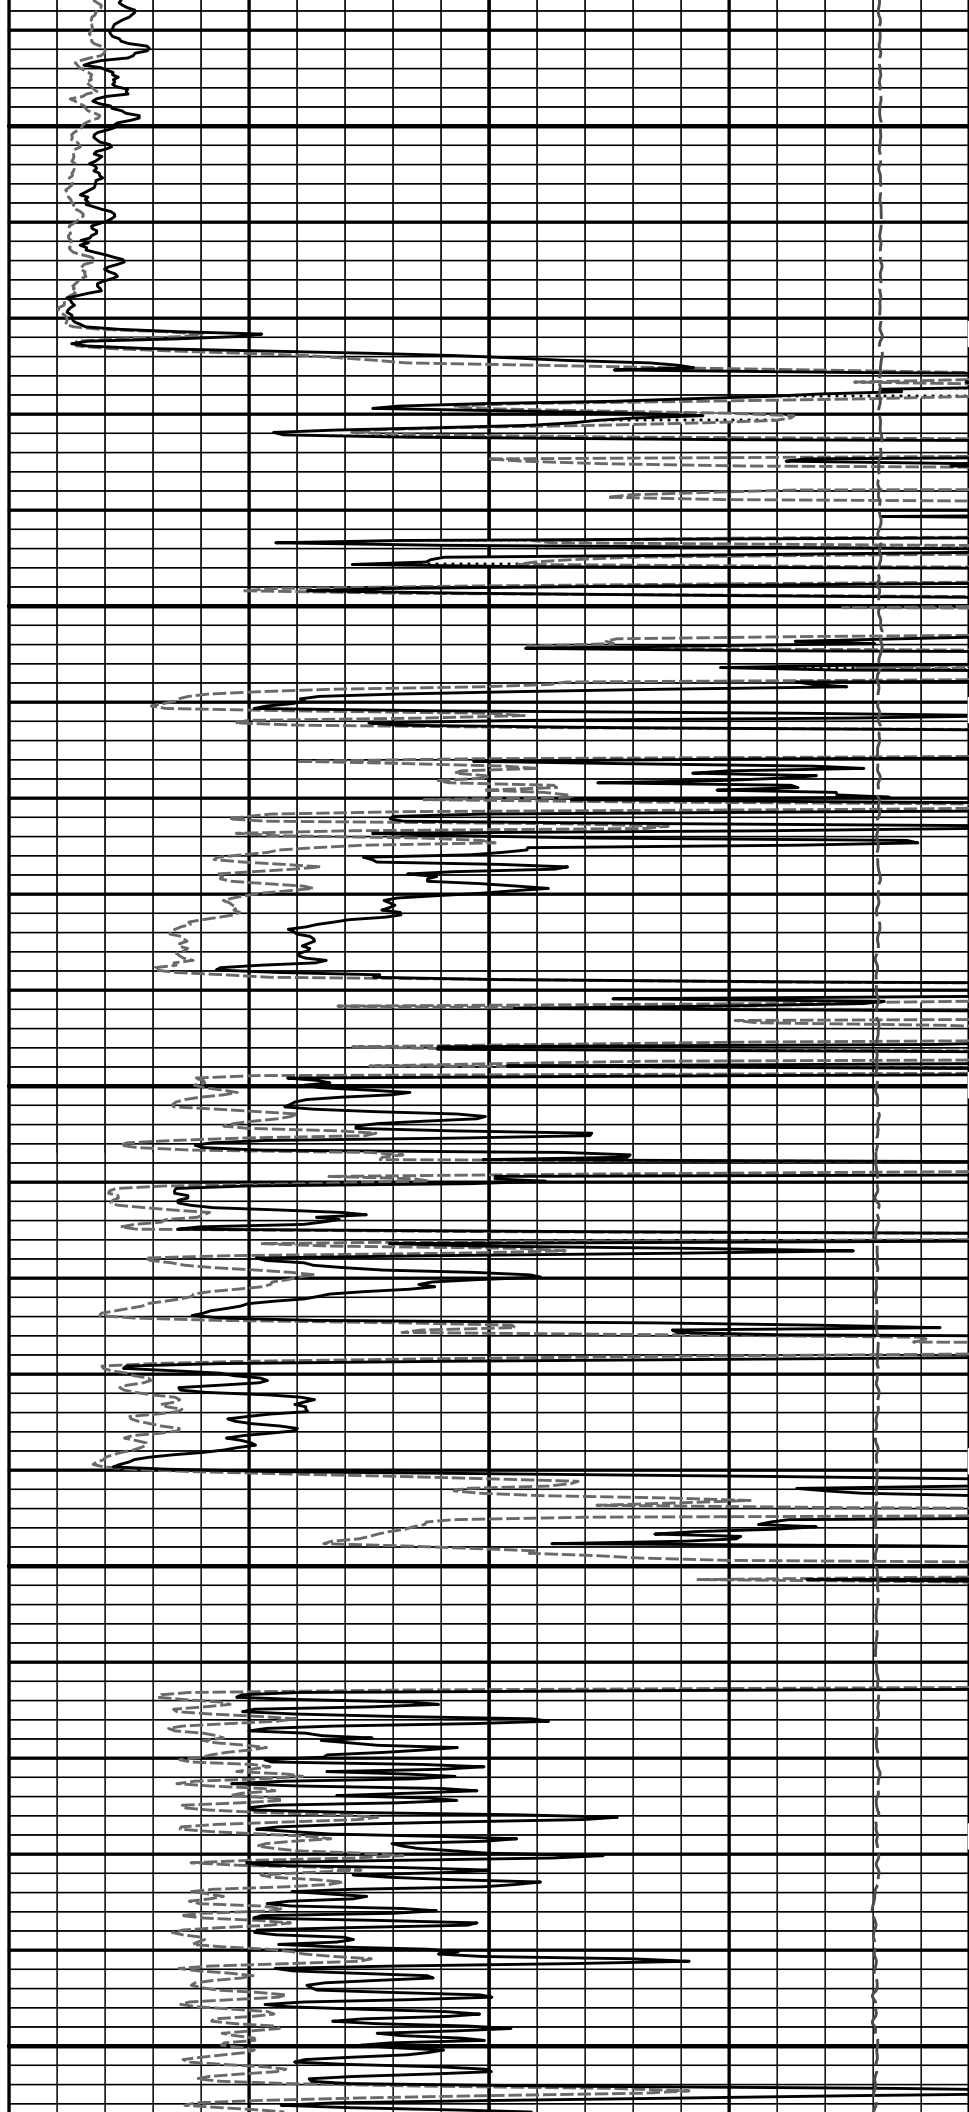


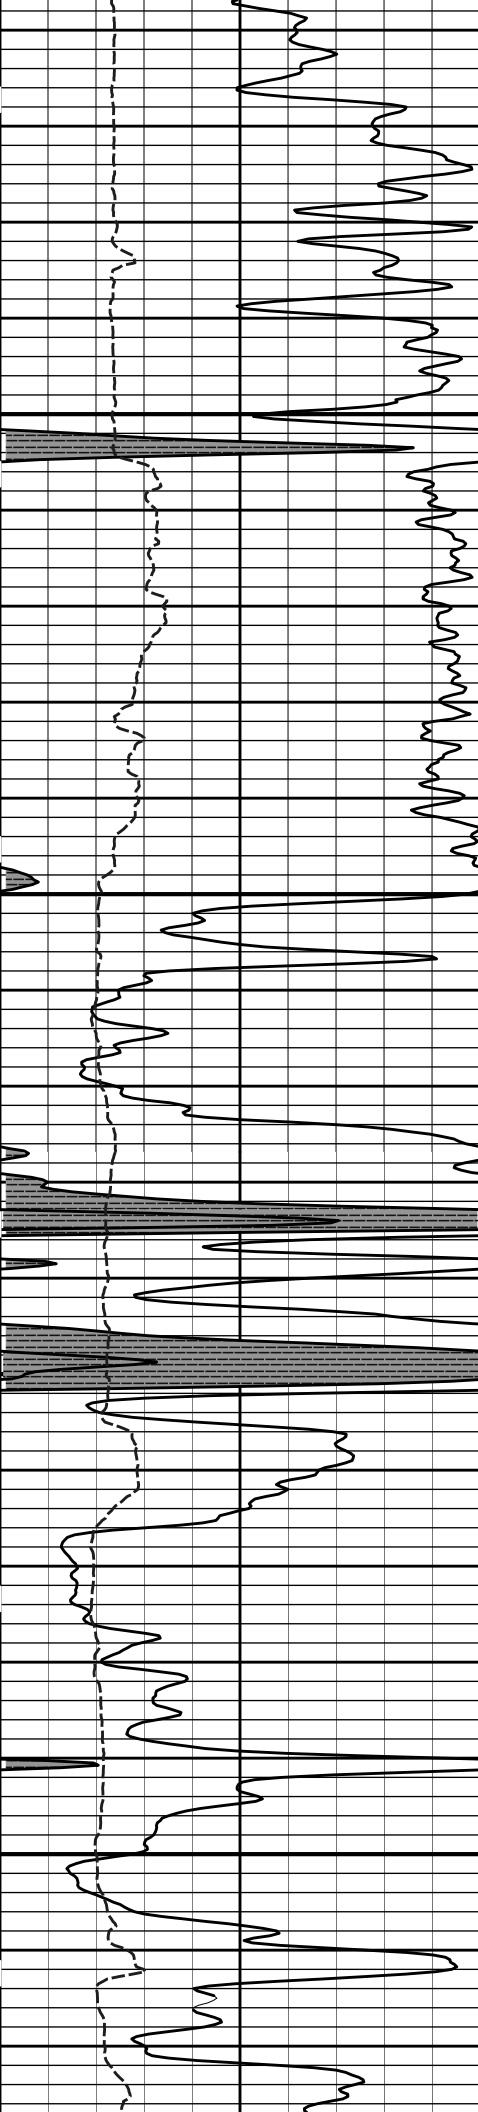

4400


4500

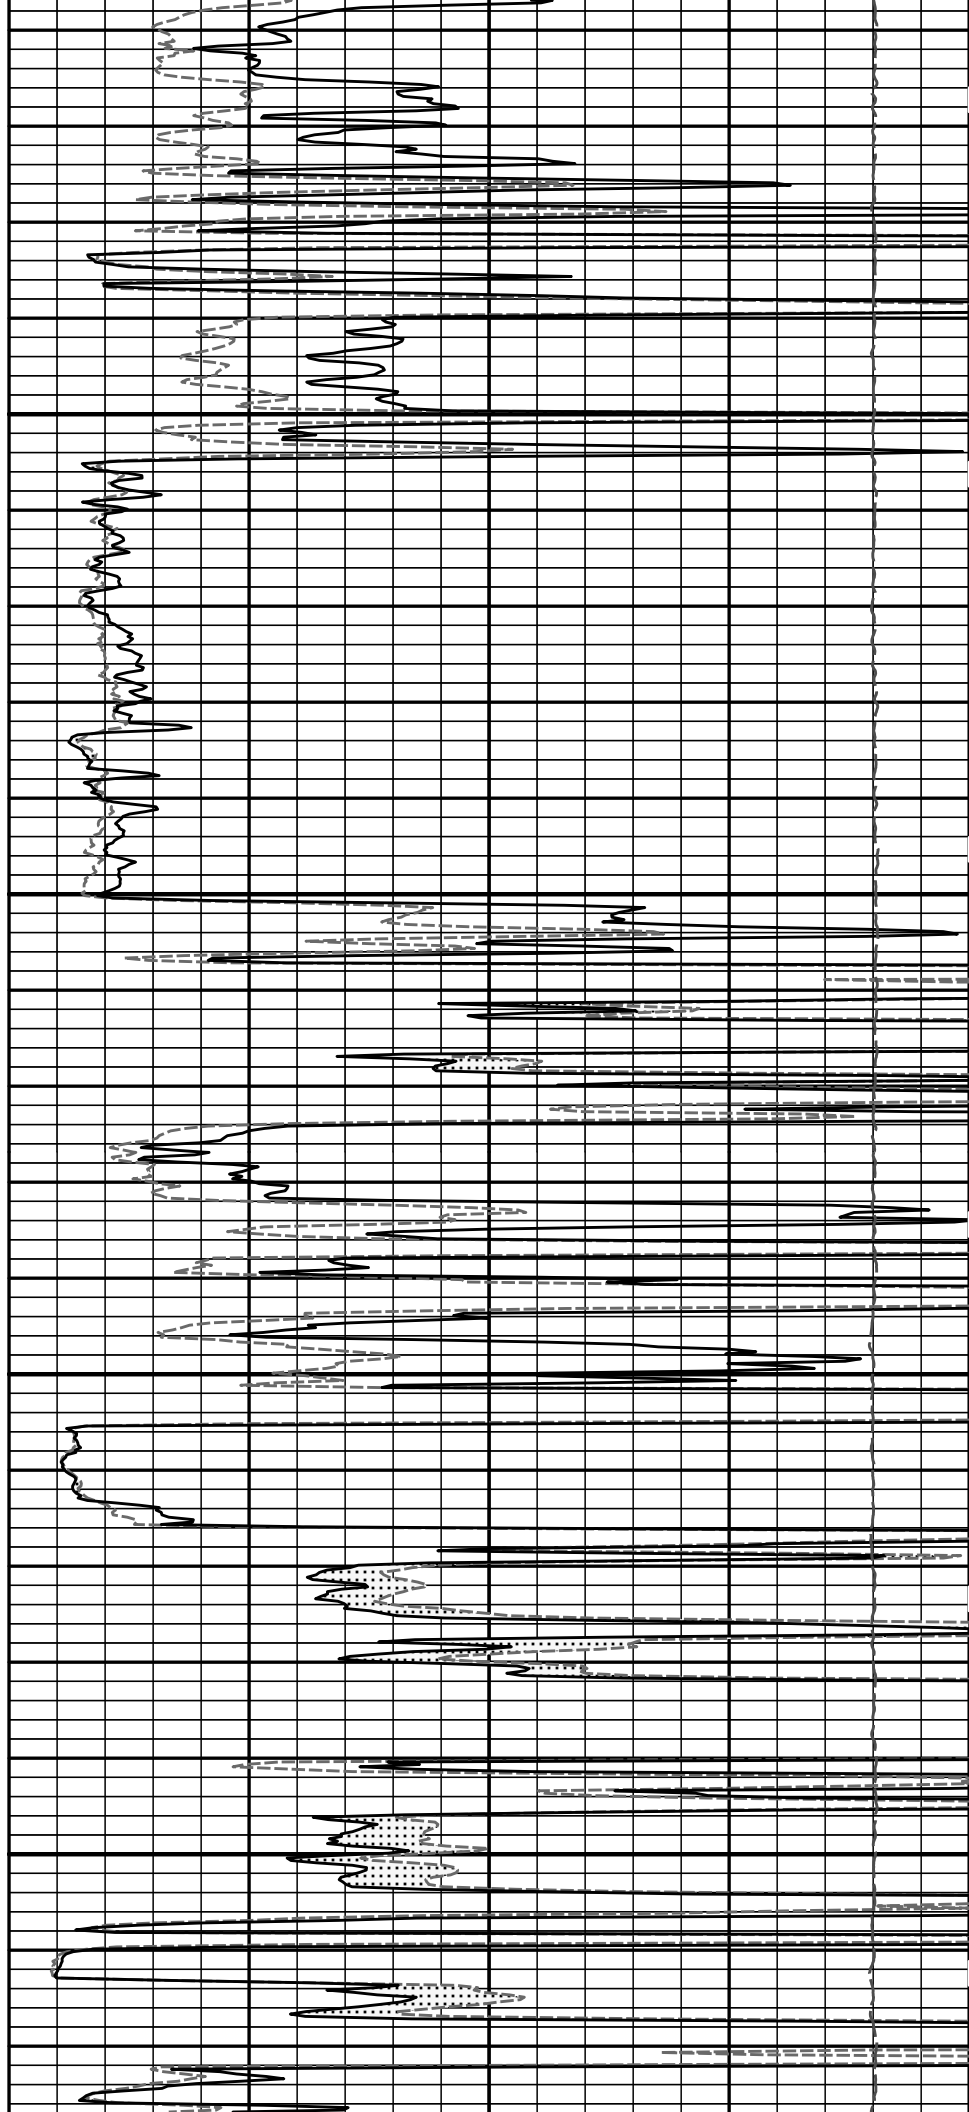


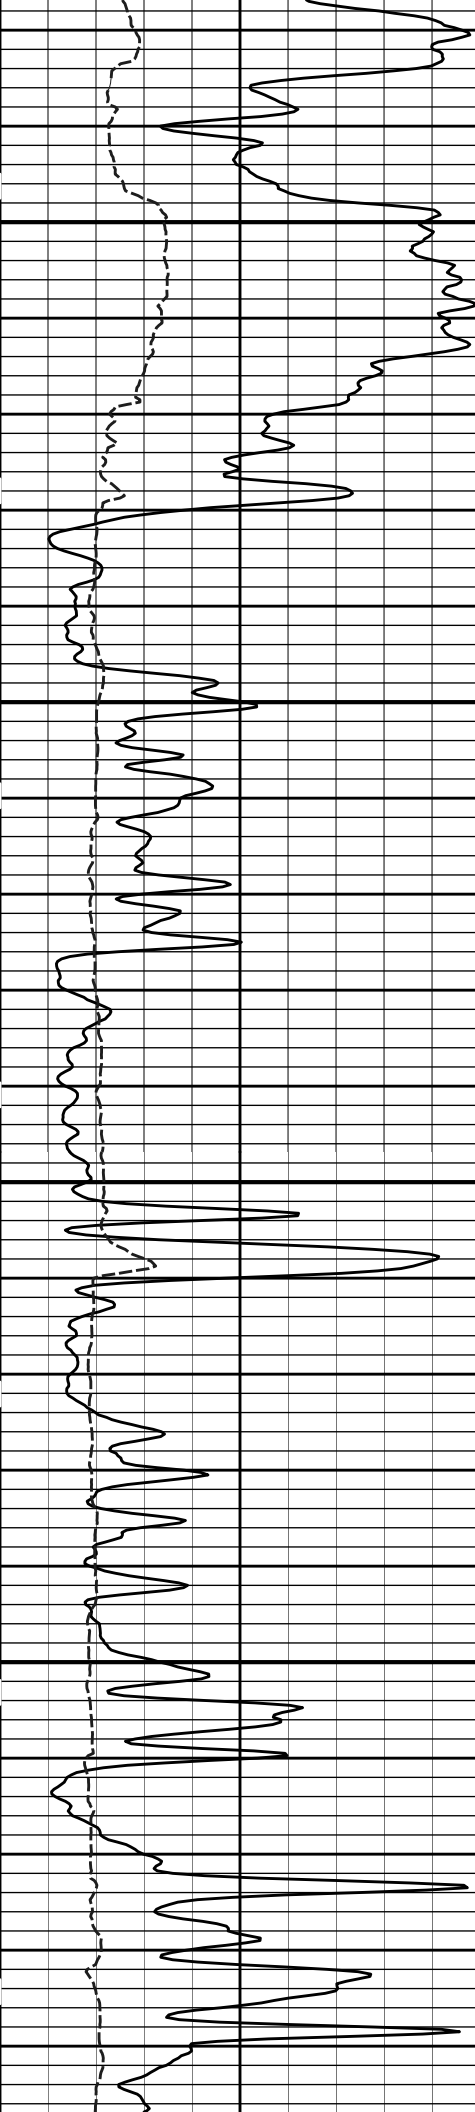

4600


4700

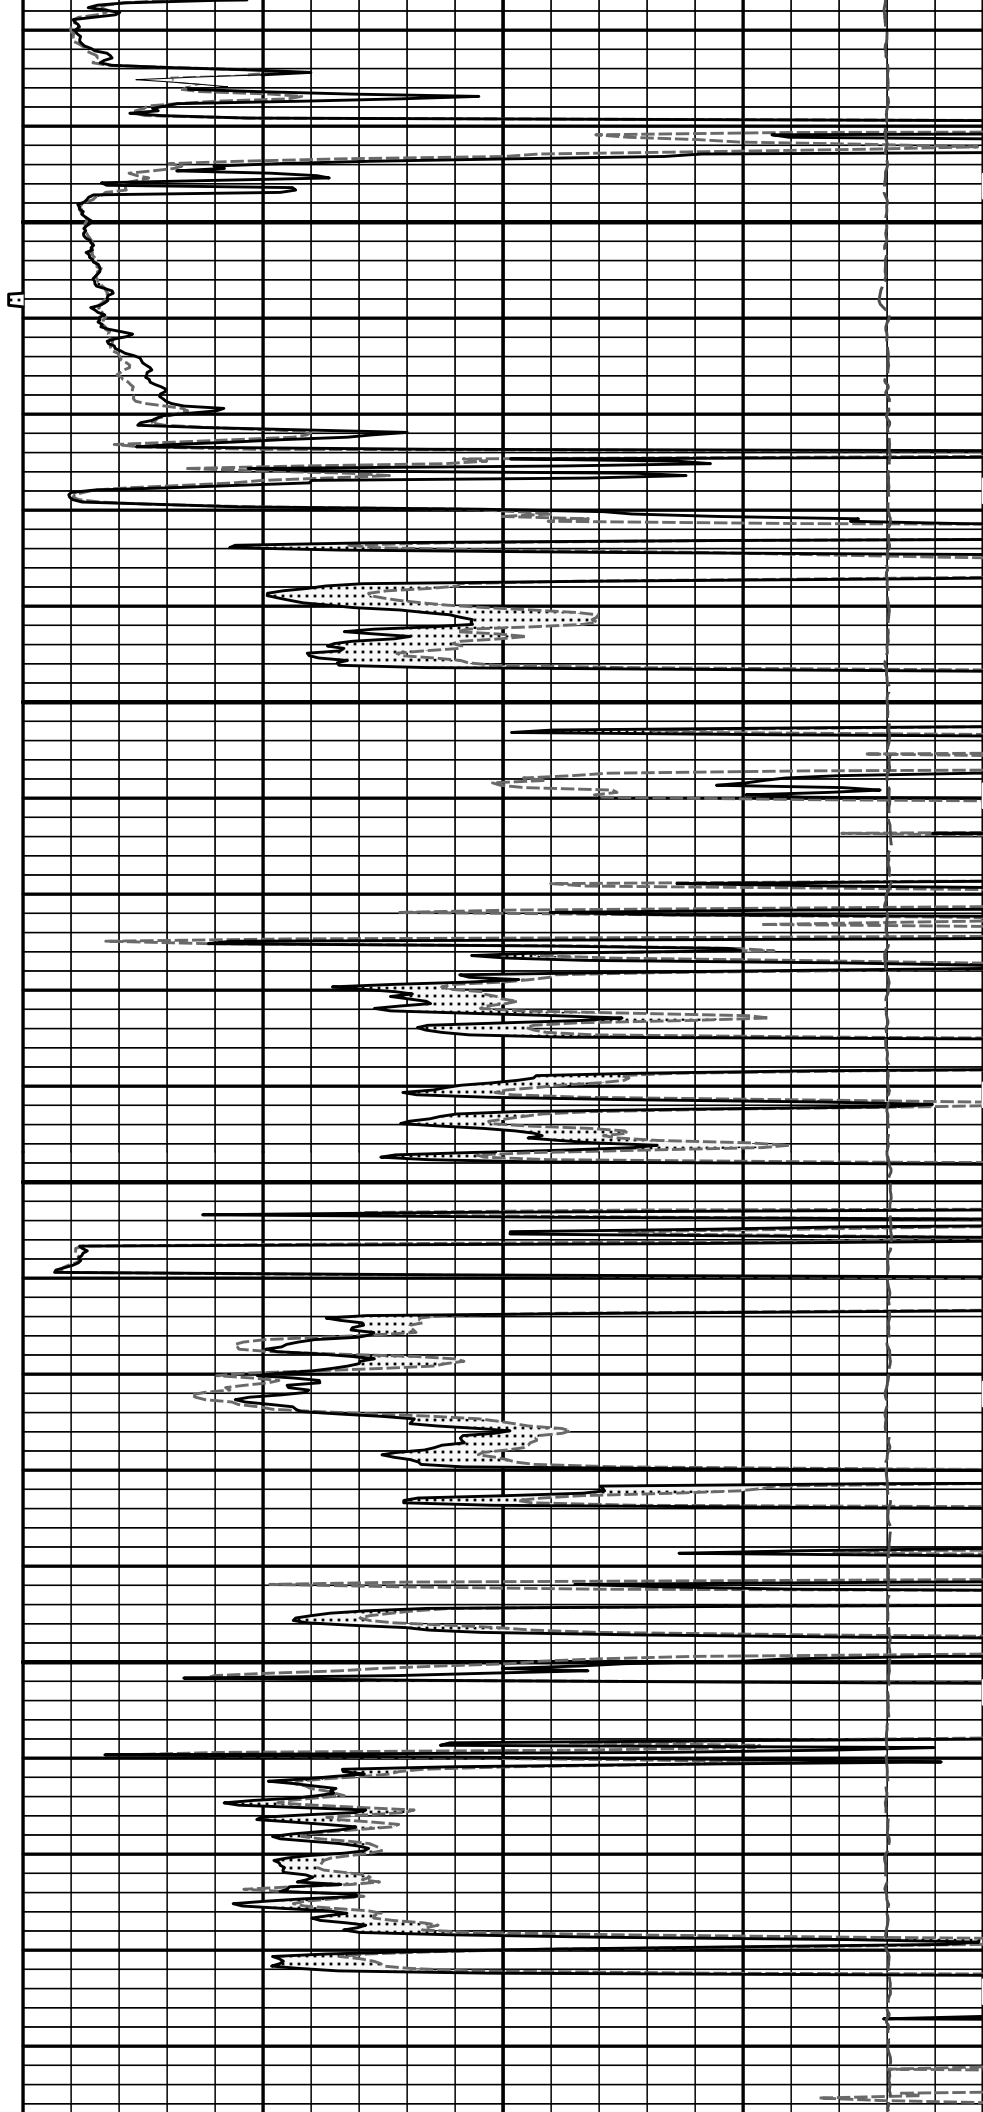


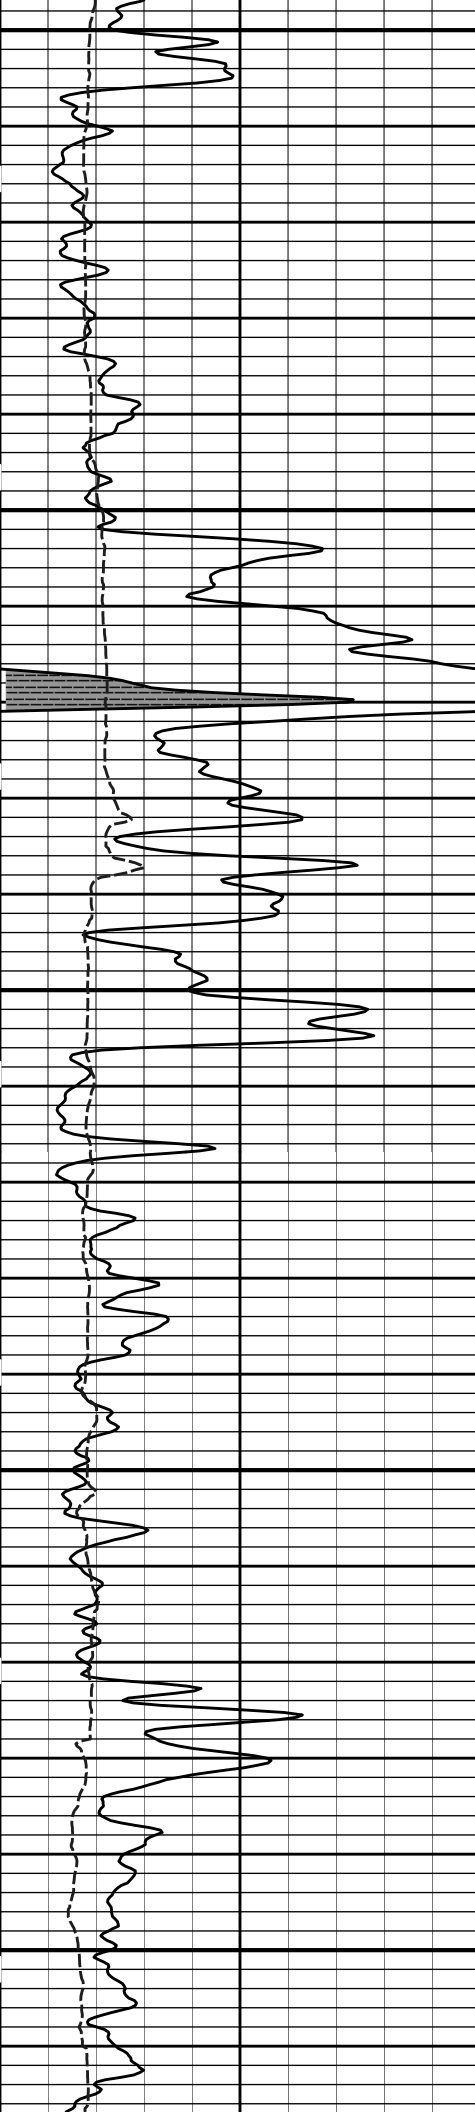

4800


4900

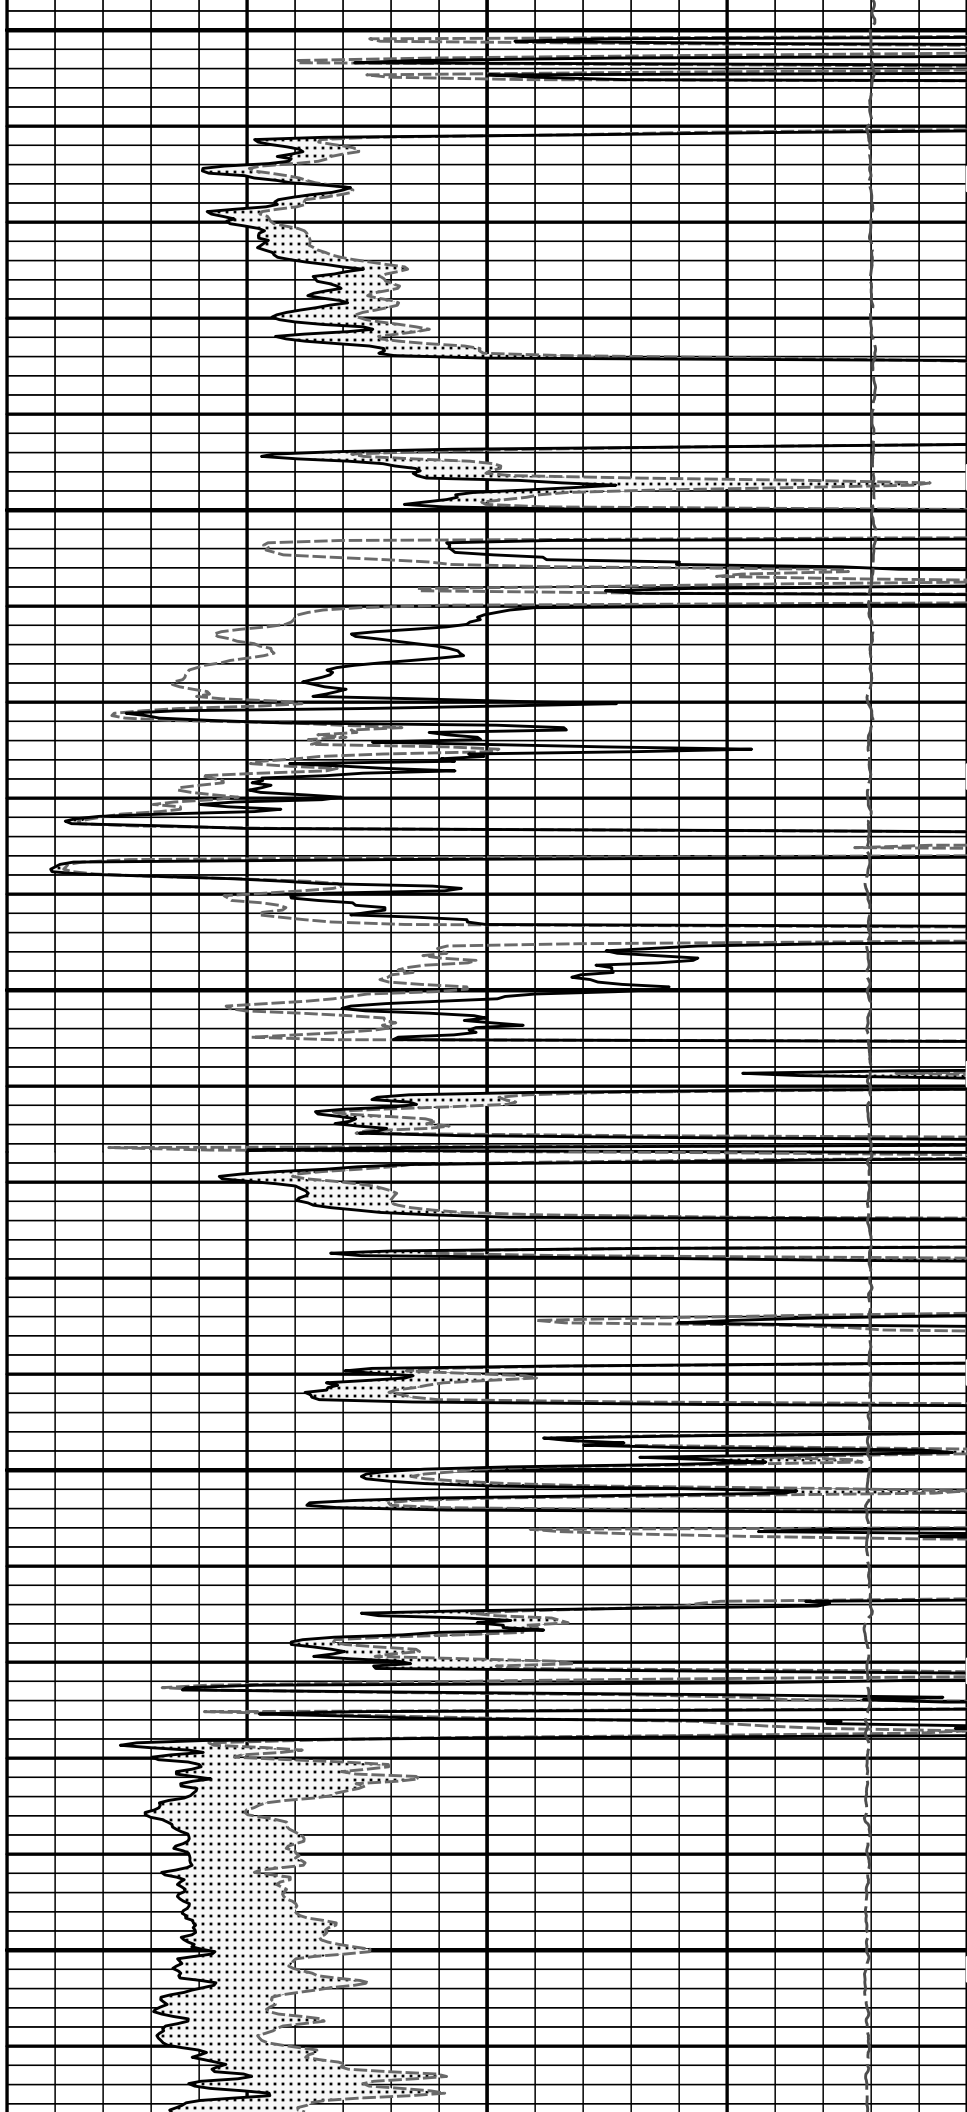


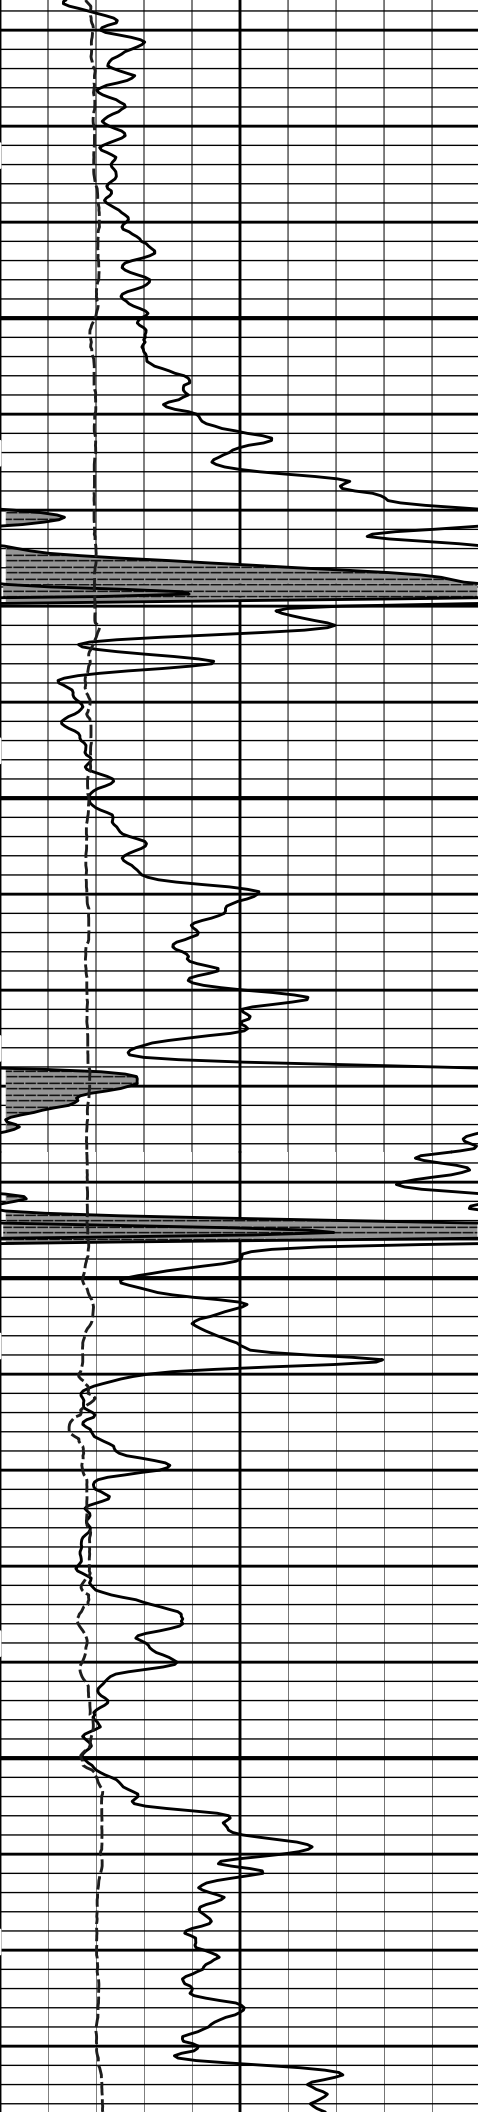

5000

5100

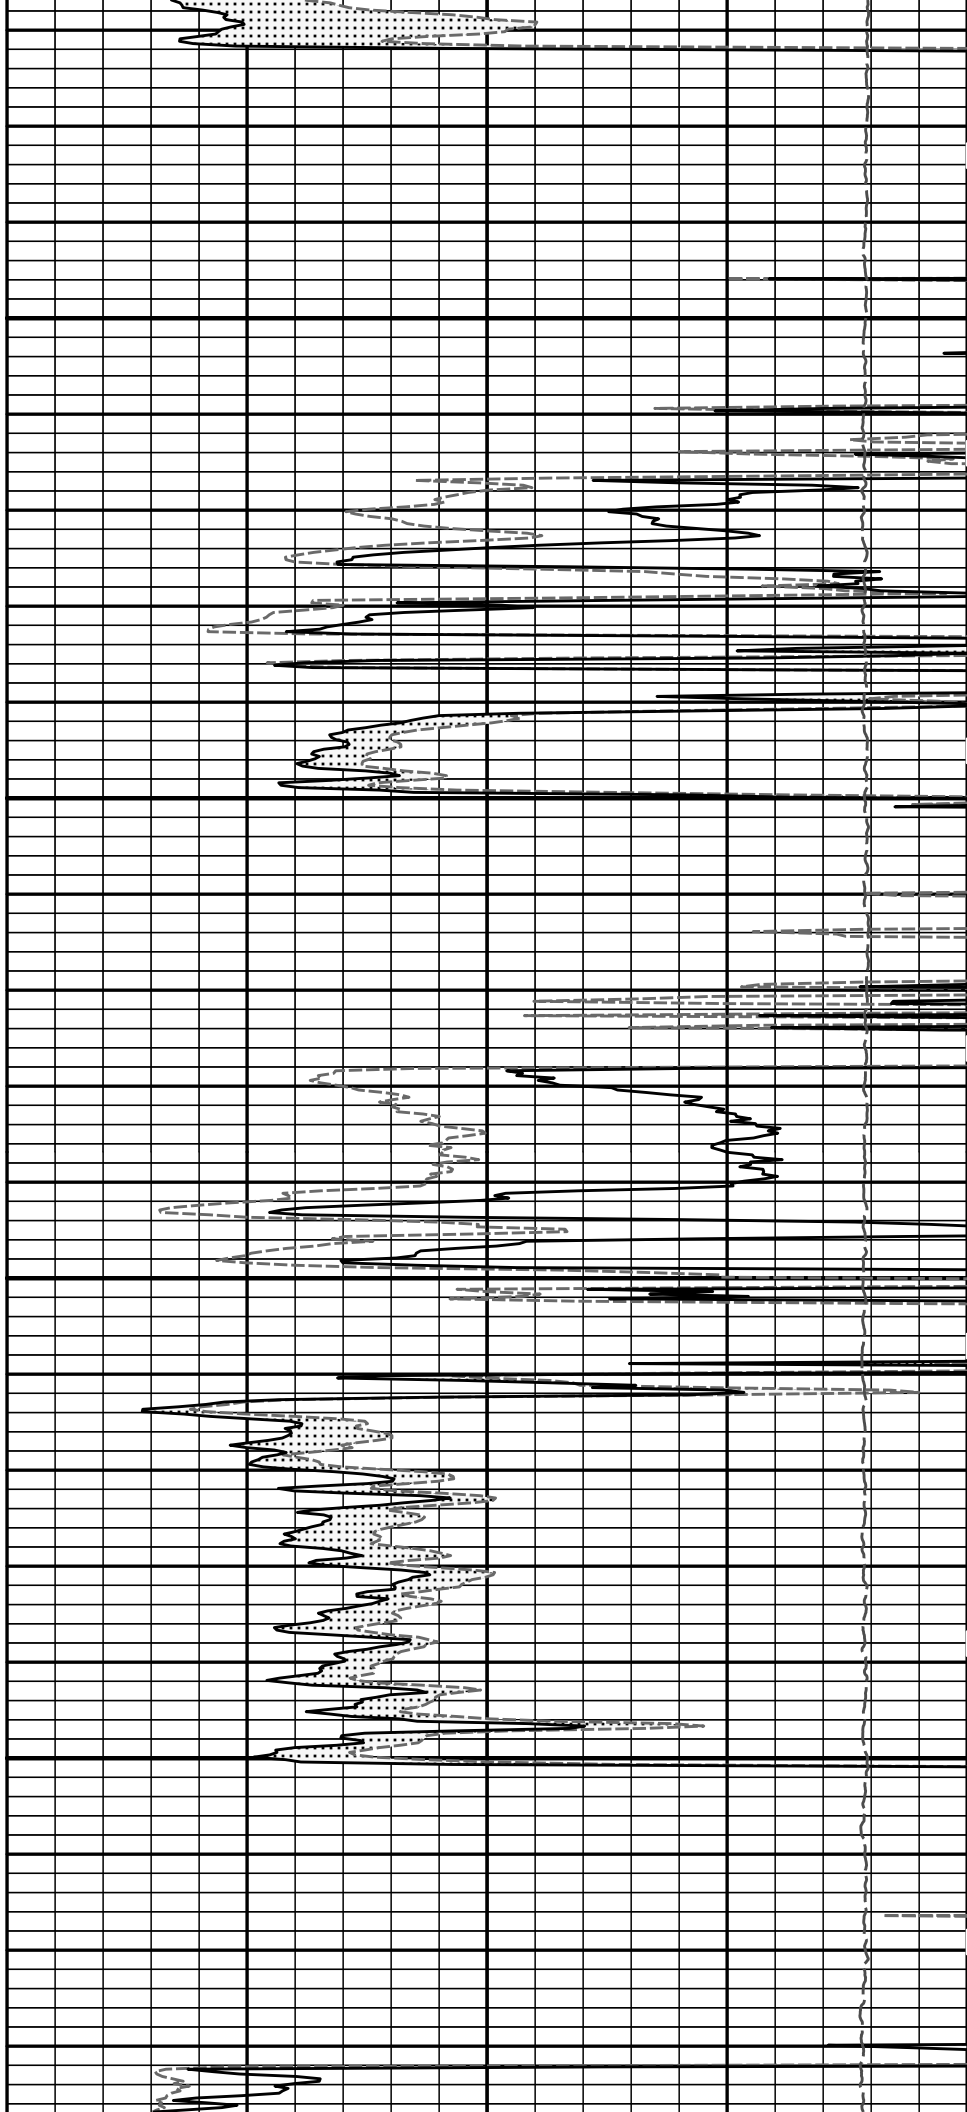


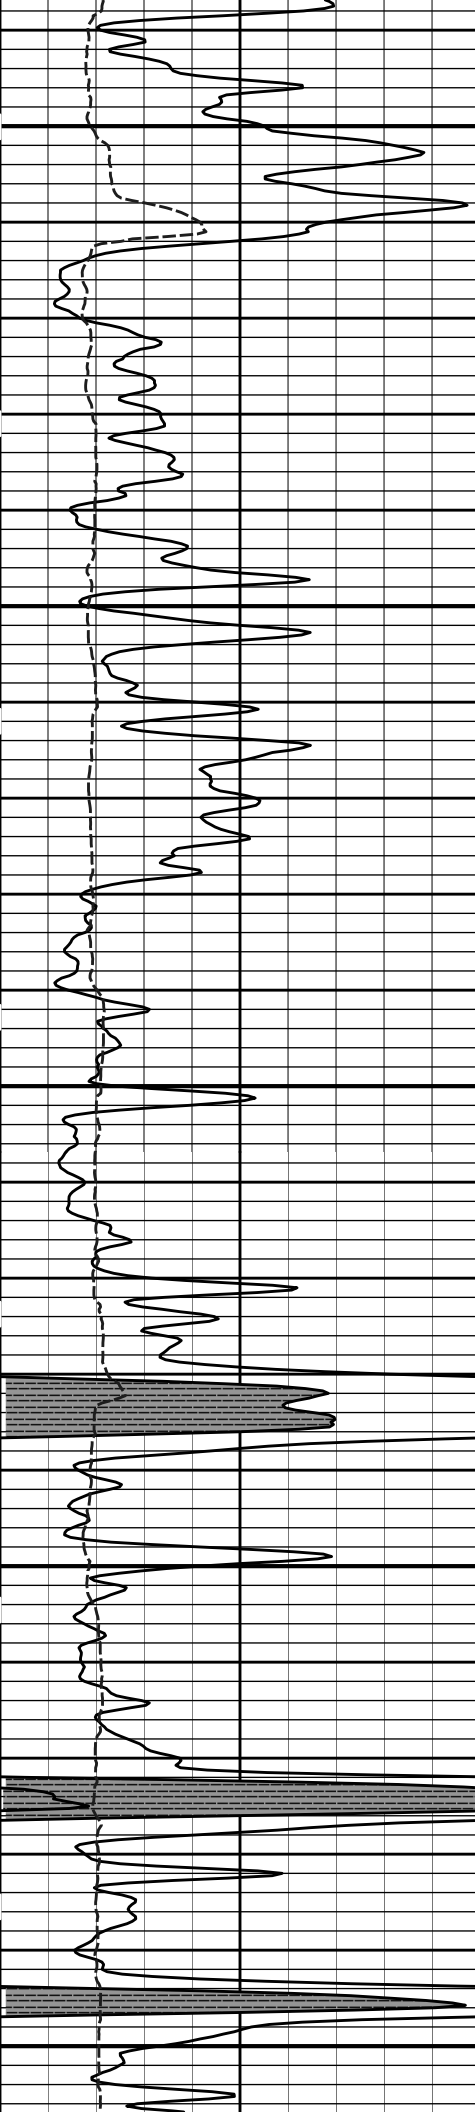


5200

5300


5400

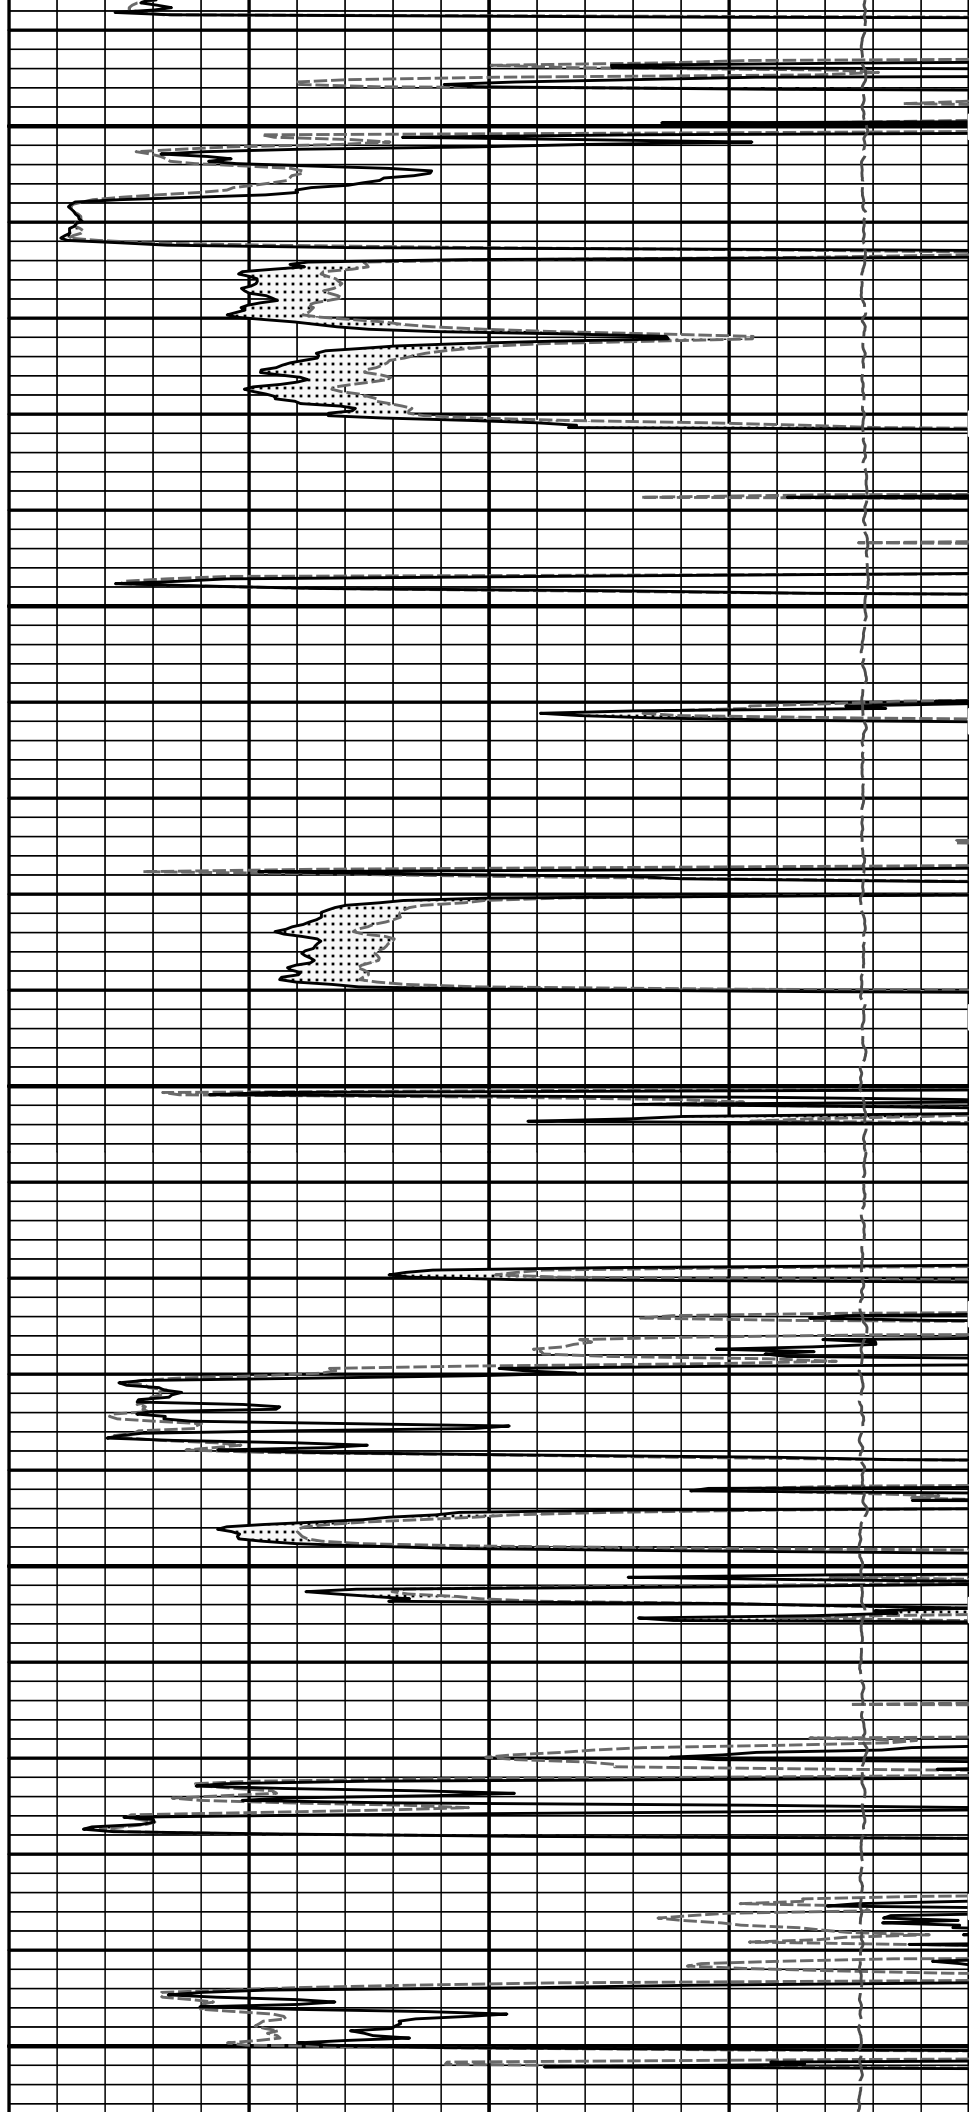


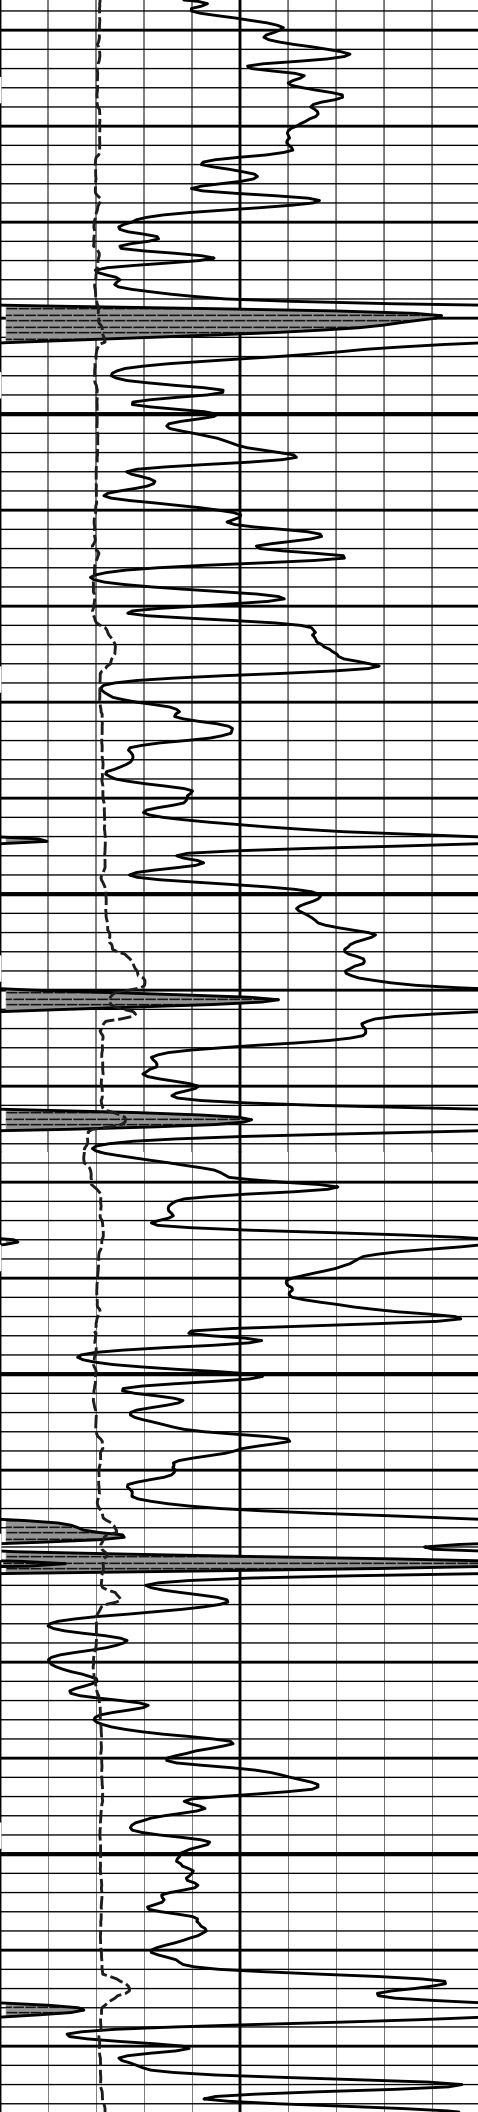

5500

5600

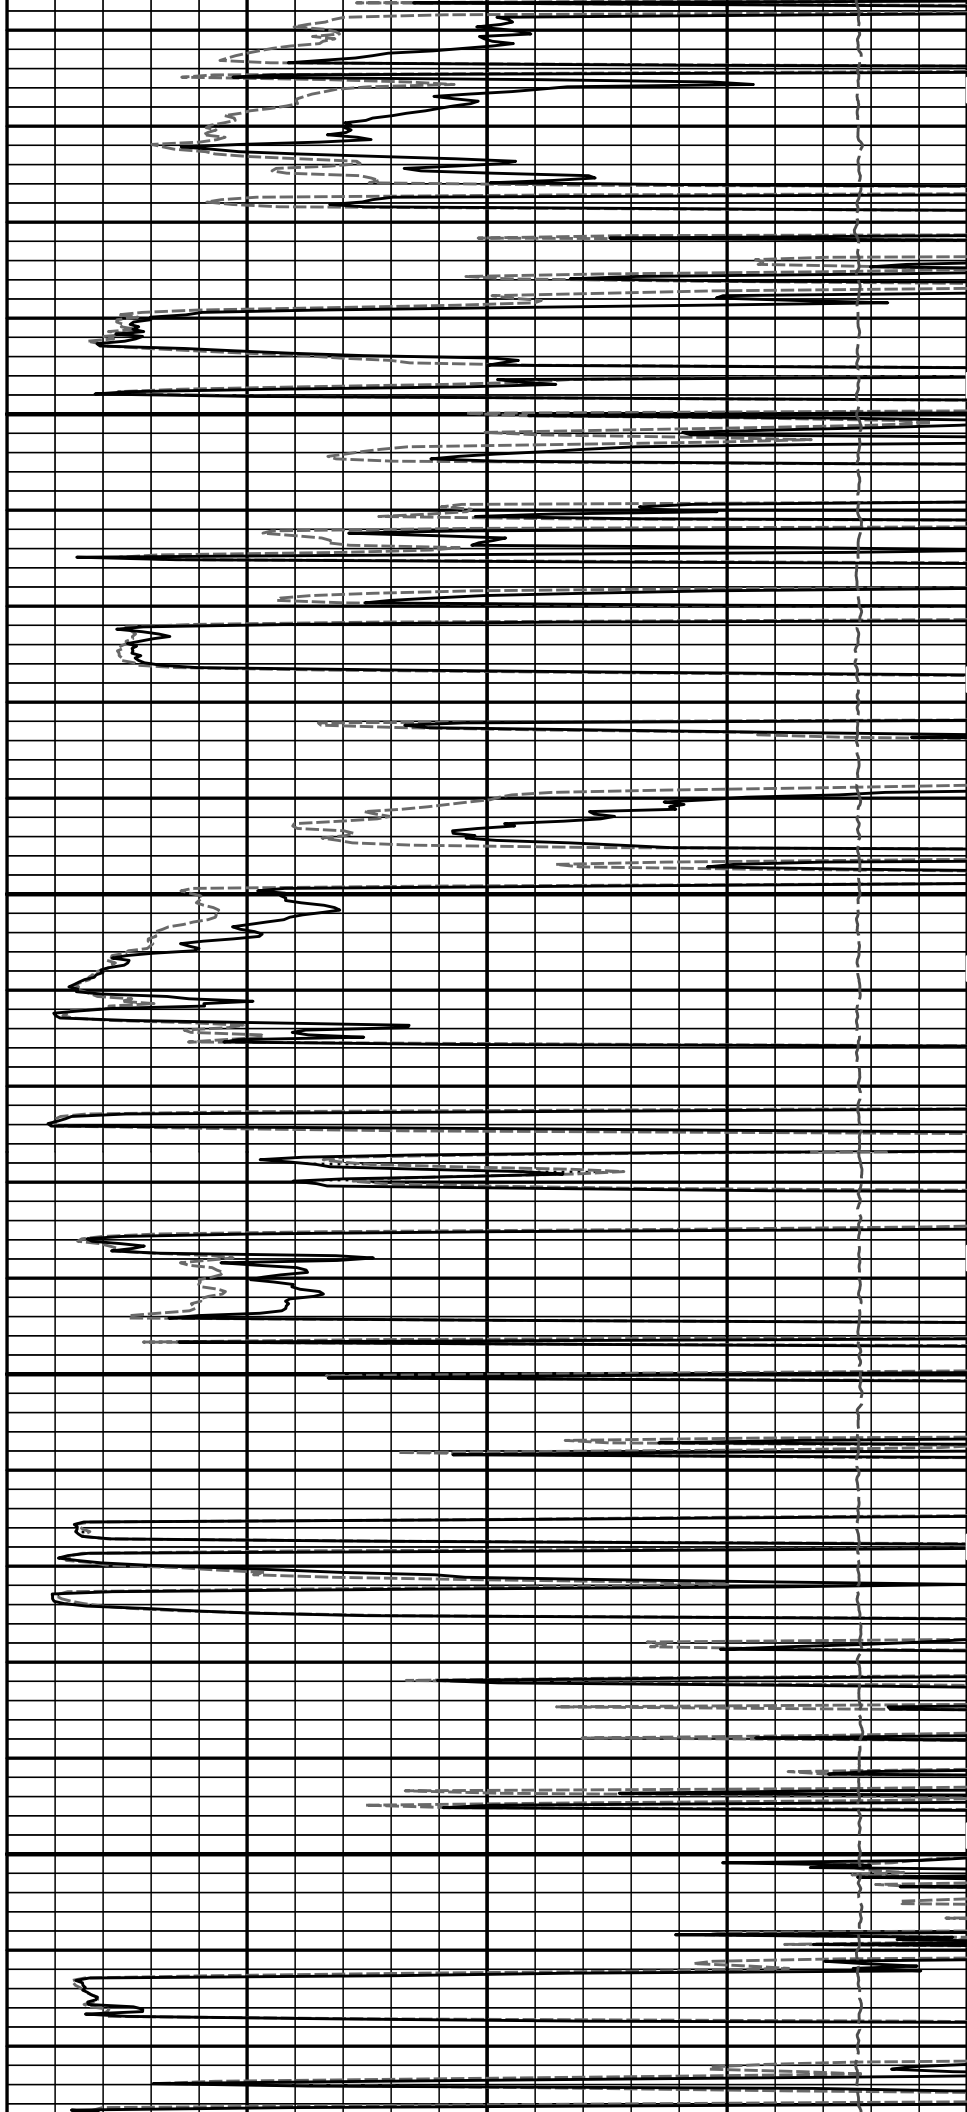


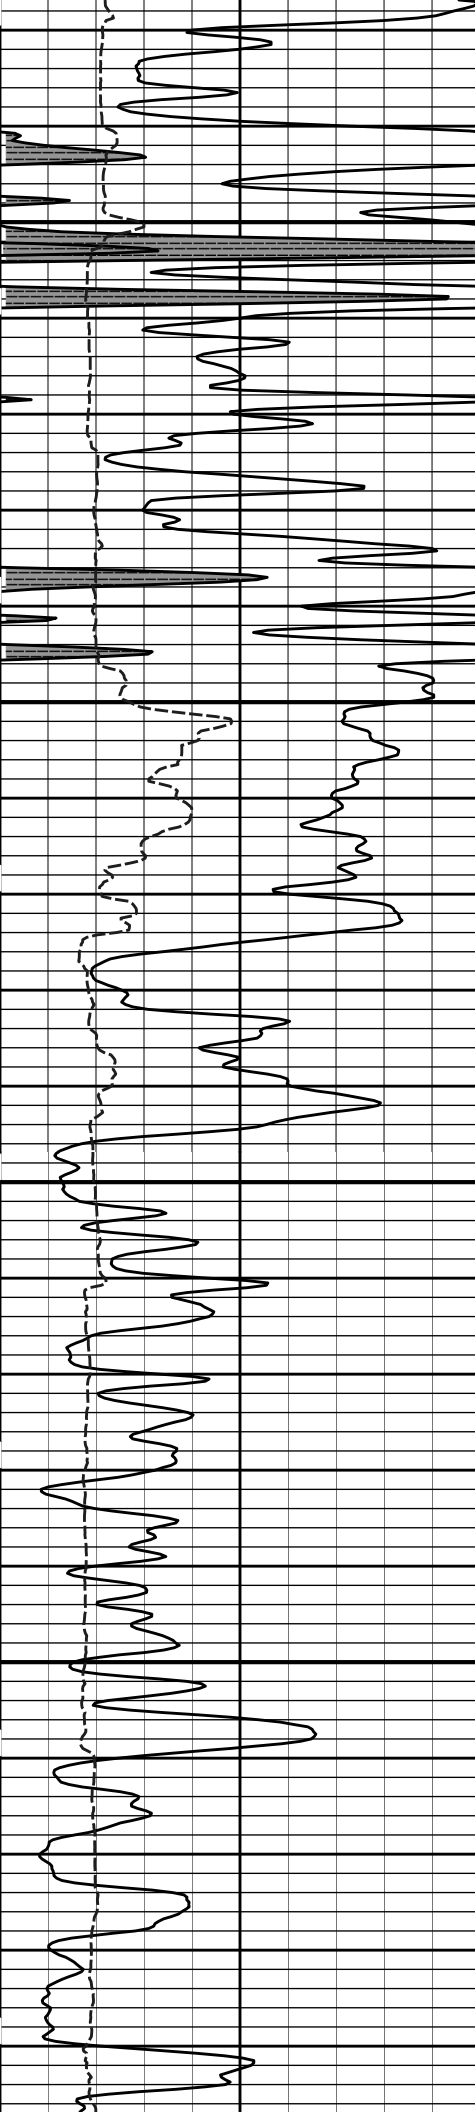


TD

5700


5800

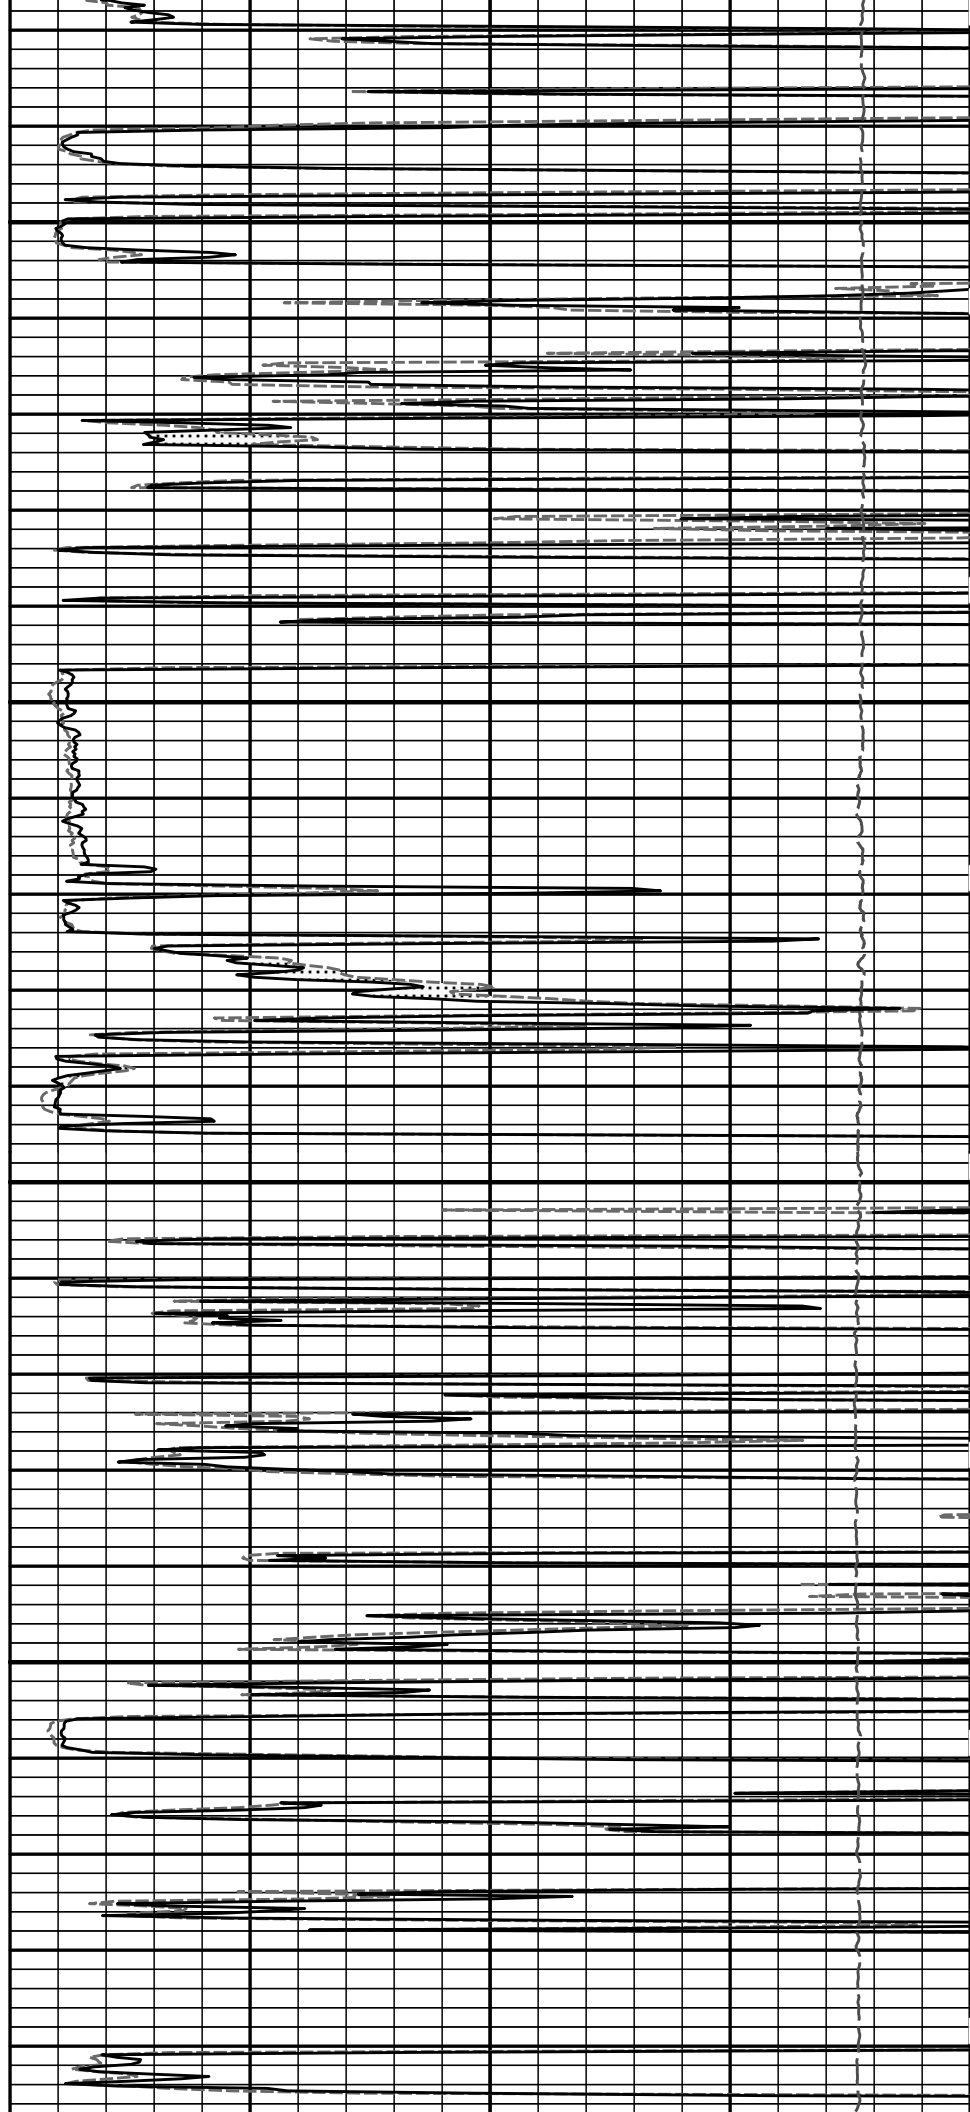


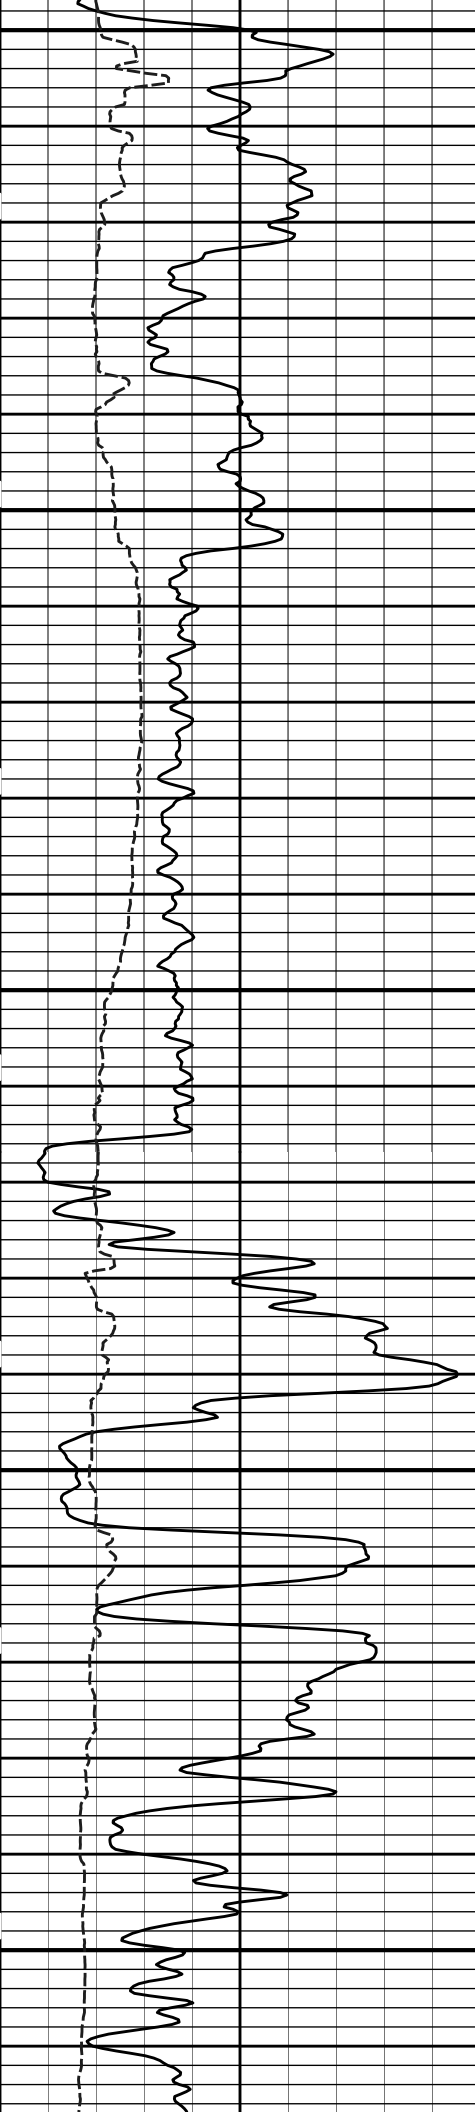

5900

6000

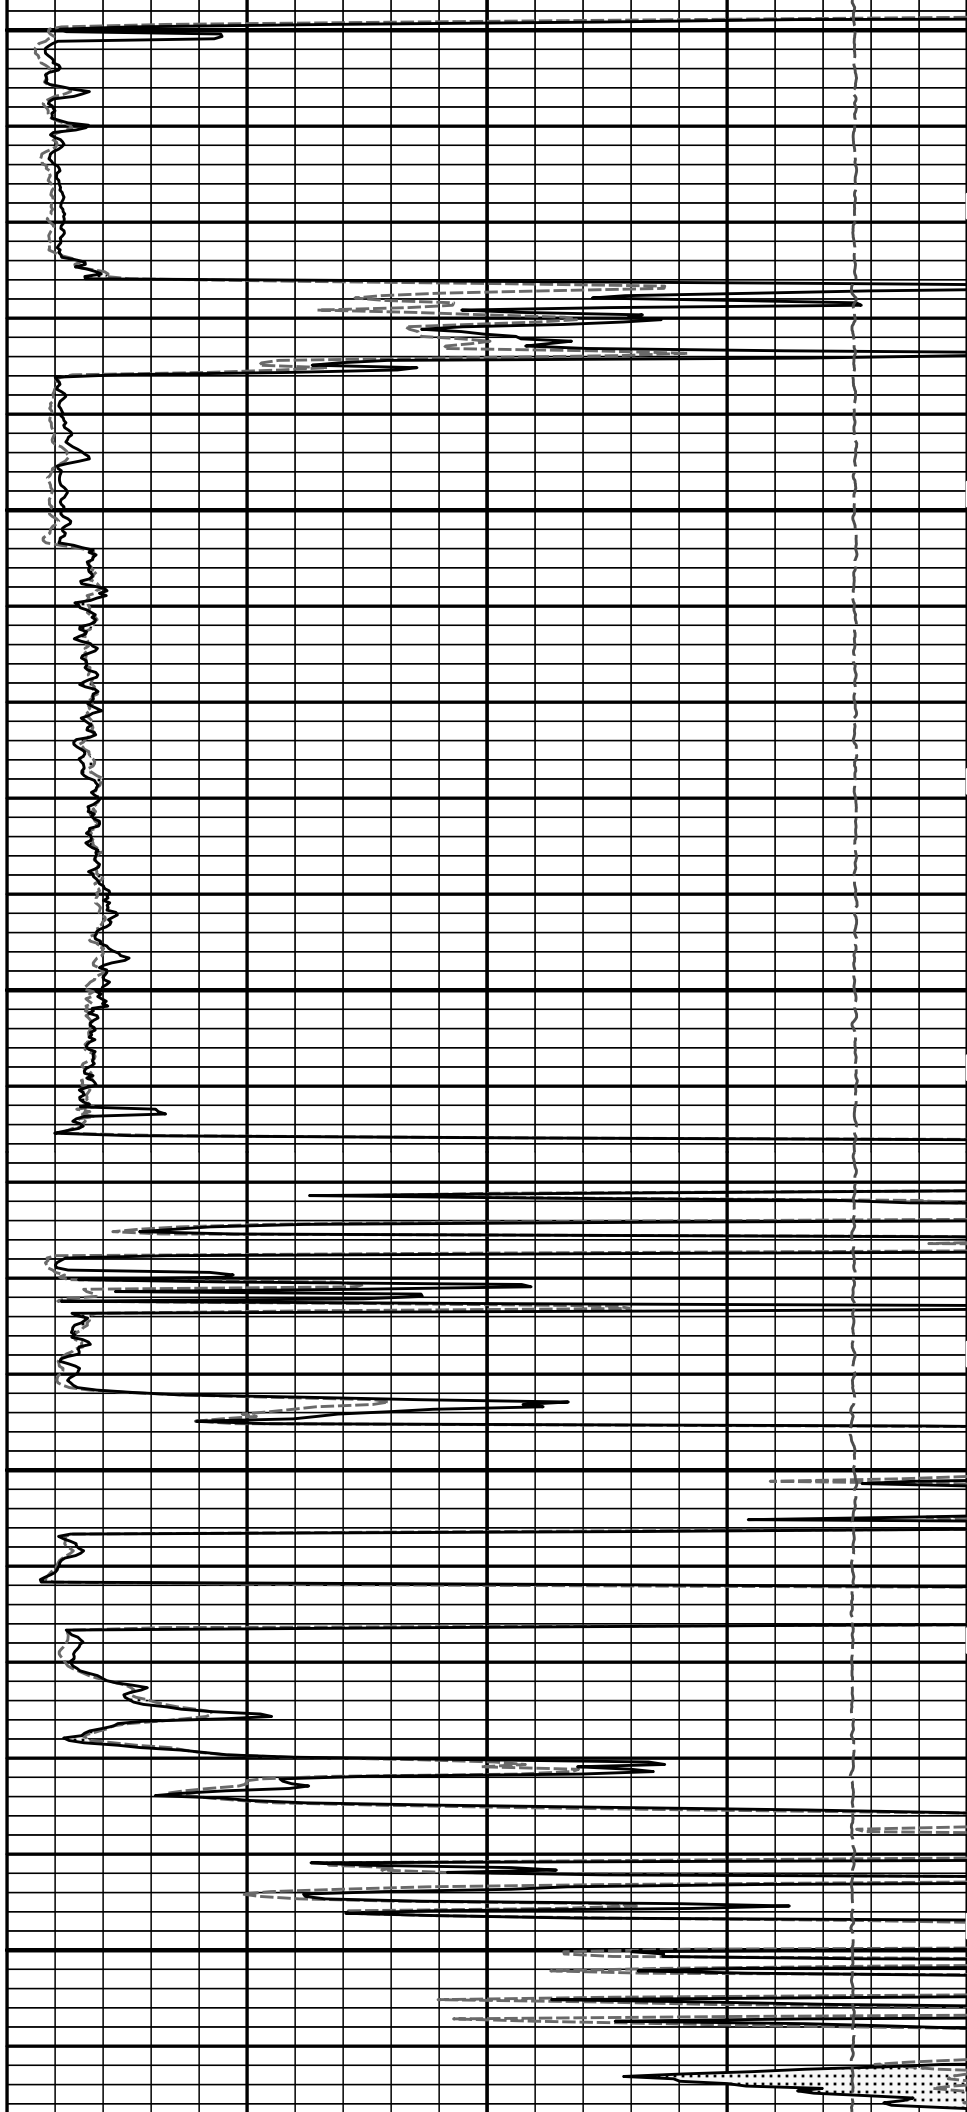

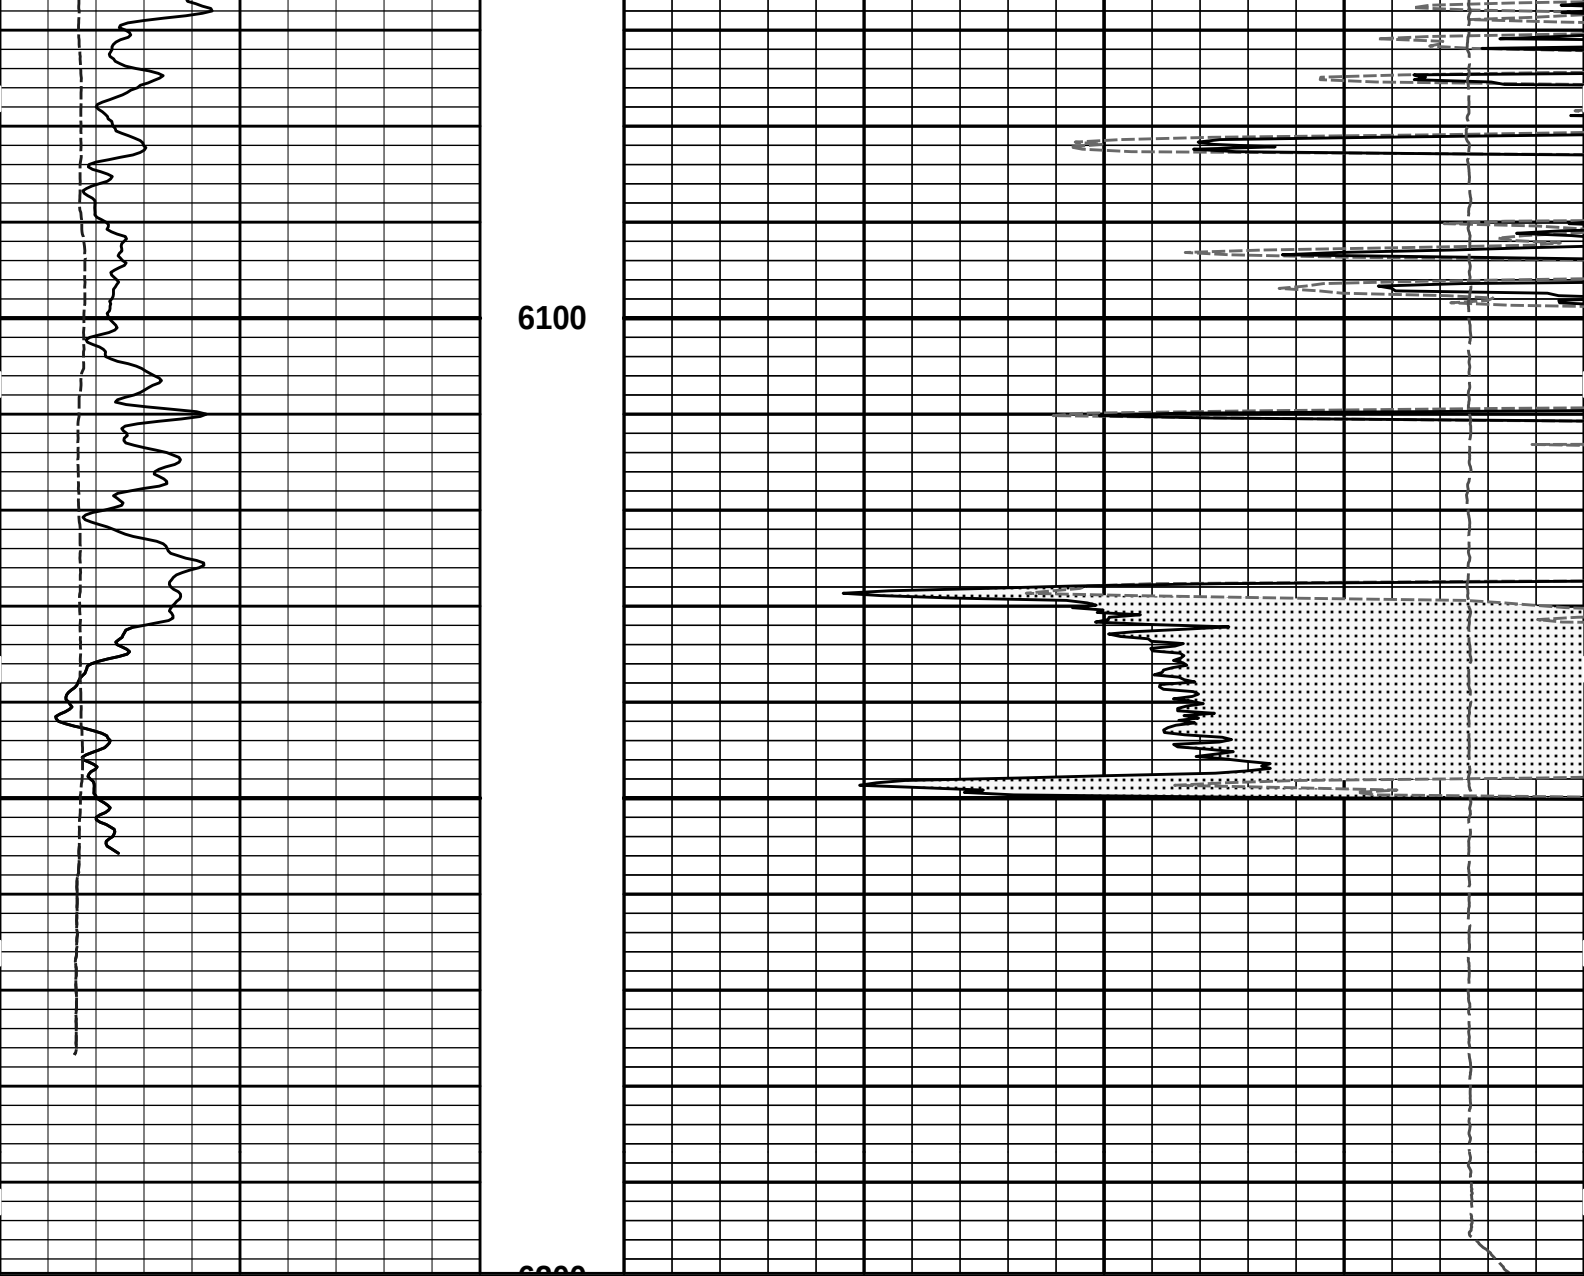

6	Caliper	16	MD	1 : 240	15K	Tension	0
	inches		ft			pounds	
0	Gamma API	150	Tension Pull	10	0	MicrologLateral	20
	api					ohm-metre	
	SHALE		Tension Pull	0		MicrologNormal	20
						ohm-metre	
						PERMEABLE	

HALLIBURTON


Plot Time: 18-Nov-12 15:04:26
Plot Range: 2495 ft to 6199.5 ft
Data: ANGELL #4-6\Well Based\POROSITY\
Plot File: \\-LOCAL-ANGELL #4-6\Well Based\MICROLOG\Microlog_IQ_5_main_lib


5 INCH MAIN LOG

HALLIBURTON

Plot Time: 18-Nov-12 15:04:26
Plot Range: 5695 ft to 6201.25 ft
Data: ANGELL #4-6\Well Based\REPEAT\
Plot File: \\-LOCAL-ANGELL #4-6\Well Based\MICROLOG\Microlog_IQ_5_rep_lib


REPEAT SECTION

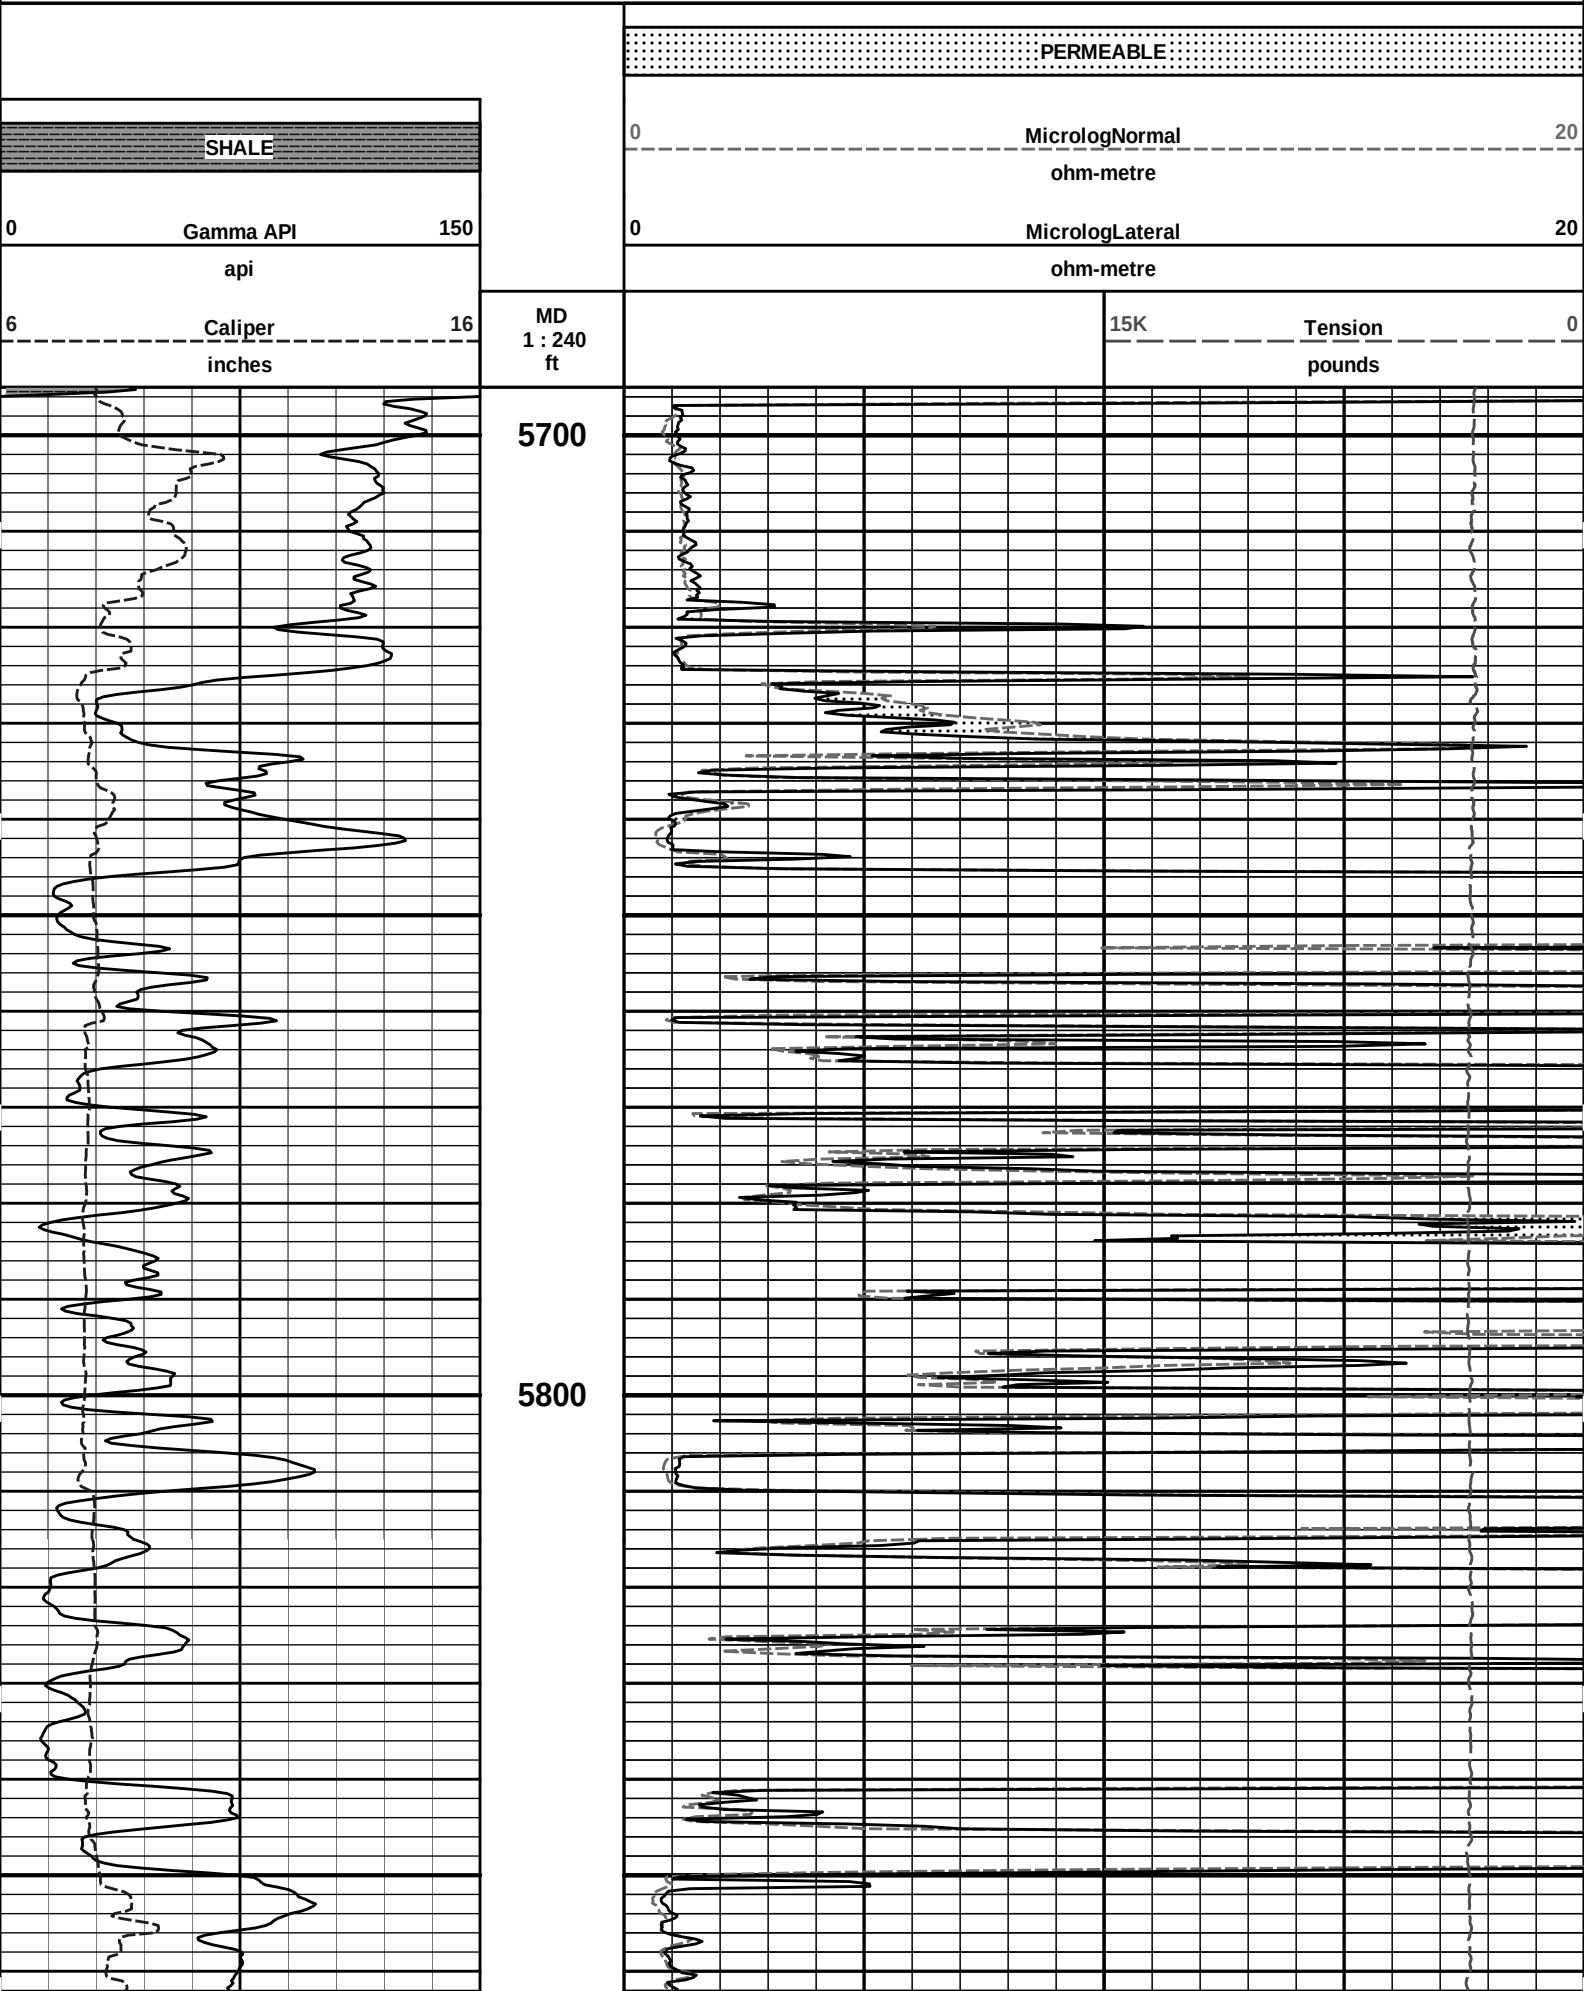


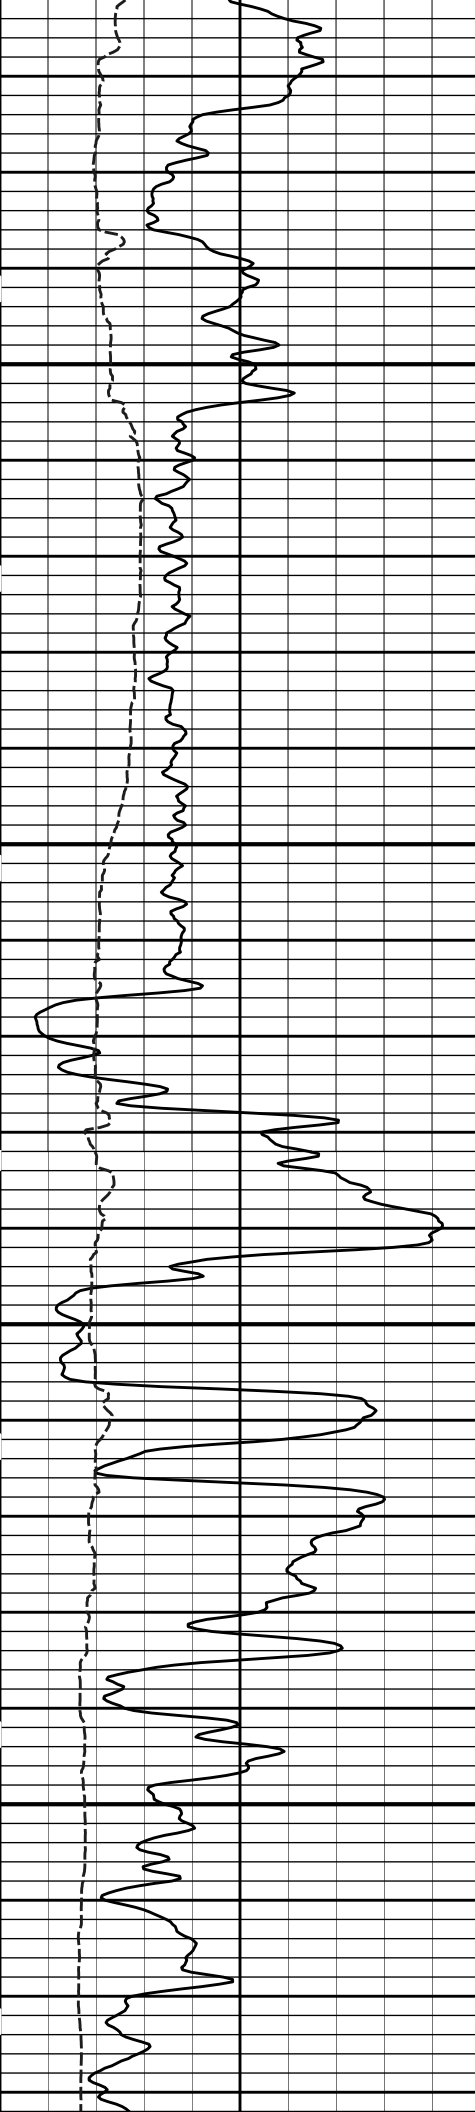

5900

6000

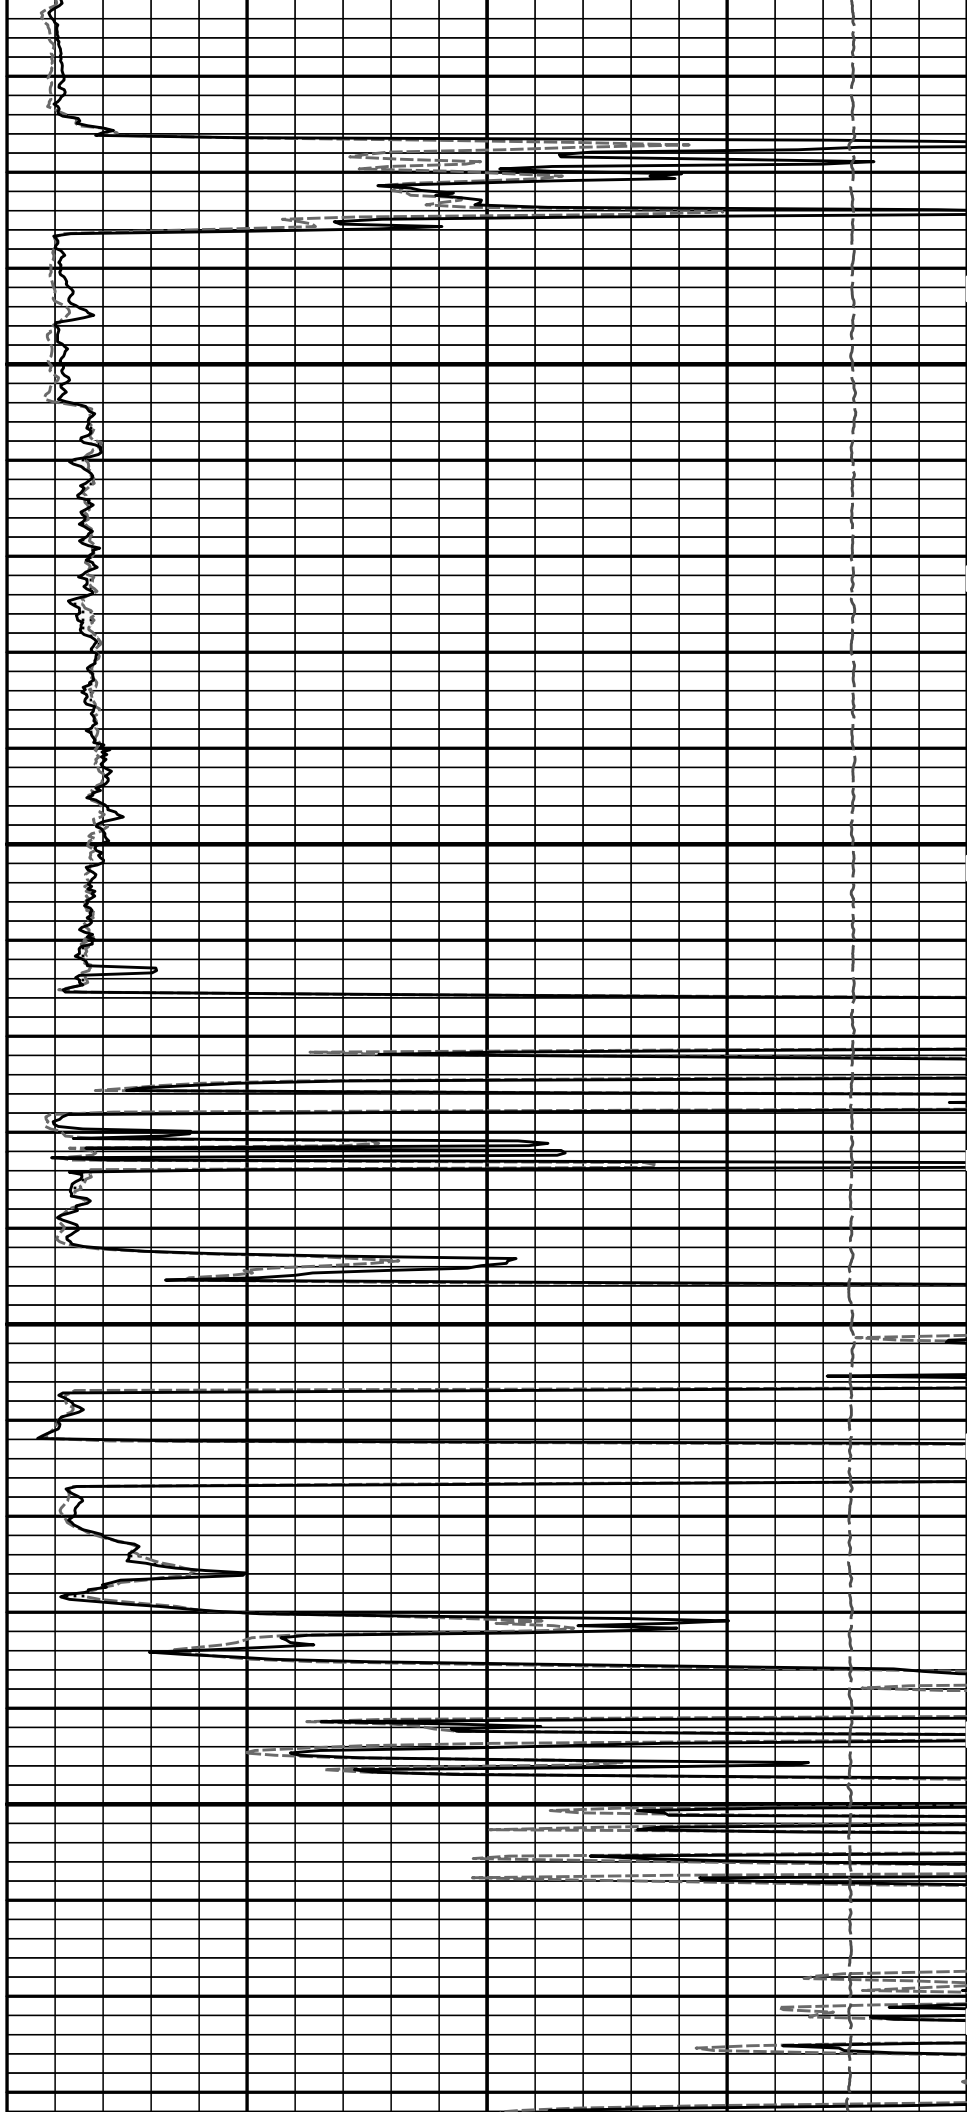

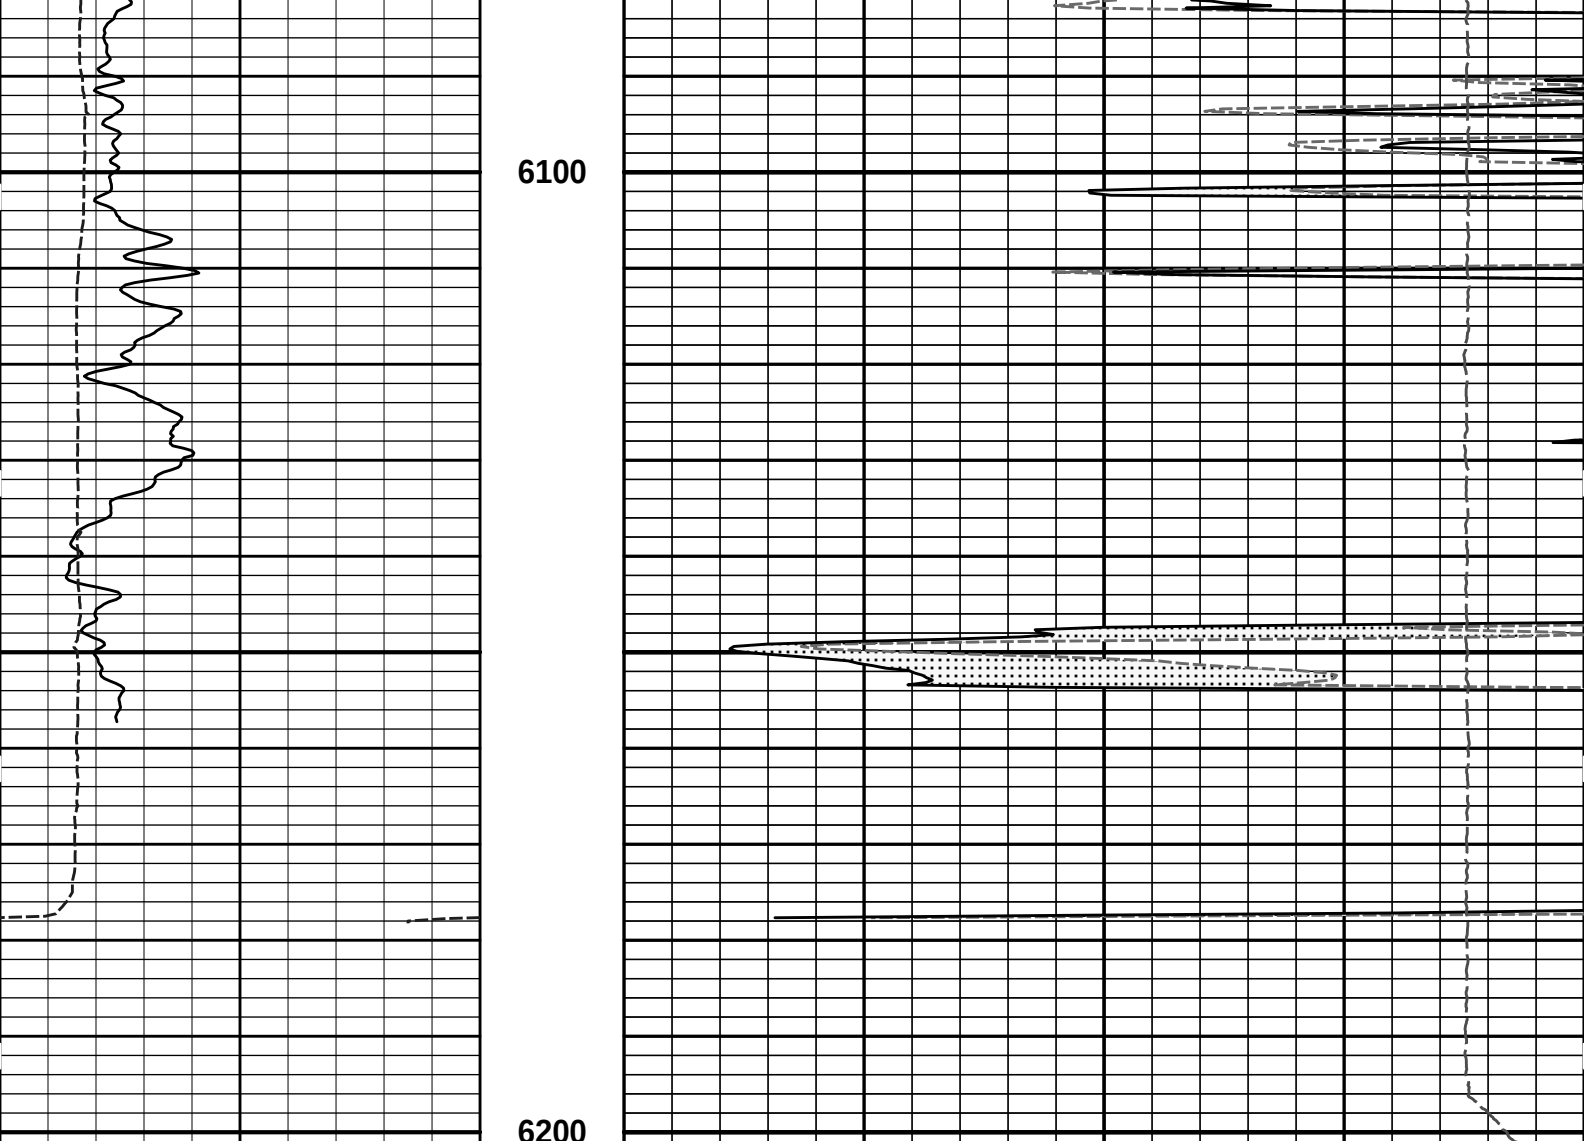

6Caliper16		MD 1 : 240 ft	15KTension0	
inches			pounds	
0	Gamma API150		0MicrologLateral20	
api			ohm-metre	
SHALE			0MicrologNormal20	
			ohm-metre	
			PERMEABLE	

HALLIBURTON


Plot Time: 18-Nov-12 15:04:34
Plot Range: 5695 ft to 6201.25 ft
Data: ANGELL #4-6\Well Based\REPEAT\
Plot File: \\-LOCAL-\\ANGELL #4-6\Well Based\MICROLOG\Microlog_IQ_5_rep_lib

REPEAT SECTION

HALLIBURTON

TOOL STRING DIAGRAM REPORT

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
						55.62 ft

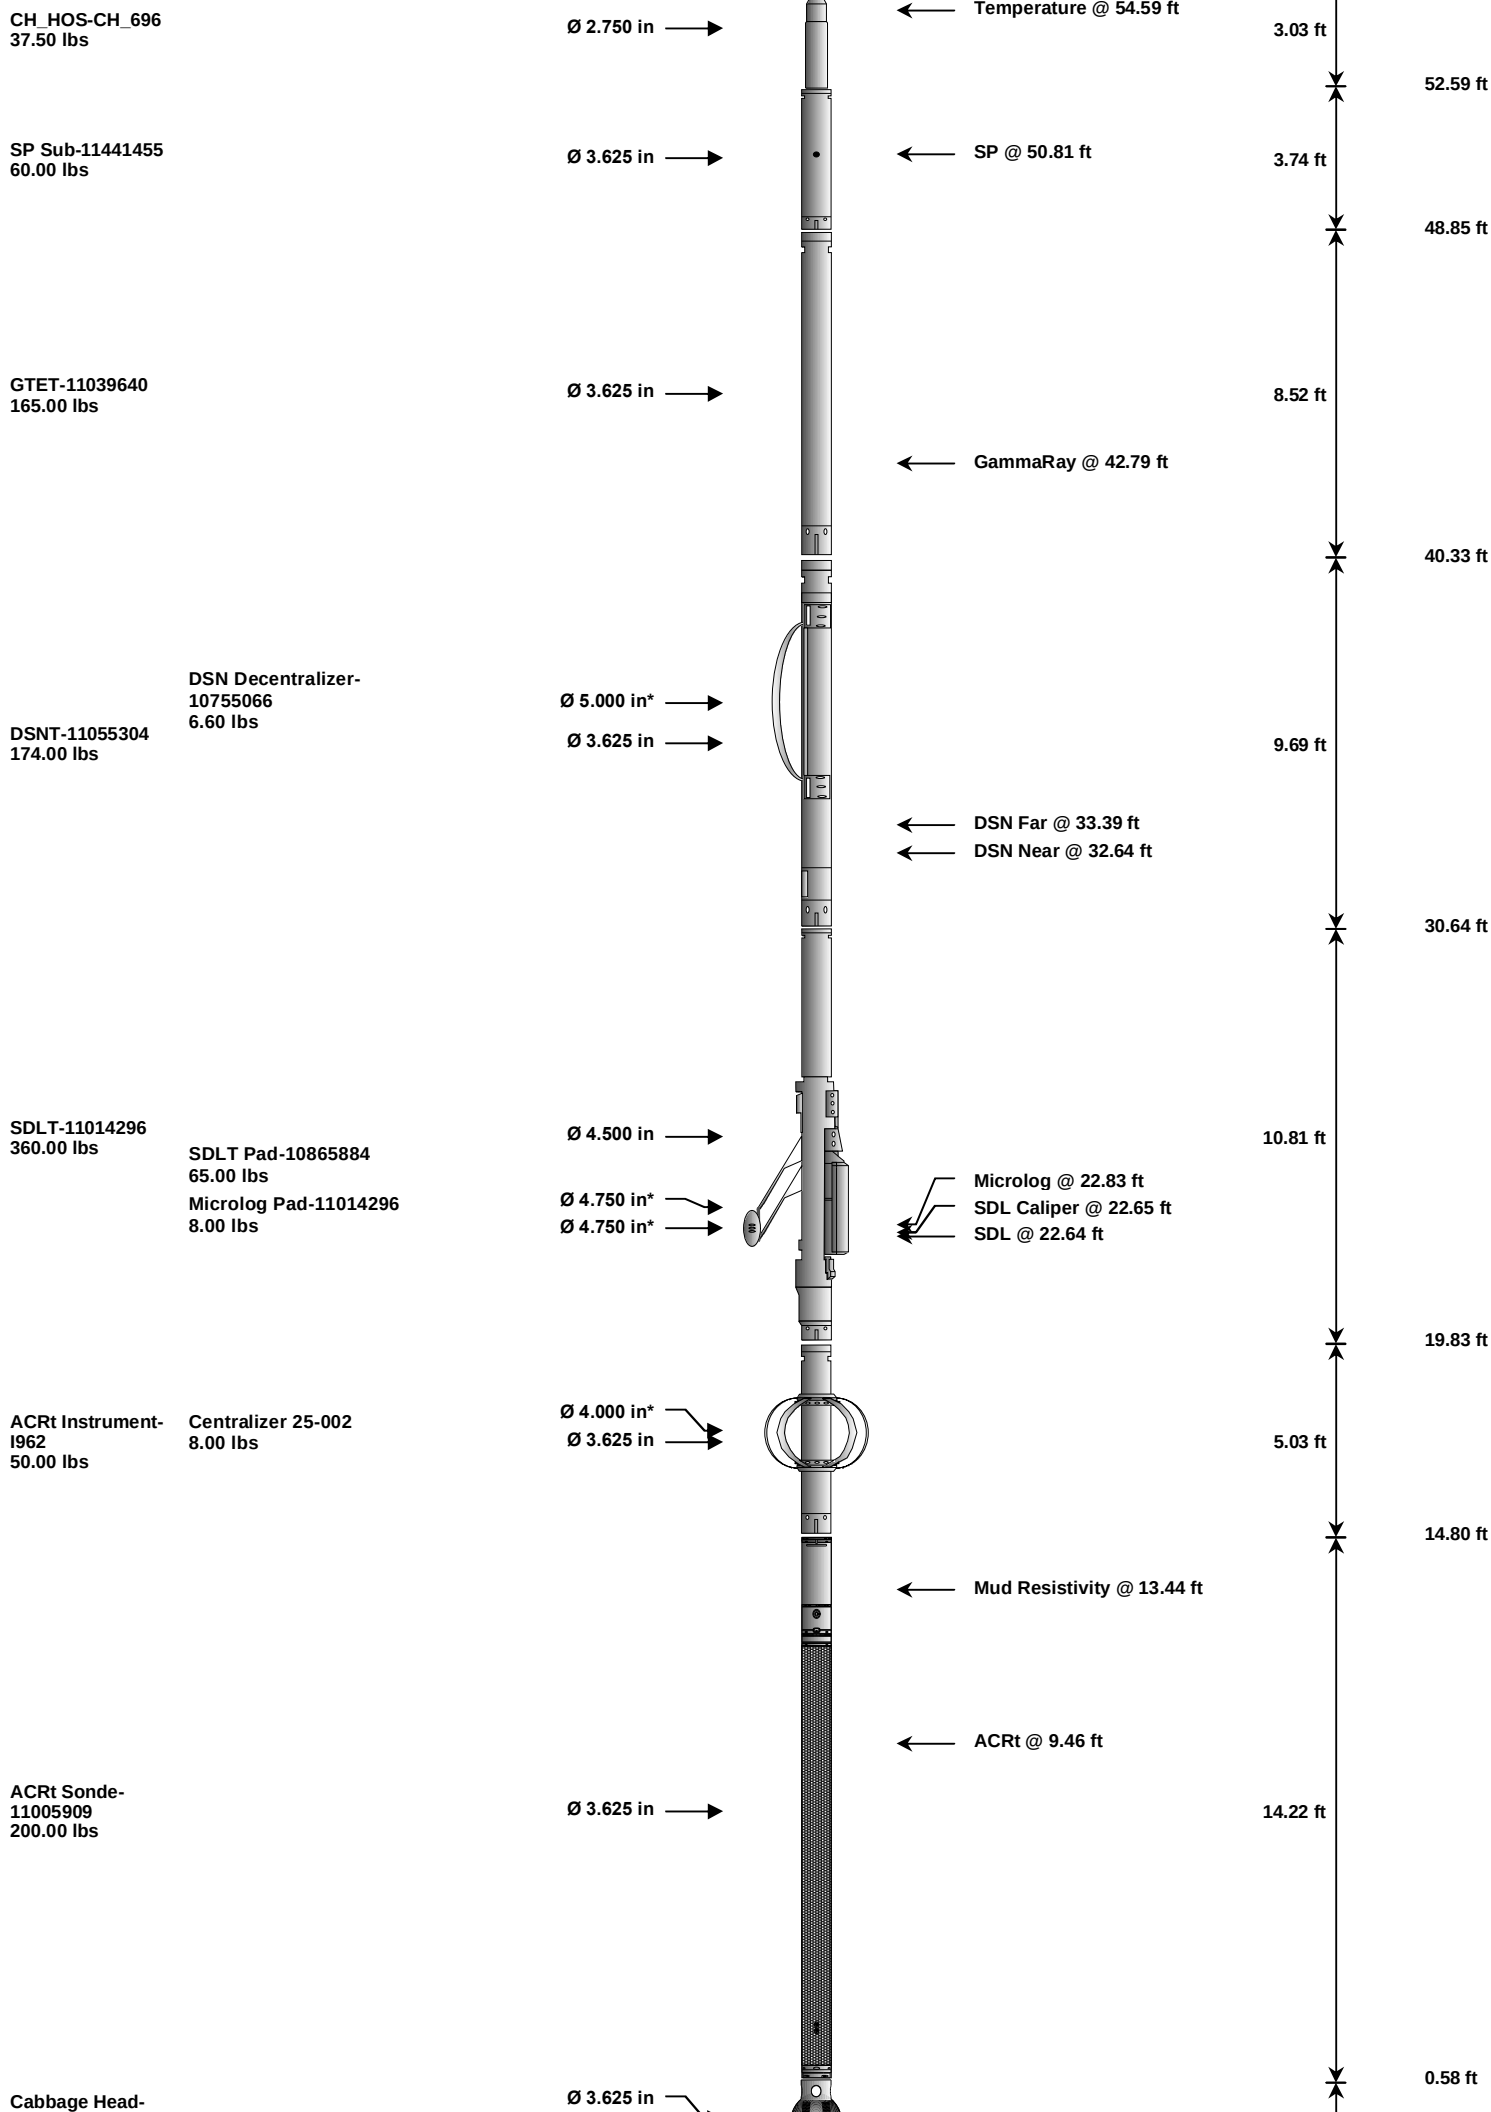

TRK696 10.00 lbs		Ø 6.000 in 				0.58 ft ↓		0.00 ft	
Mnemonic		Tool Name		Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max.Log. Speed (fpm)	
CH_HOS	Hostile Cable Head with Load Cell			CH_696	37.50	3.03	52.59	300.00	
SP	SP Sub			11441455	60.00	3.74	48.85	300.00	
GTET	Gamma Telemetry Tool			11039640	165.00	8.52	40.33	60.00	
DSNT	Dual Spaced Neutron			11055304	174.00	9.69	30.64	60.00	
DCNT	DSN Decentralizer			10755066	6.60	5.13	*	33.97	300.00
SDLT	Spectral Density Tool			11014296	360.00	10.81	19.83	60.00	
SDLP	Density Insite Pad			10865884	65.00	2.55	*	22.04	60.00
MICP	Microlog Pad			11014296	8.00	1.00	*	22.33	60.00
ACRt	Array Compensated True Resistivity Instrument Section			I962	50.00	5.03	14.80	300.00	
OBCEN	Centralizer - 25 in. Overbody			002	8.00	2.08	*	16.44	300.00
ACRt	Array Compensated True Resistivity Sonde Section			11005909	200.00	14.22	0.58	300.00	
CBHD	Cabbage Head			TRK696	10.00	0.58	0.00	300.00	
Total					1,144.10	55.62			
* Not included in Total Length and Length Accumulation.									
Data: ANGELL #4-6I0001 SP-GTET-DSN-SDL-ACRT-CHIDLE									
Date: 18-Nov-12 10:58:28									

HALLIBURTON						
PARAMETERS REPORT						
Depth (ft))	Tool Name	Mnemonic	Description	Value	Units	
TOP						
	SHARED	BS	Bit Size	7.875	in	
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No		
	SHARED	MDBS	Mud Base	Water		
	SHARED	MDWT	Borehole Fluid Weight	9.200	ppg	
	SHARED	WAGT	Weighting Agent	Natural		
	SHARED	BSAL	Borehole salinity	0.00	ppm	
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm	
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%	
	SHARED	RMUD	Mud Resistivity	1.000	ohmm	
	SHARED	TRM	Temperature of Mud	75.0	degF	
	SHARED	CSD	Logging Interval is Cased?	No		
	SHARED	ICOD	AHV Casing OD	5.500	in	
	SHARED	ST	Surface Temperature	75.0	degF	
	SHARED	TD	Total Well Depth	6200.00	ft	
	SHARED	BHT	Bottom Hole Temperature	135.0	degF	
	SHARED	SVTM	Navigation and Survey Master Tool	NONE		
	SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET		
	SHARED	TEMM	Temperature Master Tool	NONE		
	SHARED	BHSM	Borehole Size Master Tool	NONE		
	Rwa / CrossPlot	XPOK	Process Crossplot?	Yes		
	Rwa / CrossPlot	FCHO	Select Source of F	Automatic		
	Rwa / CrossPlot	AFAC	Archie A factor	0.6200		
	Rwa / CrossPlot	MFAC	Archie M factor	2.1500		
	Rwa / CrossPlot	RMFR	Rmf Reference	0.10	ohmm	
	Rwa / CrossPlot	TMFR	Rmf Ref Temp	75.00	degF	
	Rwa /					

Rwa / CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm
Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No	
GTET	GROK	Process Gamma Ray?	Yes	
GTET	GRSO	Gamma Tool Standoff	0.000	in
GTET	GEOK	Process Gamma Ray EVR?	No	
GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
DSNT	DNOK	Process DSN?	Yes	
DSNT	DEOK	Process DSN EVR?	No	
DSNT	NLIT	Neutron Lithology	Limestone	
DSNT	DNSO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
DSNT	DNTP	Temperature Correction Type	None	
DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
SDLT	CLOK	Process Caliper Outputs?	Yes	
SDLT Pad	DNOK	Process Density?	Yes	
SDLT Pad	DNOK	Process Density EVR?	No	
SDLT Pad	CB	Logging Calibration Blocks?	No	
SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT Pad	DTWN	Disable temperature warning	No	
SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc
SDLT Pad	DFL	Formation Density Fluid	1.000	g/cc
Microlog Pad	MLOK	Process MicroLog Outputs?	Yes	
ACRt Sonde	RTOK	Process ACRt?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	1.50	in
ACRt Sonde	TCS1	Temperature Correction Source	FP Lwr & FP Upr	
ACRt Sonde	TPOS	Tool Position	Free Hanging	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMIN	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	
ACRt Sonde	MRFX	Fixed mud resistivity	2000	ohmm
BOTTOM				
Data: ANGELL #4-6I0001 SP-GTET-DSN-SDL-ACRT-CH004 18-Nov-12 13:04 Up @6199.5f			Date: 18-Nov-12 14:32:42	

HALLIBURTON

CALIBRATION REPORT

NATURAL GAMMA RAY TOOL SHOP CALIBRATION

Tool Name:	GTET - 11039640	Reference Calibration Date:	25-Sep-12 15:48:12
Engineer:	T. HYDE	Calibration Date:	02-Nov-12 10:48:45
Software Version:	WL INSITE R3.6.0 (Build 3)	Calibration Version:	1

Calibrator Source S/N: TB146

Calibrator API Reference:265.00 api

Equivalent Calibrator API Reference:269.6 api

Measurement	Measured	Calibrated	Units
Background	63.1	62.7	api
Background + Calibrator	334.4	332.3	api
Calibrator	271.3	269.6	api

NATURAL GAMMA RAY TOOL FIELD CALIBRATION

NATURAL GAMMA RAY TOOL FIELD CALIBRATION				
Tool Name:	GTET - 11039640		Reference Calibration Date:	02-Nov-12 10:48:45
Engineer:	S. INGERSOLL		Calibration Date:	18-Nov-12 07:44:32
Software Version:	WL INSITE R3.6.0 (Build 3)		Calibration Version:	1
Calibrator Source S/N: TB146				
Calibrator API Reference:265.00 api				
Equivalent Calibrator API Reference:269.6 api				
Field Verification		Shop	Field	Units
Background		62.7	62.8	api
Background + Calibrator		332.3	328.1	api
Calibrator		269.6	265.2	api
Shop		Field	Difference	Tolerance
269.6		265.2	4.4	+/- 9.00

DENSITY CALIPER SHOP CALIBRATION				
Tool Name:	SDLT - 11014296		Reference Calibration Date:	03-Oct-12 13:32:52
Engineer:	T. HYDE		Calibration Date:	02-Nov-12 10:17:50
Software Version:	WL INSITE R3.6.0 (Build 3)		Calibration Version:	1
Host Tool Name:	DSNT - 11055304			

CALIBRATION COEFFICIENTS			
Measurement	Previous Value	New Value	Control Limit On New Value
Pad Offset	-4436.57	-3840.06	-7000.00 - -1000.00
Pad Gain	0.0004115	0.0003836	0.000200 - 0.000600
Arm Offset	-2657.94	-2907.65	-5000.00 - 3000.00
Arm Gain	0.0005195	0.0004674	0.000300 - 0.000700
Arm Power	-0.000004820	-0.000000836	-0.000010000 - 0.000010000

The ring diameter is computed from: DIAMETER = PAD EXTENSION + ARM EXTENSION + TOOL DIAMETER

Tool Diameter: 4.50 in

CALIBRATION RINGS				
Measurement	Current Reading (Previous Coeff.)	Calibrated (New Coeff.)	Change	Control Limit On New Value
PAD EXTENSION:				
Small Ring (in)	1.90	2.00	0.10	+/- 0.20
Medium Ring (in)	3.78	3.75	-0.03	+/- 0.20
RING DIAMETER:				
Small Ring (in)	6.56	6.50	-0.06	+/- 0.20
Medium Ring (in)	8.41	8.25	-0.16	+/- 0.20
Large Ring (in)	14.95	15.00	0.05	+/- 0.20

PASS/FAIL SUMMARY	
Calibration-Coefficients Range Check:	Passed
Ring-Measurement Check:	Passed
PASS/FAIL SUMMARY	
Calibration-Coefficients Range Check:	Passed

Measurement	Micro Log Normal Tool Value	Micro Log Lateral Tool Value	Units
Tool Zero	2.75	0.91	V
Calibration Point #1	17.84	2.08	V
Calibration Point #2	5287.60	6875.38	V
Internal Reference	5273.01	6869.82	V

MICRO LOG FIELD CHECK			
Tool Name:	Microlog Pad - 11014296	Reference Calibration Date:	02-Nov-12 10:12:14
Engineer:	S. INGERSOLL	Calibration Date:	18-Nov-12 07:57:22
Software Version:	WL INSITE R3.6.0 (Build 3)	Calibration Version:	1

	Measurement	Micro Log Normal		Micro Log Lateral	
		Shop	Field	Shop	Field
					Units
	Tool Zero	-0.06	-0.07	-0.00	-0.00
	Internal Reference	19.94	19.92	19.98	19.96
Summary					
	Signal	Shop	Field	Difference	Tolerance
	Microlog Normal	19.94	19.92	0.02	+/- 0.80
	Microlog Lateral	19.98	19.96	0.02	+/- 0.80

SDLT CALIPER FIELD CALIBRATION			
Tool Name:	SDLT - 11014296	Reference Calibration Date:	02-Nov-12 10:17:50
Engineer:	S. INGERSOLL	Calibration Date:	18-Nov-12 08:06:09
Software Version:	WL INSITE R3.6.0 (Build 3)	Calibration Version:	1

MEASURED CALIPER VALUES				
Measurement	Shop	Field	Change	Control Limit On New Value
Pad Extension	3.75	3.70	-0.05	+/- 0.10
Ring Diameter	8.25	8.30	0.05	+/- 0.15

PASS/FAIL SUMMARY	
Pad Extension Check:	Passed
Diameter Check:	Passed

CALIBRATION SUMMARY						
Sensor	Shop	Field	Post	Difference	Tolerance	Units
GTET-11039640						
Gamma Ray Calibrator	269.6	265.2	-----	4.4	+/- 9.00	api
SDLT-11014296						
Pad Extension	3.75	3.70	-----	0.05	+/-0.10	in
Ring Diameter	8.25	8.30	-----	-0.05	+/-0.15	in
Microlog Pad-11014296						

MicroLog Normal	19.94	19.92	-----	0.02	+/-0.80	ohmm
MicroLog Lateral	19.98	19.96	-----	0.02	+/-0.80	ohmm
Data: ANGELL #4-6\0001 SP-GTET-DSN-SDL-ACRT-CH\004 18-Nov-12 13:04 Up @6199.5f					Date: 18-Nov-12 14:34:01	

HALLIBURTON

INPUTS, DELAYS AND FILTERS TABLE

Mnemonic	Input Description	Delay (ft)	Filter Type	Filter Length (ft)
Depth Panel				
TENS	Tension	0.00	NO	
CH_HOS				
DHTN	DownholeTension	0.00	BLK	0.000
SP Sub				
PLTC	Plot Control Mask	50.81	NO	
SP	Spontaneous Potential	50.81	BLK	1.250
SPR	Raw Spontaneous Potential	50.81	NO	
SPO	Spontaneous Potential Offset	50.81	NO	
GTET				
TPUL	Tension Pull	42.79	NO	
GR	Natural Gamma Ray API	42.79	TRI	1.750
GRU	Unfiltered Natural Gamma Ray API	42.79	NO	
EGR	Natural Gamma Ray API with Enhanced Vertical Resolution	42.79	W	1.416 , 0.750
ACCZ	Accelerometer Z	0.00	BLK	0.083
DEVI	Inclination	0.00	NO	
DSNT				
TPUL	Tension Pull	32.54	NO	
RNDS	Near Detector Telemetry Counts	32.64	BLK	1.417
RFDS	Far Detector Telemetry Counts	33.39	TRI	0.583
DNTT	DSN Tool Temperature	32.64	NO	
DSNS	DSN Tool Status	32.54	NO	
ERND	Near Detector Telemetry Counts EVR	32.64	BLK	0.000
ERFD	Far Detector Telemetry Counts EVR	33.39	BLK	0.000
ENTM	DSN Tool Temperature EVR	32.64	NO	
SDLT				
TPUL	Tension Pull	22.65	NO	
PCAL	Pad Caliper	22.65	TRI	0.250
ACAL	Arm Caliper	22.65	TRI	0.250
ACRt Sonde				
TPUL	Tension Pull	2.97	NO	
F1R1	ACRT 12KHz - 80in R value	9.22	BLK	0.000
F1X1	ACRT 12KHz - 80in X value	9.22	BLK	0.000
F1R2	ACRT 12KHz - 50in R value	6.72	BLK	0.000
F1X2	ACRT 12KHz - 50in X value	6.72	BLK	0.000
F1R3	ACRT 12KHz - 29in R value	5.22	BLK	0.000
F1X3	ACRT 12KHz - 29in X value	5.22	BLK	0.000
F1R4	ACRT 12KHz - 17in R value	4.22	BLK	0.000
F1X4	ACRT 12KHz - 17in X value	4.22	BLK	0.000
F1R5	ACRT 12KHz - 10in R value	3.72	BLK	0.000

F1X5	ACRT 12KHz - 10in X value	3.72	BLK	0.000
F1R6	ACRT 12KHz - 6in R value	3.47	BLK	0.000
F1X6	ACRT 12KHz - 6in X value	3.47	BLK	0.000
F2R1	ACRT 36KHz - 80in R value	9.22	BLK	0.000
F2X1	ACRT 36KHz - 80in X value	9.22	BLK	0.000
F2R2	ACRT 36KHz - 50in R value	6.72	BLK	0.000
F2X2	ACRT 36KHz - 50in X value	6.72	BLK	0.000
F2R3	ACRT 36KHz - 29in R value	5.22	BLK	0.000
F2X3	ACRT 36KHz - 29in X value	5.22	BLK	0.000
F2R4	ACRT 36KHz - 17in R value	4.22	BLK	0.000
F2X4	ACRT 36KHz - 17in X value	4.22	BLK	0.000
F2R5	ACRT 36KHz - 10in R value	3.72	BLK	0.000
F2X5	ACRT 36KHz - 10in X value	3.72	BLK	0.000
F2R6	ACRT 36KHz - 6in R value	3.47	BLK	0.000
F2X6	ACRT 36KHz - 6in X value	3.47	BLK	0.000
F3R1	ACRT 72KHz - 80in R value	9.22	BLK	0.000
F3X1	ACRT 72KHz - 80in X value	9.22	BLK	0.000
F3R2	ACRT 72KHz - 50in R value	6.72	BLK	0.000
F3X2	ACRT 72KHz - 50in X value	6.72	BLK	0.000
F3R3	ACRT 72KHz - 29in R value	5.22	BLK	0.000
F3X3	ACRT 72KHz - 29in X value	5.22	BLK	0.000
F3R4	ACRT 72KHz - 17in R value	4.22	BLK	0.000
F3X4	ACRT 72KHz - 17in X value	4.22	BLK	0.000
F3R5	ACRT 72KHz - 10in R value	3.72	BLK	0.000
F3X5	ACRT 72KHz - 10in X value	3.72	BLK	0.000
F3R6	ACRT 72KHz - 6in R value	3.47	BLK	0.000
F3X6	ACRT 72KHz - 6in X value	3.47	BLK	0.000
RMUD	Mud Resistivity	12.76	BLK	0.000
F1RT	Transmitter Reference 12 KHz Real Signal	2.97	BLK	0.000
F1XT	Transmitter Reference 12 KHz Imaginary Signal	2.97	BLK	0.000
F2RT	Transmitter Reference 36 KHz Real Signal	2.97	BLK	0.000
F2XT	Transmitter Reference 36 KHz Imaginary Signal	2.97	BLK	0.000
F3RT	Transmitter Reference 72 KHz Real Signal	2.97	BLK	0.000
F3XT	Transmitter Reference 72 KHz Imaginary Signal	2.97	BLK	0.000
TFPU	Upper Feedpipe Temperature Calculated	2.97	BLK	0.000
TFPL	Lower Feedpipe Temperature Calculated	2.97	BLK	0.000
ITMP	Instrument Temperature	2.97	BLK	0.000
TCVA	Temperature Correction Values Loop Off	2.97	NO	
TIDV	Instrument Temperature Derivative	2.97	NO	
TUDV	Upper Temperature Derivative	2.97	NO	
TLDV	Lower Temperature Derivative	2.97	NO	
TRBD	Receiver Board Temperature	2.97	NO	
SDLT Pad				
TPUL	Tension Pull	22.64	NO	
NAB	Near Above	22.46	BLK	0.920
NHI	Near Cesium High	22.46	BLK	0.920
NLO	Near Cesium Low	22.46	BLK	0.920
NVA	Near Valley	22.46	BLK	0.920
NBA	Near Barite	22.46	BLK	0.920
NDE	Near Density	22.46	BLK	0.920
NPK	Near Peak	22.46	BLK	0.920
NLI	Near Lithology	22.46	BLK	0.920
NBAU	Near Barite Unfiltered	22.46	BLK	0.250
NLIU	Near Lithology Unfiltered	22.46	BLK	0.250
FAB	Far Above	22.81	BLK	0.250

FHI	Far Cesium High	22.81	BLK	0.250
FLO	Far Cesium Low	22.81	BLK	0.250
FVA	Far Valley	22.81	BLK	0.250
FBA	Far Barite	22.81	BLK	0.250
FDE	Far Density	22.81	BLK	0.250
FPK	Far Peak	22.81	BLK	0.250
FLI	Far Lithology	22.81	BLK	0.250
PTMP	Pad Temperature	22.65	BLK	0.920
NHV	Near Detector High Voltage	22.04	NO	
FHV	Far Detector High Voltage	22.04	NO	
ITMP	Instrument Temperature	22.04	NO	
DDHV	Detector High Voltage	22.04	NO	
Microlog Pad				
TPUL	Tension Pull	22.83	NO	
MINV	Microlog Lateral	22.83	BLK	0.750
MNOR	Microlog Normal	22.83	BLK	0.750
Data: ANGELL #4-6I0001 SP-GTET-DSN-SDL-ACRT-CH\004 18-Nov-12 13:04 Up @6199.5f			Date: 18-Nov-12 14:36:23	

COMPANY	EVANS ENERGY LLC.		
WELL	ANGELL #4-6		
FIELD	ANGELL		
COUNTY	MEADE	STATE	KANSAS
HALLIBURTON		MICROLOG	