



SUPERIOR
Hays,
Kansas

COMPENSATED
DENSITY / NEUTRON
LOG

Company	CASTELLI EXPLORATION, INC.		
Well	GREGG #1-30		
Field			
County	COMANCHE	State	KANSAS
Location:	API # : 15-033-21634-0000		Other Services
	NE - SW - SW - NW 3070' FSL & 365' FWL		DIL MEL
Permanent Datum	GROUND LEVEL	Elevation	1775
Log Measured From	KELLY BUSHING 8' A.G.L.	K.B. 1783 D.F. G.L. 1775	
Drilling Measured From	KELLY BUSHING		
Date	5-12-12		
Run Number	ONE		
Depth Driller	5200		
Depth Logger	5199		
Bottom Logged Interval	5176		
Top Log Interval	3800		
Casing Driller	344		
Casing Logger	344		
Bit Size	7.875		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.4 / 49	CHLORIDES 4.000	
pH / Fluid Loss	9.5 / 9.6		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	0.90 @ 72F		
Rmf @ Meas. Temp	0.68 @ 72F		
Rmc @ Meas. Temp	1.08 @ 72F		
Source of Rmf / Rmc	MEASURED		
Rim @ BHT	0.51 @ 127F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	127F		
Equipment Number	860		
Location	HAYS, KS.		
Recorded By	DAN GOTTSCHALK		
Witnessed By	RICK POPP		


<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments



THANK YOU FOR USING SUPERIOR WELL SERVICES, INC.
HAYS, KS. 785-628-6395
DIRECTIONS: COLDWATER - EAST ON 160 TO RD. 22 - SOUTH TO STOP SIGN -
SOUTH AND EAST THRU 3 CATTLEGAURDS TO WHITE SHED - WEST SIDE OF SHED -
SOUTH 1 MILE


0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)	-10
0	MINMK	20	TBHV		-0.25 CORRECTION (g/cc)	0.25
			0 (ft3) 10			

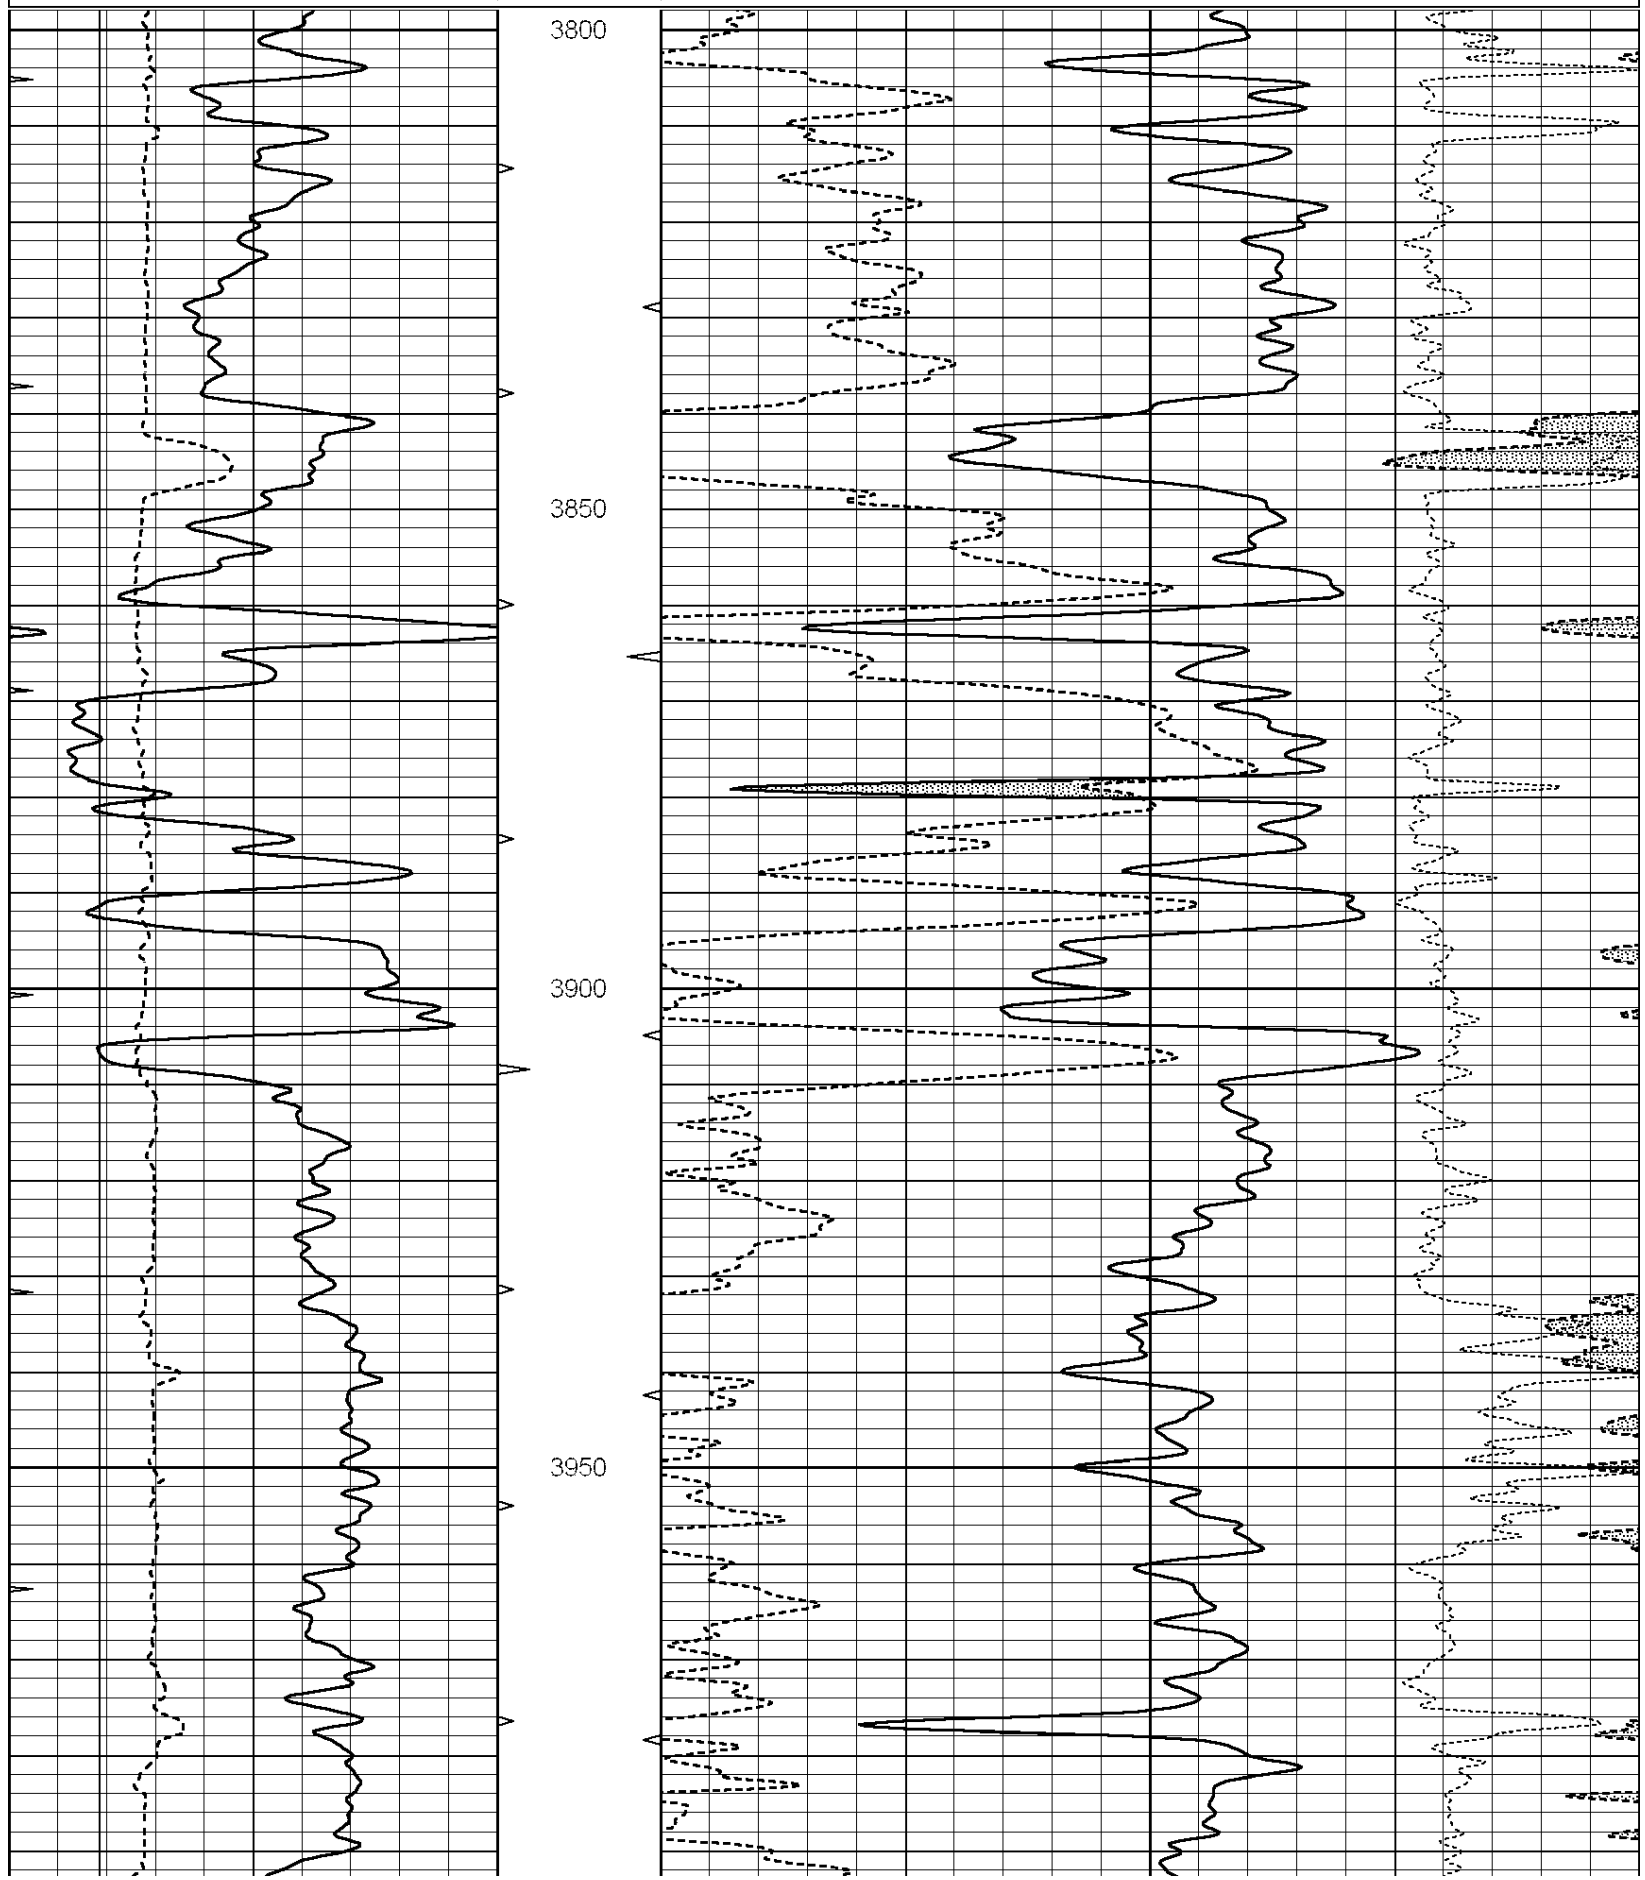

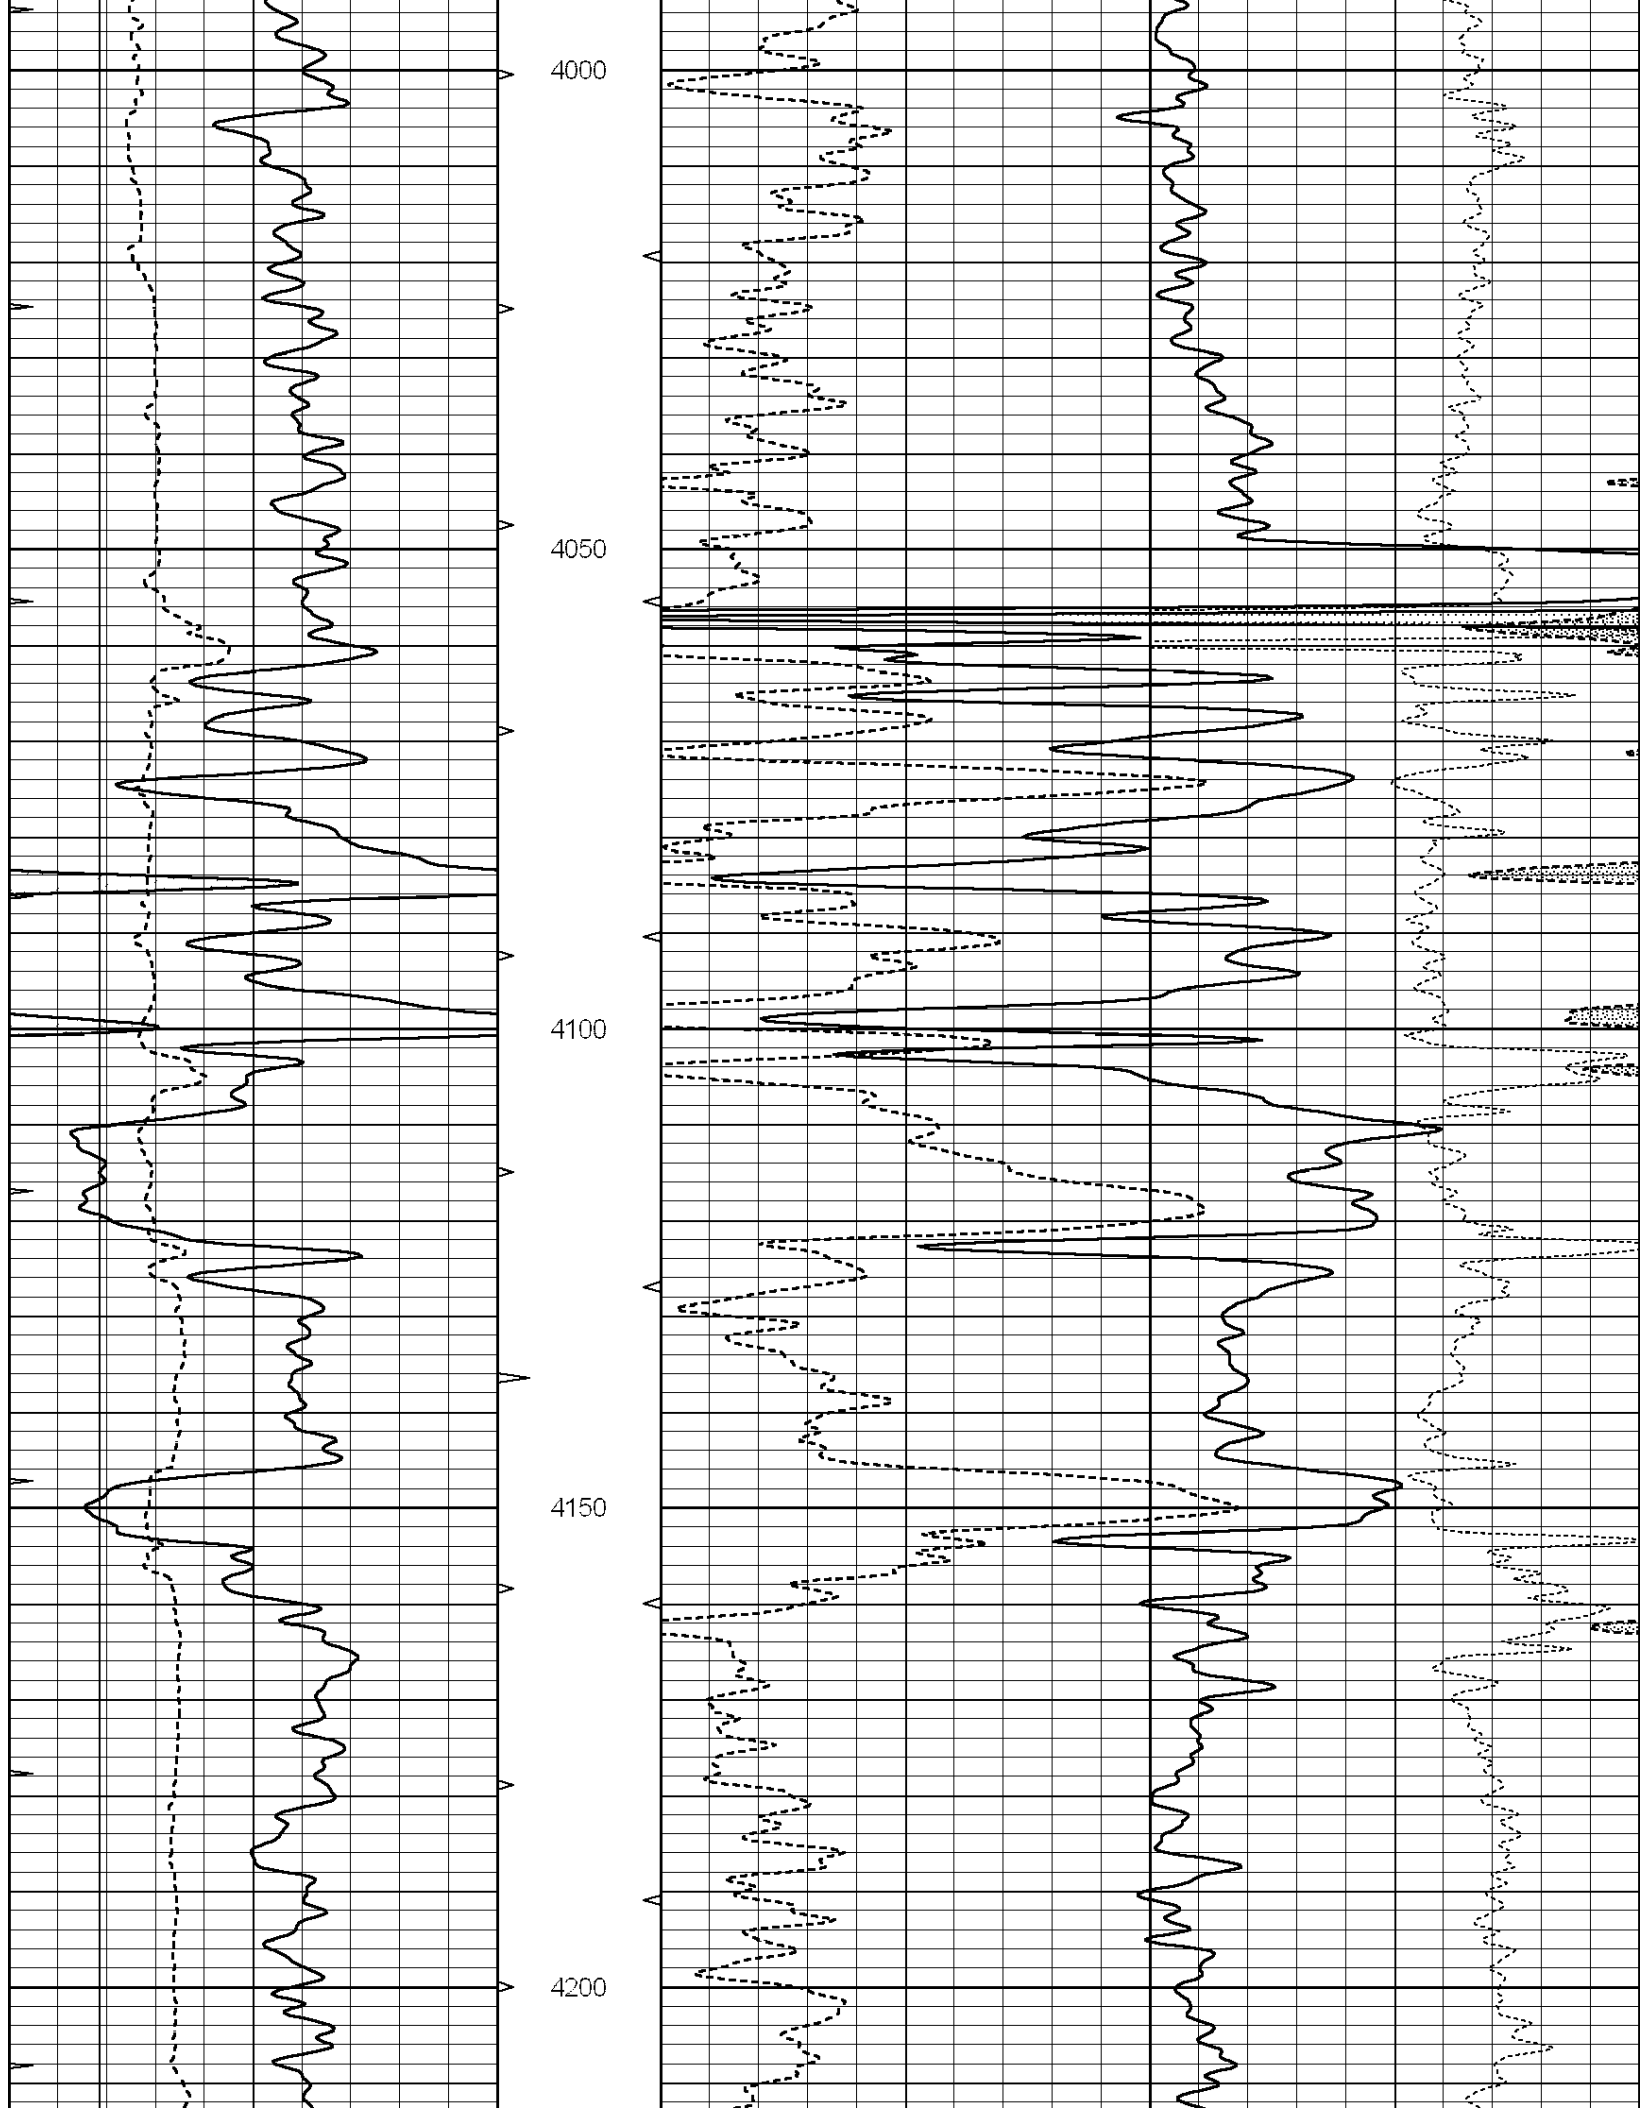

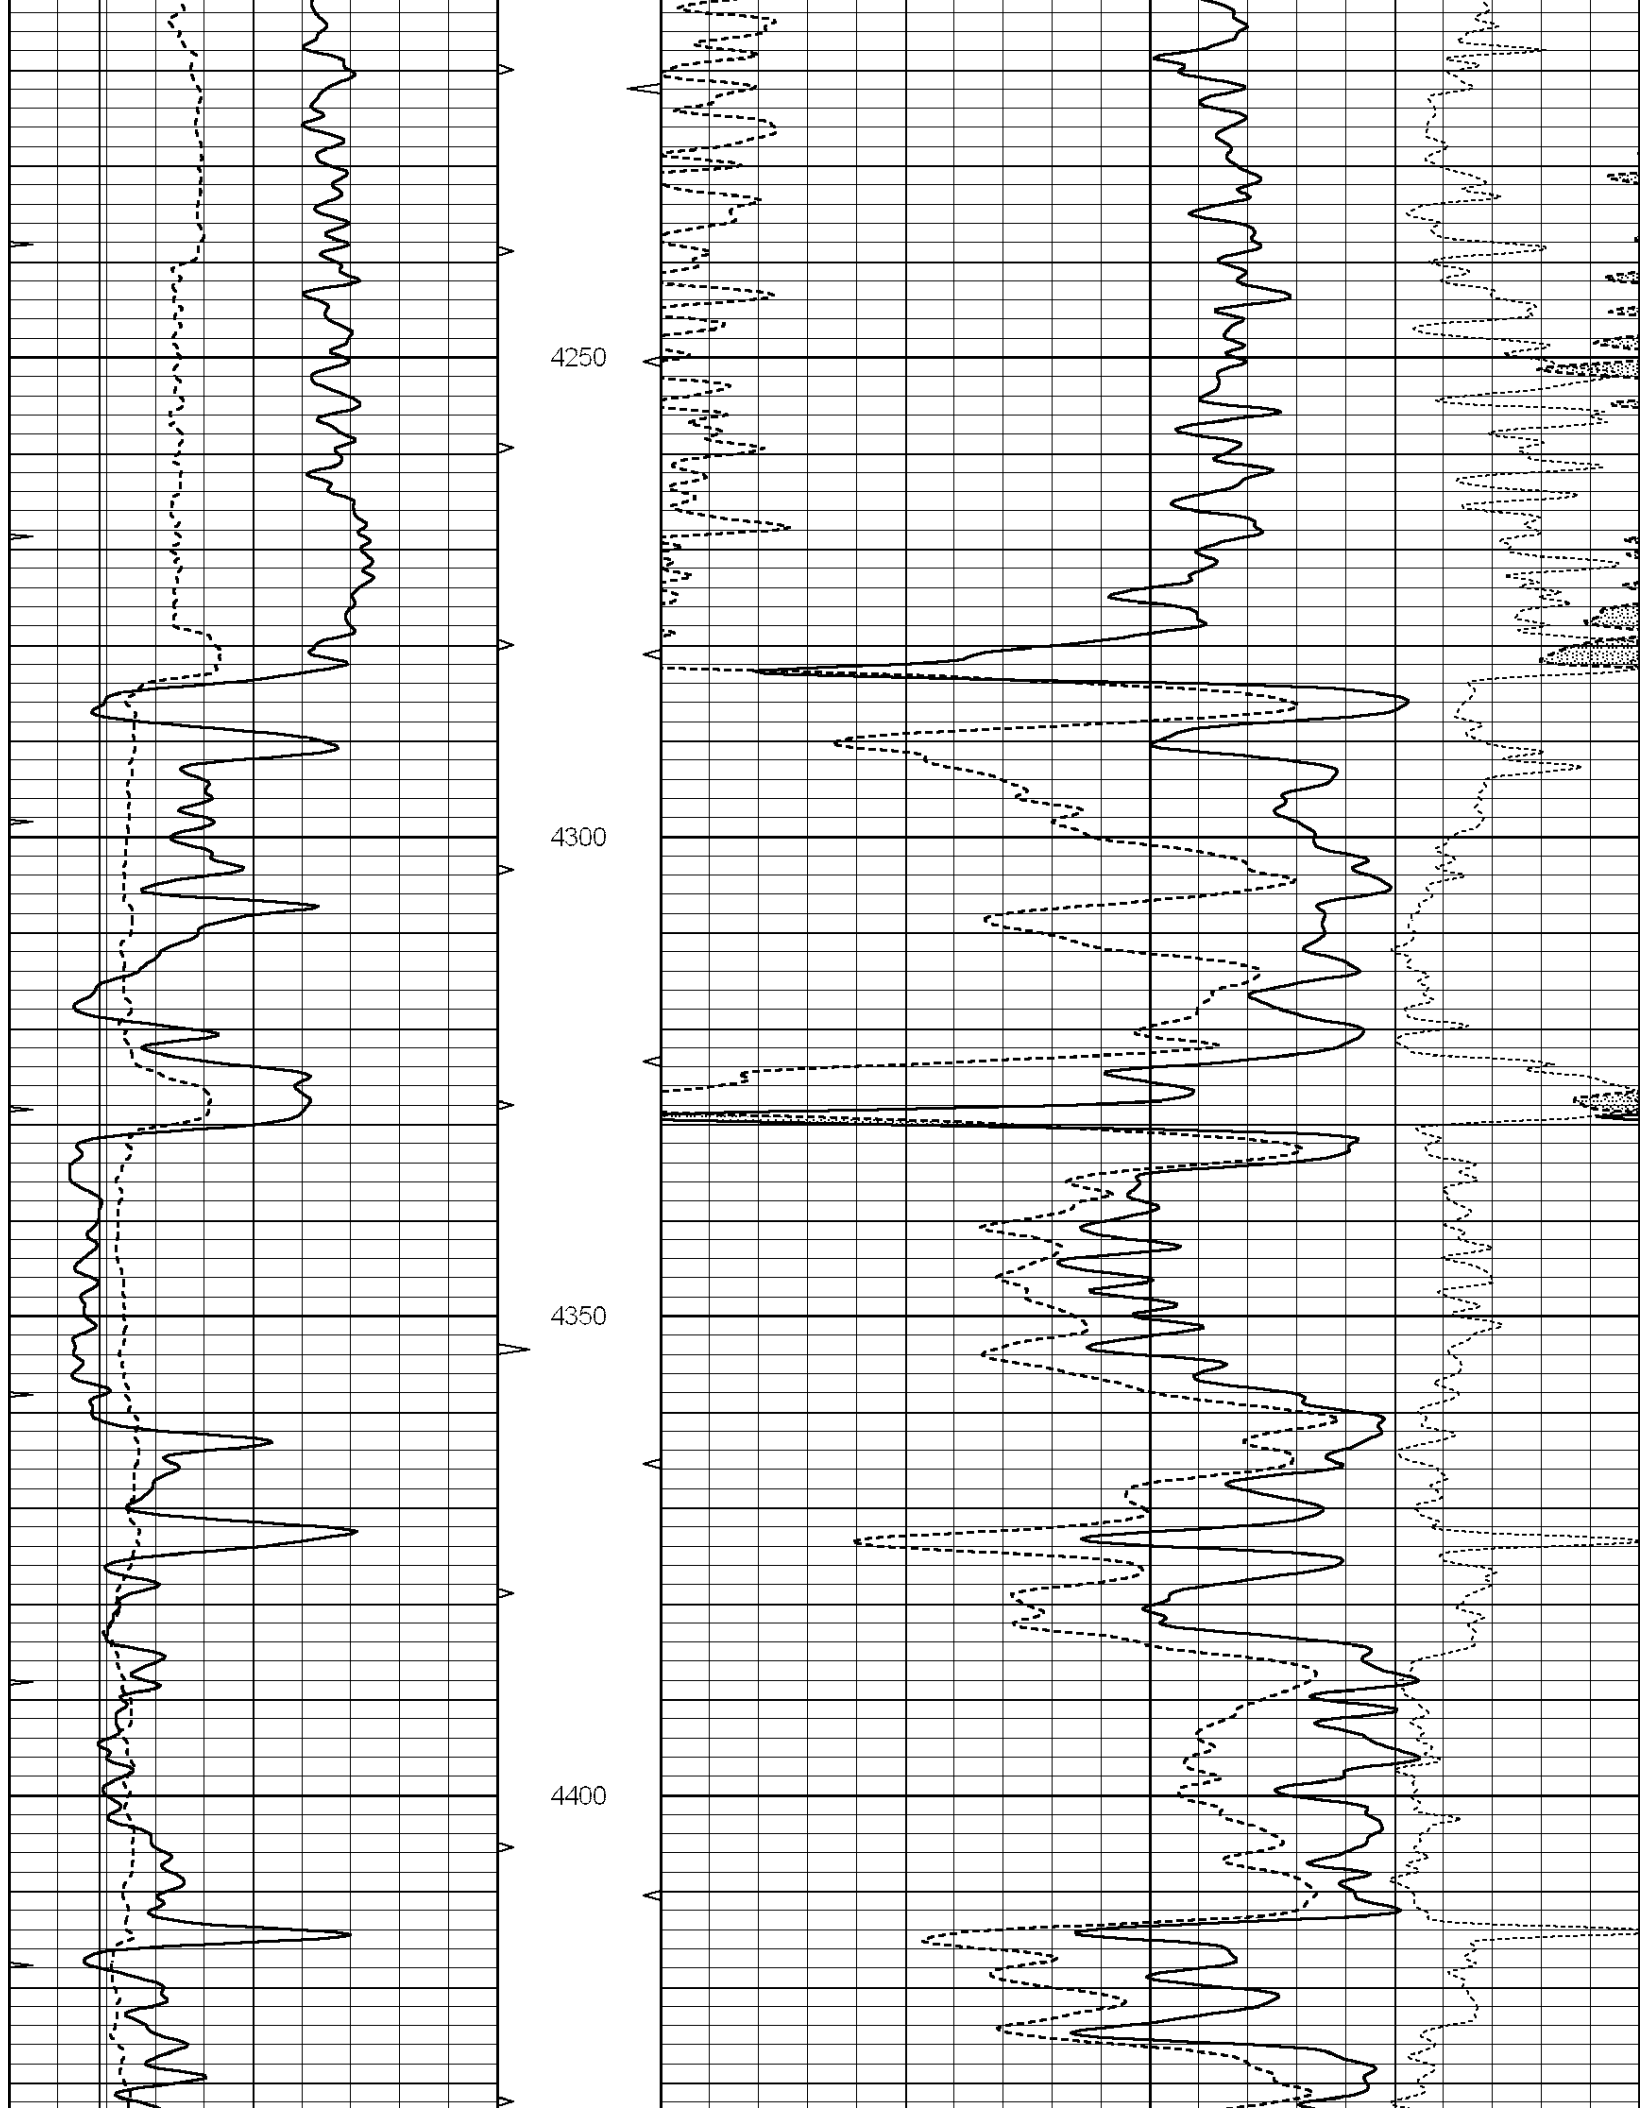

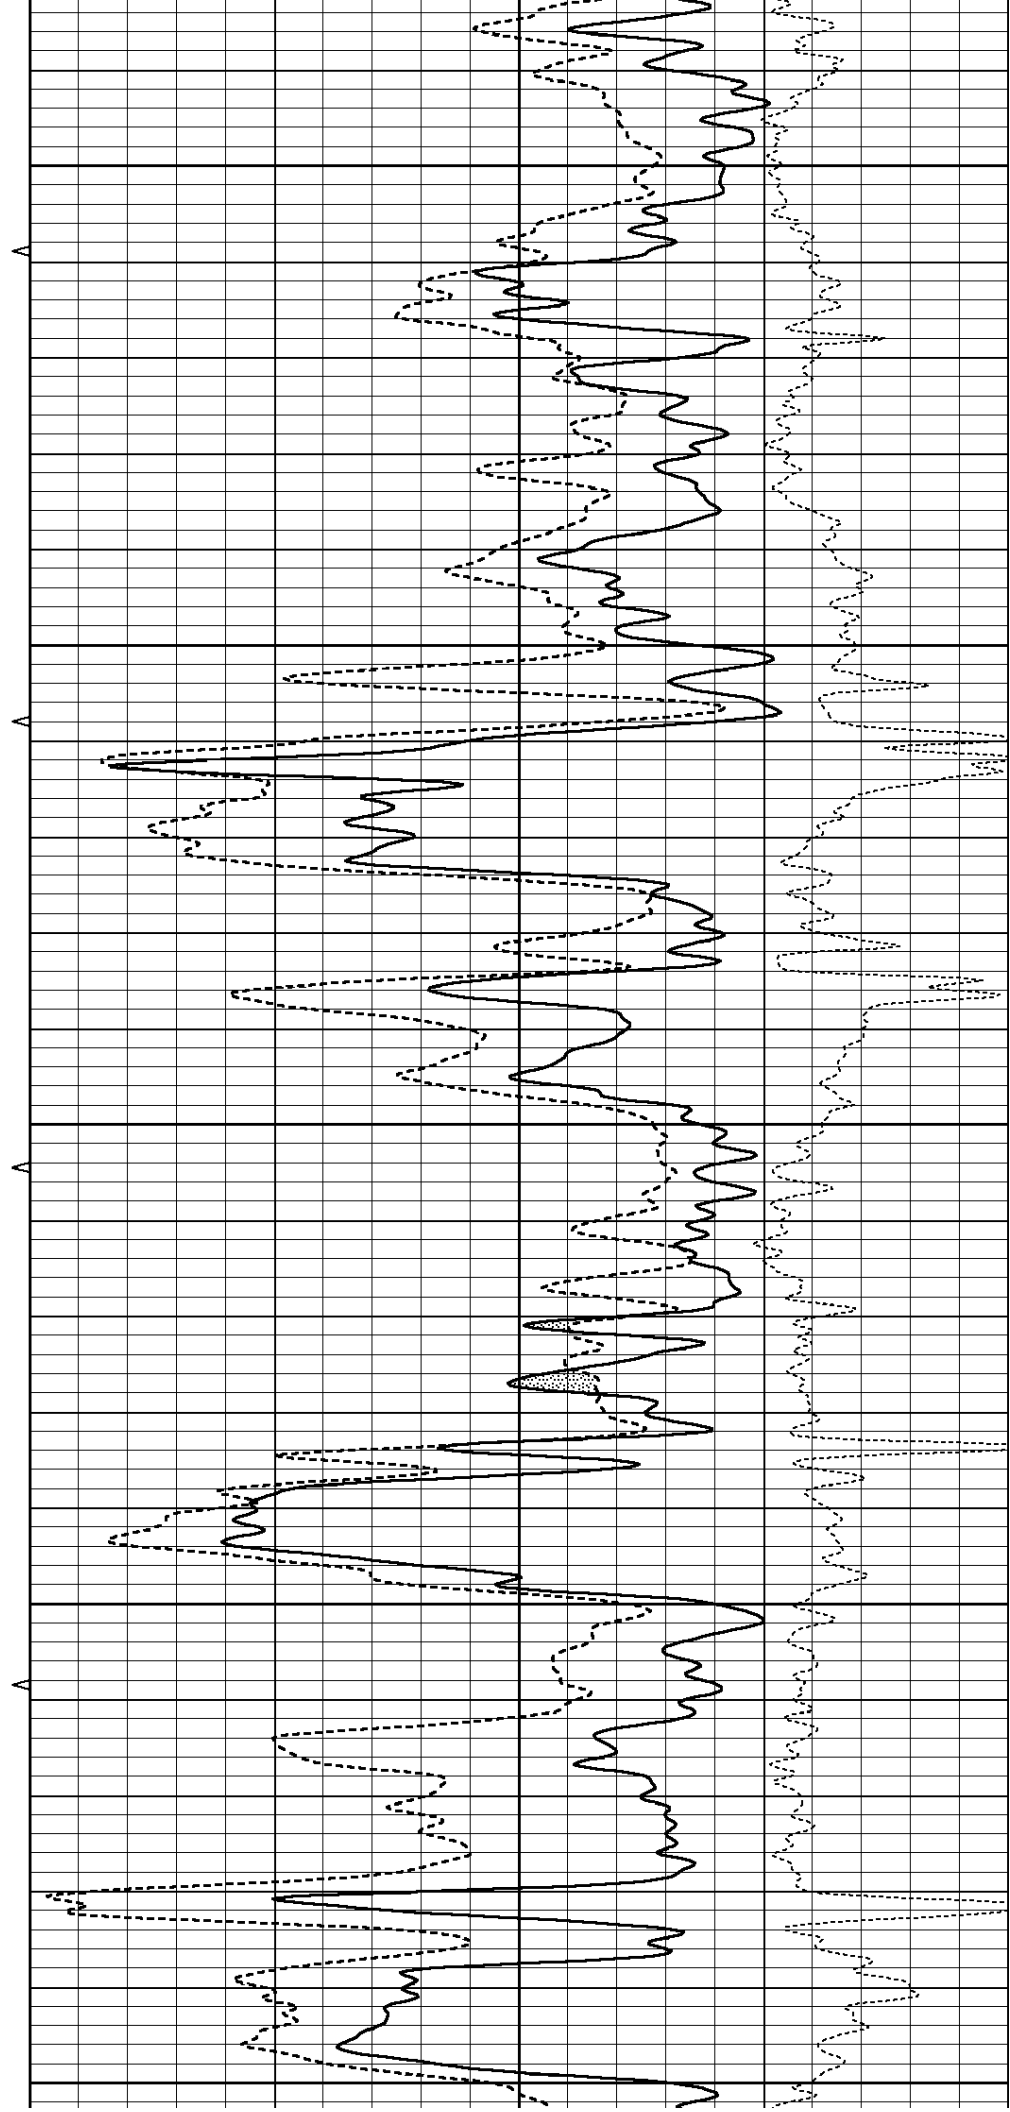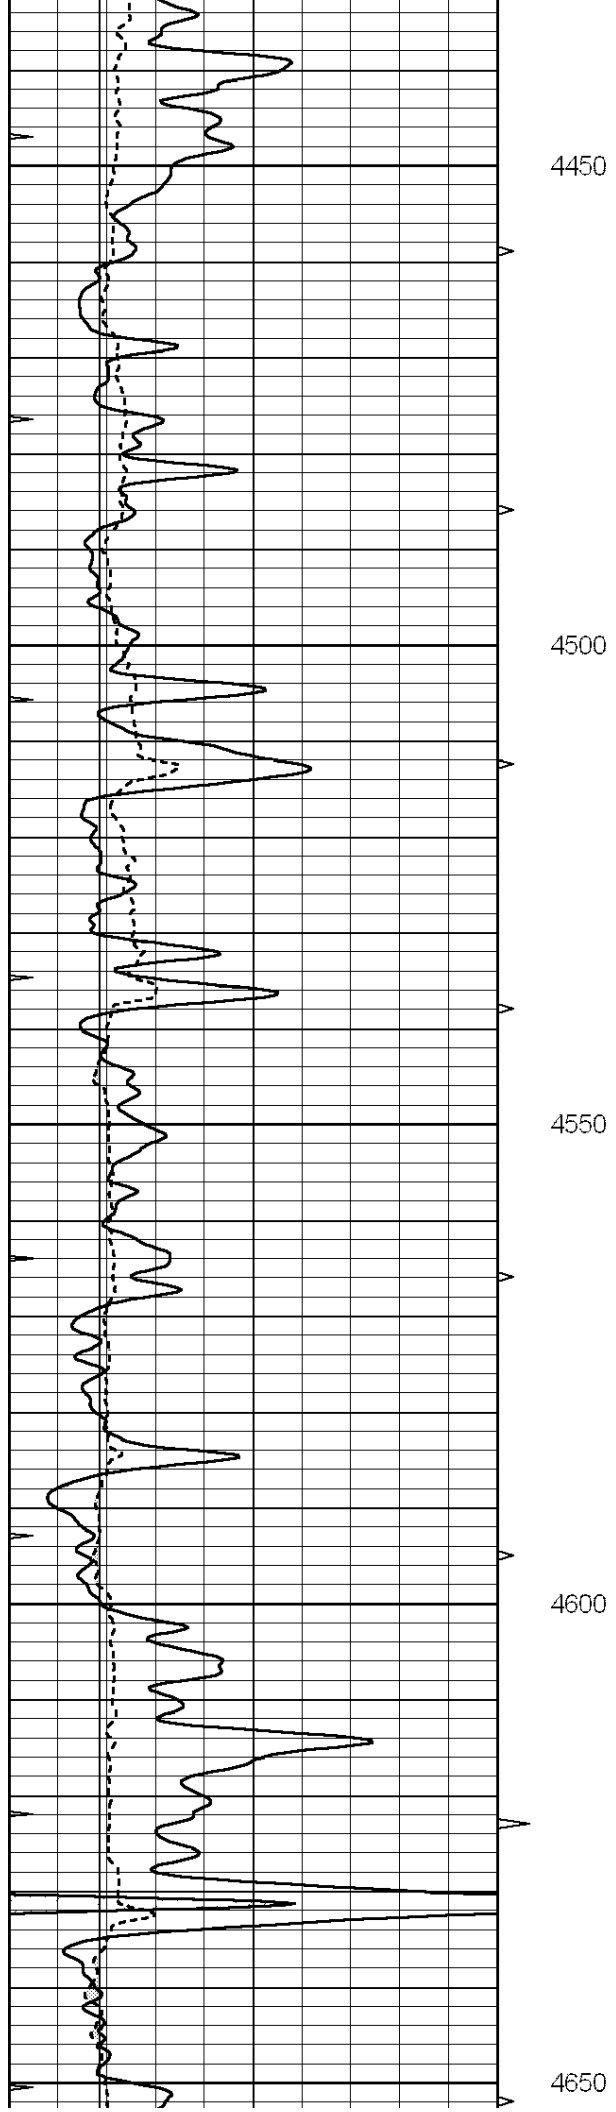

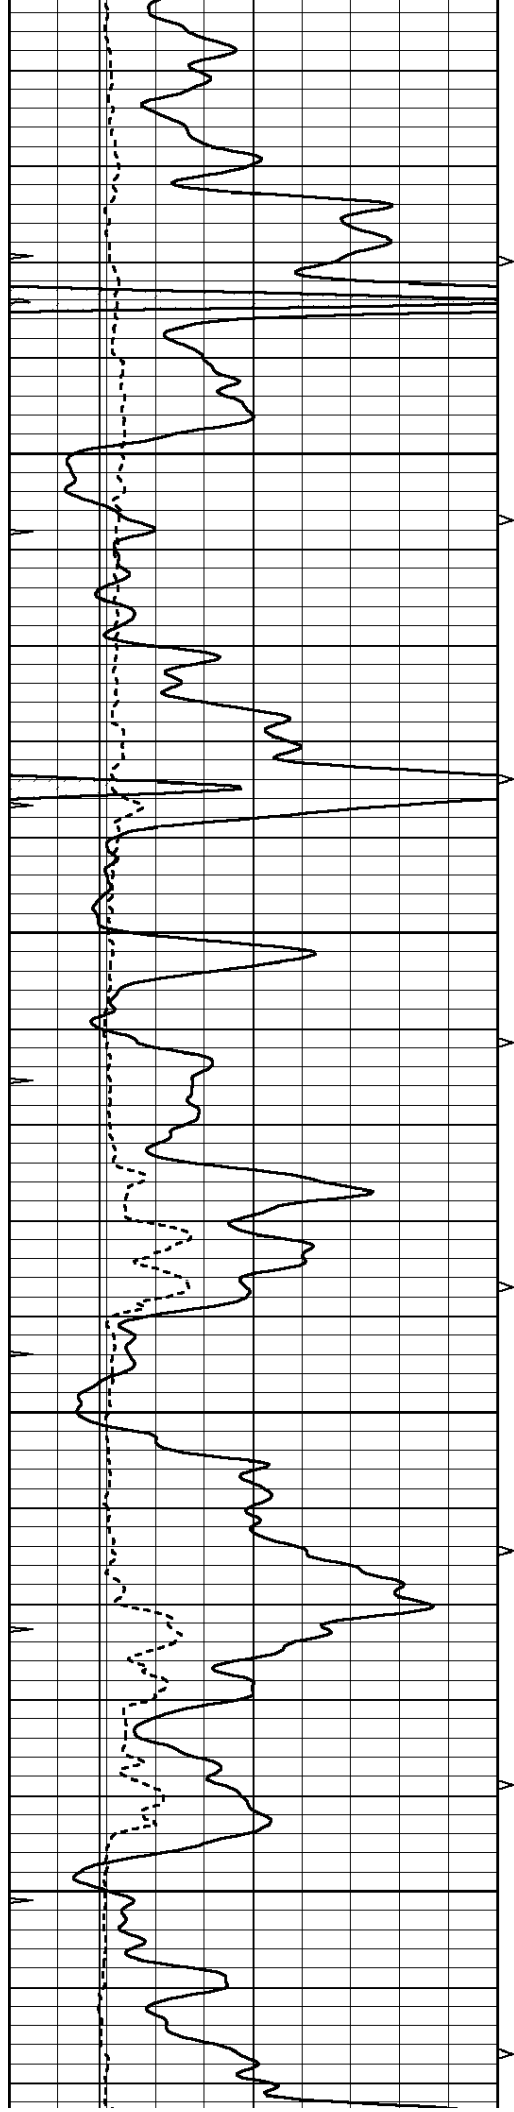




4700


4750

4800

4850

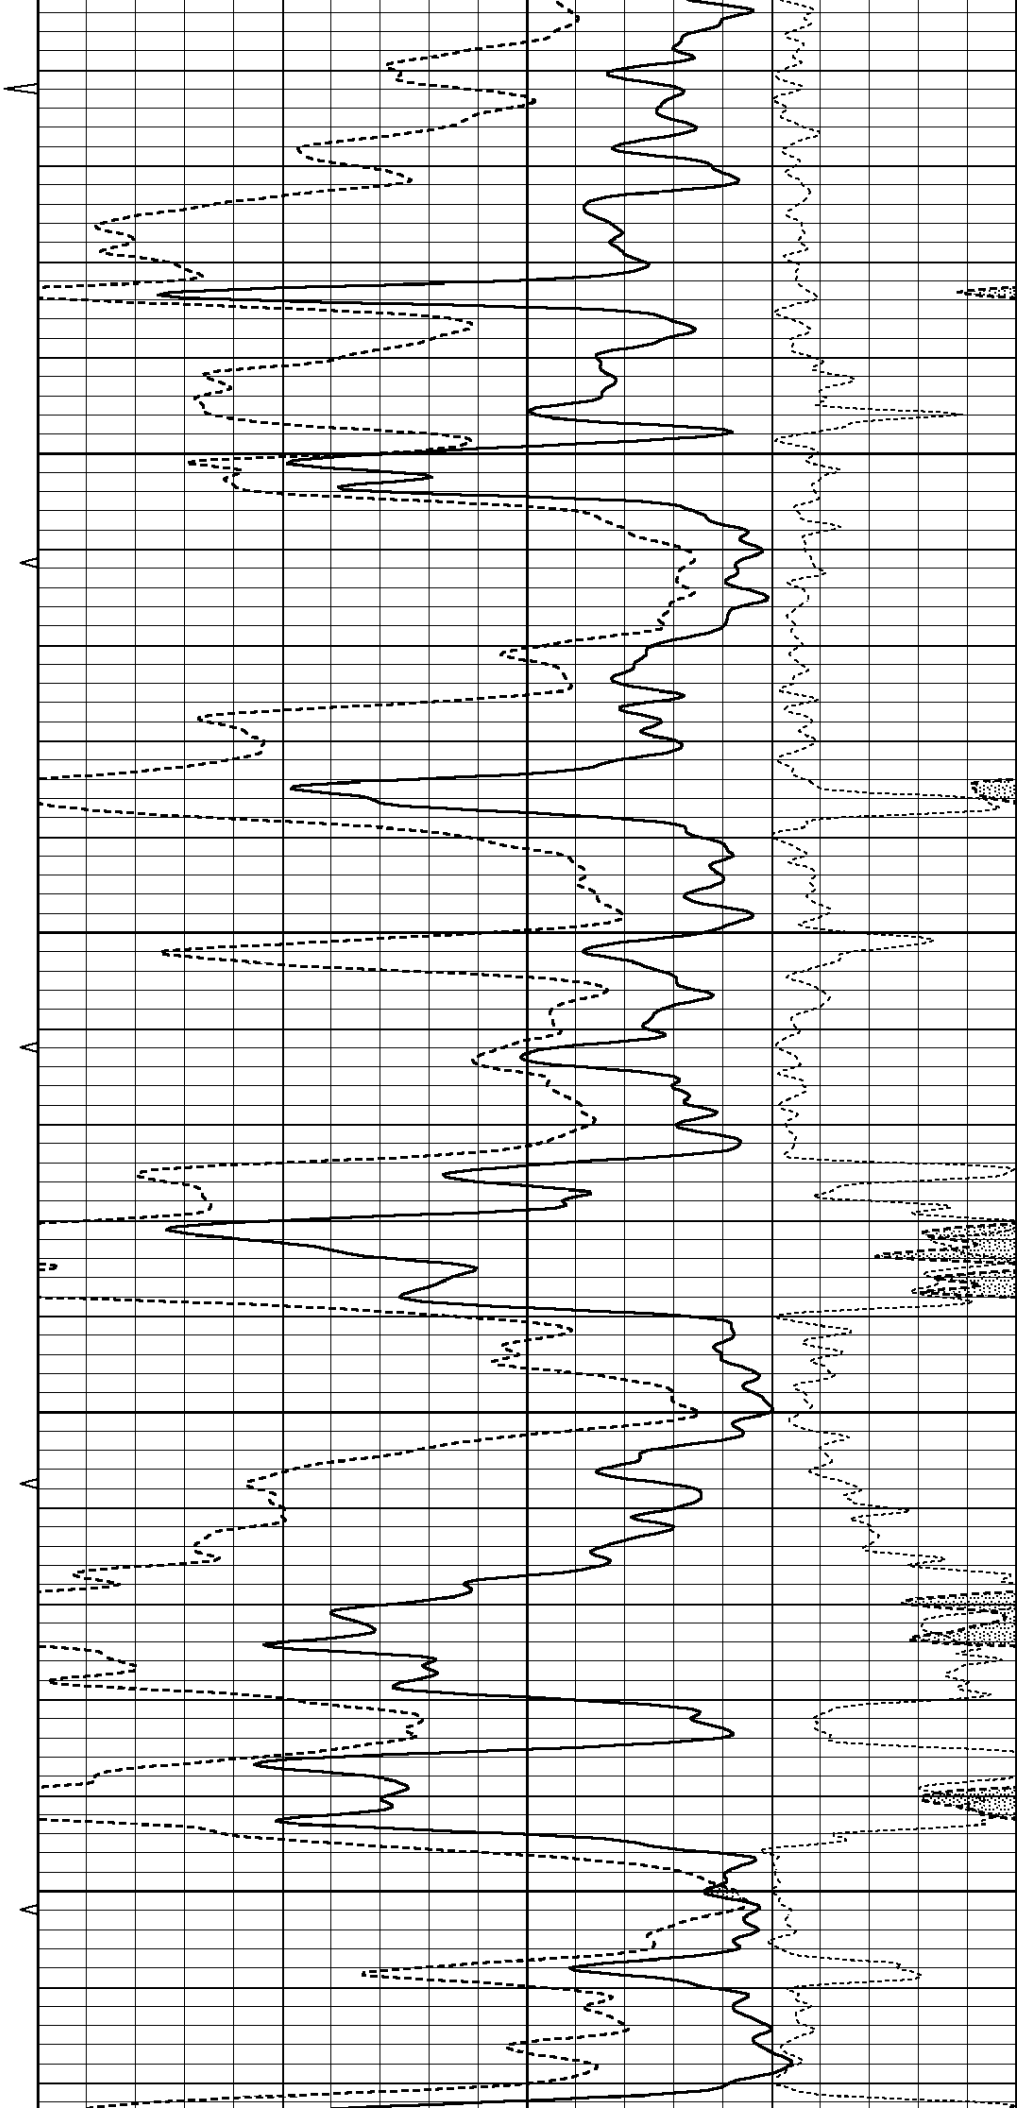

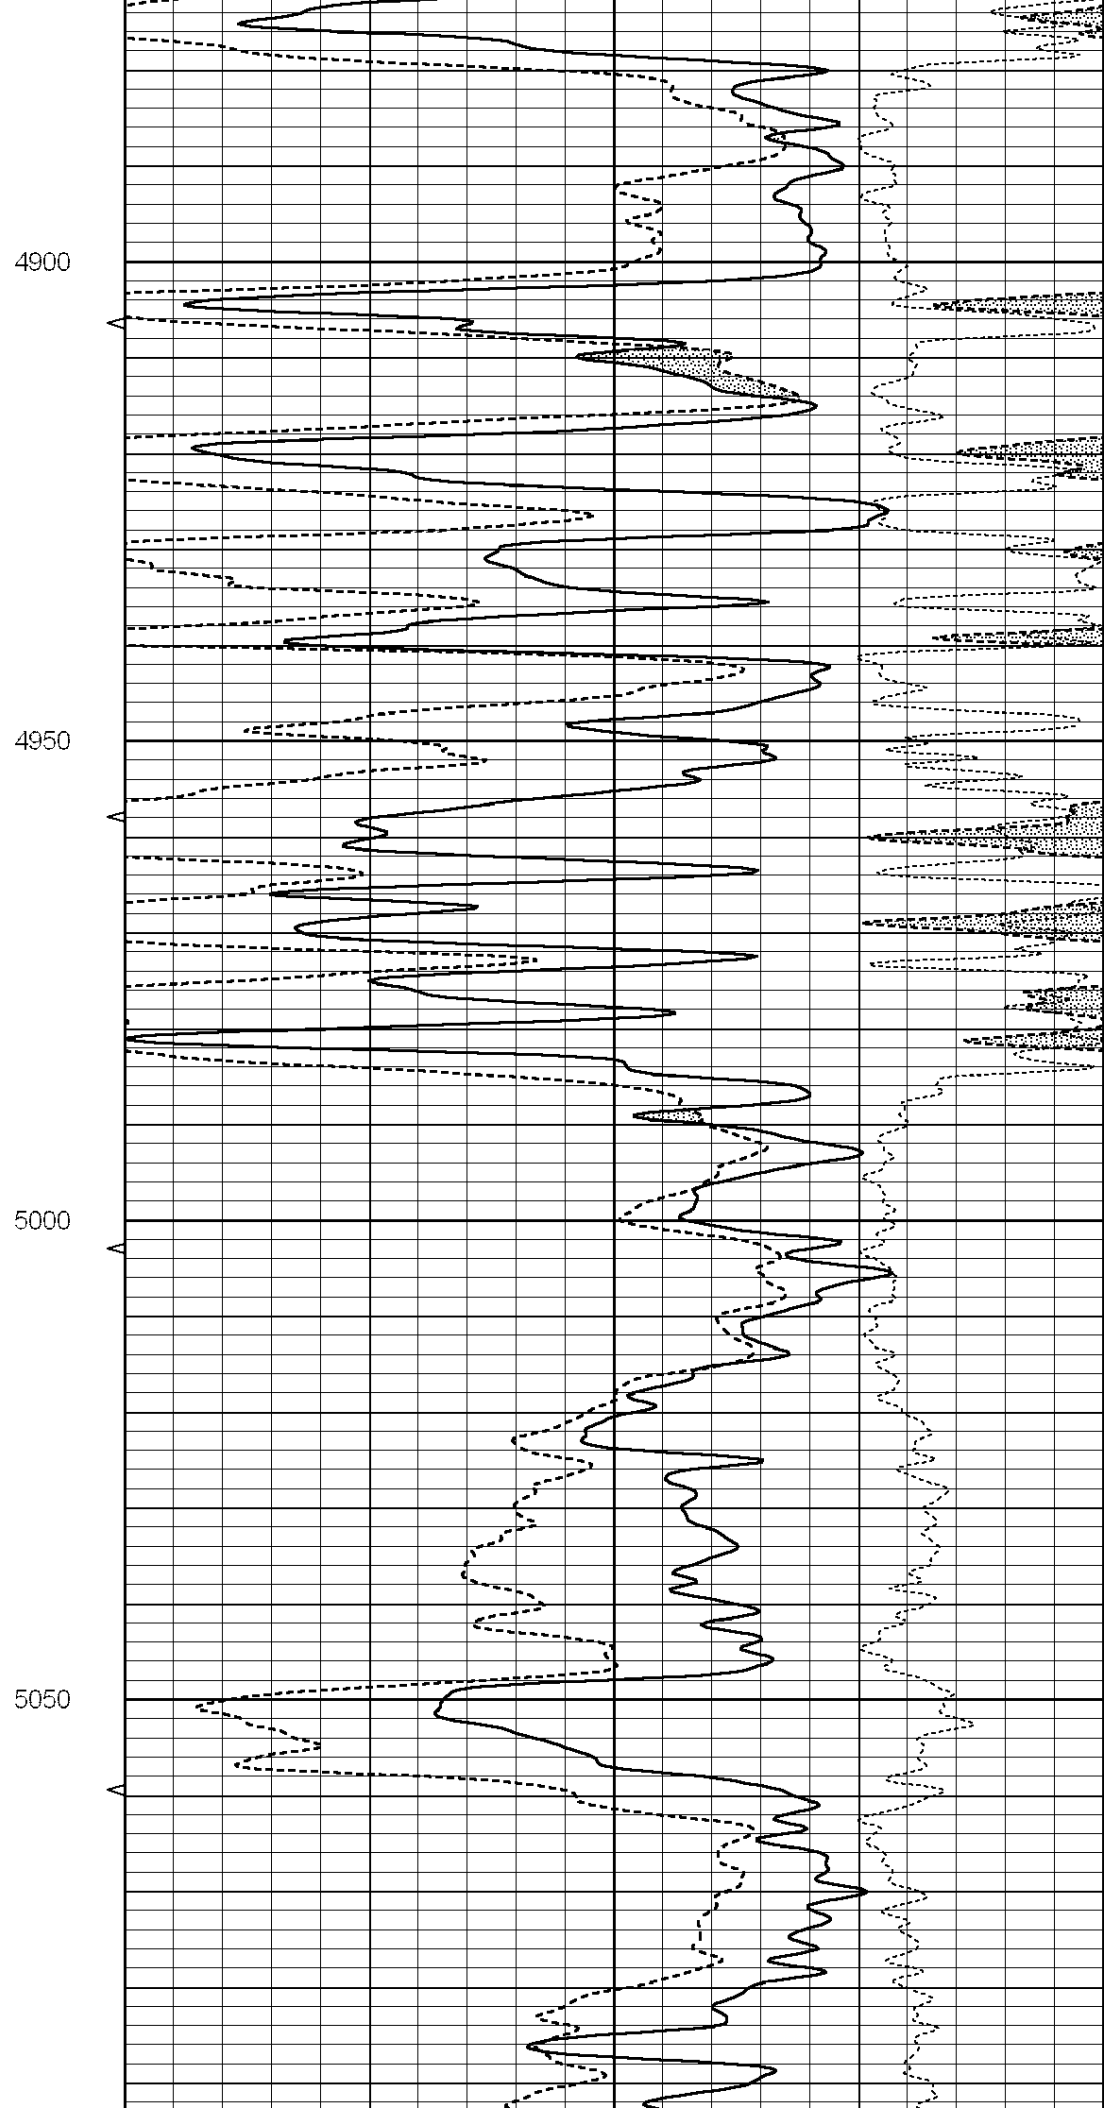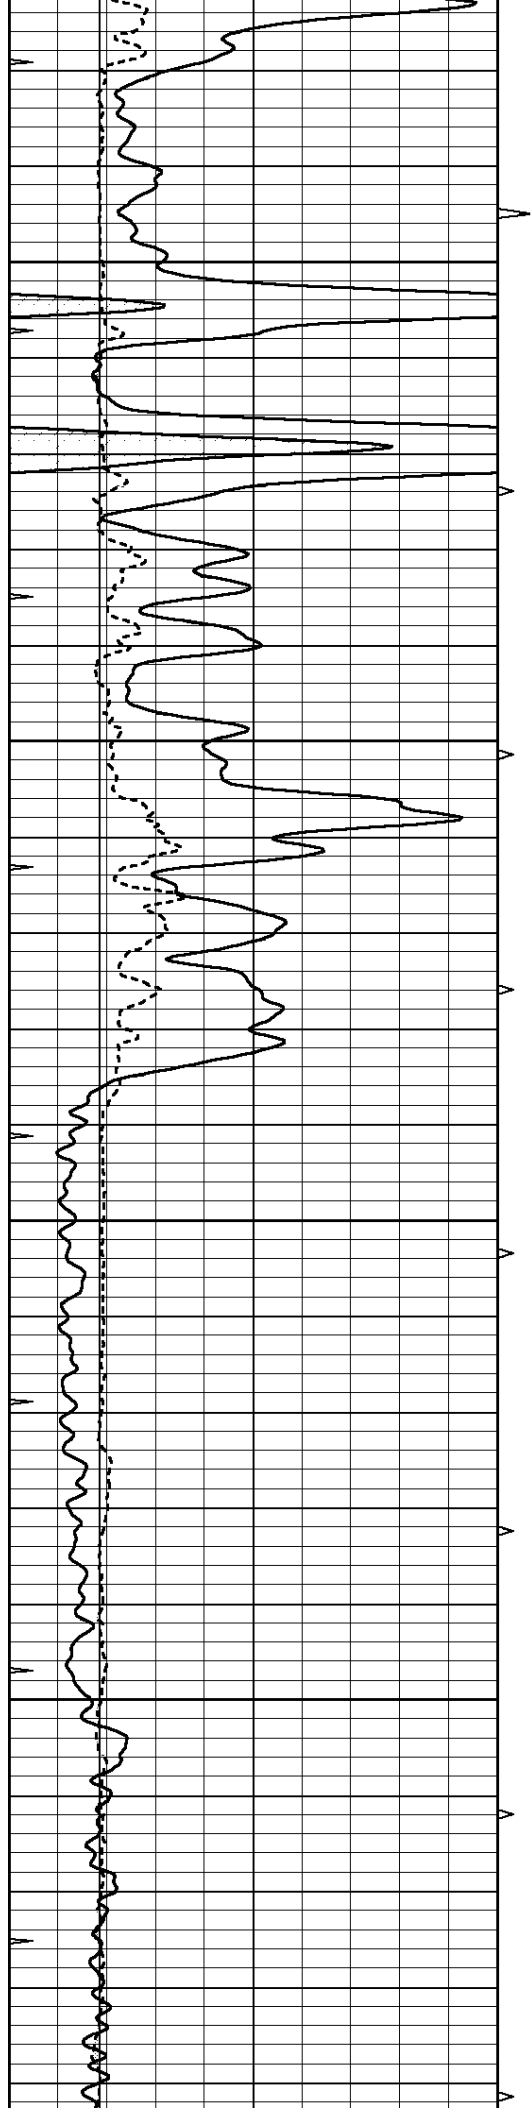


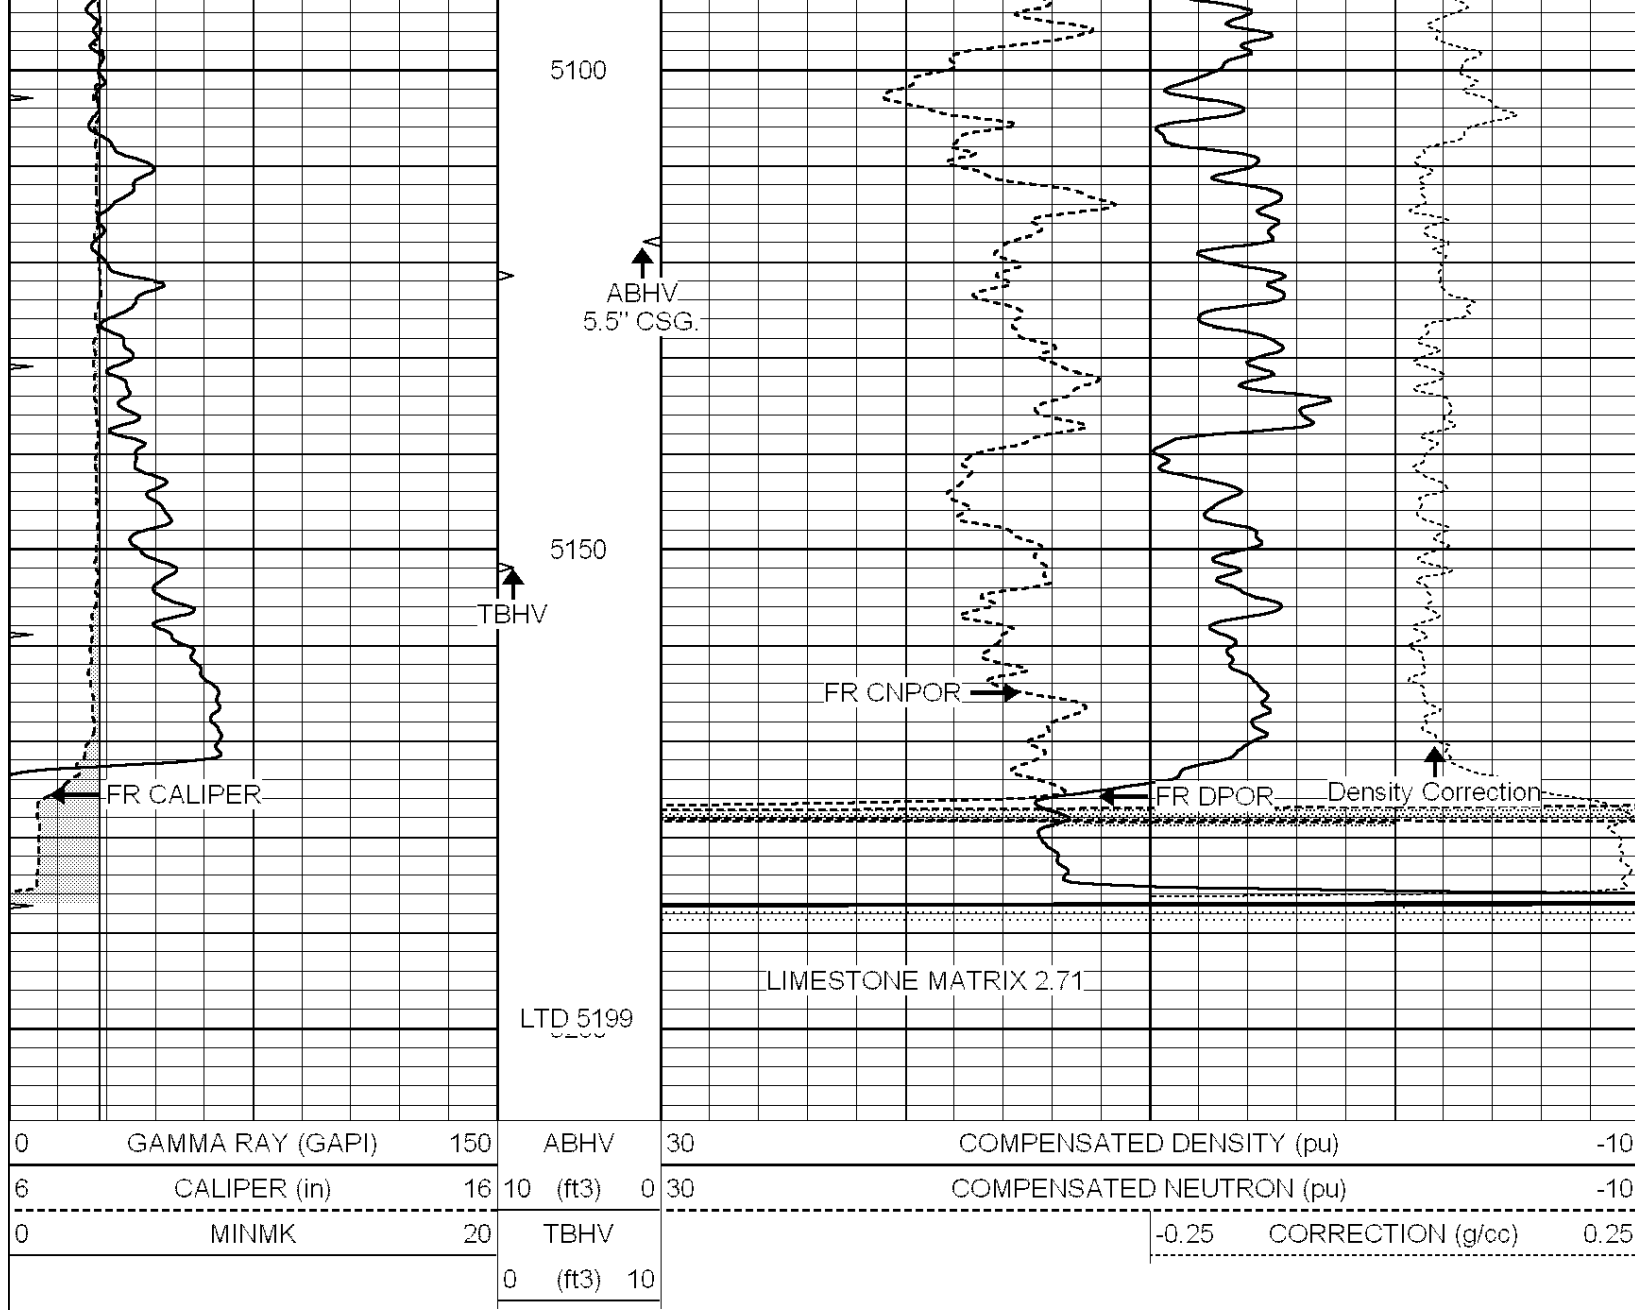


SUPERIOR
Hays,
Kansas

REPEAT SECTION

Database File: 9176ddh.db
 Dataset Pathname: pass3.4
 Presentation Format: den_neu
 Dataset Creation: Sat May 12 00:11:30 2012 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

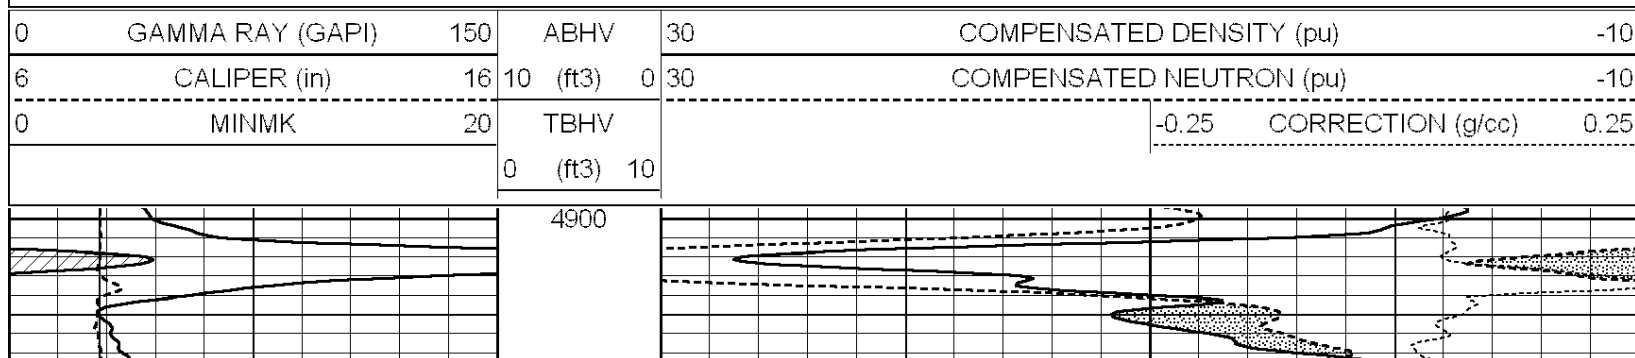

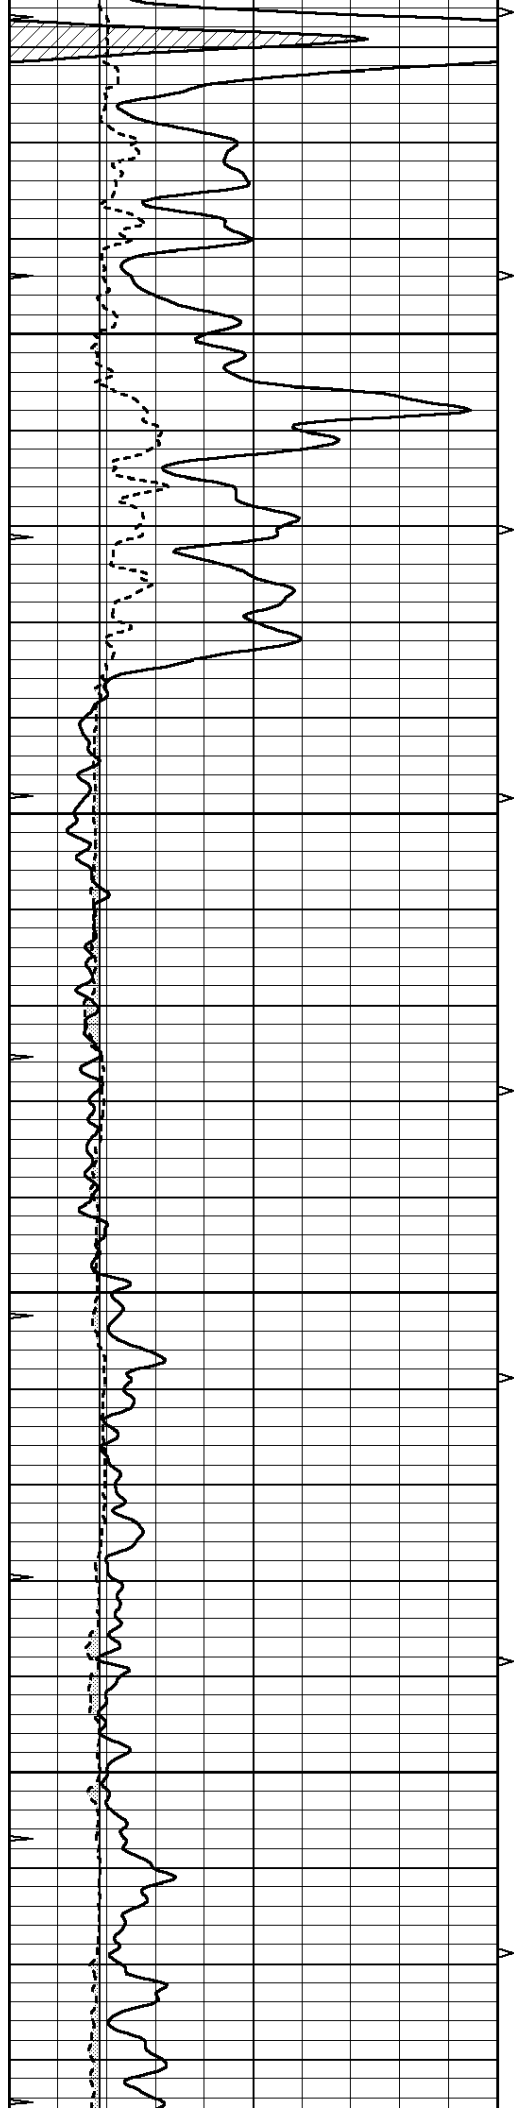



4950

5000

5050

5100

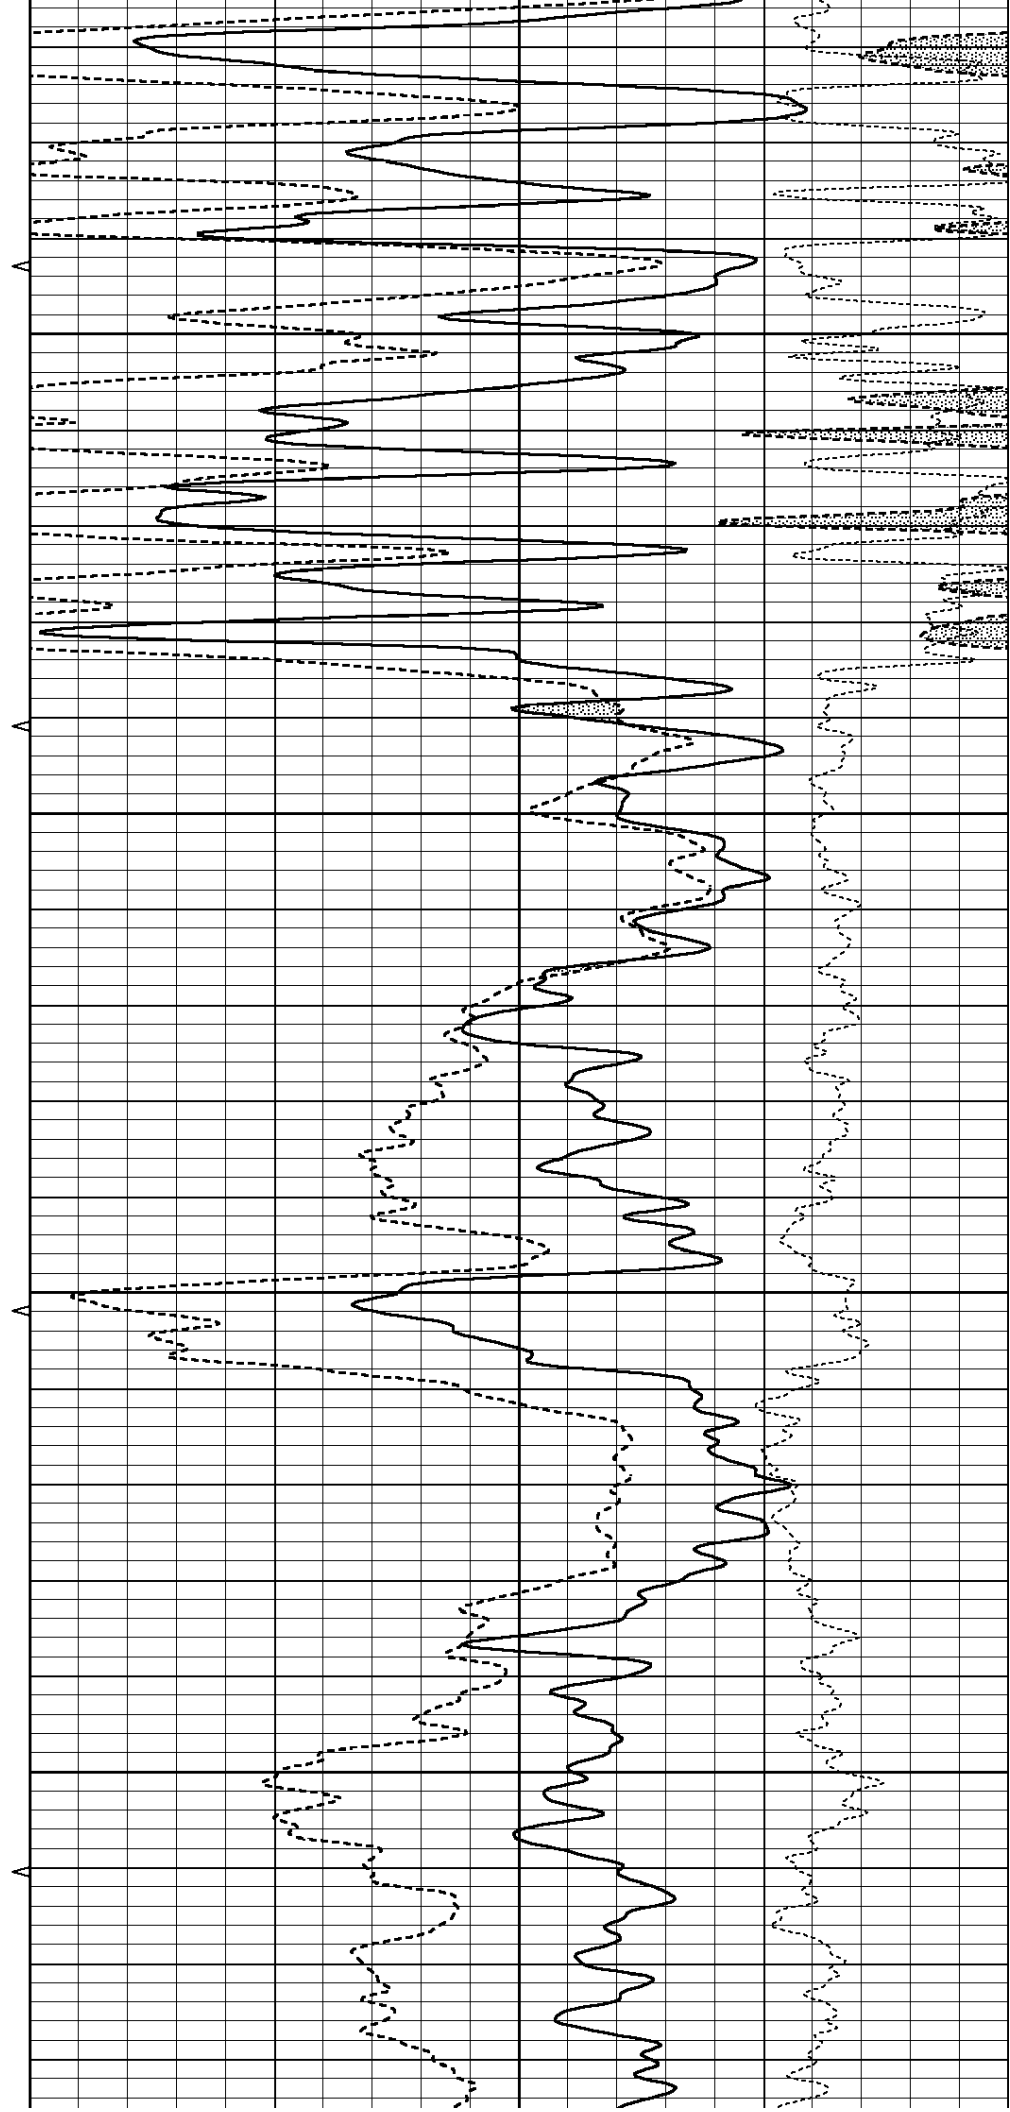

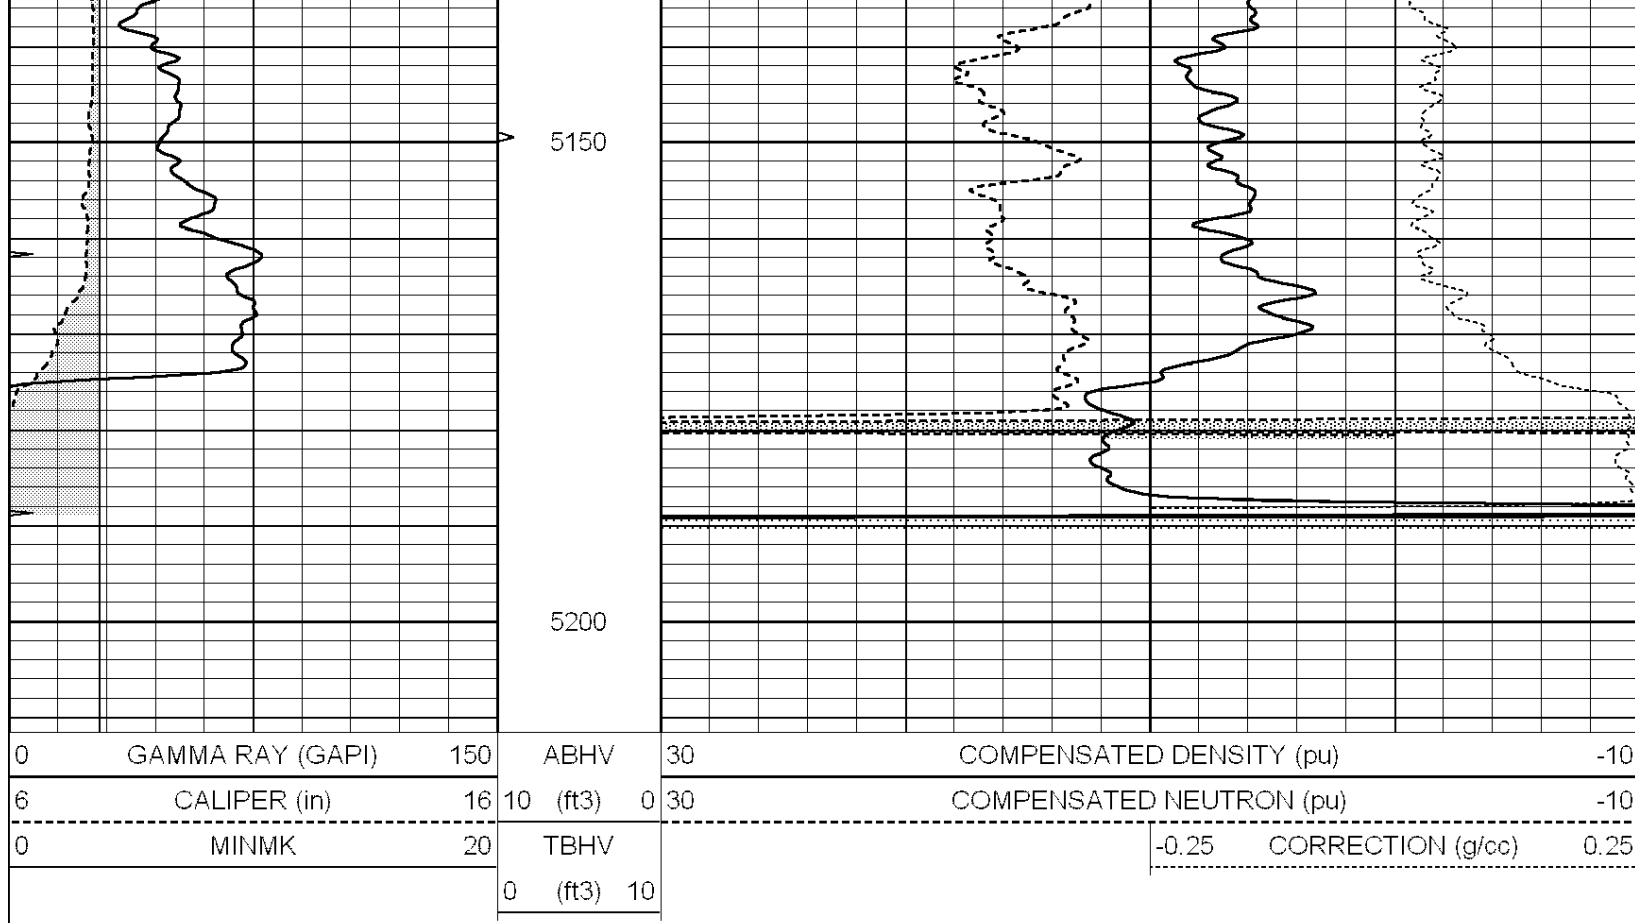

Calibration Report

Database File: 9176ddn.db
Dataset Pathname: pass1
Dataset Creation: Fri May 11 21:16:48 2012 by Log Open-Cased 090629

Dual Induction Calibration Report

Serial-Model: PROBE9-DILG
Surface Cal Performed: Thu May 10 04:20:47 2012
Downhole Cal Performed: Mon Jul 28 12:02:56 2008
After Survey Verification Performed: Mon Jul 28 12:02:56 2008

Surface Calibration

Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	550.000	-8.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	540.000	-10.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration

Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3970.000	mmho-m		

After Survey Verification

	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Compensated Density Calibration Report

Serial-Model: GEAR1-GEARHART
 Source / Verifier: 147 / 147
 Master Calibration Performed: Thu May 10 04:14:54 2012

Master Calibration

	Density			Far Detector	Near Detector	
Magnesium	1.710	g/cc		1243.76	629.14	cps
Aluminum	2.590	g/cc		282.16	435.01	cps
Spine Angle = 76.03			Density/Spine Ratio = 0.576			
	Size			Reading		
Small Ring	9.00	in		4.01	V	
Large Ring	14.00	in		5.67	V	

Compensated Neutron Calibration Report

Serial Number: NUE_2I
 Tool Model: G

CALIBRATION

Detector	Readings		Target	Normalization	
Short Space	1.00	cps	1.00	cps	1.0000
Long Space	1.00	cps	1.00	cps	1.0000

Gamma Ray Calibration Report

Serial Number: GR5
 Tool Model: OPEN
 Performed: Thu May 10 07:14:18 2012

 Calibrator Value: 1.0 GAPI

 Background Reading: 0.0 cps
 Calibrator Reading: 1.0 cps

 Sensitivity: 0.6300 GAPI/cps