






accuracy or correctness of the contents, damages, or representations are also

Company		LaVeta Oil & Gas	
Well		Vinta Garton #2	
Field		Richardson	
County		Stafford	
State		Kansas	
Location:		1940 FM & 1830 FVL	
API #:		15 185 2769	
Other Services		DIL	
Permanent Datum		SEC 29	T1YP 22S. RGE 11W
Log Measured From		Ground Level	Elevation
Drilling Measured From		KB @ AGL	1828'
Date		1-24-13	
Run in Time		5:00	
Depth		3652'	
Bottom Logged Interval		3622'	
Total Log Interval		2800'	
Casing Driller		214'	
Bit Size		2 1/4"	
BT Size		7 1/8"	
Type Fluid in Hole		Chemical	
Density / Viscosity		9.174	
pH / Fluid Loss		11.0/8.9	
Source of Sample		PH	
Run @ Mass Temp		14.0/85degF	
Run @ Mass Temp		1.40/68degF	
Source of Rint / Rinc		Calculated	
Run @ BHT		110@11.2degF	
Time Circulation Stopped		17:20 p.m.	
Log Completion		17:20 p.m.	
Maximum Recorded Temperature		112 degF	
Equipment Number		T045	
Location		Hays, KS	
Recorded By		Gus Pfannenstiel	
Witnessed By		Mr. Bruce Reed	
		Mr. Bernie Griffin	


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any losses, damages or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are subject to our general terms and conditions set out in our current Price Schedule.

Comments

--

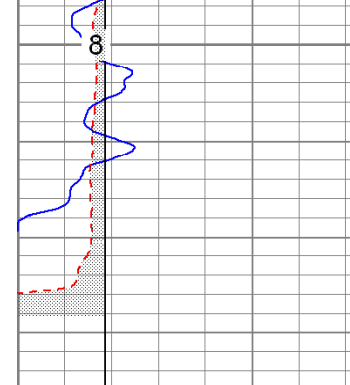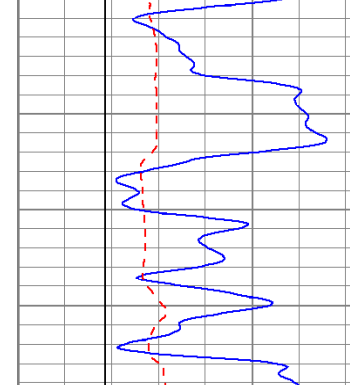

0	GR (GAPI)	150	30	NPOR (pu)	-10	
0	DCAL (in)	16	30	DPOR (pu)	-10	
6	BOREID (in)	16	70	DPOR (pu)	30	
TBHV (ft3)				-0.25	RHOC (g/cc)	0.25
				8000	LTEN (lb)	0

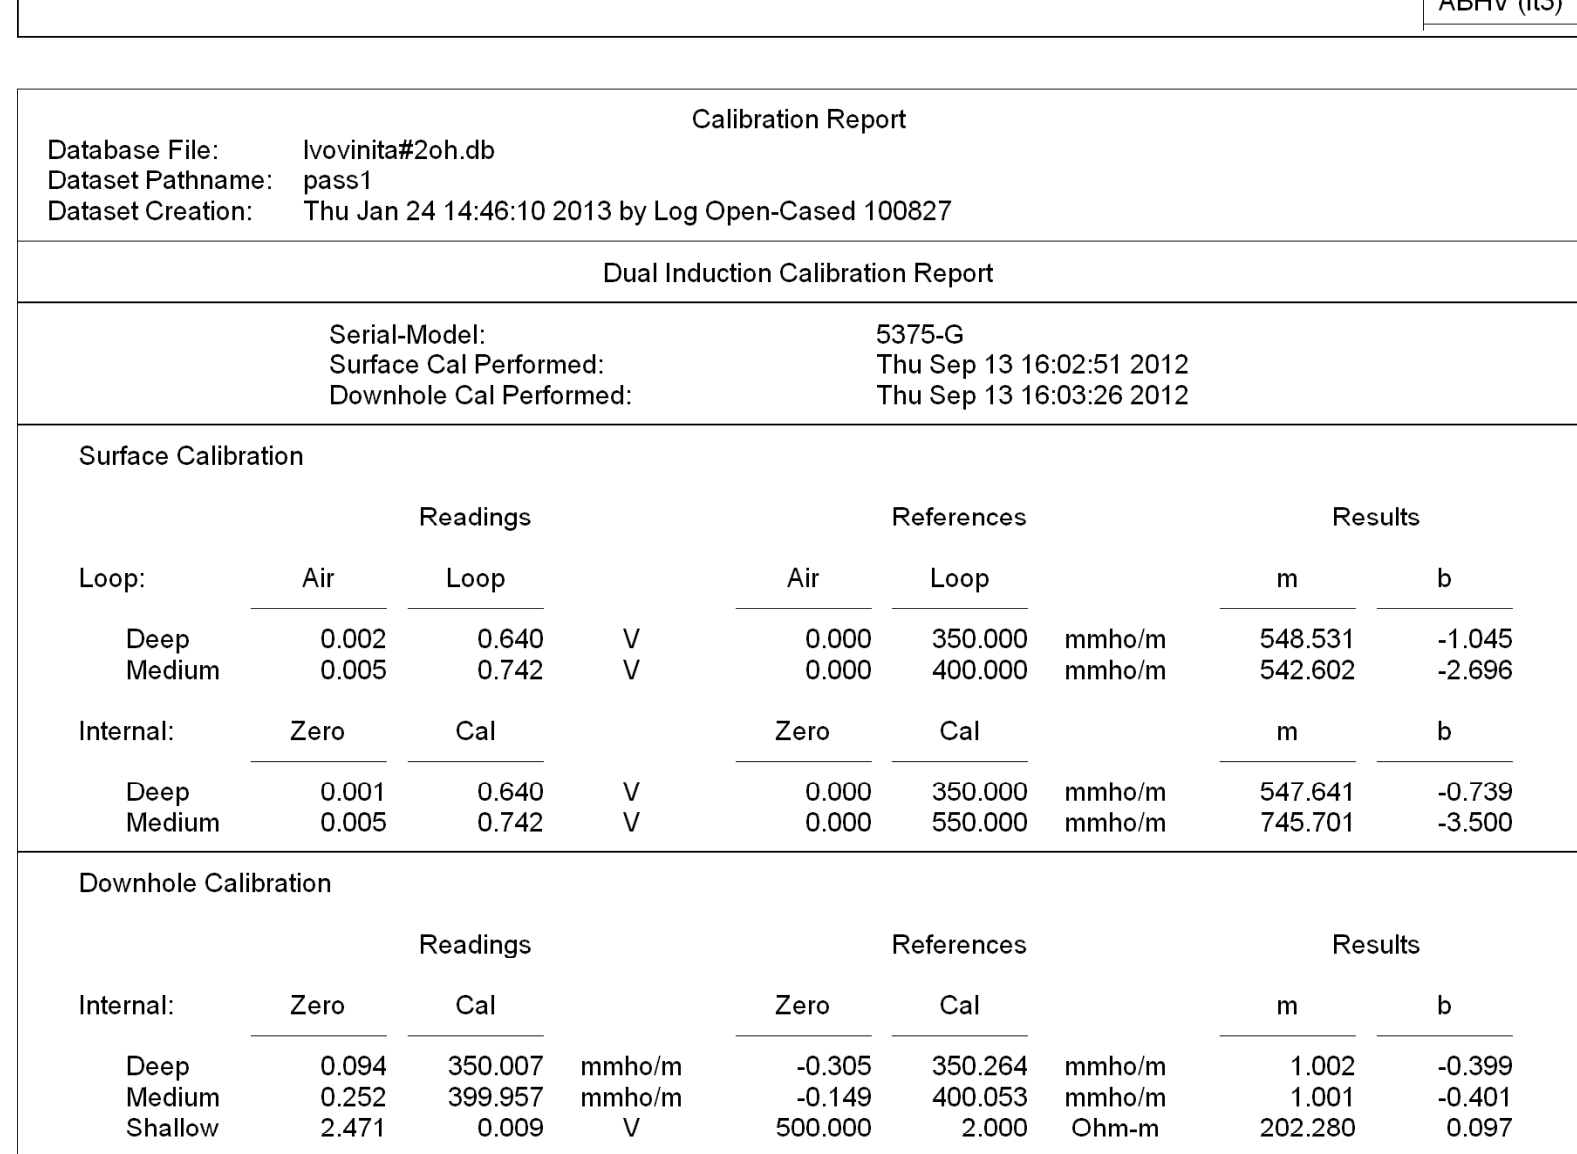

Compensated Density Calibration Report	
Serial-Model:	2388DHT-DHT
Source / Verifier:	/
Master Calibration Performed:	Mon Jan 07 17:00:17 2013

Master Calibration				
Density			Far Detector	Near Detector
Magnesium	1.750	g/cc	717.11	305.57 cps
Aluminum	2.620	g/cc	140.63	205.93 cps
Spine Angle = 76.38			Density/Spine Ratio = 0.519	
Size			Reading	
Small Ring	8.25	in	5771.32	
	8.25		6245.52	

Gamma Ray Calibration Report		
Serial Number:	2001	
Tool Model:	OH	
Performed:	Mon Jan 07 17:00:47 2013	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps

Sensitivity:	0.2300	GAPI/cps
Neutron Calibration Report		
Serial Number:	5108	
Tool Model:	PROBE	
Performed:	Mon Jan 07 17:00:44 2013	
Calibrator Value:	1	NAPI
Calibrator Reading:	1	cps
Sensitivity:	1	NAPI/cps

Sensor	Offset (ft)	Schematic	Description	Len (ft)	OD (in)	Wt (lb)
NEU	37.85		None	0.75	1.50	5.00
			NEU-PROBE (5108) Probe	4.92	3.63	85.00
GR	32.32		GR-OH (2001) 2001	3.56	3.25	40.00

[illegible]

CILD	10.60		DIL-G (5375)	21.47	4.00	345.00
SP	10.60		Gearhart			
CILM	6.89					