



Dual Induction Log

DIGITAL LOG

(785) 625-3858

API No.

15-101-22388-00-00

Company Credo Petroleum Corporation

Well Nancy #1-22

Field Wildcat

County Lane State Kansas

Location

SE NW NW NW
525' FNL / 505' FWL

Other Services
CNL / CDL
MEL

Sec: 22

Twp: 17S

Rge: 29W

Elevation

Permanent Datum Ground Level

Elevation 2805

Log Measured From Kelly Bushing

11 Ft. Above Perm. Datum

Drilling Measured From Kelly Bushing

K.B. 2816
D.F.
G.L. 2805

Date

7/4/2012

Run Number

One

Depth Driller

4660

Depth Logger

4658

Bottom Logged Interval

4657

Top Log Interval

250

Casing Driller

8.625 @ 269

Casing Logger

266

Bit Size

7.875

Type Fluid in Hole

Chemical

Salinity, ppm CL

3700

Density / Viscosity

9.3 50

pH / Fluid Loss

10.5 11.2

Source of Sample

Flowline

Rm @ Meas. Temp

0.40 @ 90

Rmf @ Meas. Temp

0.30 @ 90

Rmc @ Meas. Temp

0.54 @ 90

Source of Rmf / Rmc

Charts

Rm @ BHT

0.29 @ 123

Operating Rig Time

4 Hours

Max Rec. Temp. F

123

Equipment Number

15

Location

Hays

Recorded By

R. Barnhart

Witnessed By

Bruce Ard

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858


Dighton, KS:
5N to 210 Rd., 3W, 1/8S, E into


Database File: c:\warrior\data\credo_nancy #1-22\credohd.db
Dataset Pathname: dil/crdmain
Presentation Format: dil2in
Dataset Creation: Wed Jul 04 03:42:27 2012
Charted by: Depth in Feet scaled 1:600

0	Gamma Ray	150
-200	SP (mV)	0

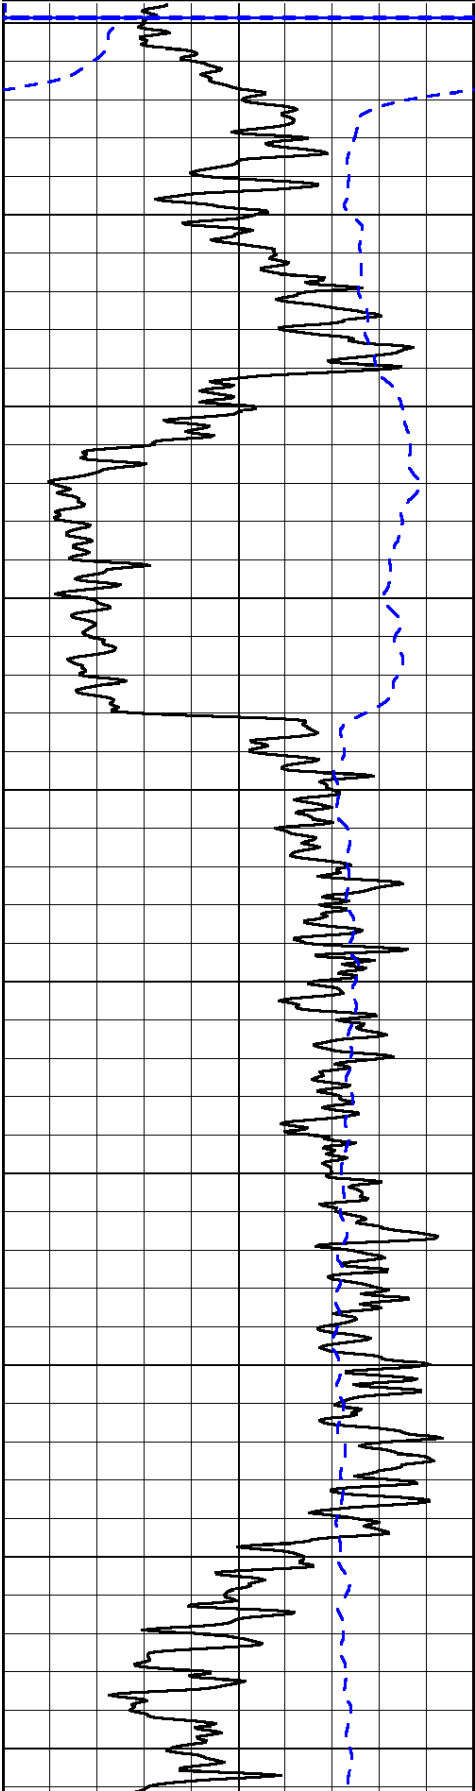

0	Shallow Resistivity	50	LSPD
0	Deep Resistivity	50	
1000	Conductivity		0
15000	Line Tension		0
50	Shallow Resistivity	500	
50	Deep Resistivity	500	

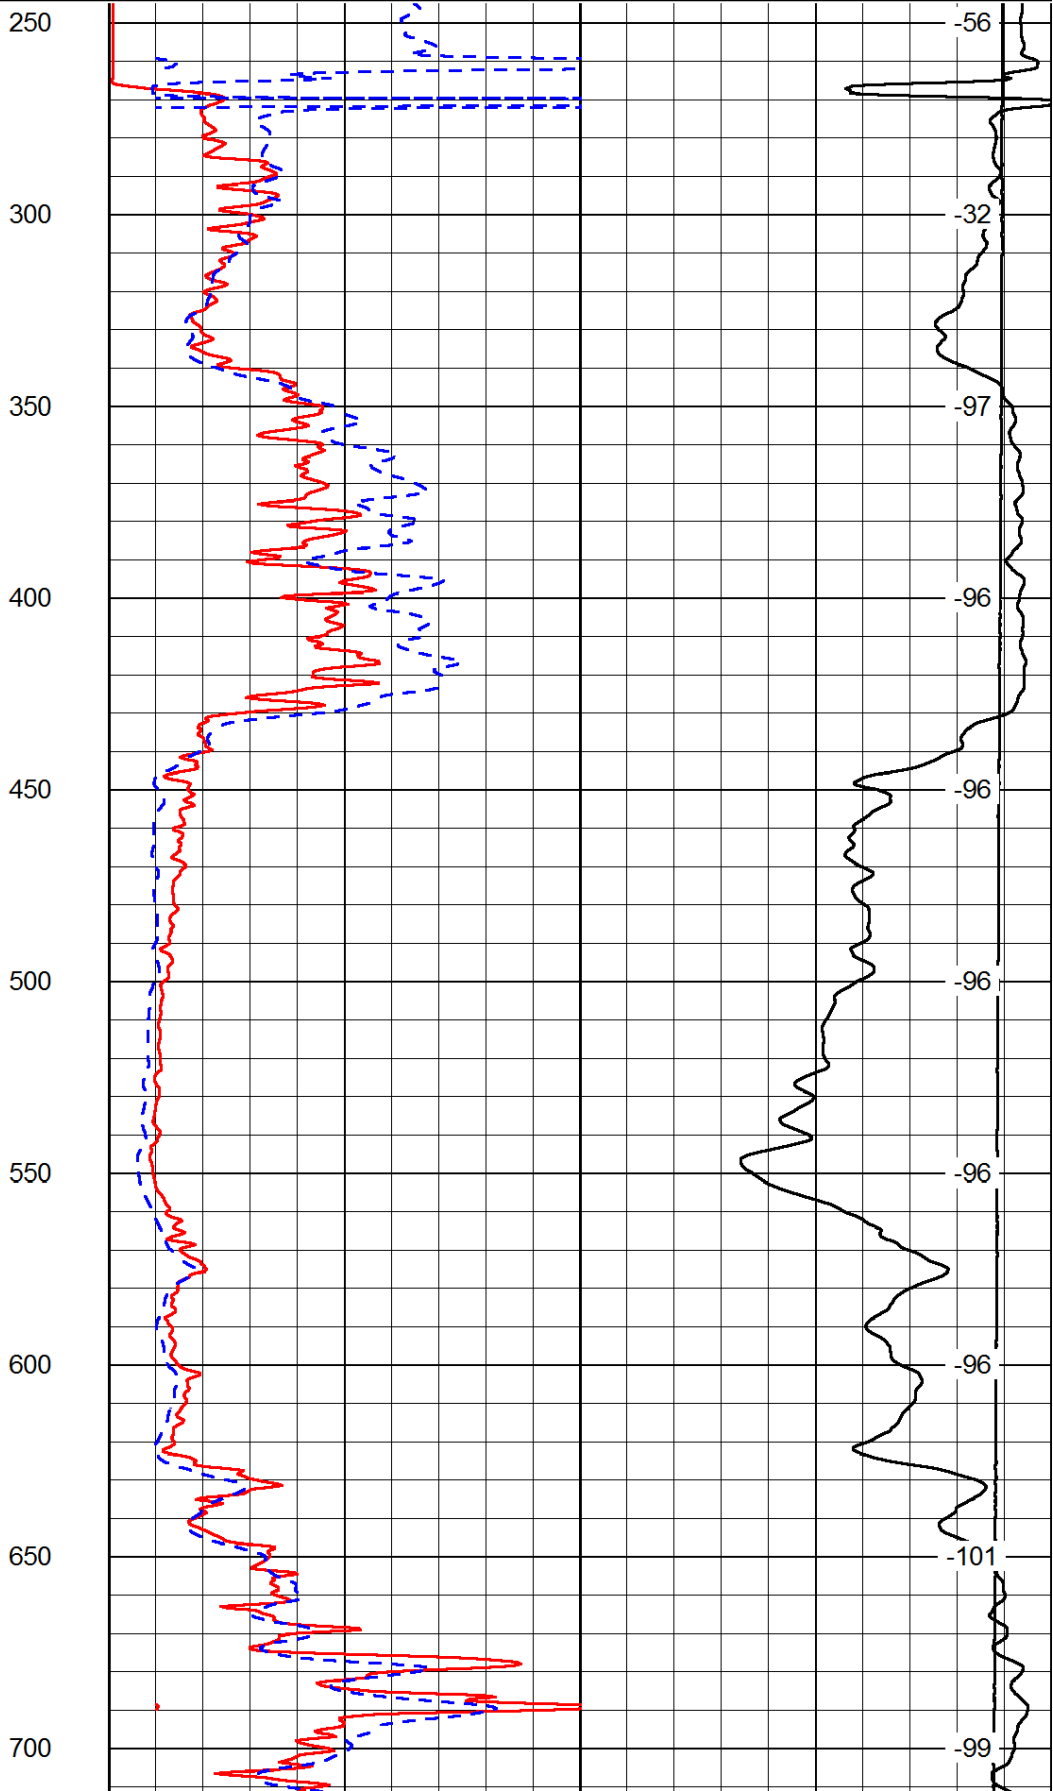

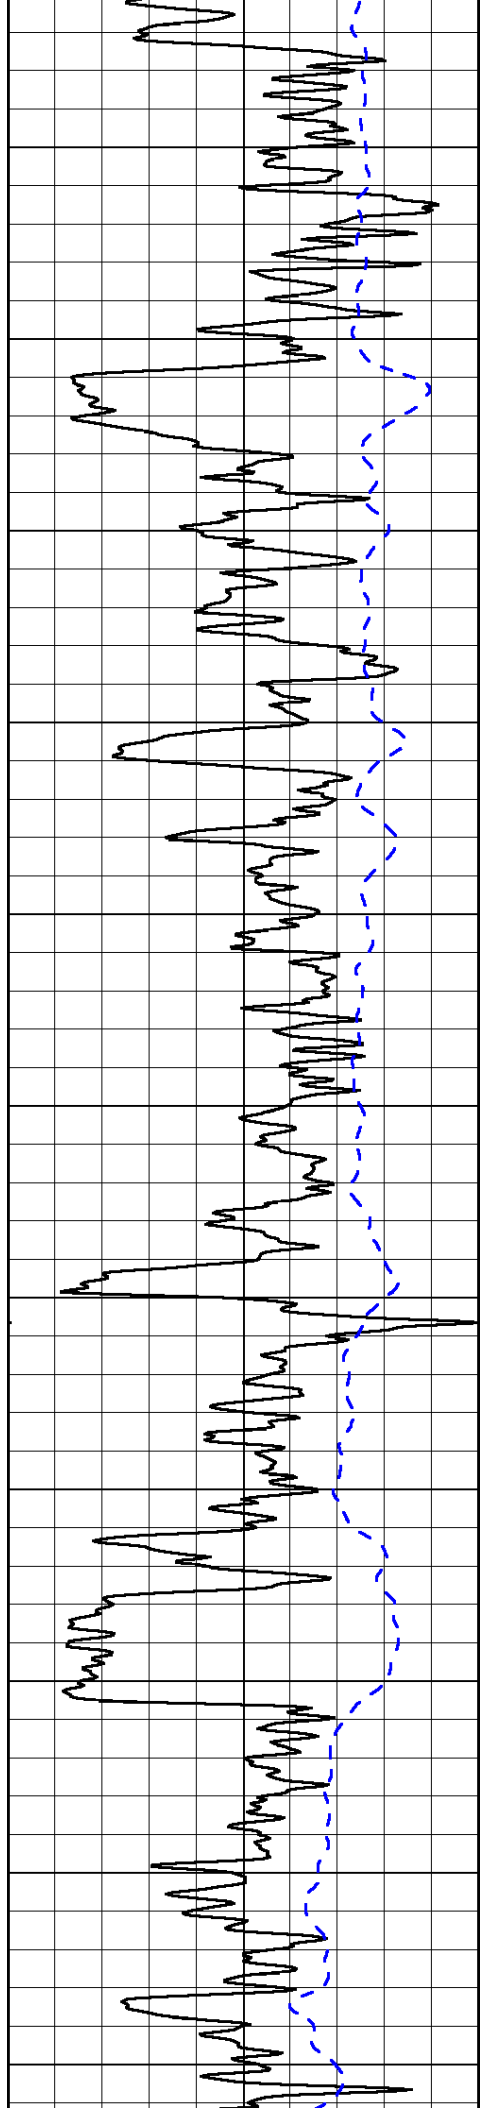

750

800

850

900

950

1000


1050

1100

1150

1200

1250

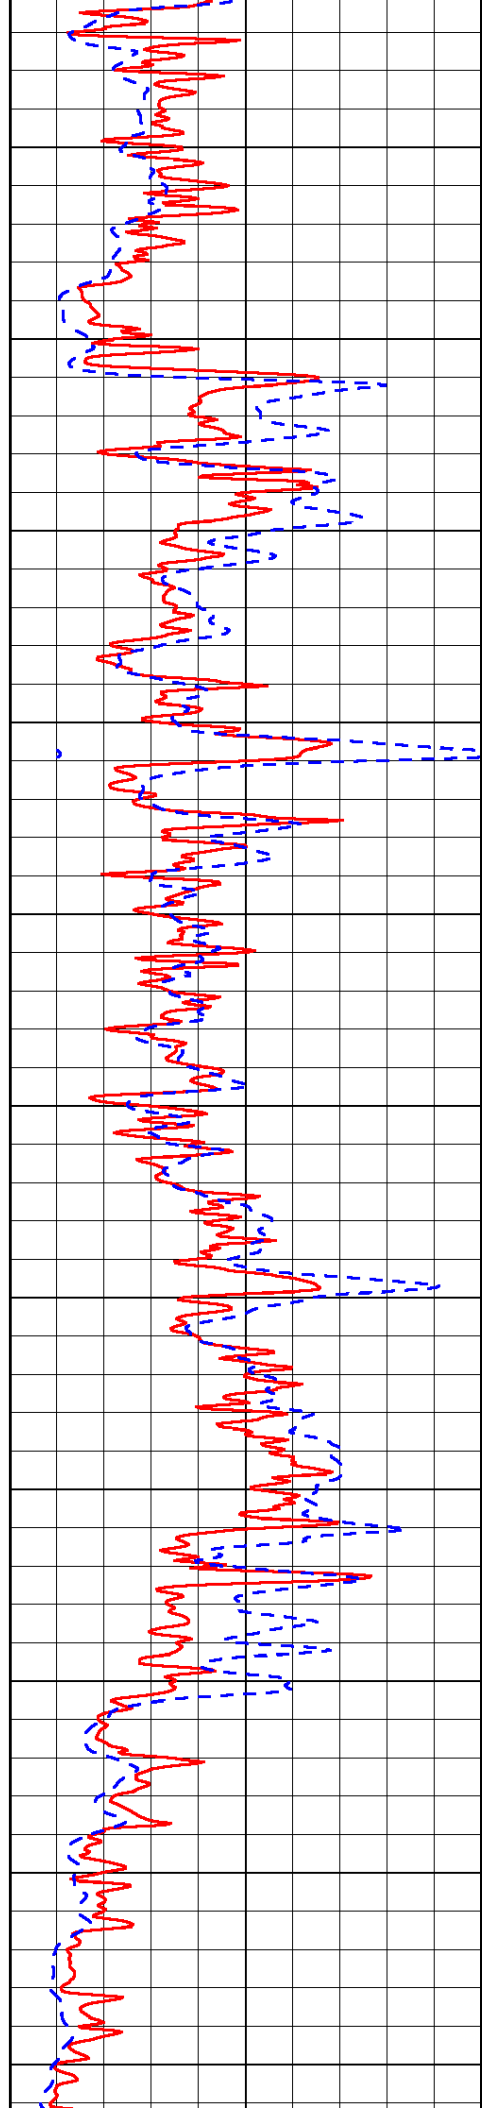

-98

-98

-98

-98

-98

-97


-98



-98



-98



-98



-98



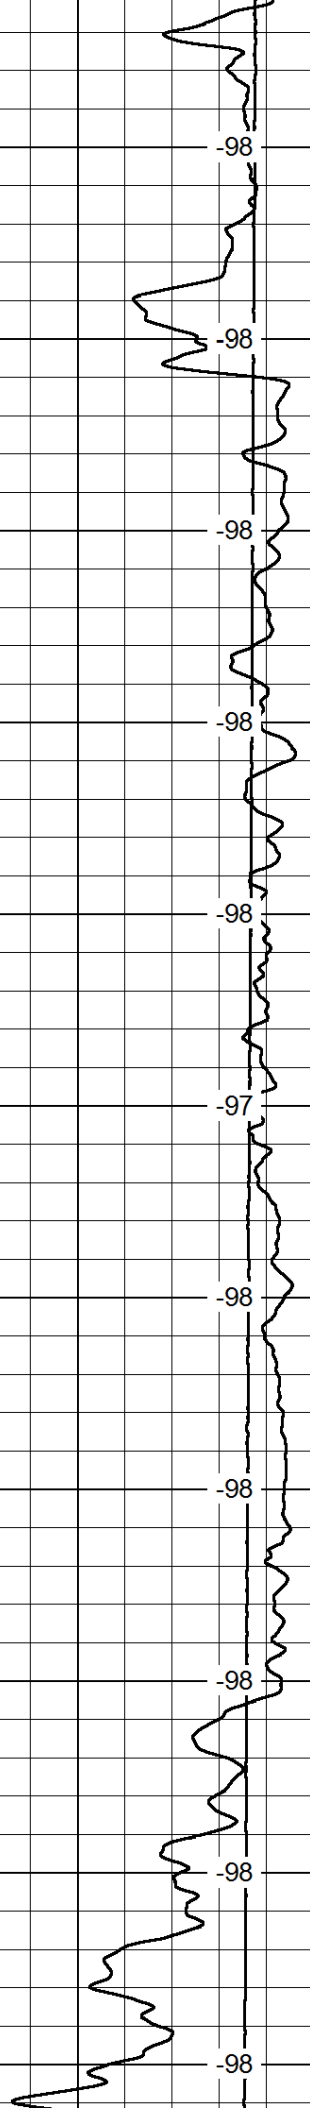



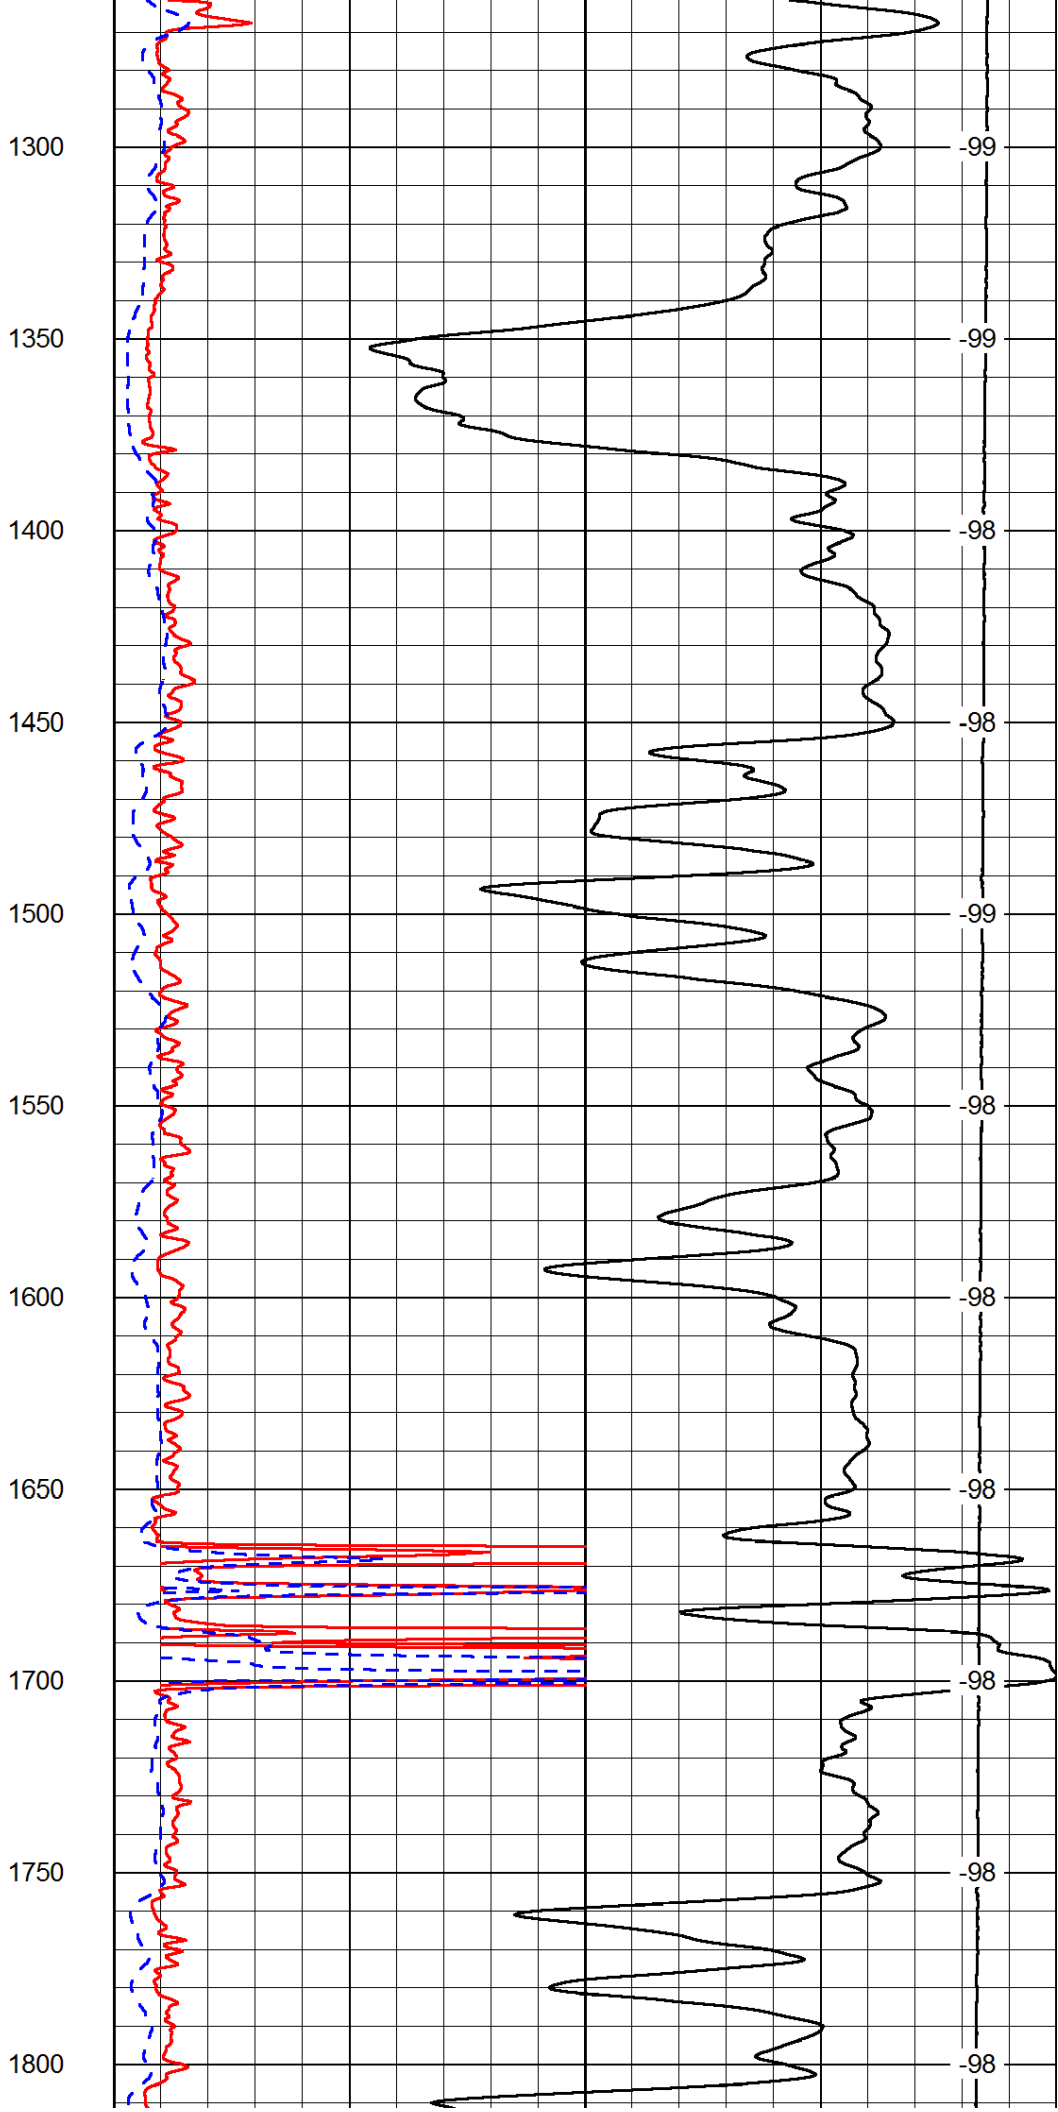
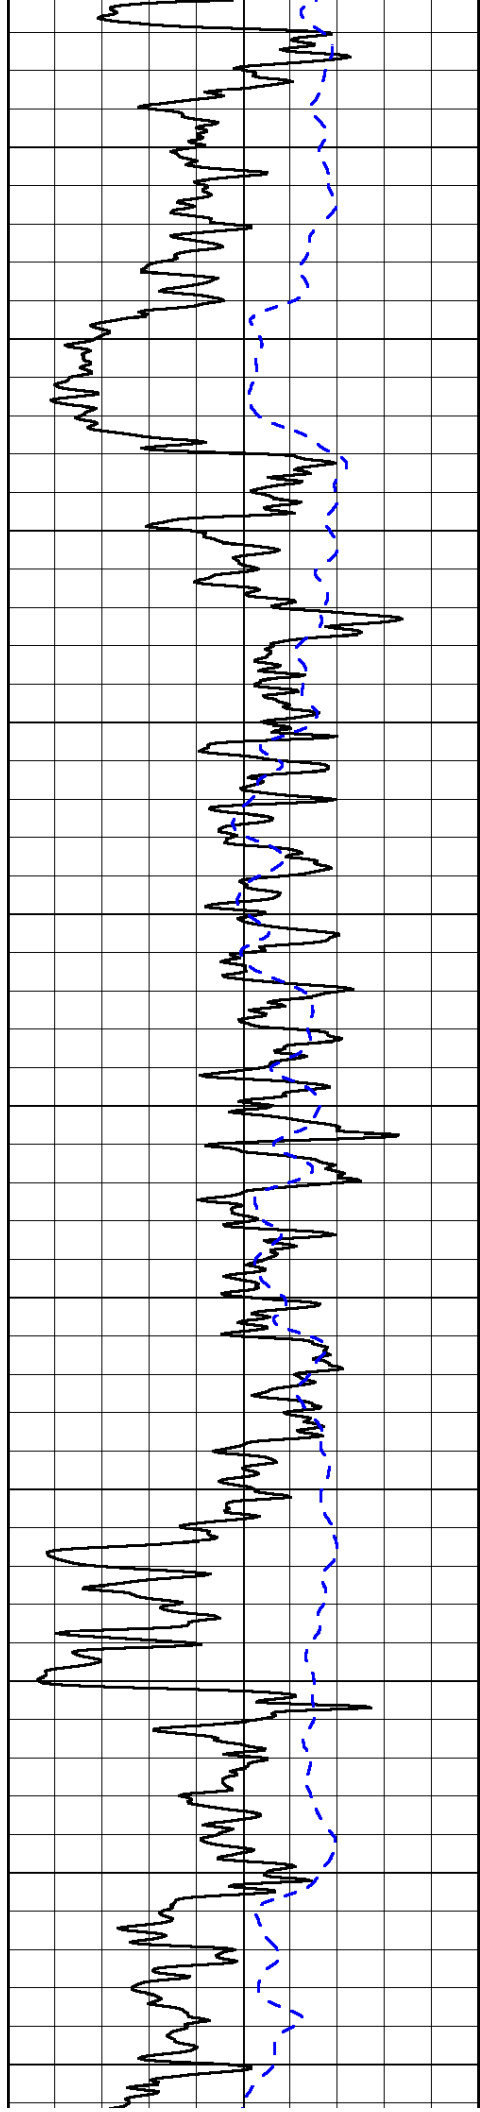


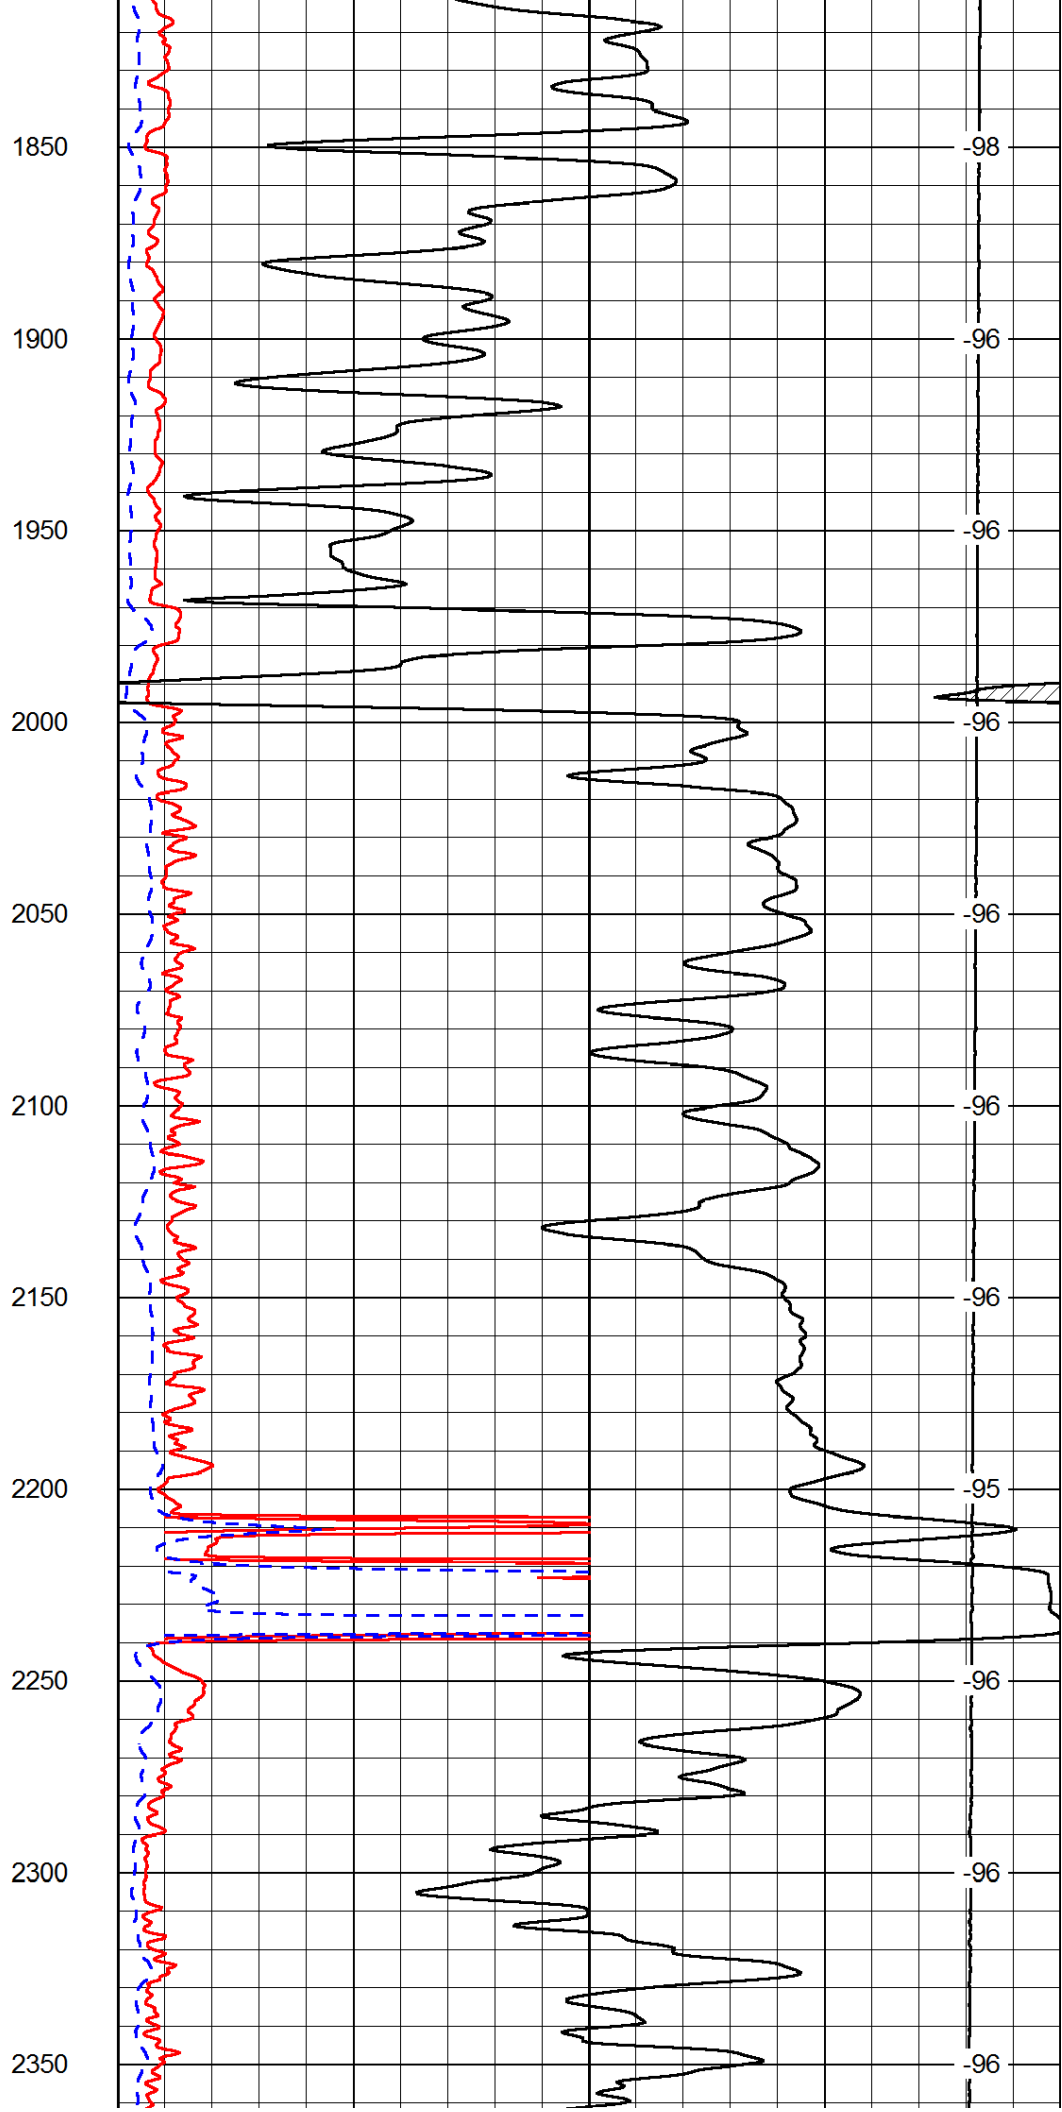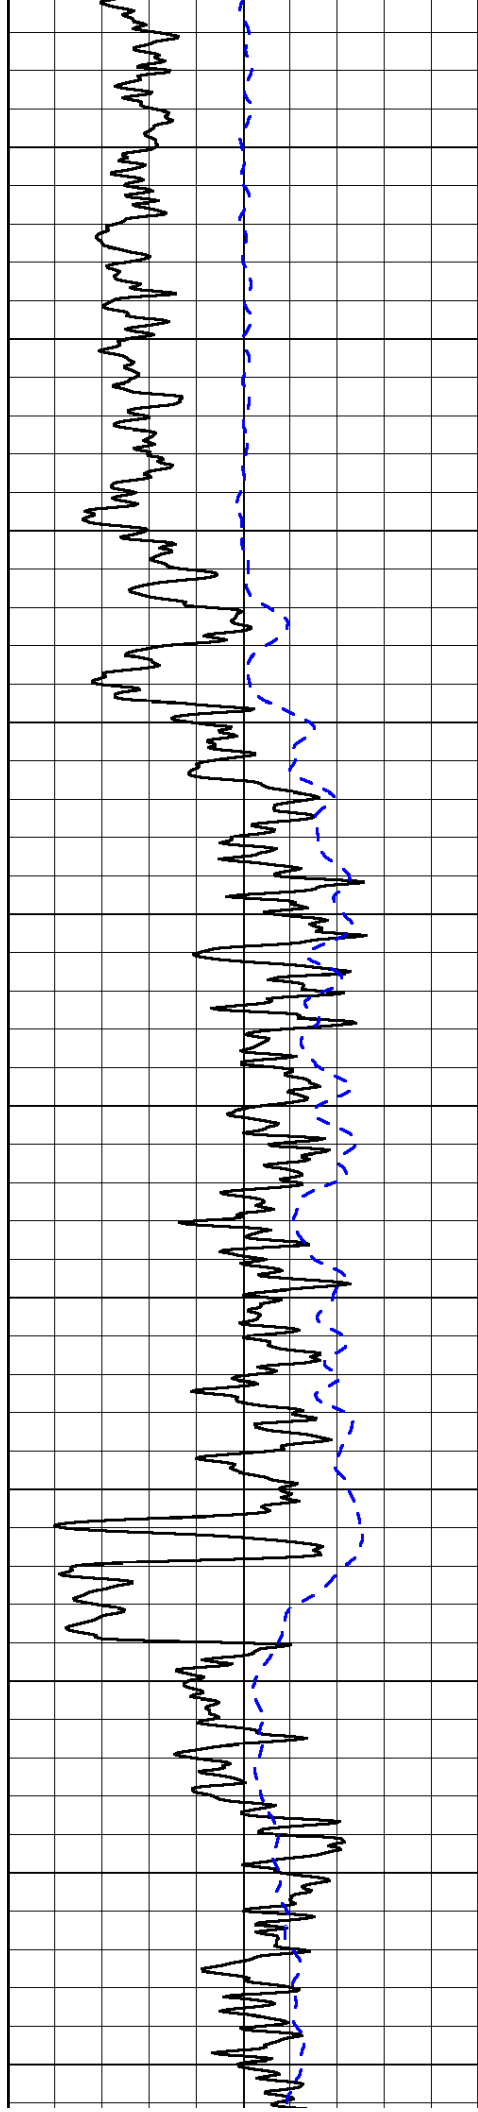


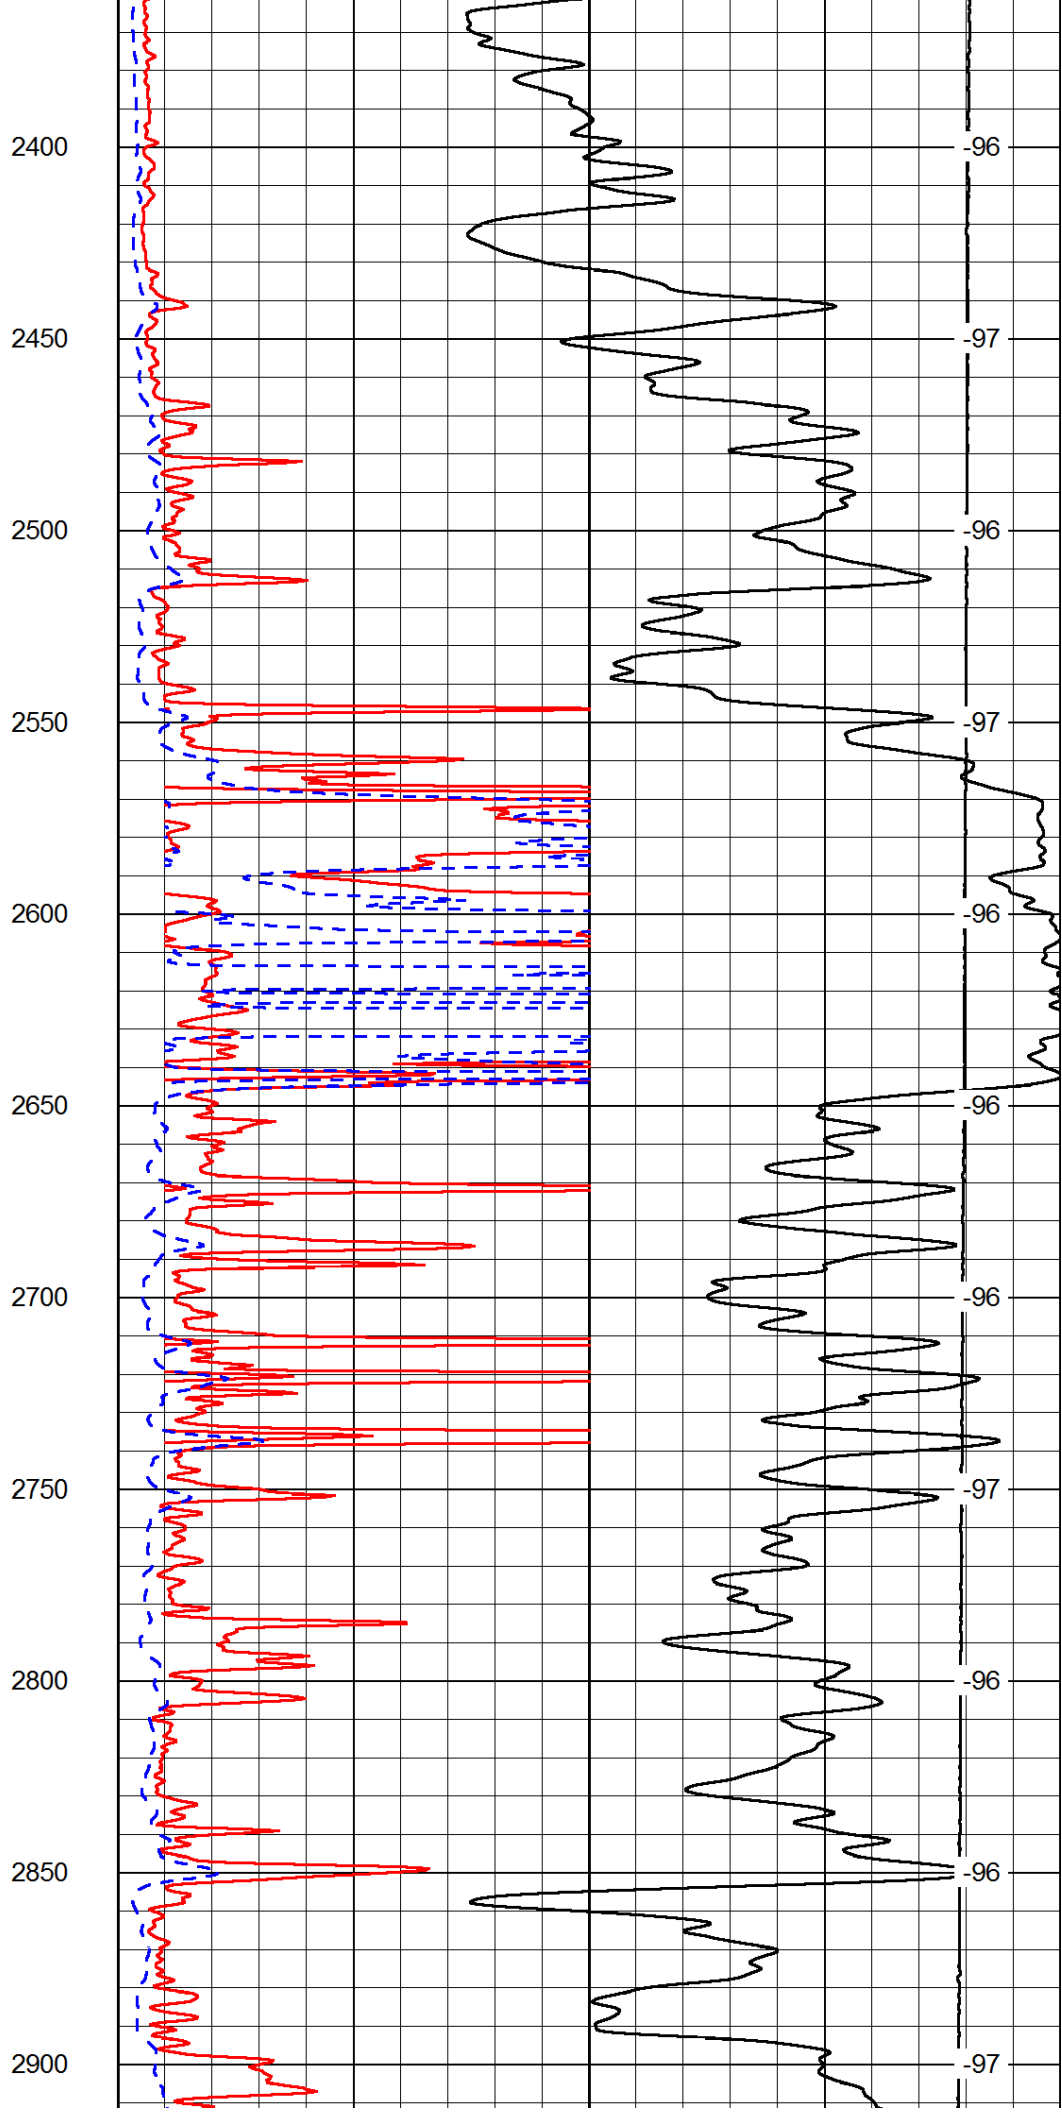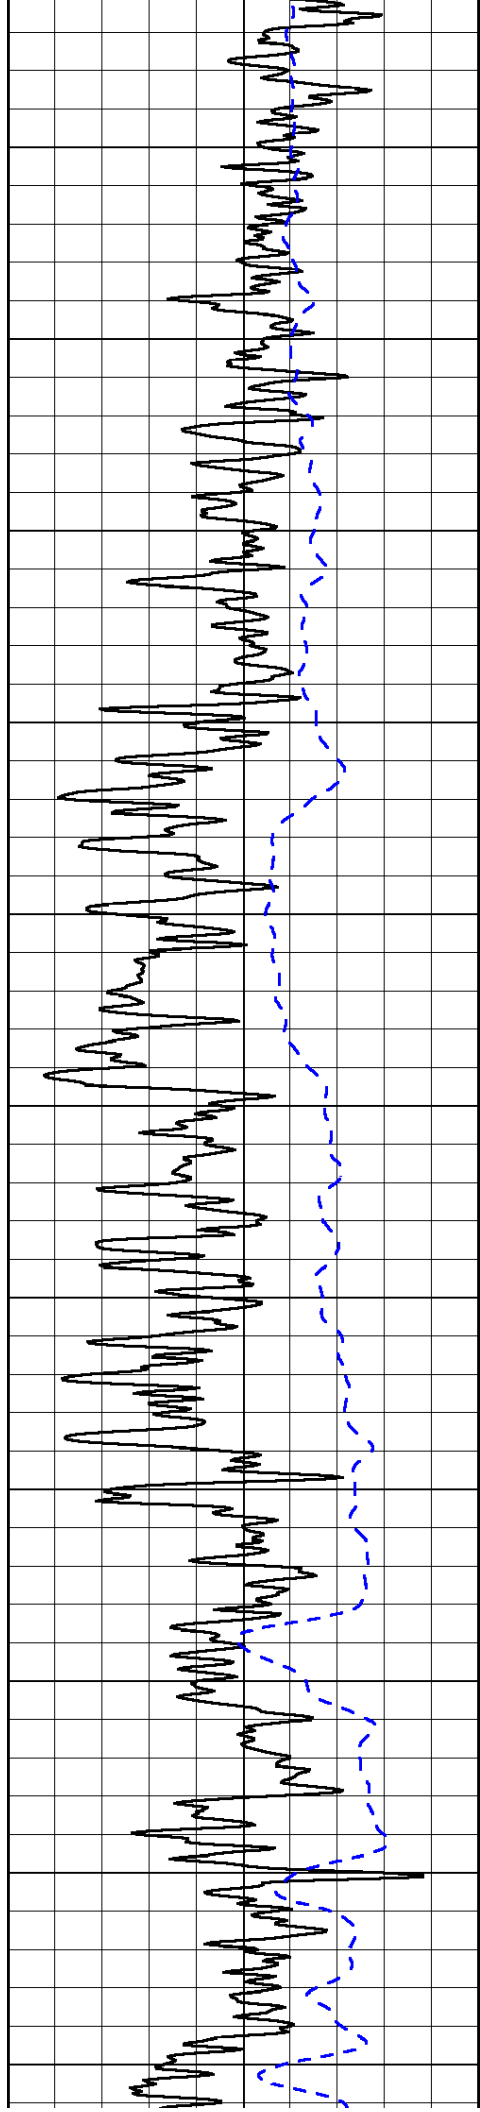

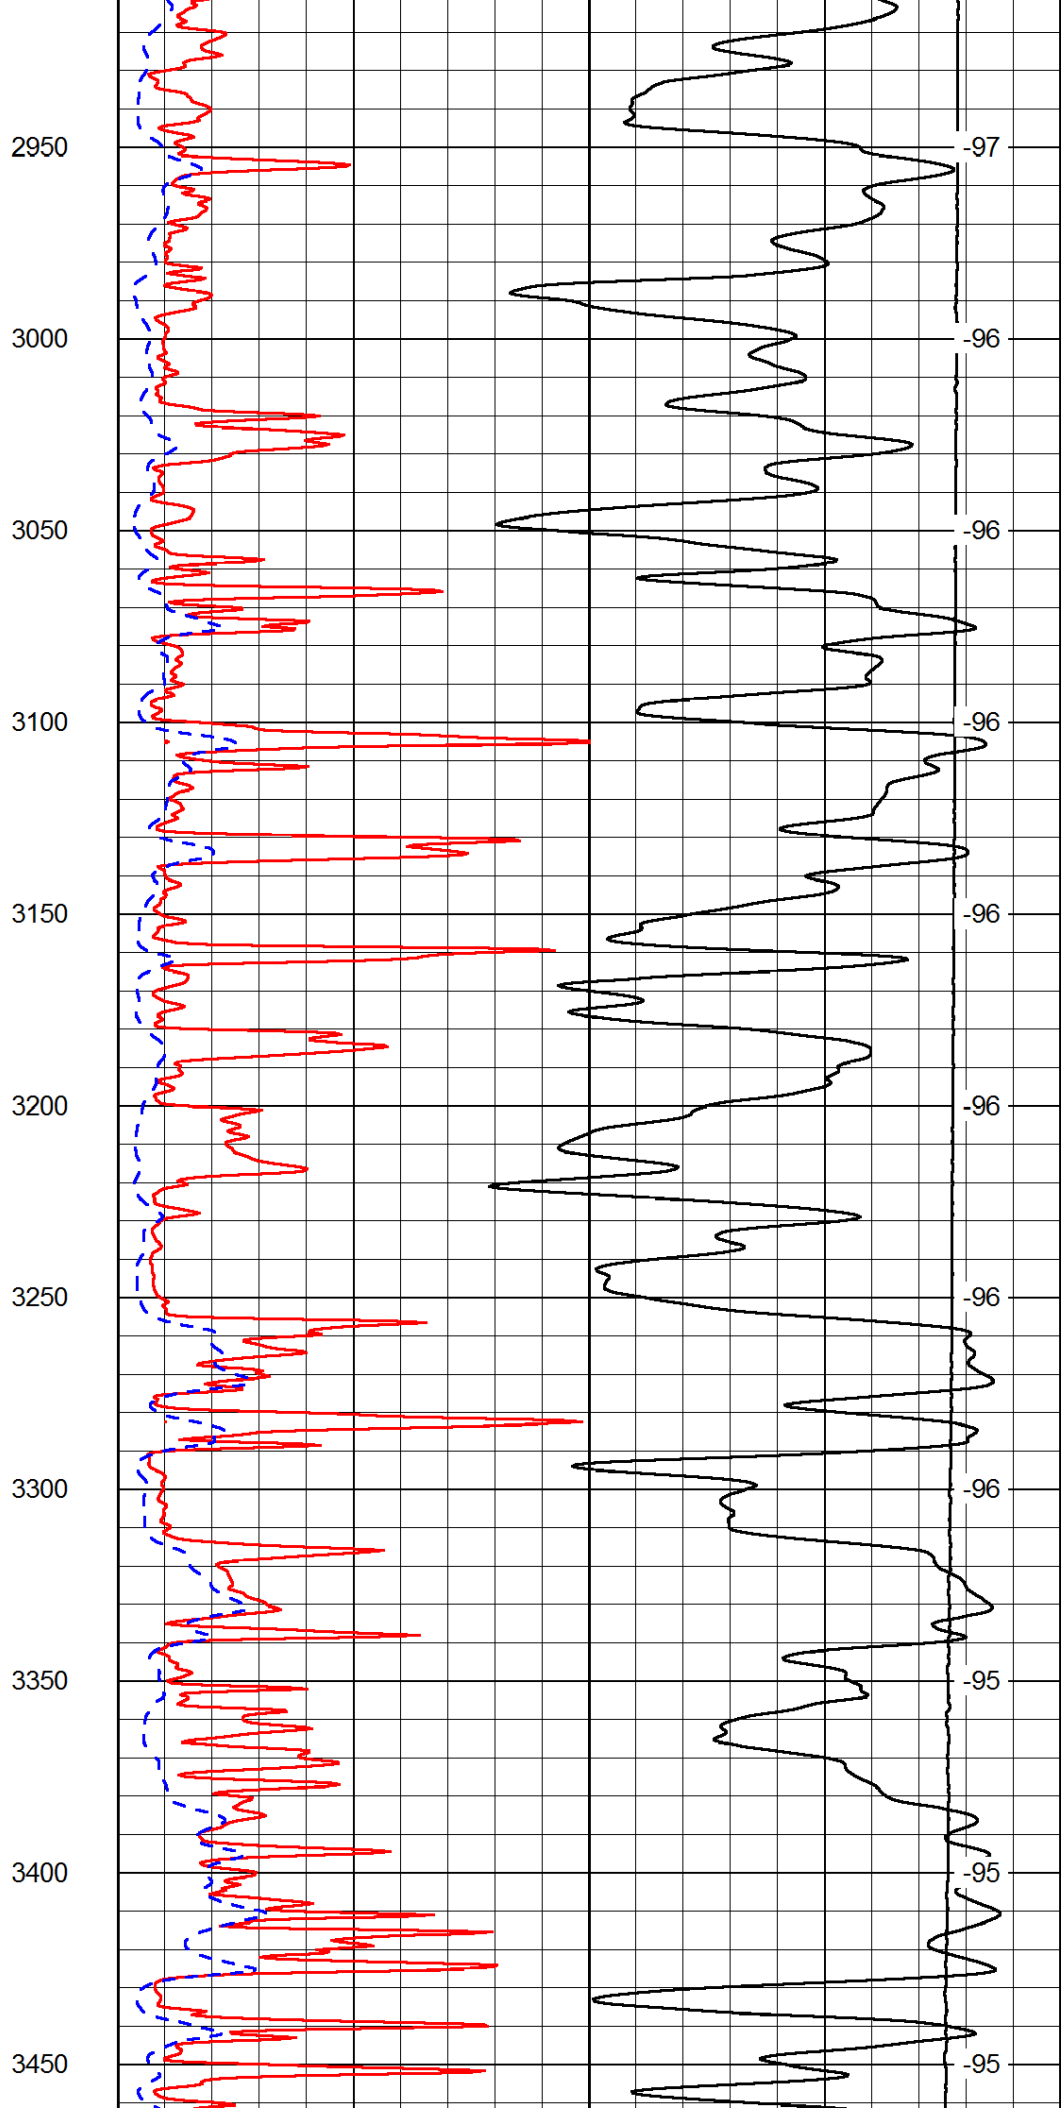
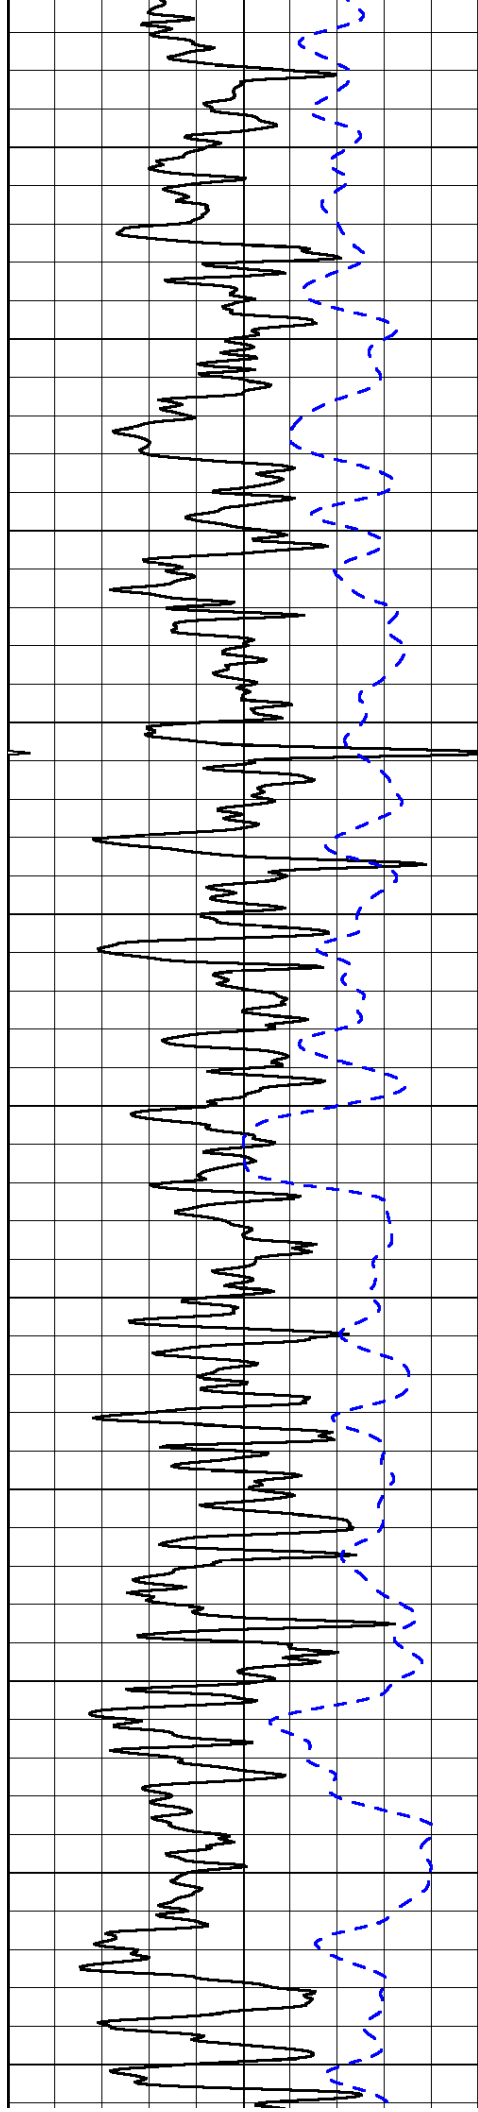


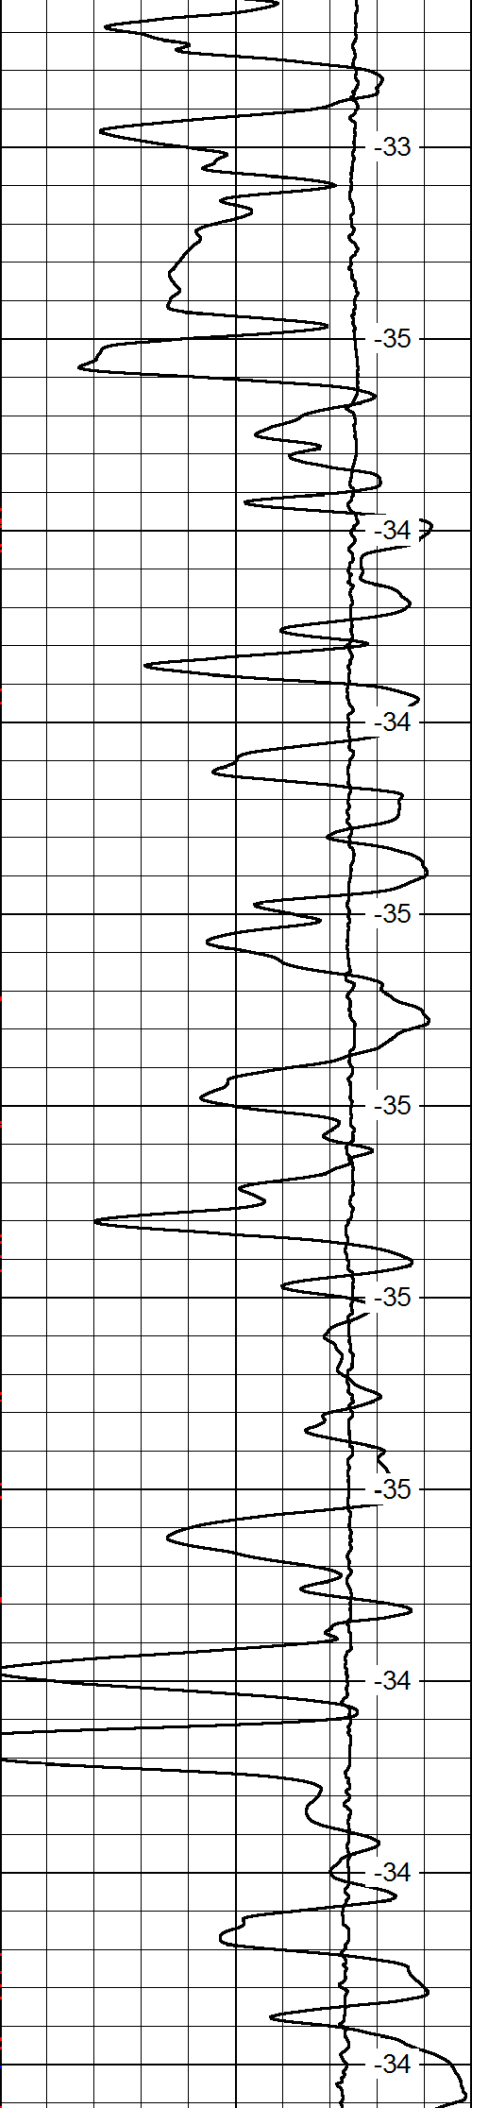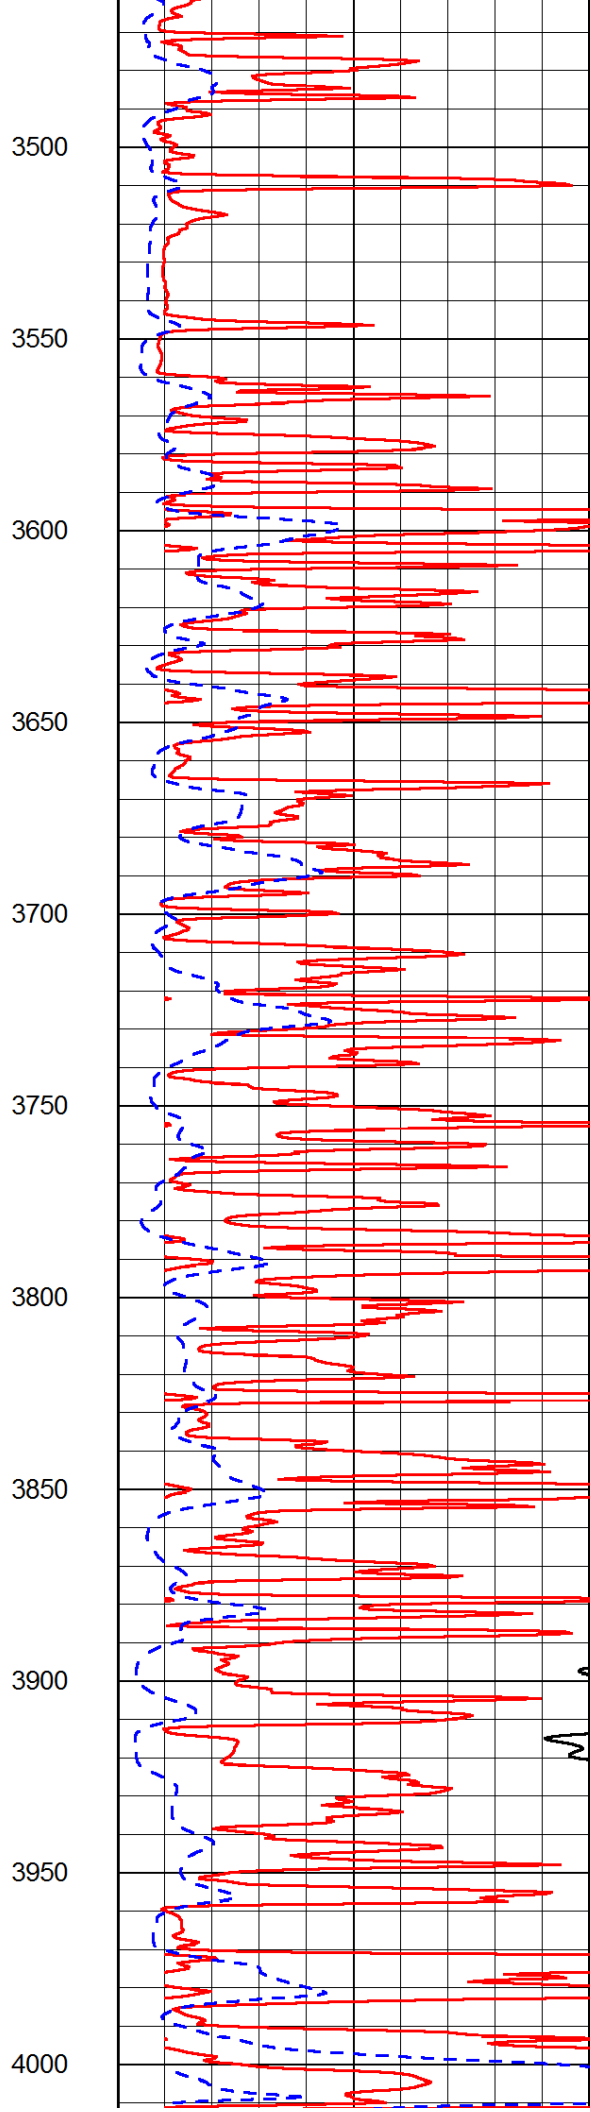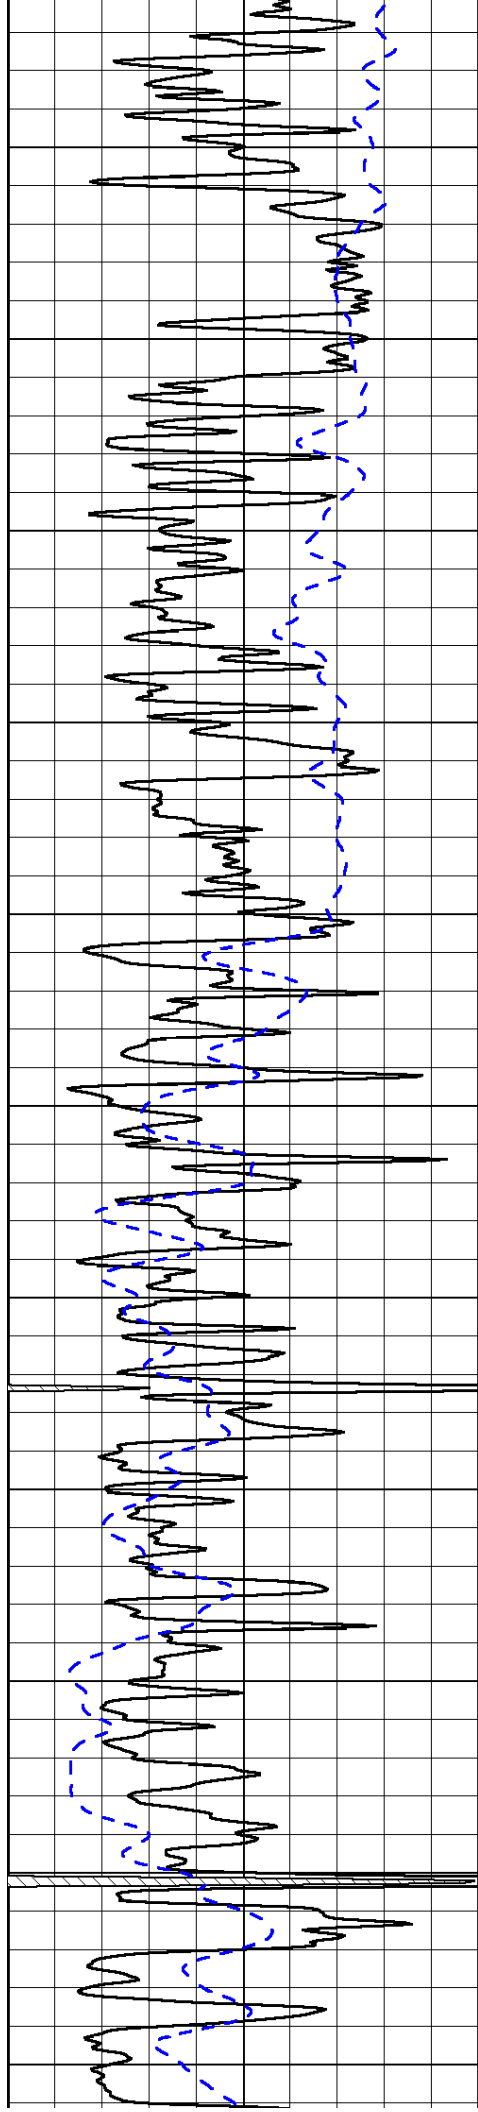

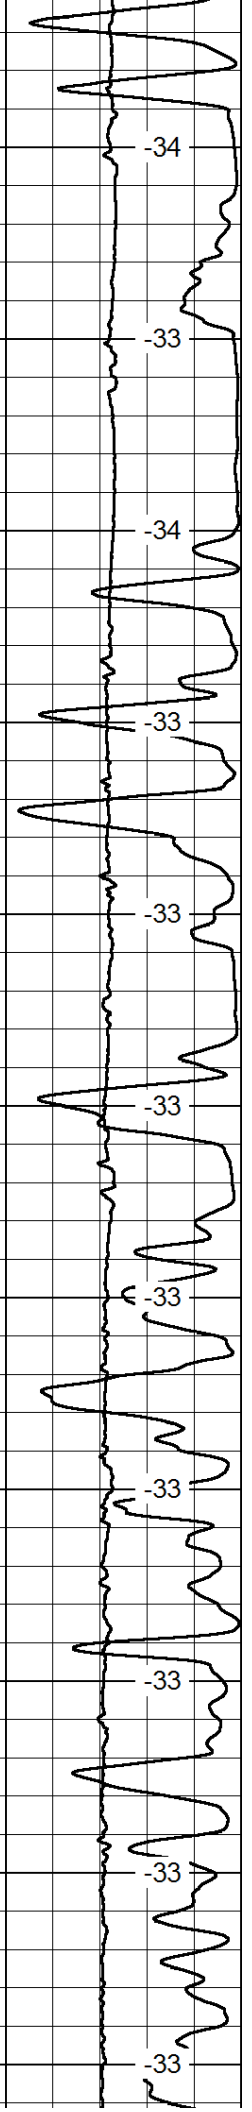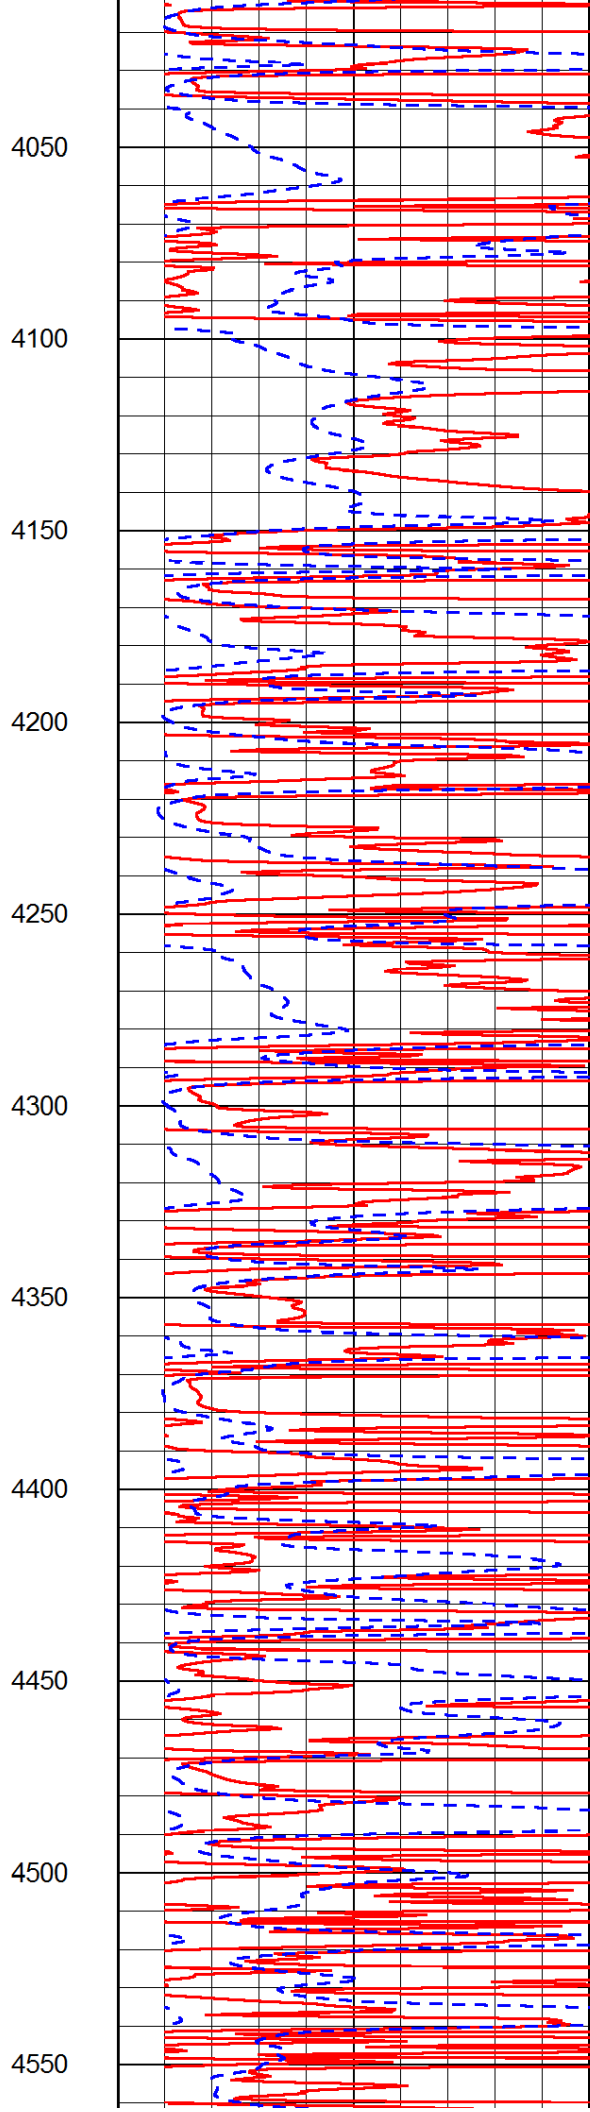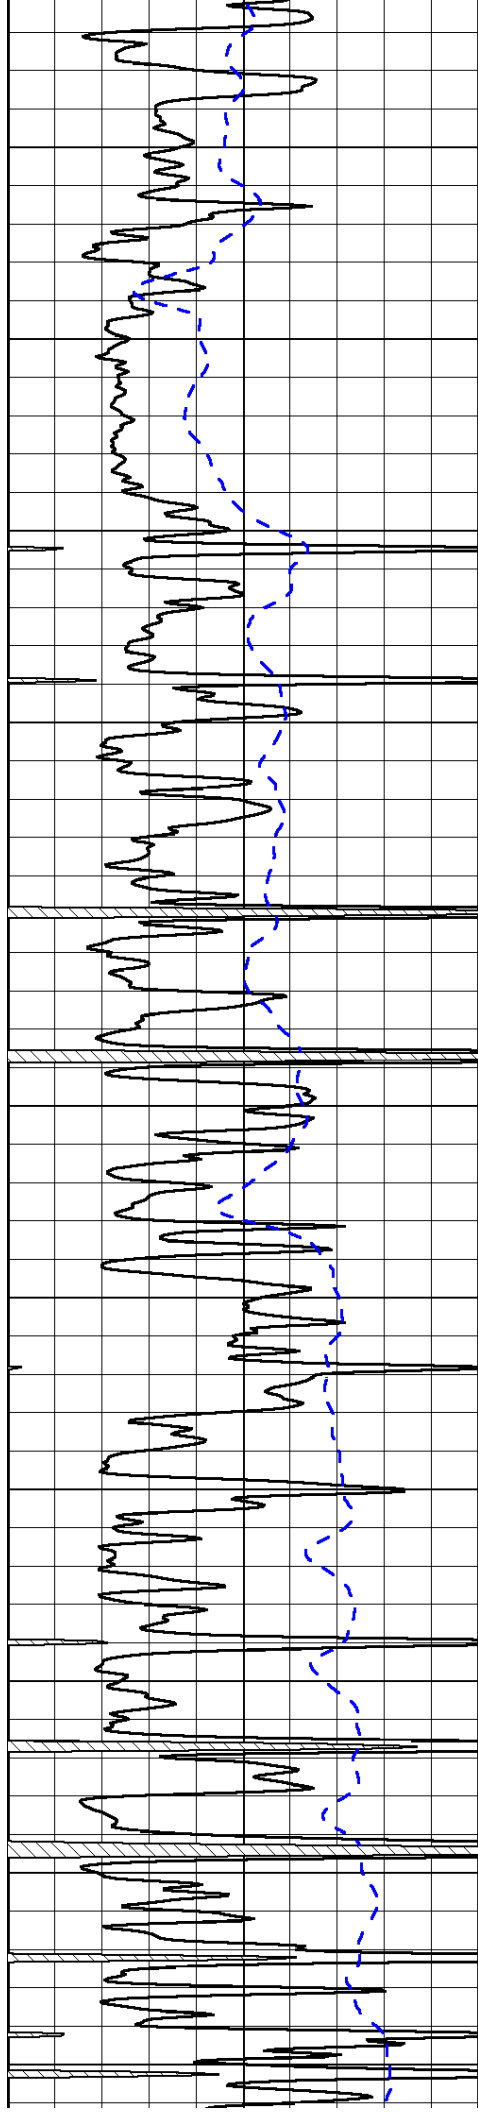

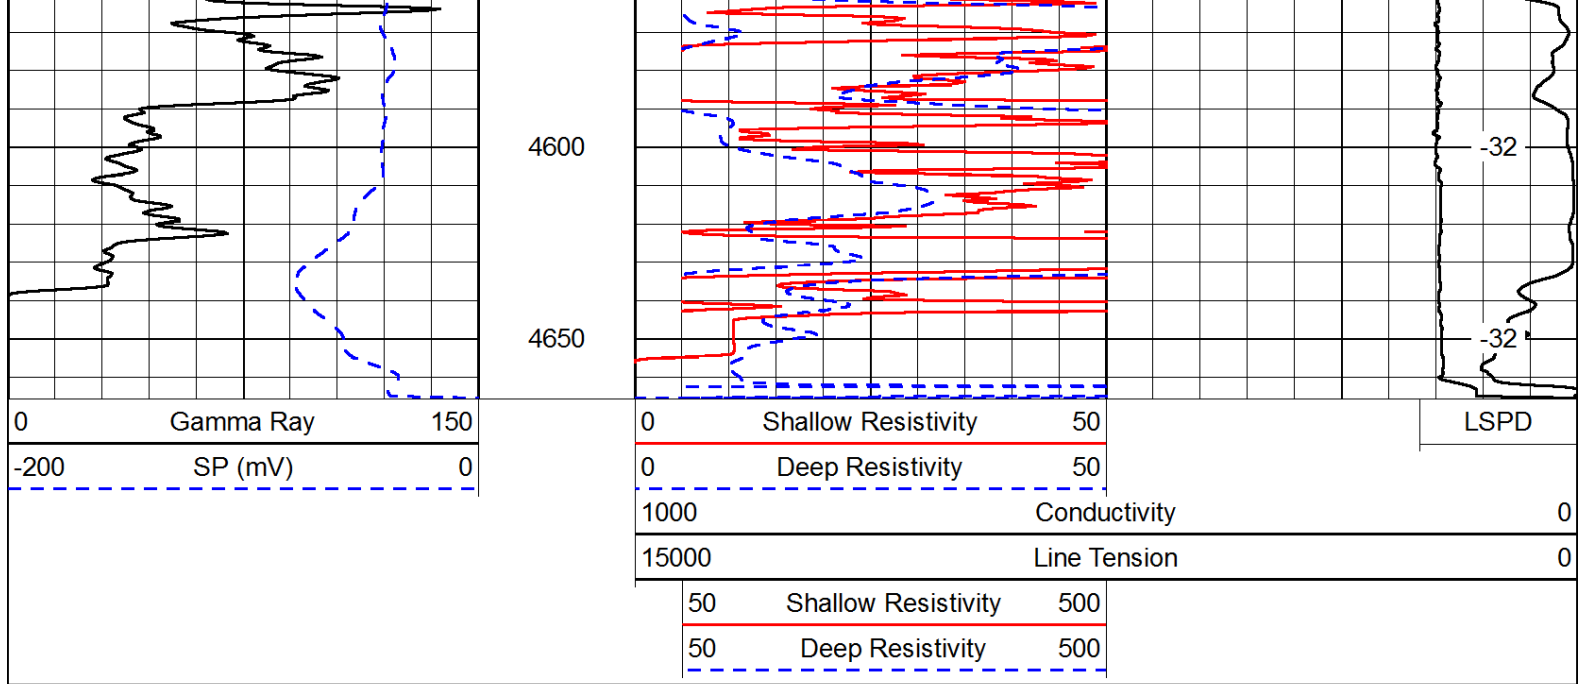

Database File: c:\warrior\data\credo_nancy #1-22\credohd.db
 Dataset Pathname: dil/crdmain
 Presentation Format: dil
 Dataset Creation: Wed Jul 04 03:42:27 2012
 Charted by: Depth in Feet scaled 1:240

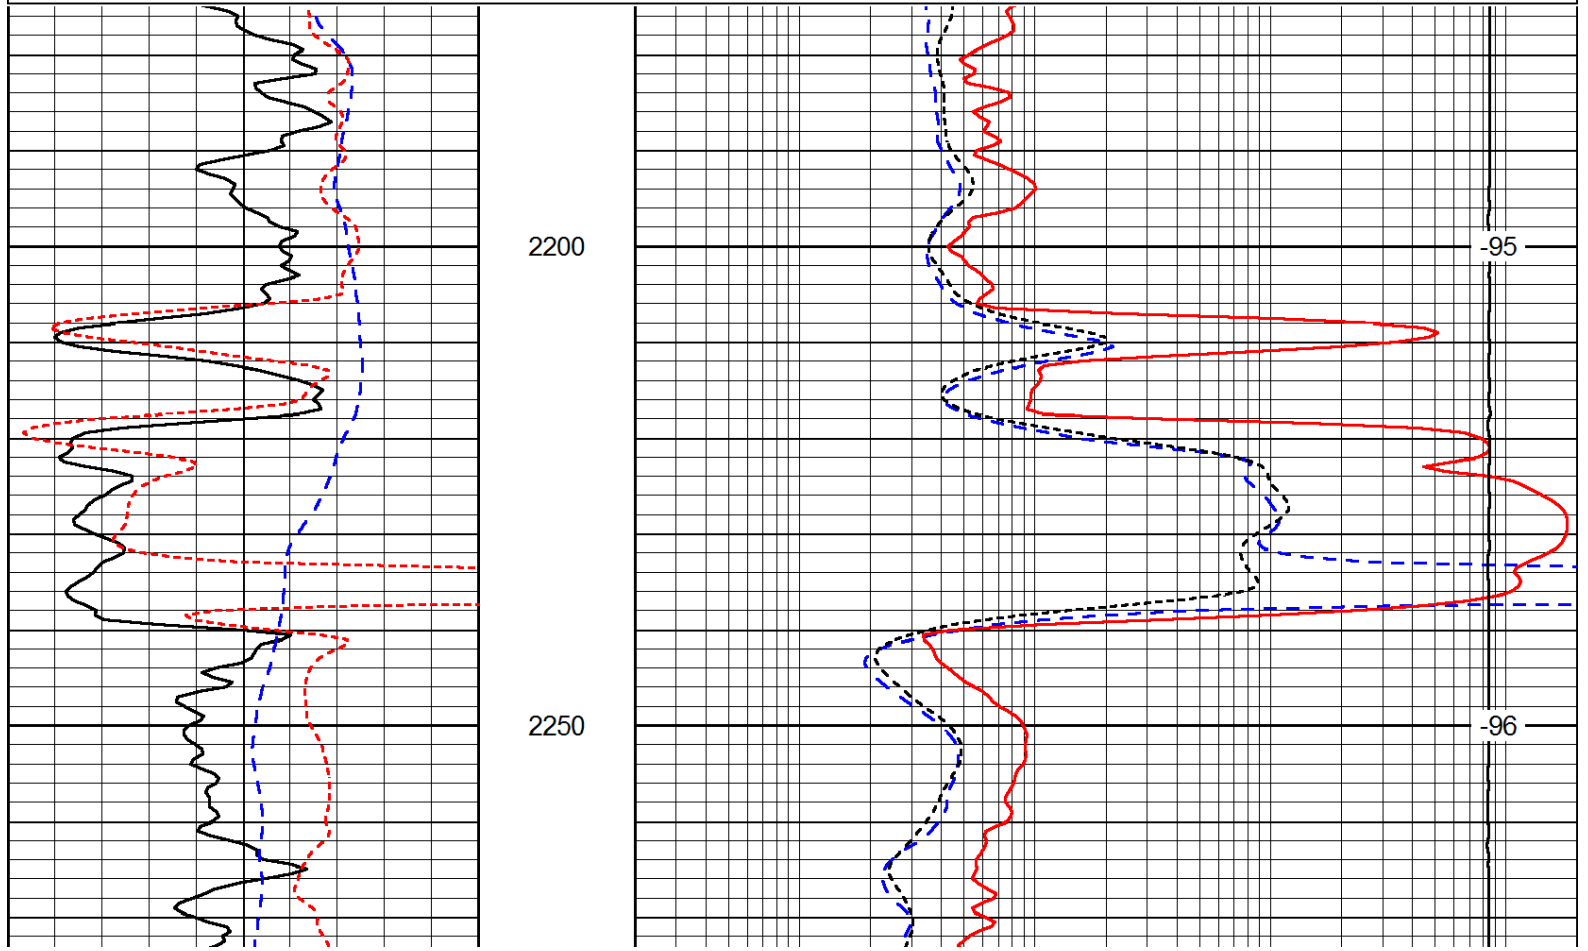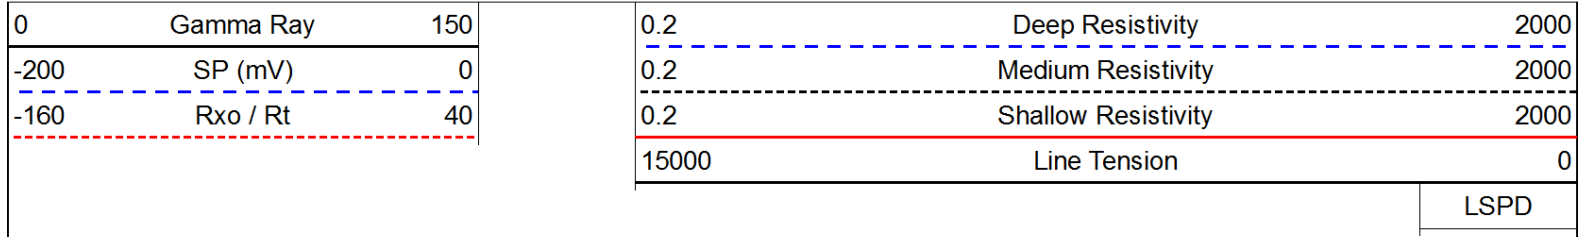


0	Gamma Ray	150
-200	SP (mV)	0
-160	Rxo / Rt	40

0.2	Deep Resistivity	2000
0.2	Medium Resistivity	2000
0.2	Shallow Resistivity	2000
15000	Line Tension	0
		LSPD

Database File:	c:\warrior\data\credo_nancy #1-22\credohd.db
Dataset Pathname:	dil/crdmain
Presentation Format:	dil
Dataset Creation:	Wed Jul 04 03:42:27 2012
Charted by:	Depth in Feet scaled 1:240

0	Gamma Ray	150
-200	SP (mV)	0
-160	Rxo / Rt	40


0.2	Deep Resistivity	2000
0.2	Medium Resistivity	2000
0.2	Shallow Resistivity	2000
15000	Line Tension	0
		LSPD

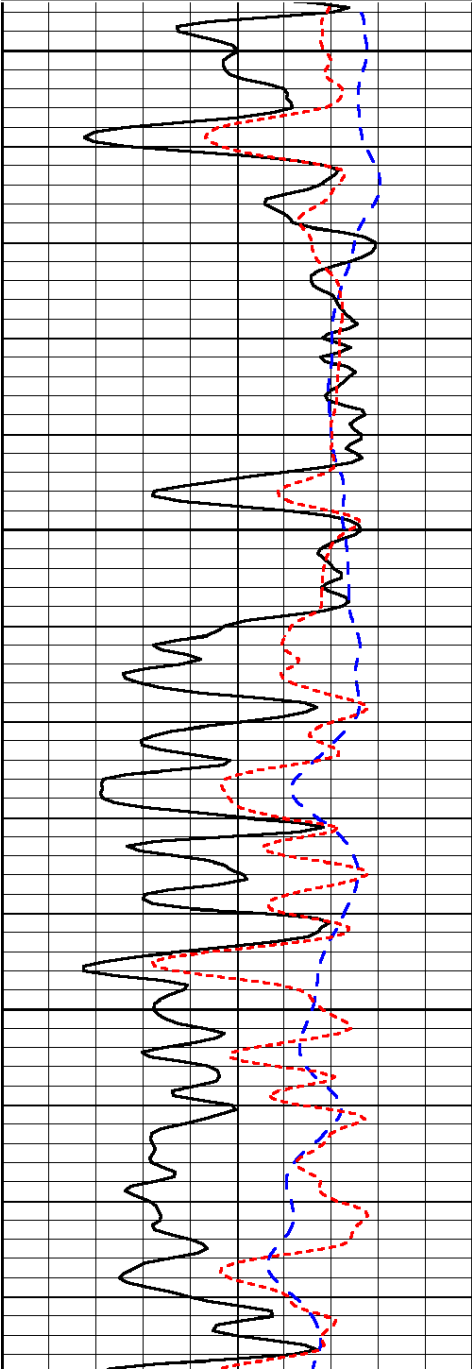

3500

3550


3600

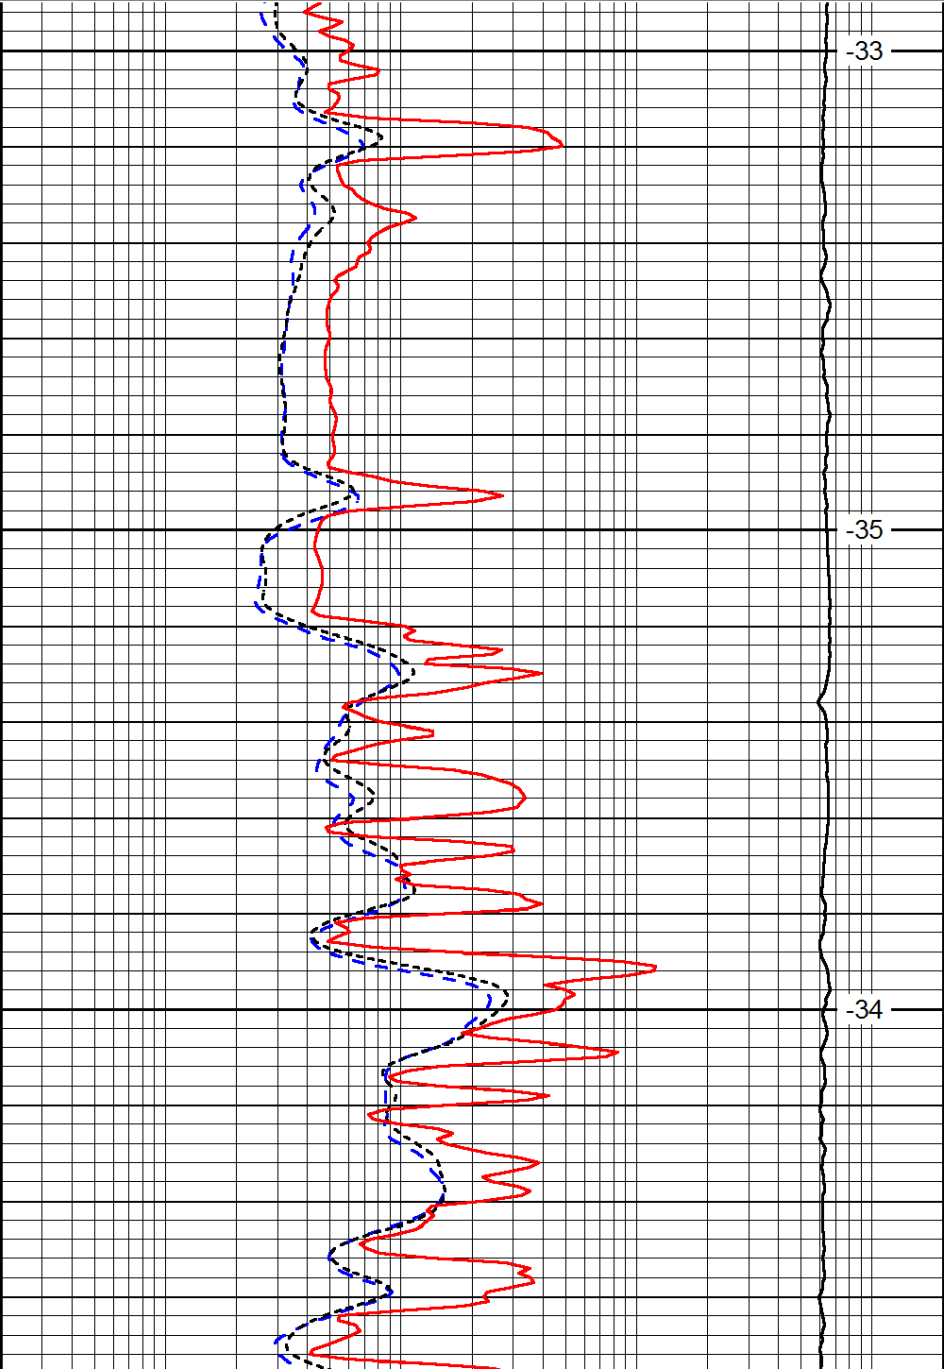

-33

-35

-34

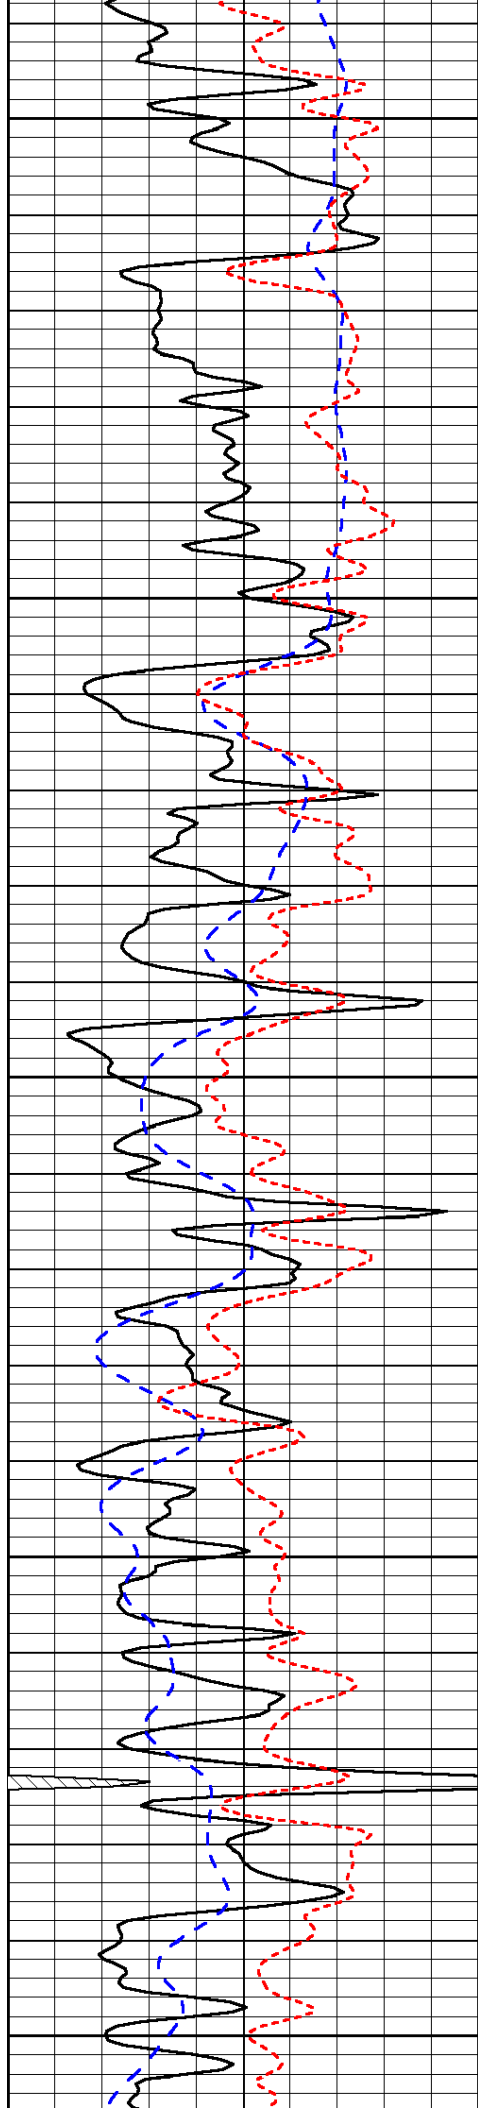


3650

3700

3750

3800

3850

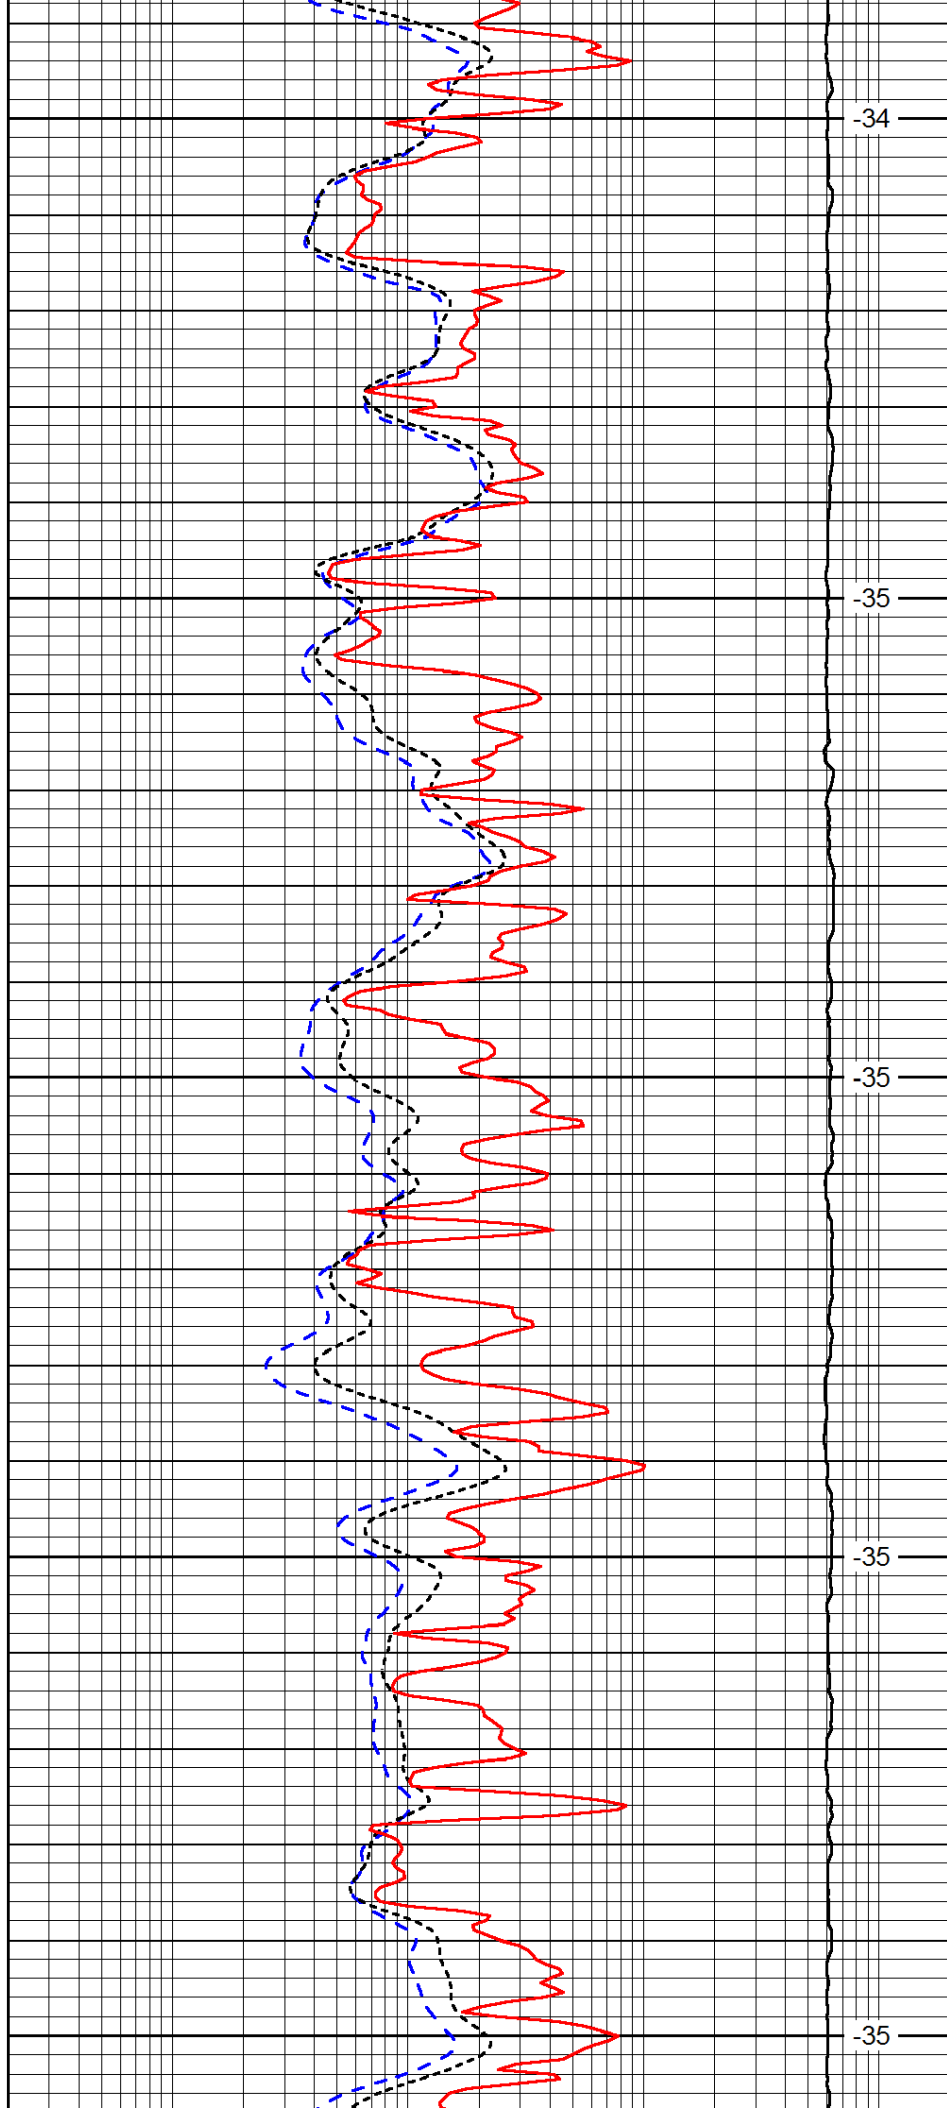


-34

-35

-35

-35

-35

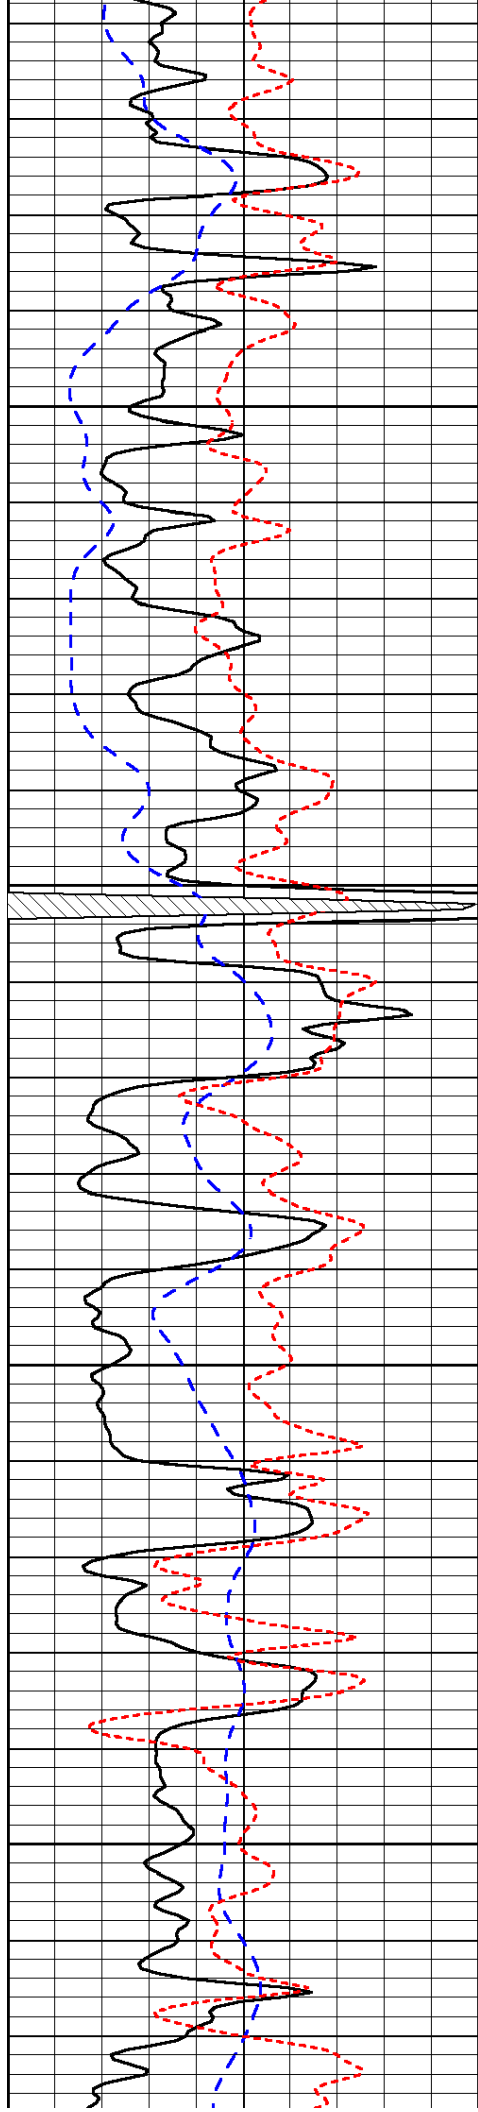


3900

3950

4000

4050

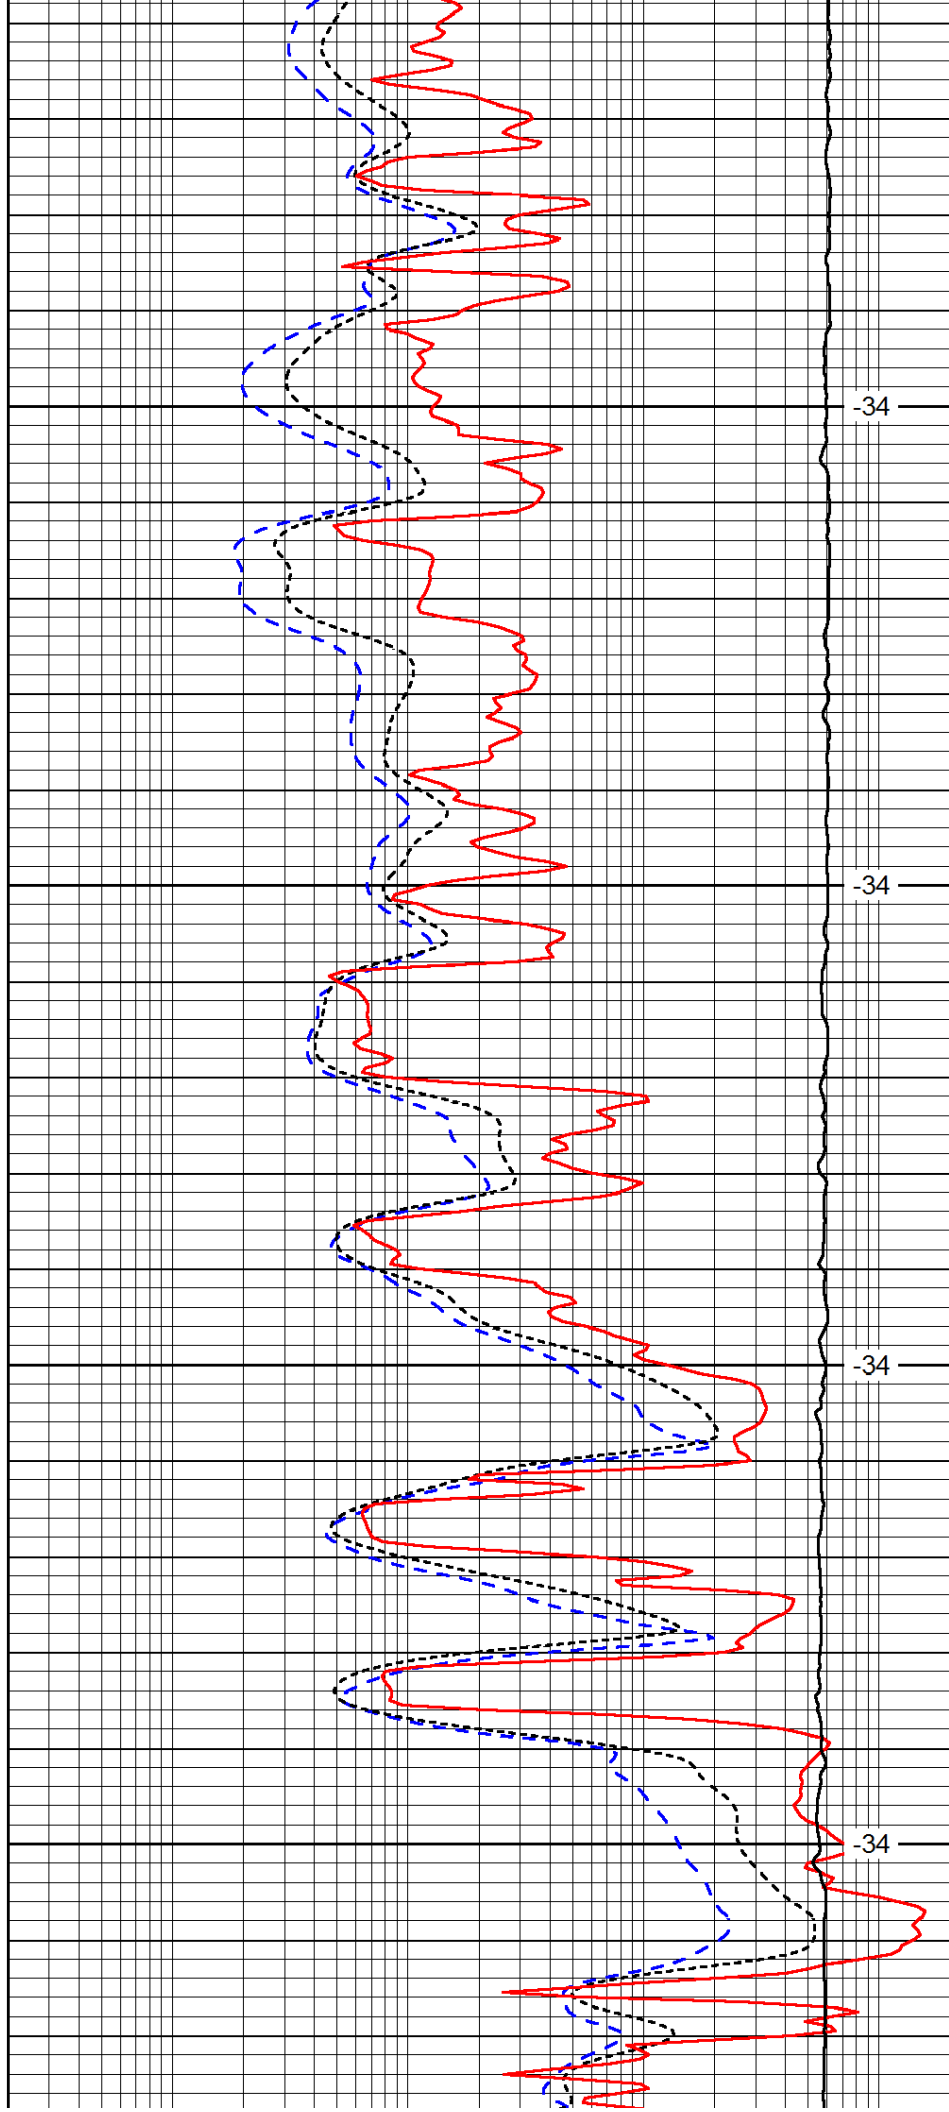


-34

-34

-34

-34

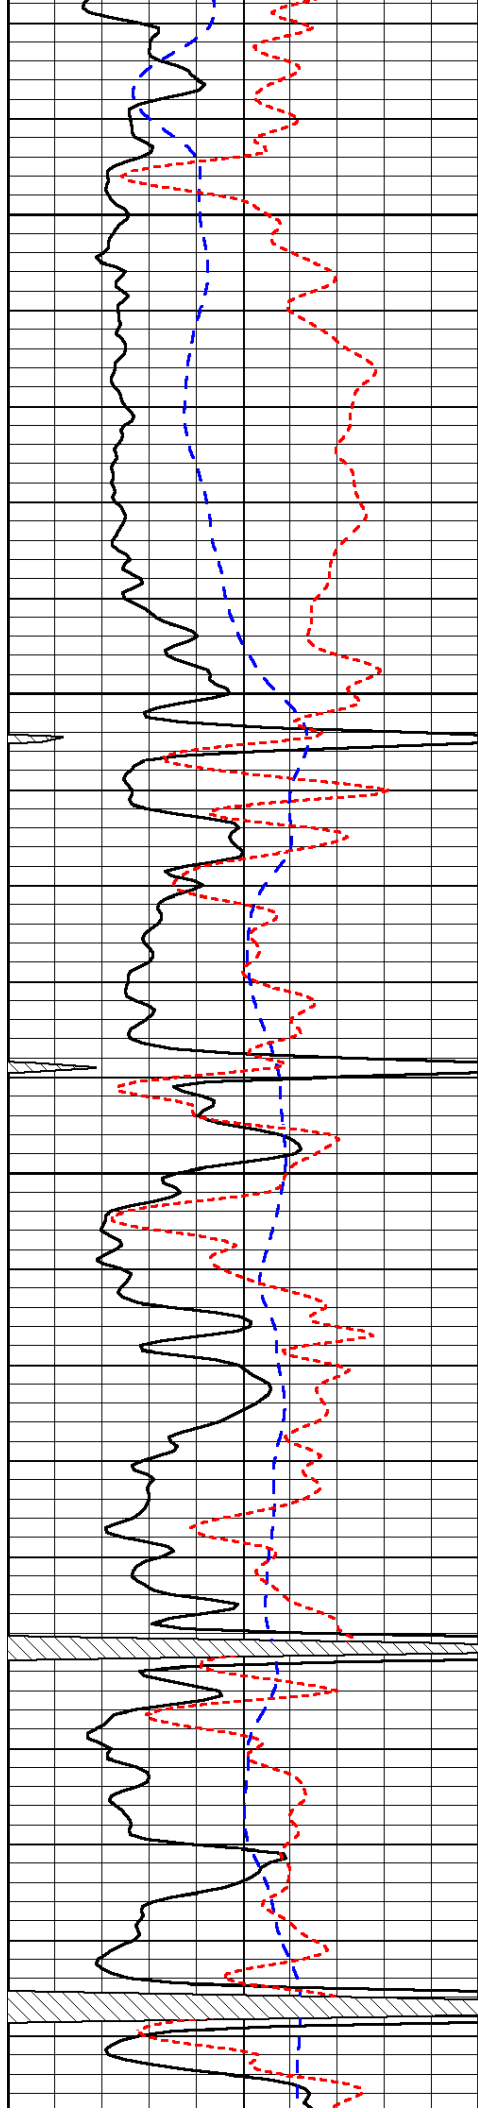


4100

4150

4200

4250

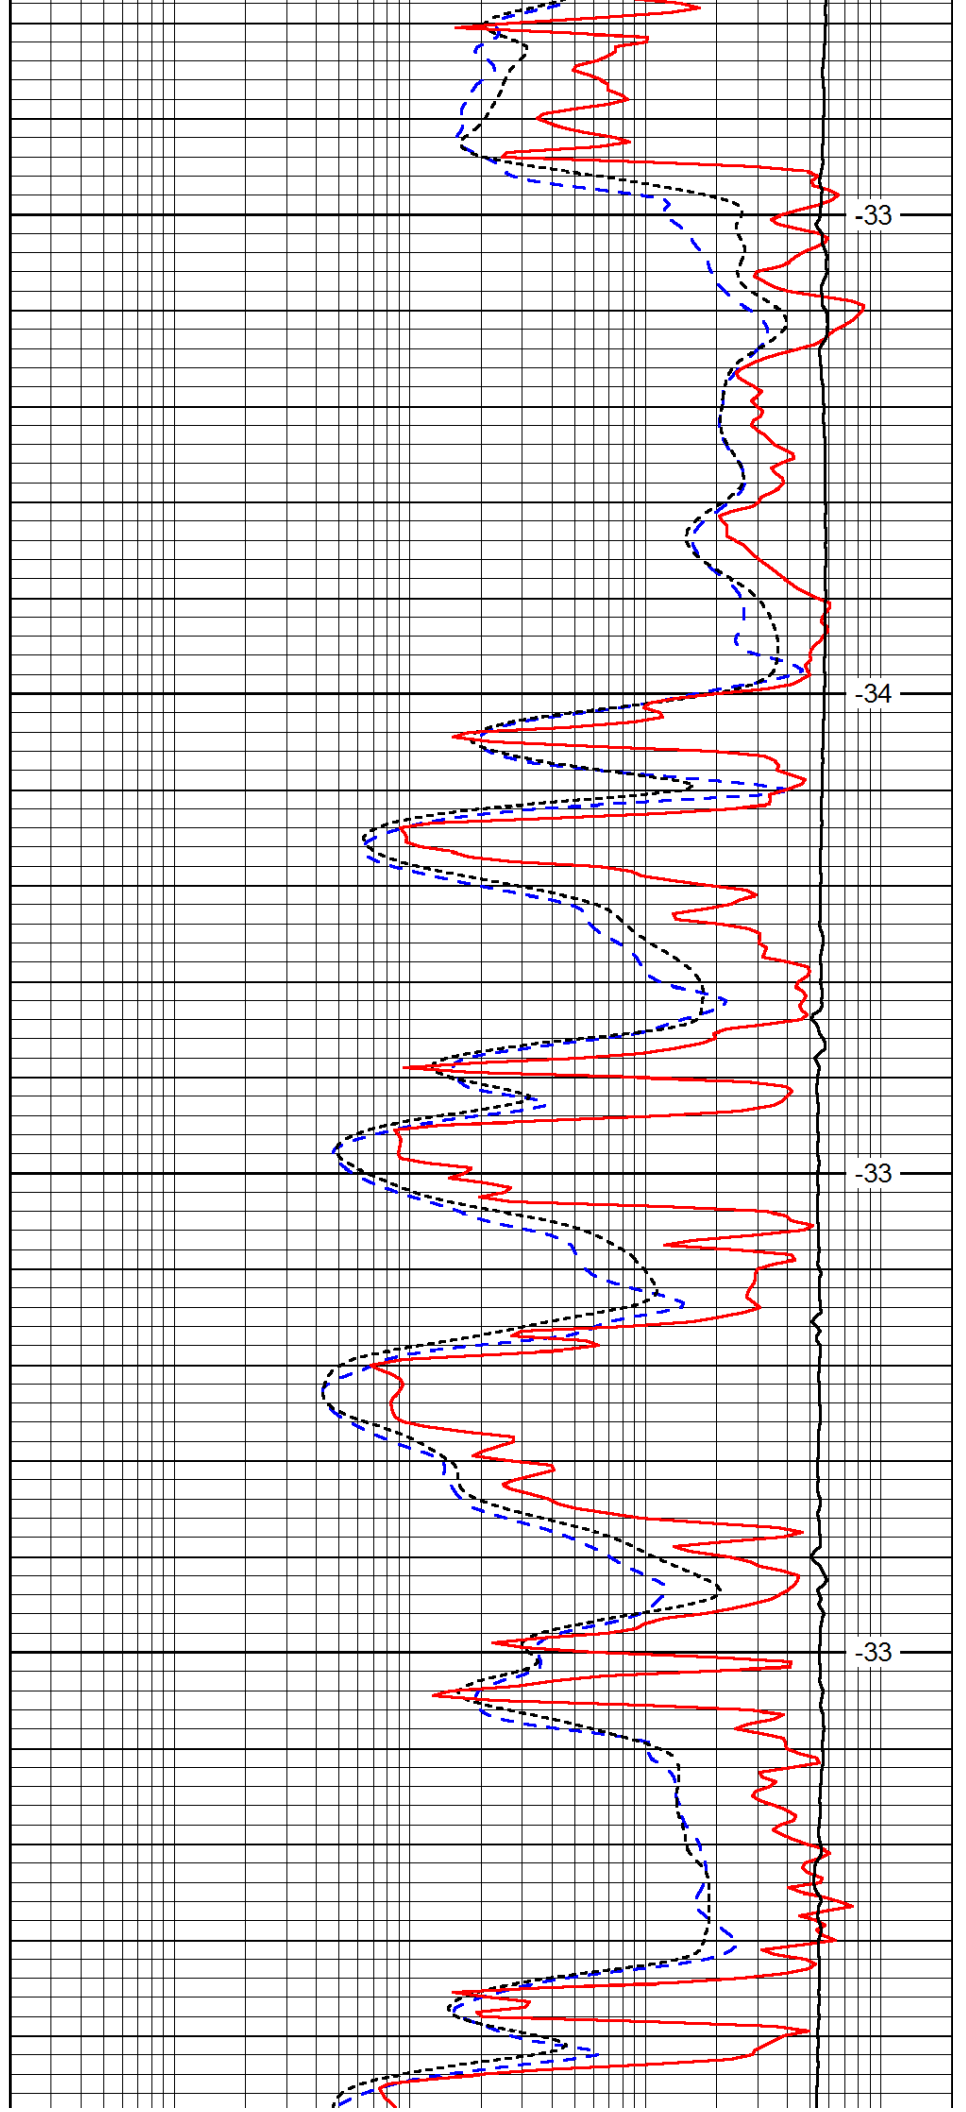


-33

-34

-33

-33

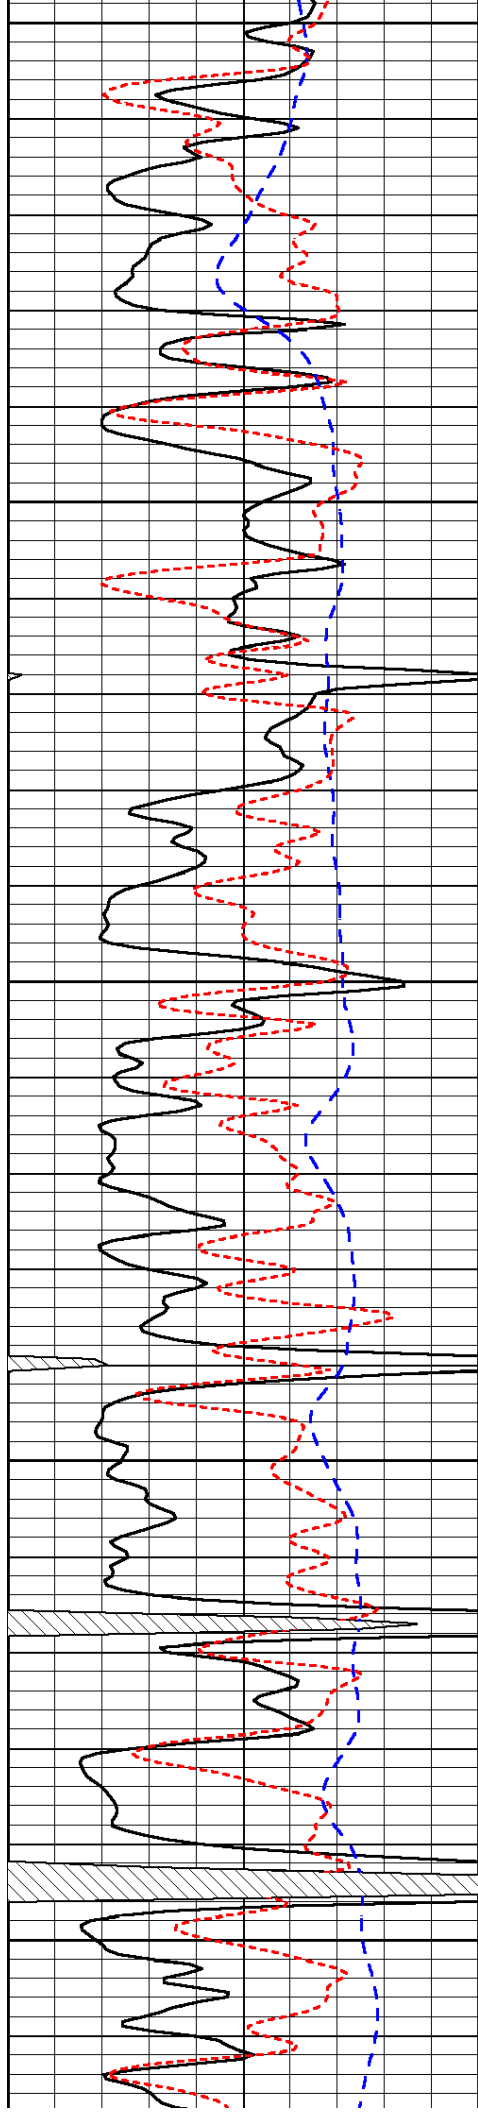


4300

4350

4400

4450

4500

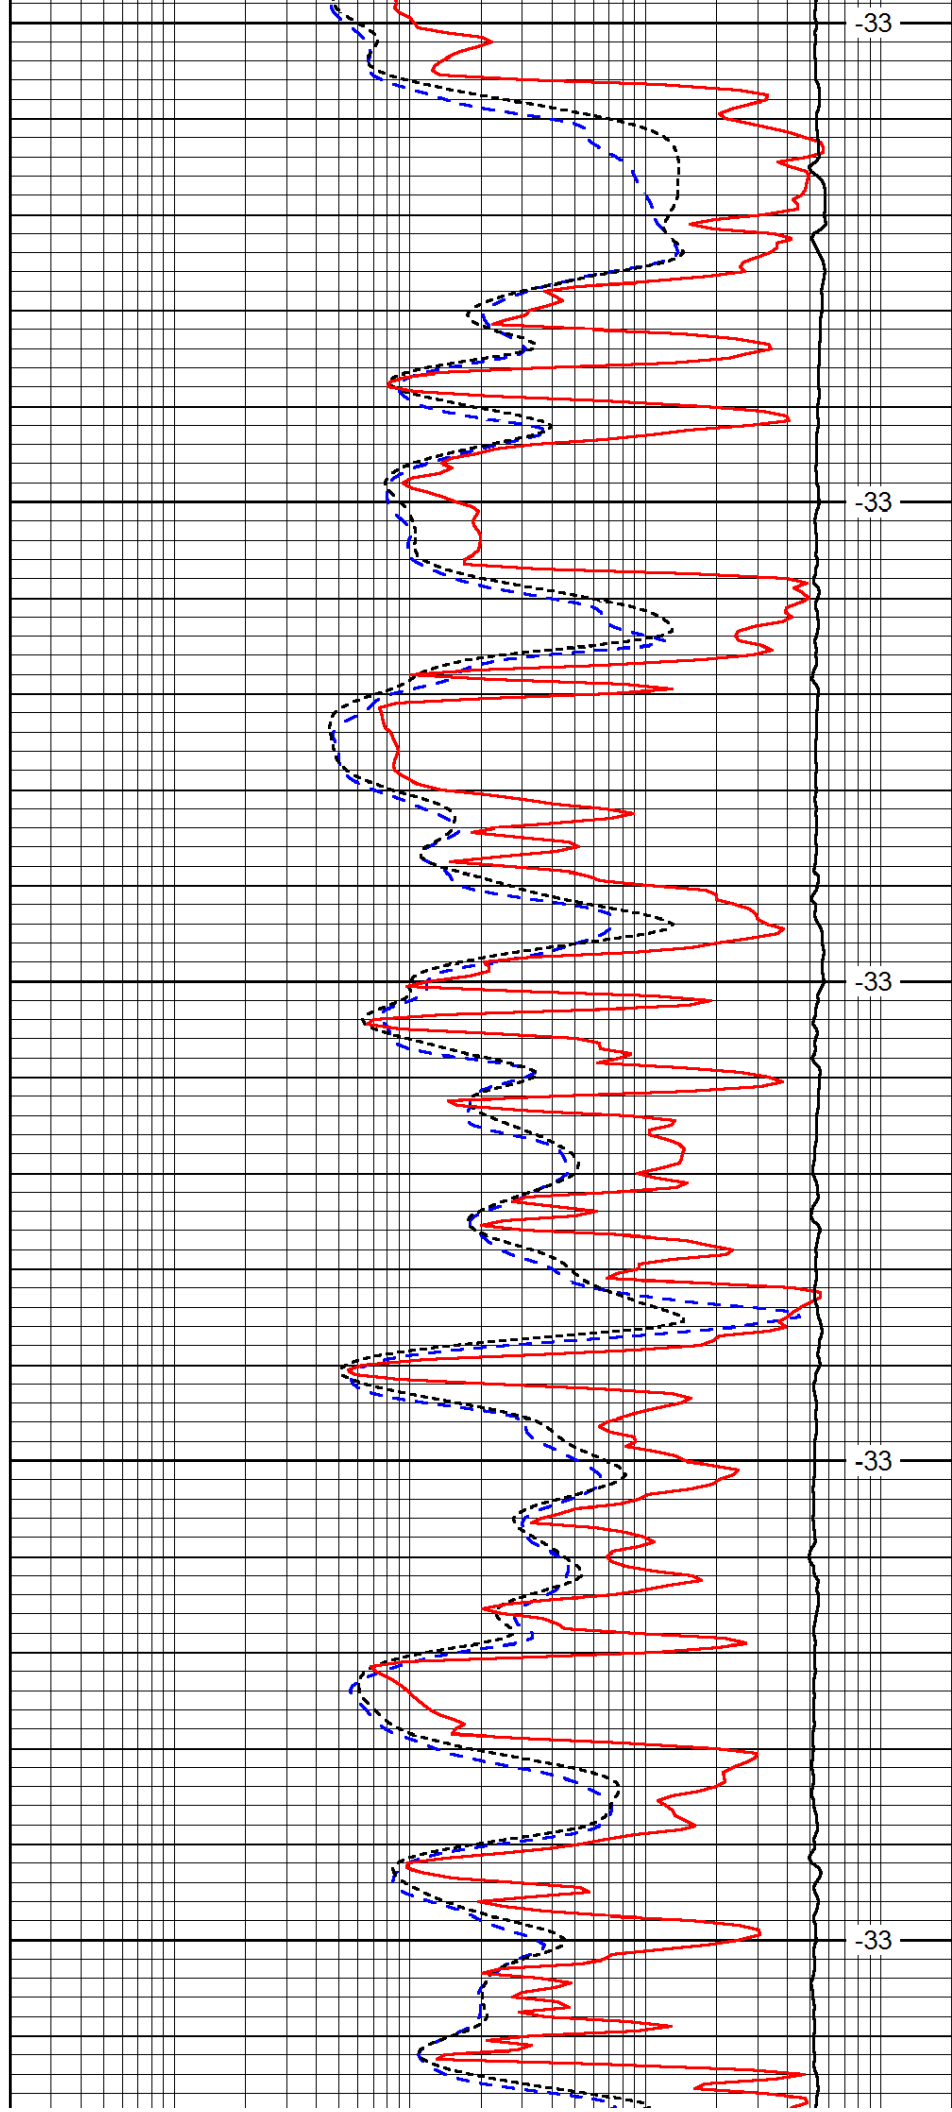



-33

-33

-33

-33

-33

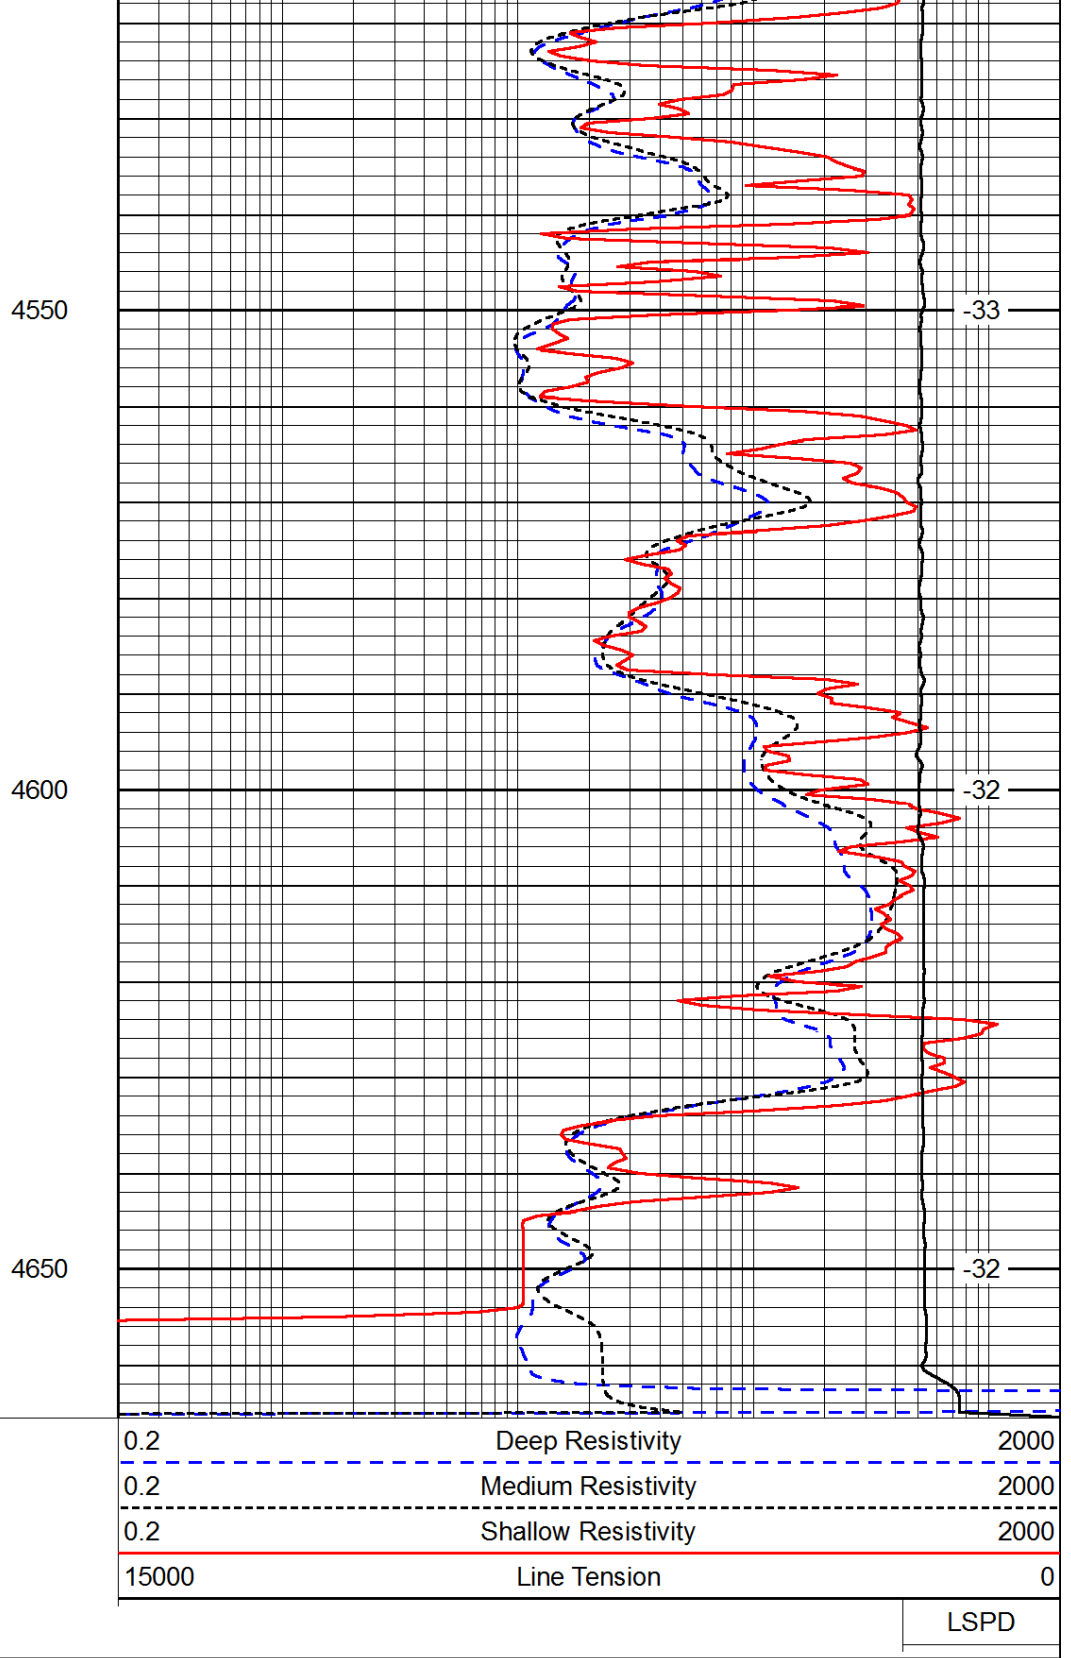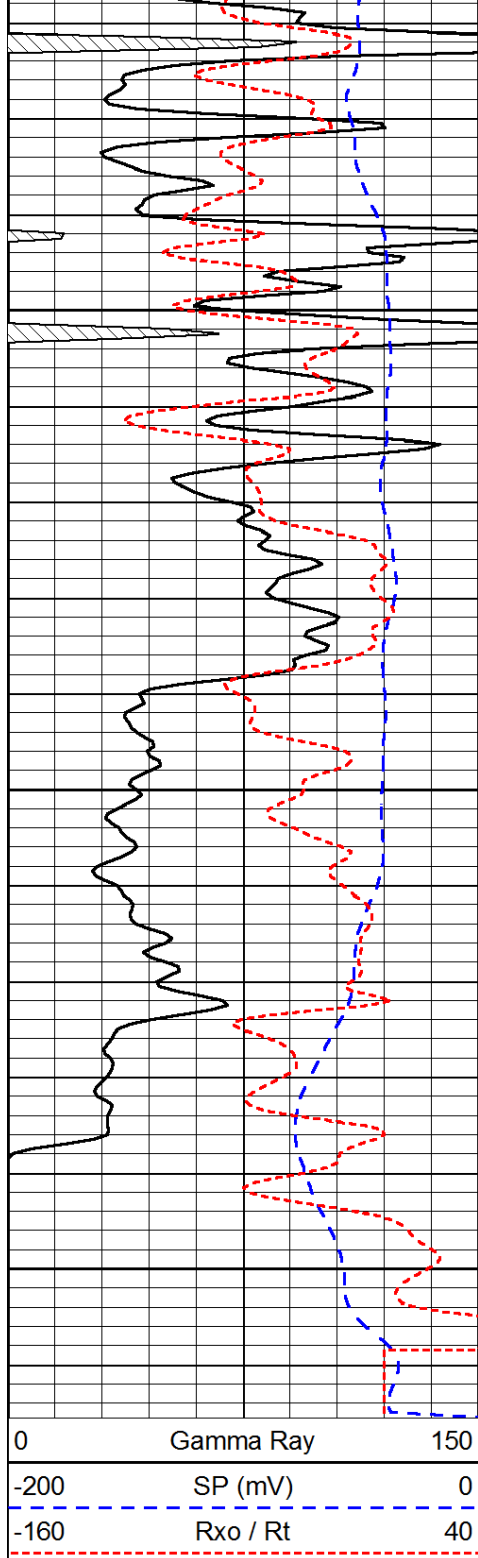

LSPD