



**BOREHOLE COMPENSATED
SONIC ARRAY
LOG**

Fold here

Service Ticket No.: 9466909						API Serial No.: 15-055-22139						PGM Version: WL INSITE R3.4.2 (Build 2)																	
CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE												RESISTIVITY SCALE CHANGES																	
Date		Sample No.										Type Log		Depth		Scale Up Hole				Scale Down Hole									
Depth-Driller																													
Type Fluid in Hole																													
Density		Viscosity																											
Ph		Fluid Loss																											
Source of Sample												RESISTIVITY EQUIPMENT DATA																	
Rm @ Meas. Temp						@						Run No.		Tool Type & No.				Pad Type				Tool Pos.				Other			
Rmf @ Meas. Temp.						@																							
Rmc @ Meas. Temp.						@																							
Source Rmf		Rmc																											
Rm @ BHT						@																							
Rmf @ BHT						@																							
Rmc @ BHT						@																							
EQUIPMENT DATA																													
GAMMA						ACOUSTIC						DENSITY						NEUTRON											
Run No.		ONE				Run No.		ONE				Run No.						Run No.											
Serial No.		10811258				Serial No.		10747683				Serial No.						Serial No.											
Model No.		GTET				Model No.		BSAT				Model No.						Model No.											
Diameter		3.625"				No. of Cent.		TWO				Diameter						Diameter											
Detector Model No.		T-102				Spacing		0.5'				Log Type						Log Type											
Type		SCINT										Source Type						Source Type											
Length		8"				LSA [Y/N]		YES				Serial No.						Serial No.											
Distance to Source		10'				FWDA [Y/N]		NO				Strength						Strength											
LOGGING DATA																													
GENERAL						GAMMA						ACOUSTIC						DENSITY						NEUTRON					


GENERAL			GAMMA		ACOUSTIC		DENSITY		NEUTRON					
Run	Depth		Speed	Scale		Scale		Matrix	Scale		Matrix	Scale		Matrix
No.	From	To	ft/min	L	R	L	R		L	R		L	R	
ONE	4976'	1829'	REC	0	150	30	-10	47.6						
DIRECTIONAL INFORMATION														
Maximum Deviation @								KOP @						
Remarks: SP-GTET-DSNT-SDLT-BSAT-ACRT RAN IN COMBINATION.														
ANNULAR HOLE VOLUME CALCULATED FOR 5.5 INCH CASING.														
CHLORIDES REPORTED AT 1300 MG/L.														
LCM REPORTED AT 2 LB/BBL.														
TODAY'S CREW: A. VAQUERA, B. TERRELL														
THANK YOU FOR CHOOSING HALLIBURTON ENERGY SERVICES. LIBERAL, KS 620-624-8123														
HALLIBURTON DOES NOT GUARANTEE THE ACCURACY OF ANY INTERPRETATION OF THE LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY HALLIBURTON PERSONNEL OR WHICH APPEAR ON THE LOG OR IN ANY OTHER FORM. ANY USER OF SUCH DATA, INTERPRETATIONS, CONVERSIONS, OR RECOMMENDATIONS AGREES THAT HALLIBURTON IS NOT RESPONSIBLE EXCEPT WHERE DUE TO GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, FOR ANY LOSS, DAMAGES, OR EXPENSES RESULTING FROM THE USE THEREOF.														
HALLIBURTON														

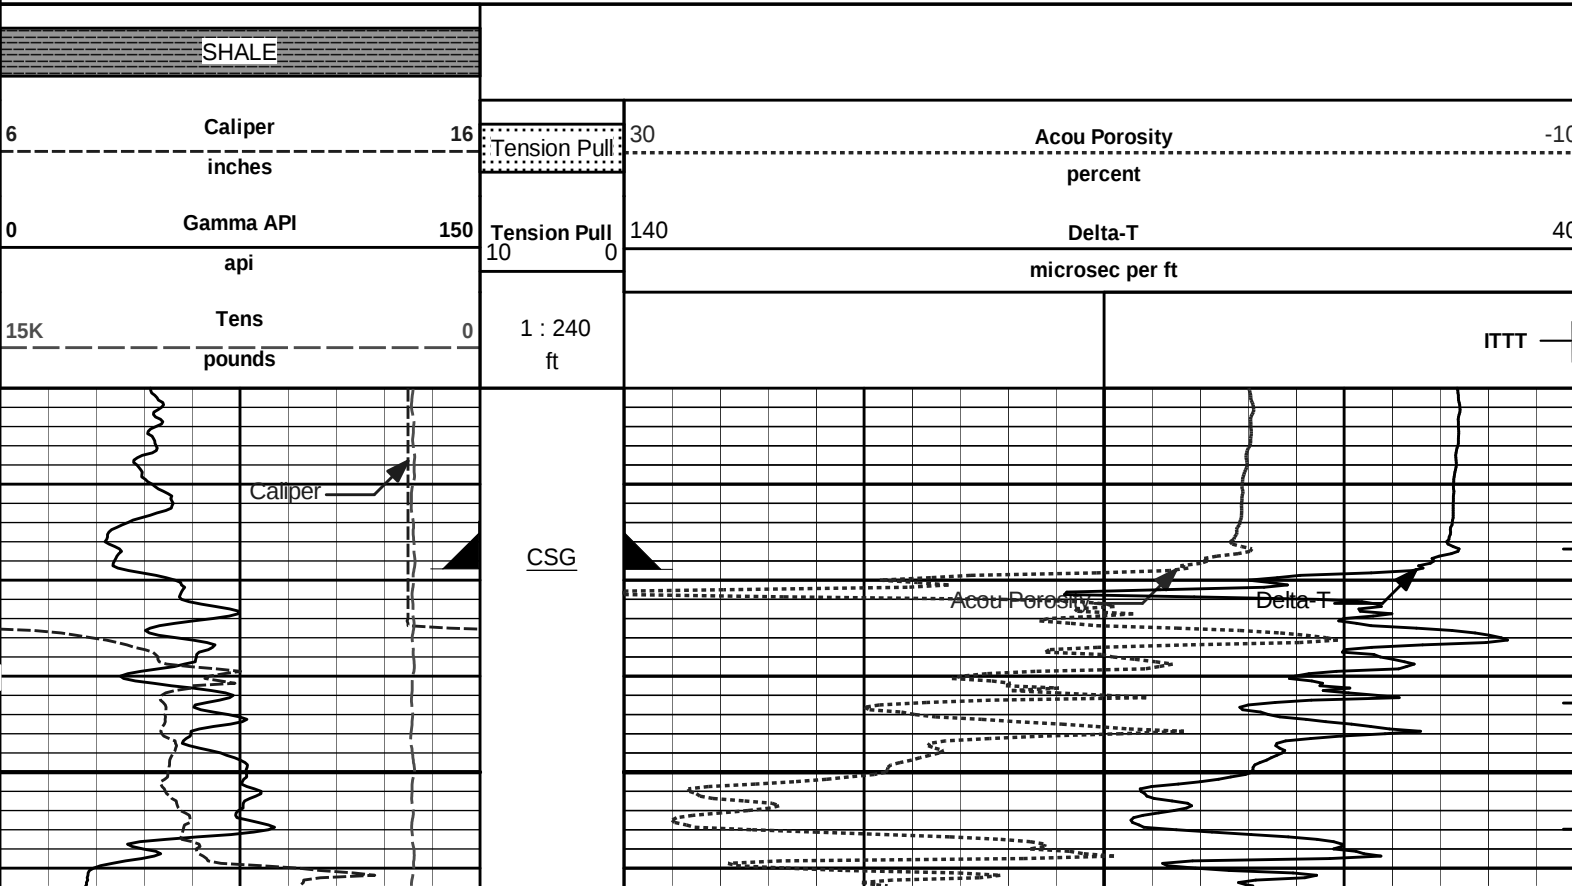


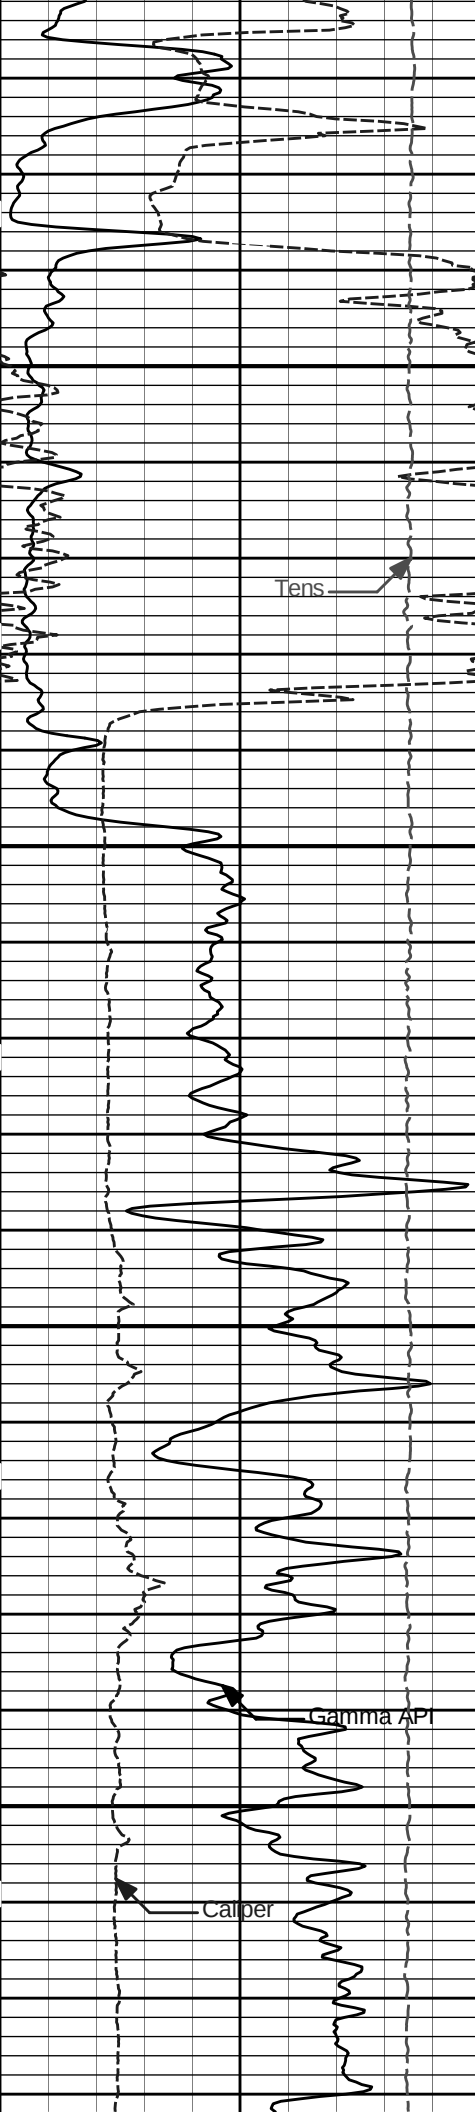

1900

2000

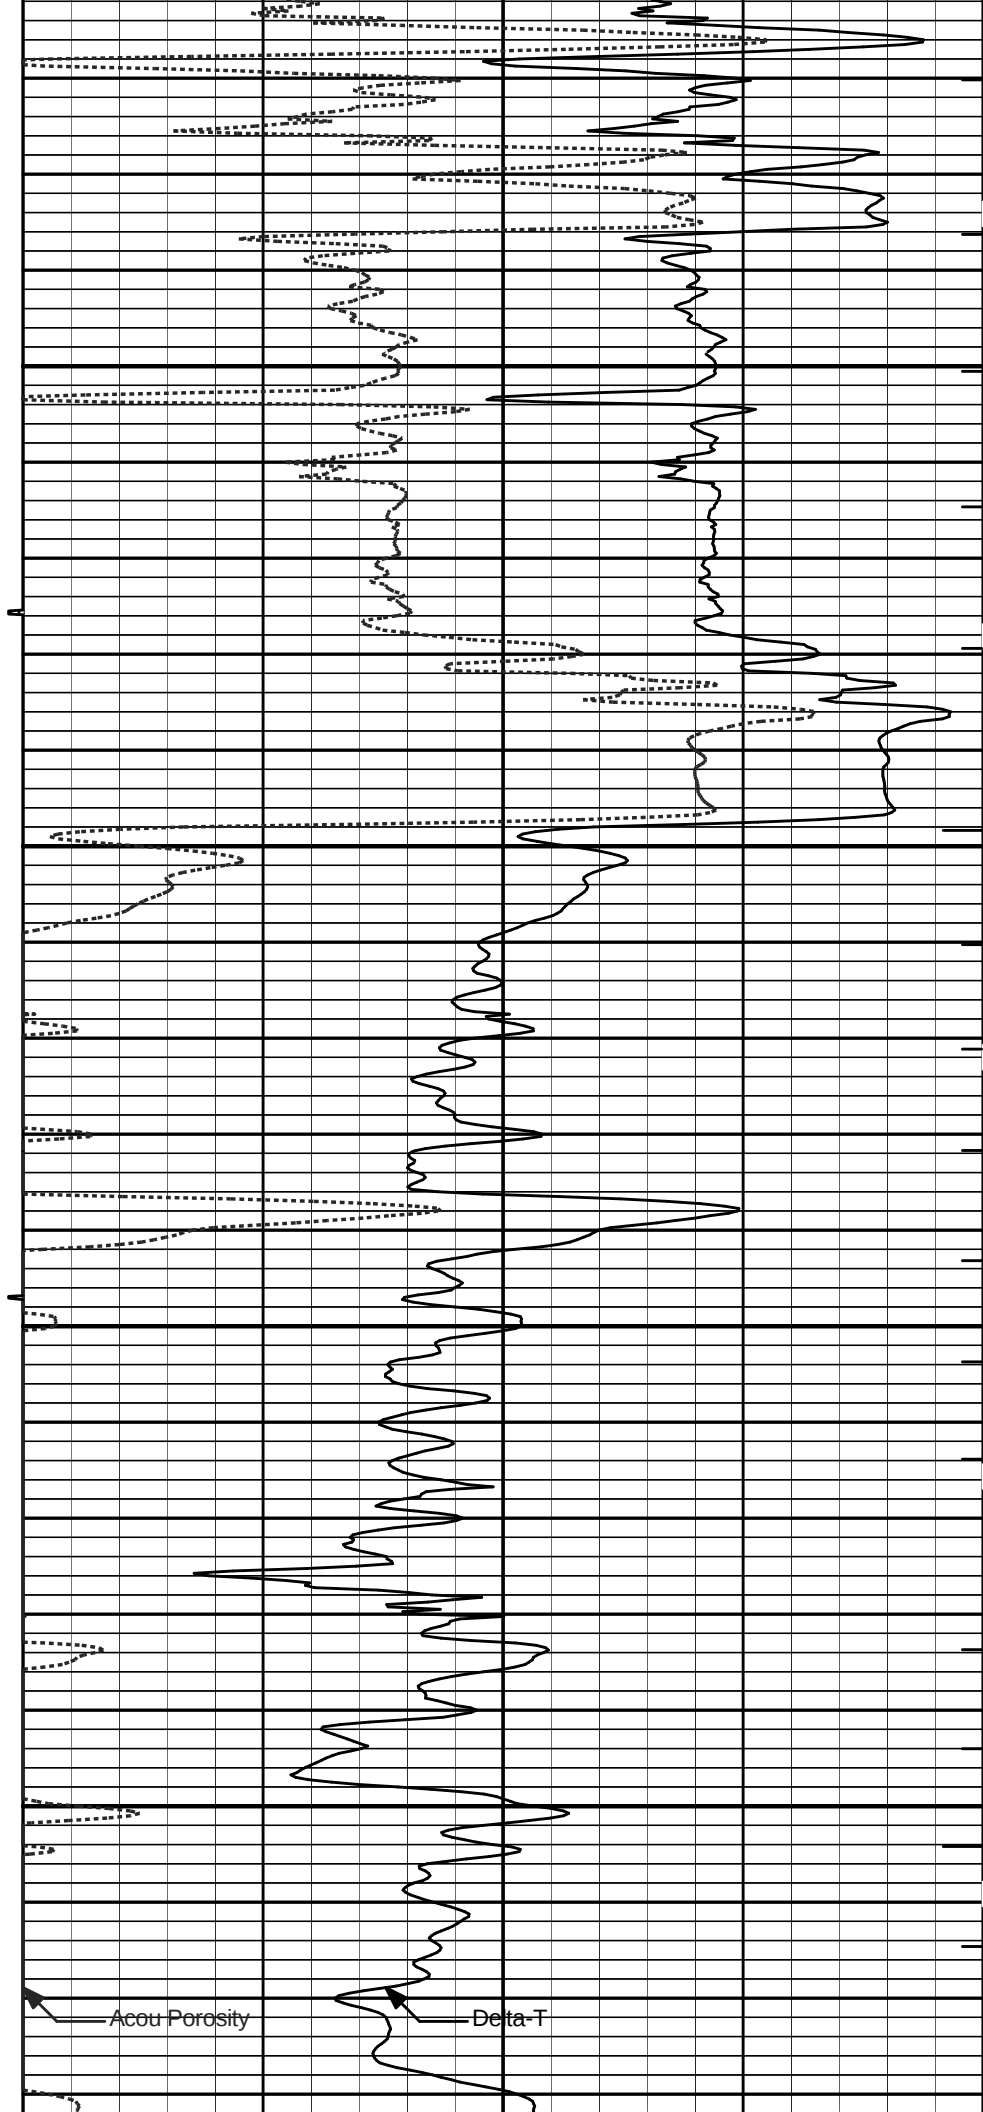


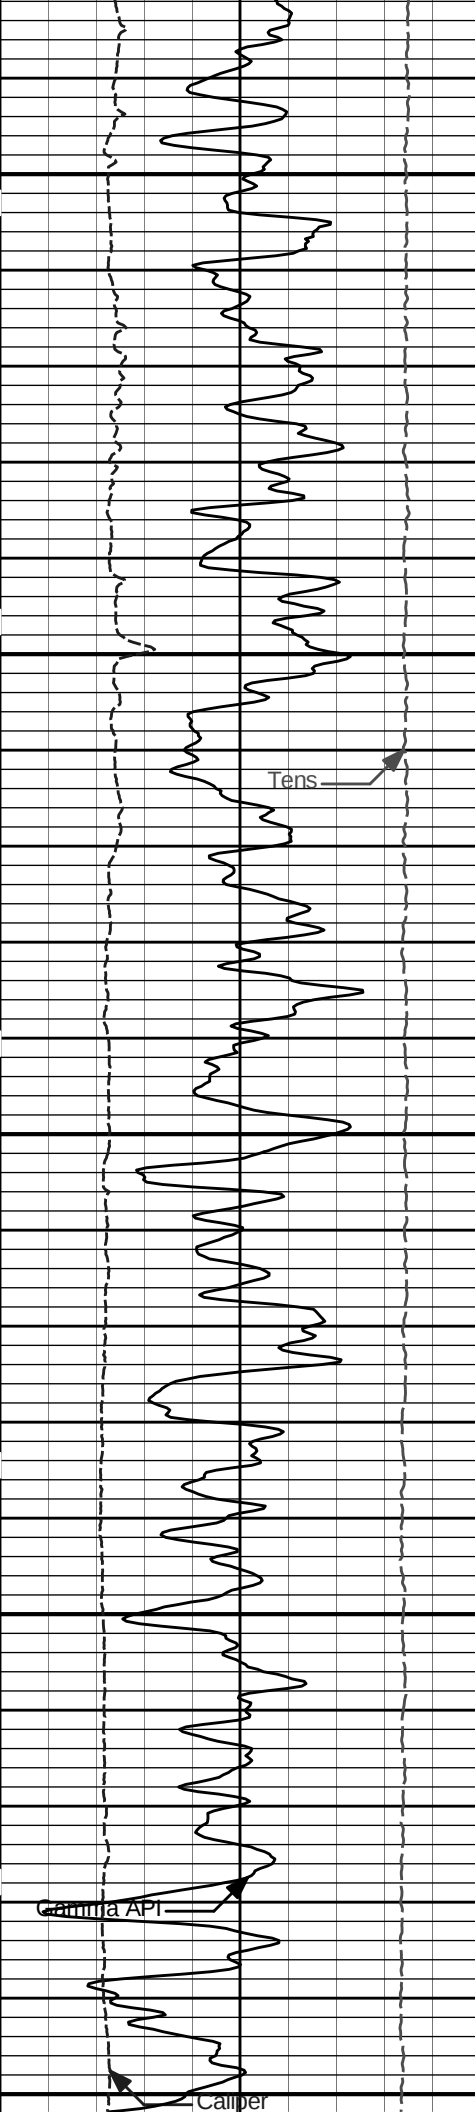


2100

2200

2300

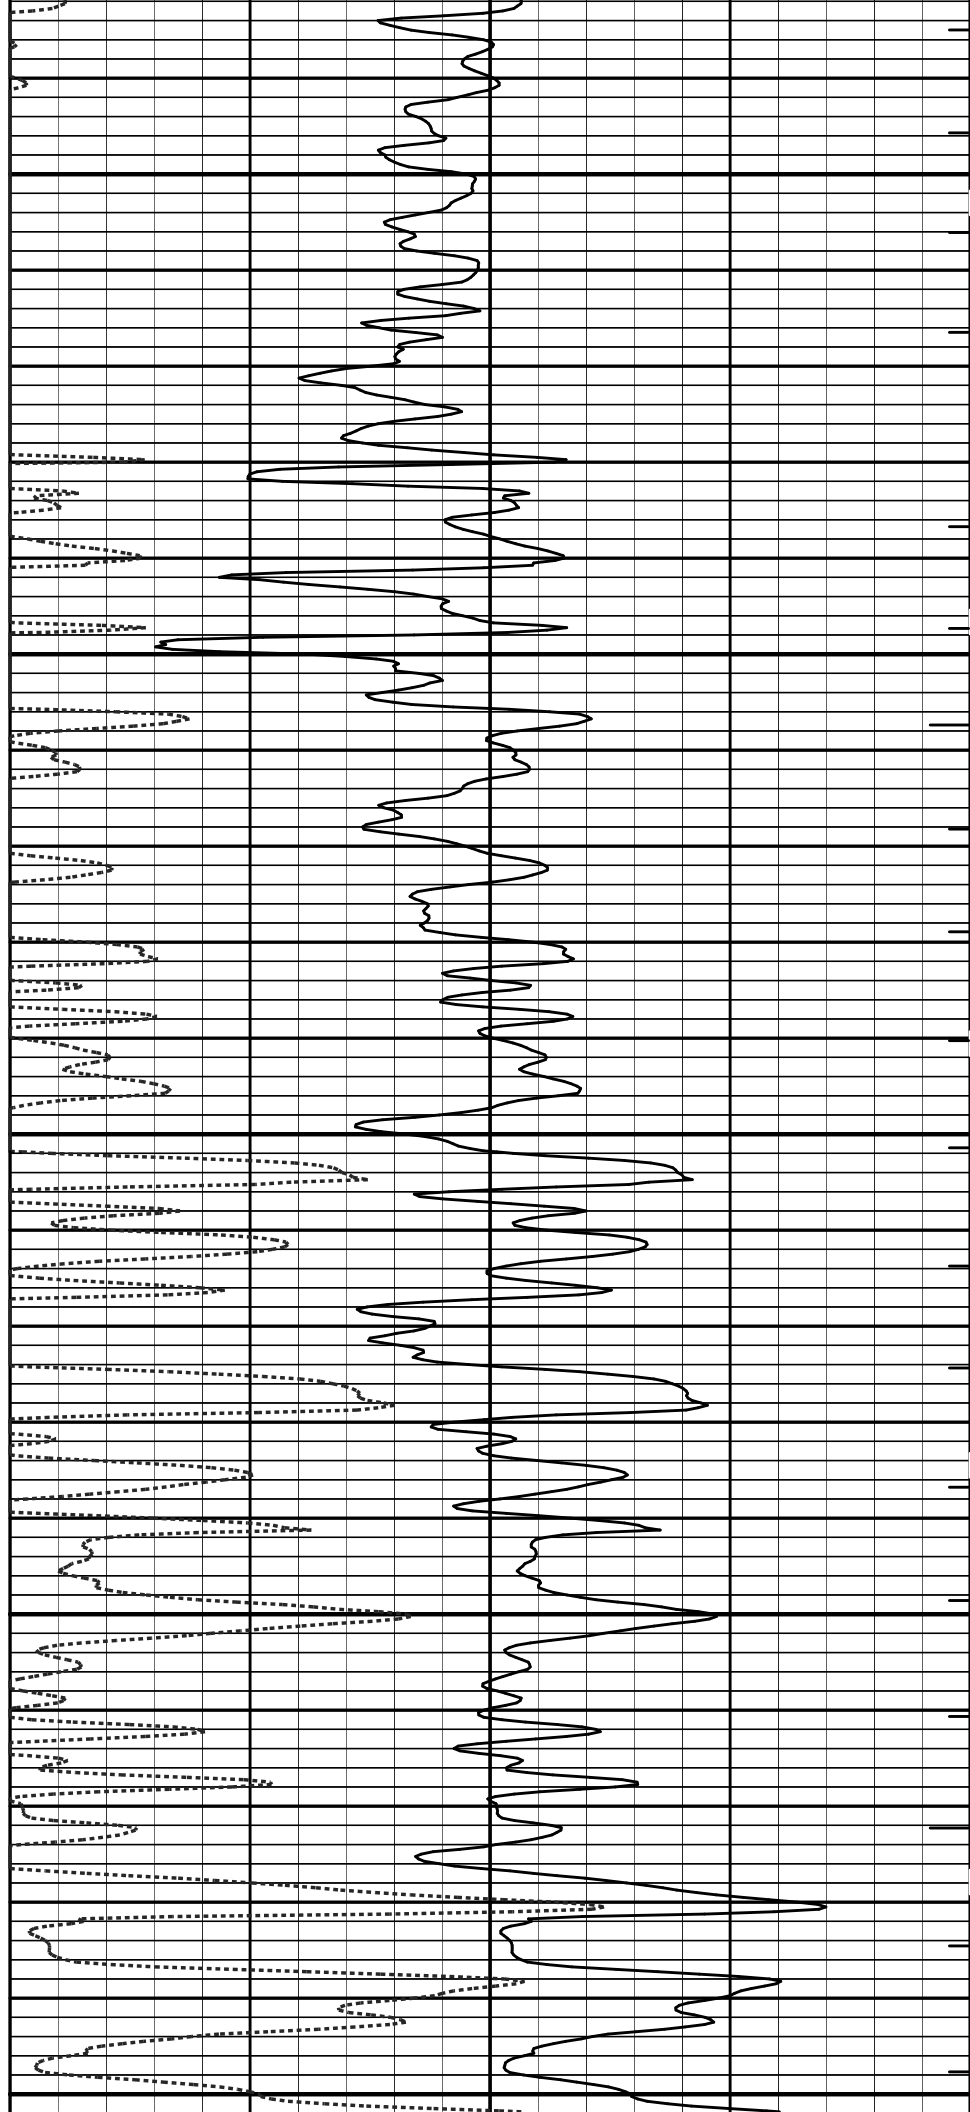

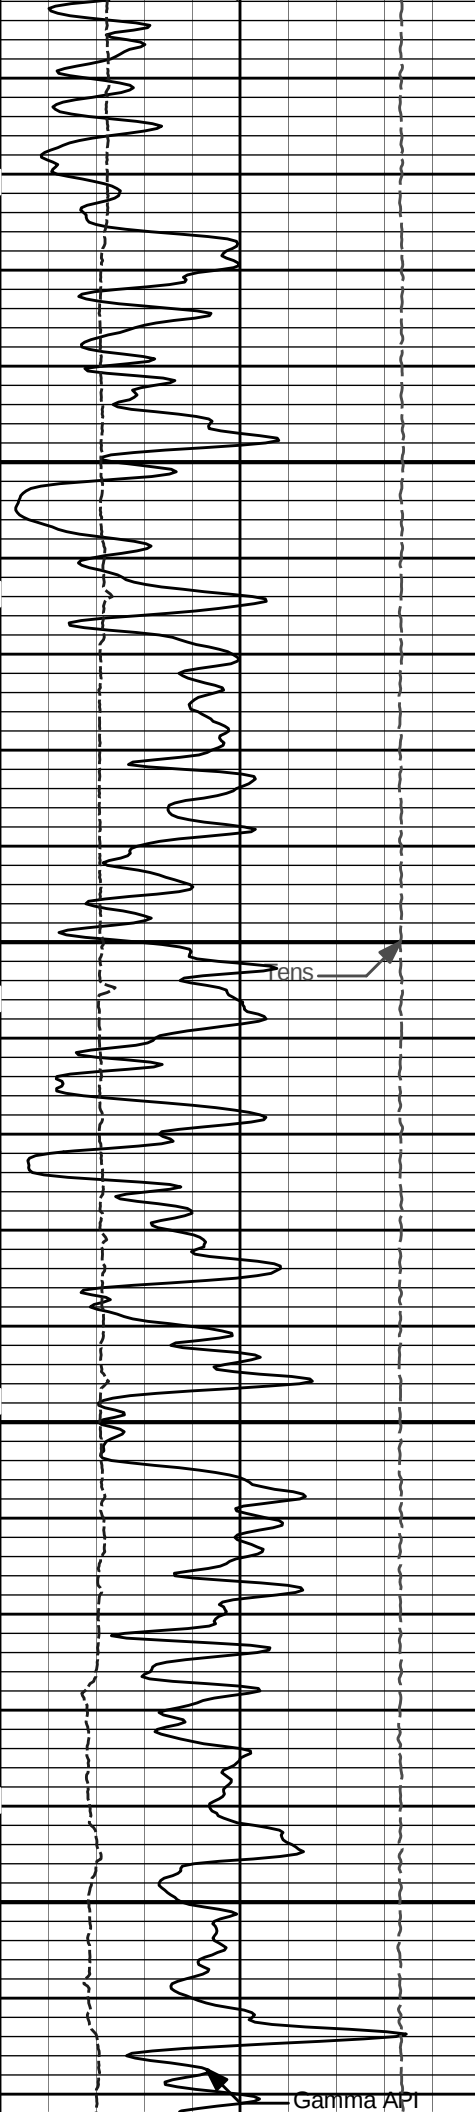


Pp

Gamma API


2400

2500

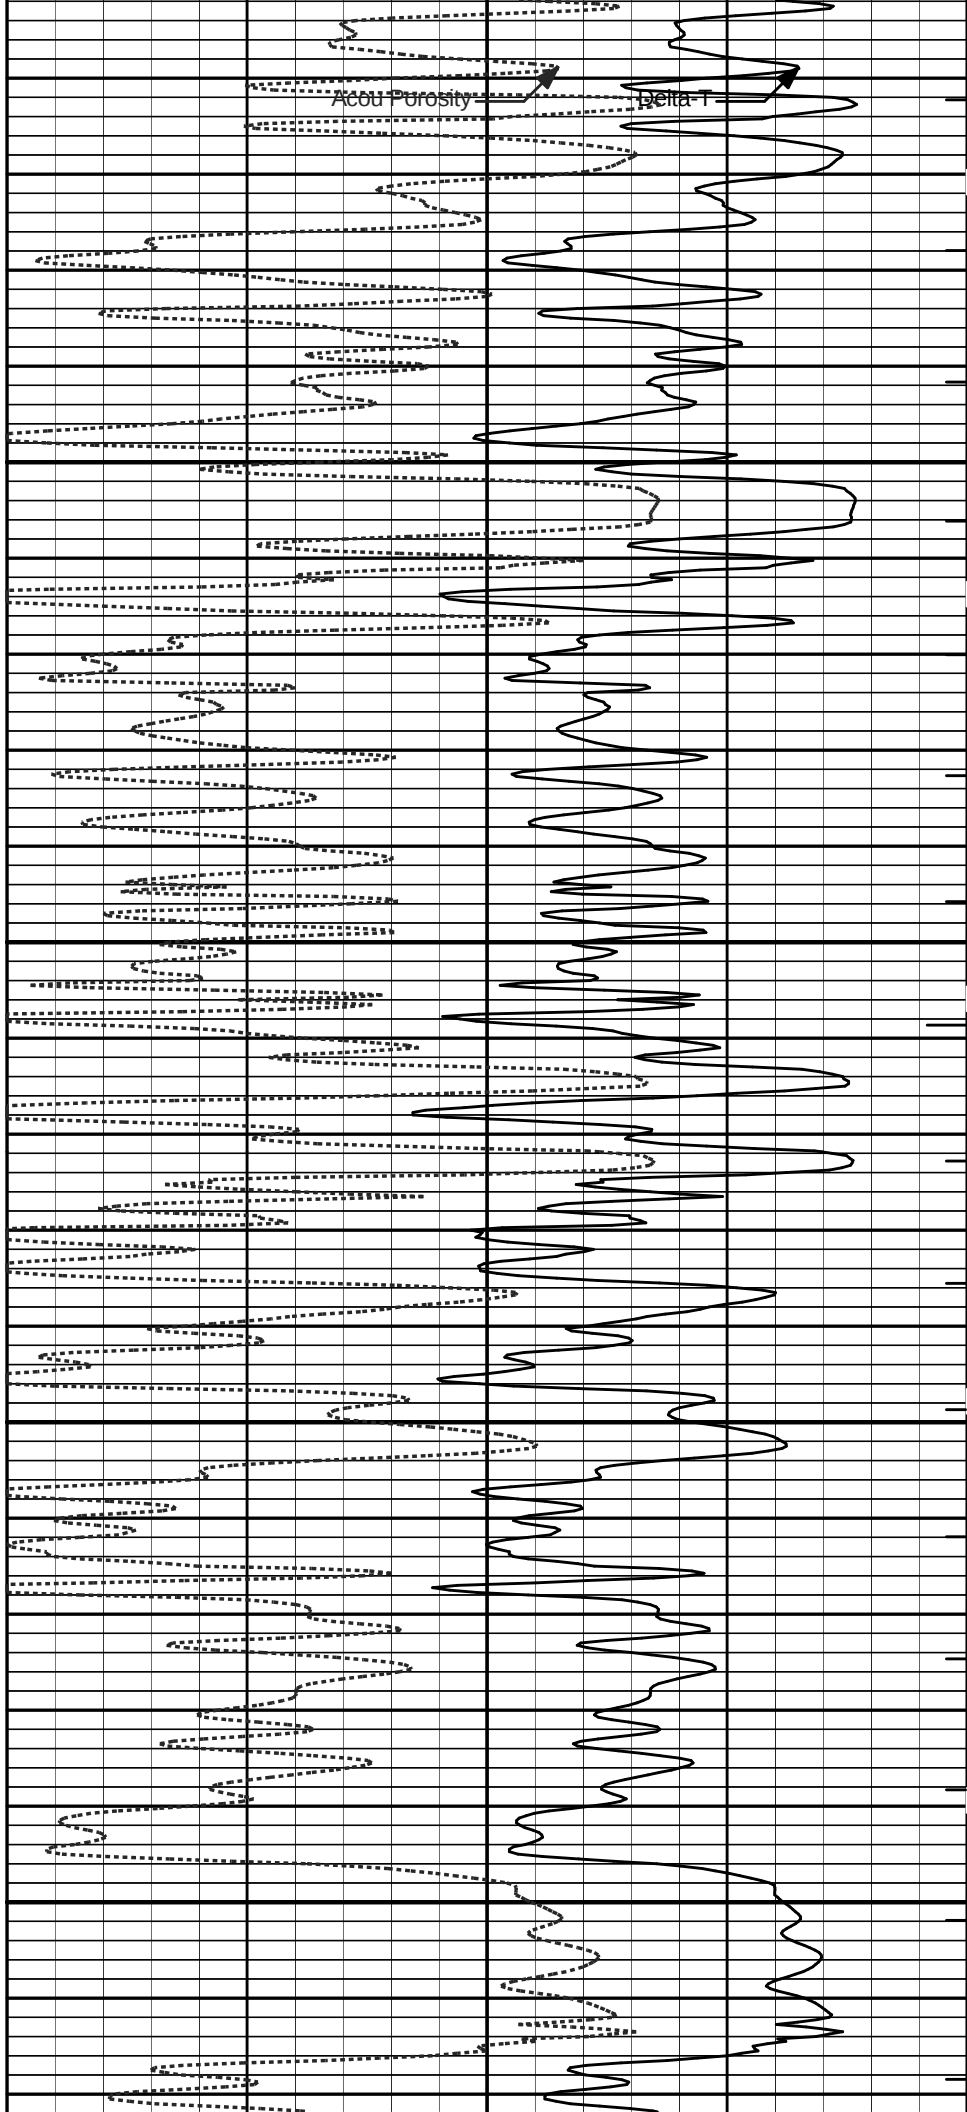


Acoustic Porosity


Delta T

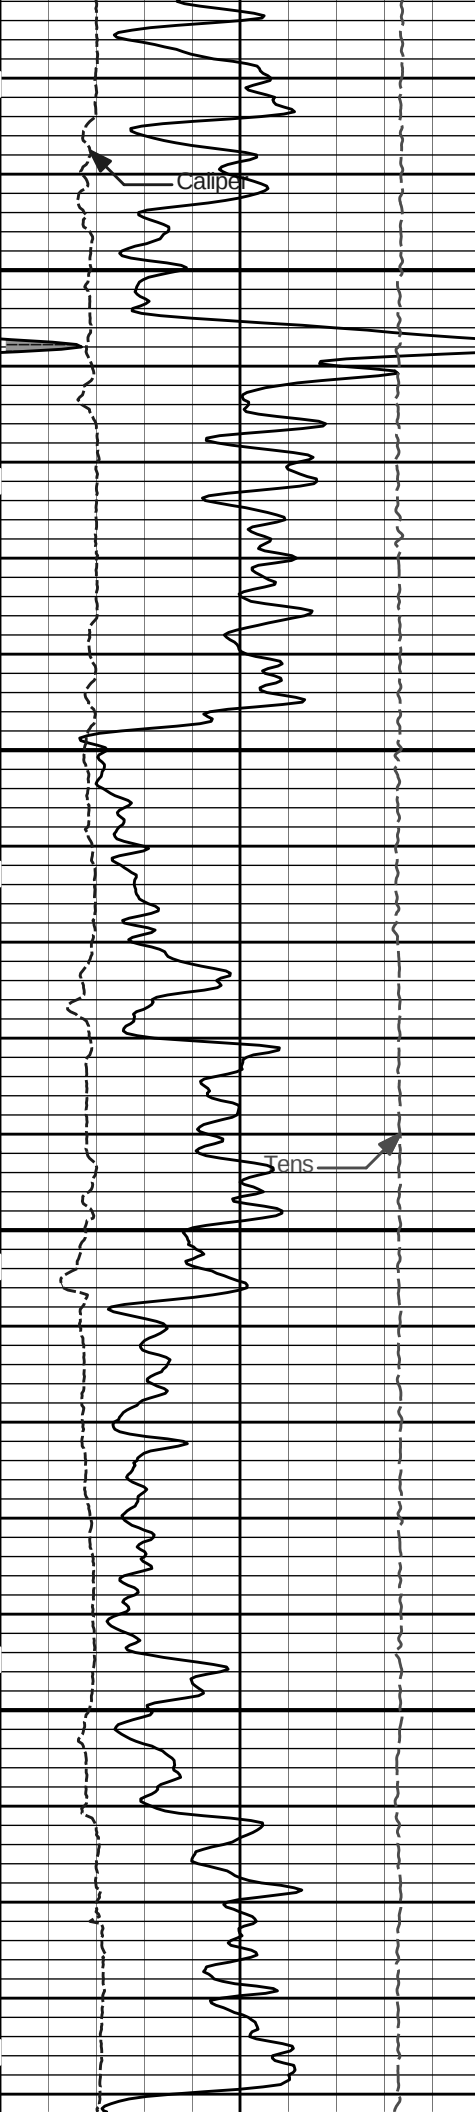

2600


2700

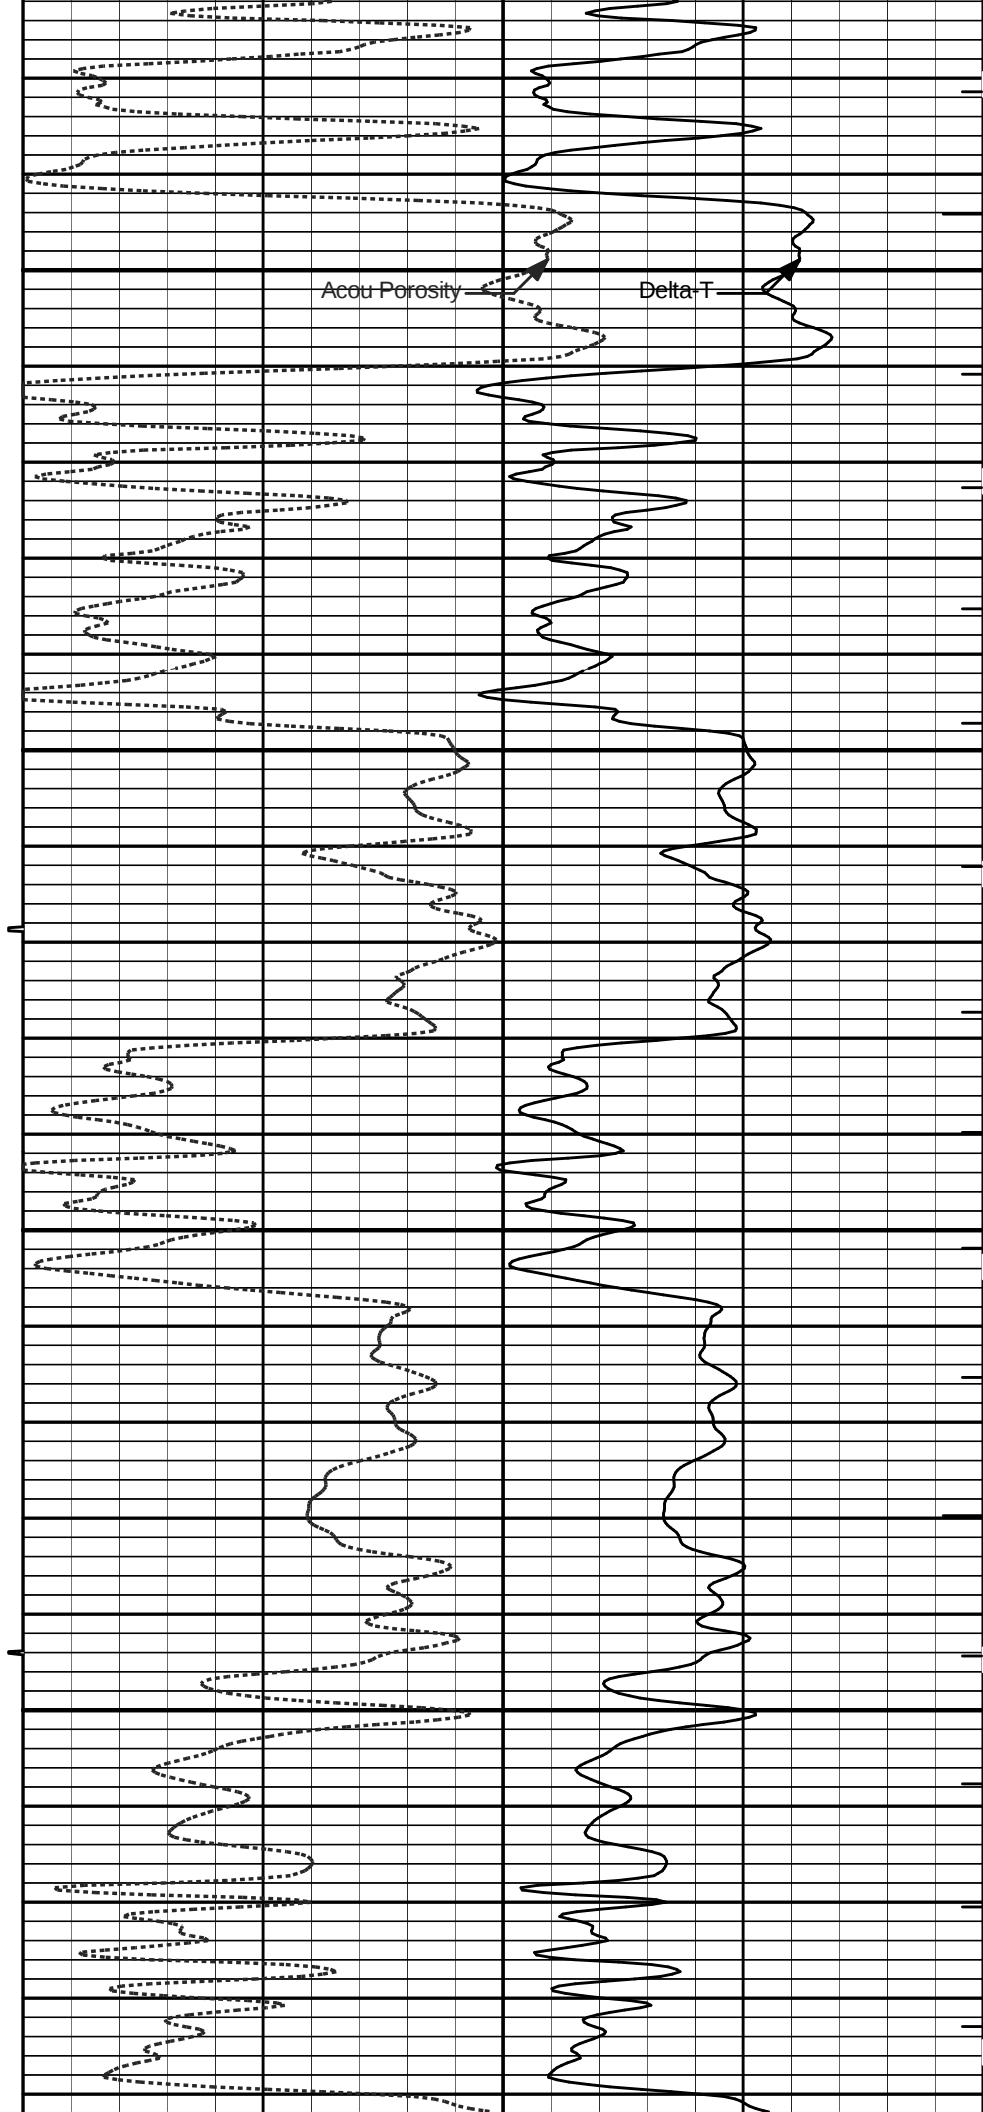


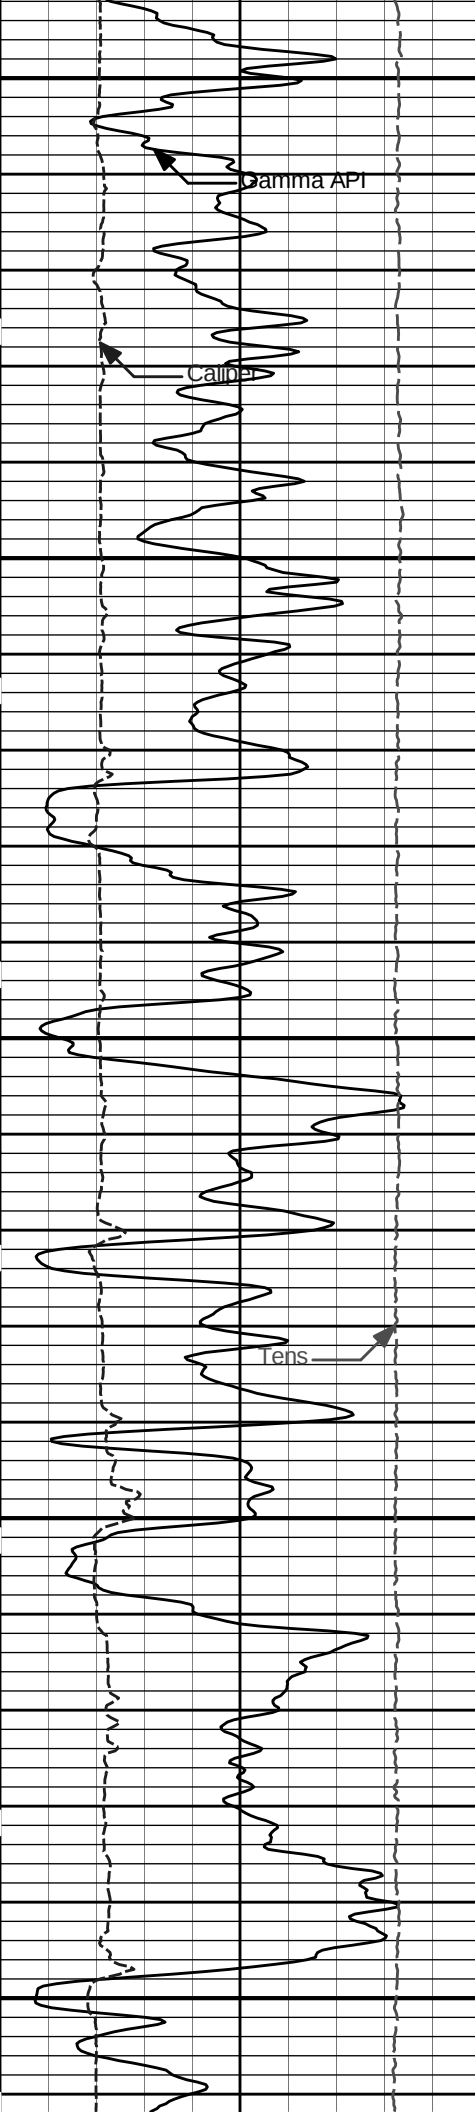

2800


2900

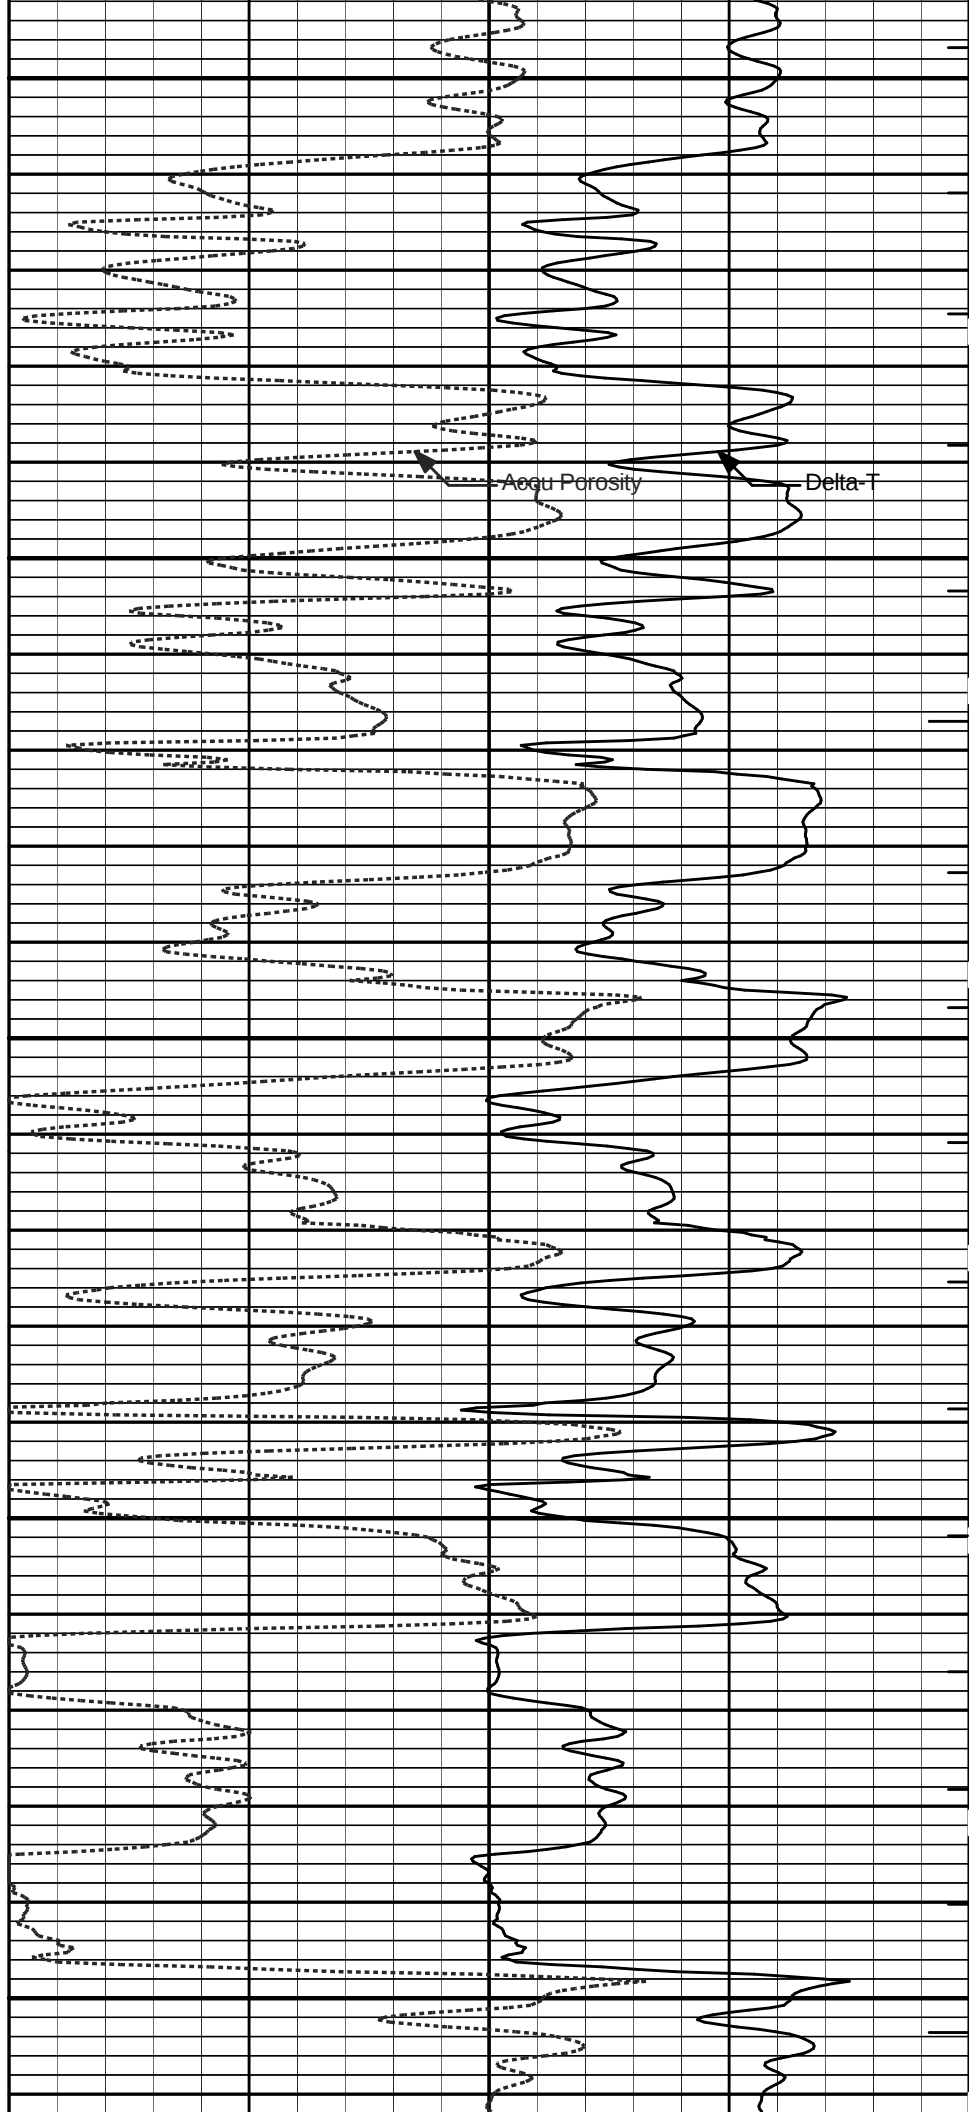


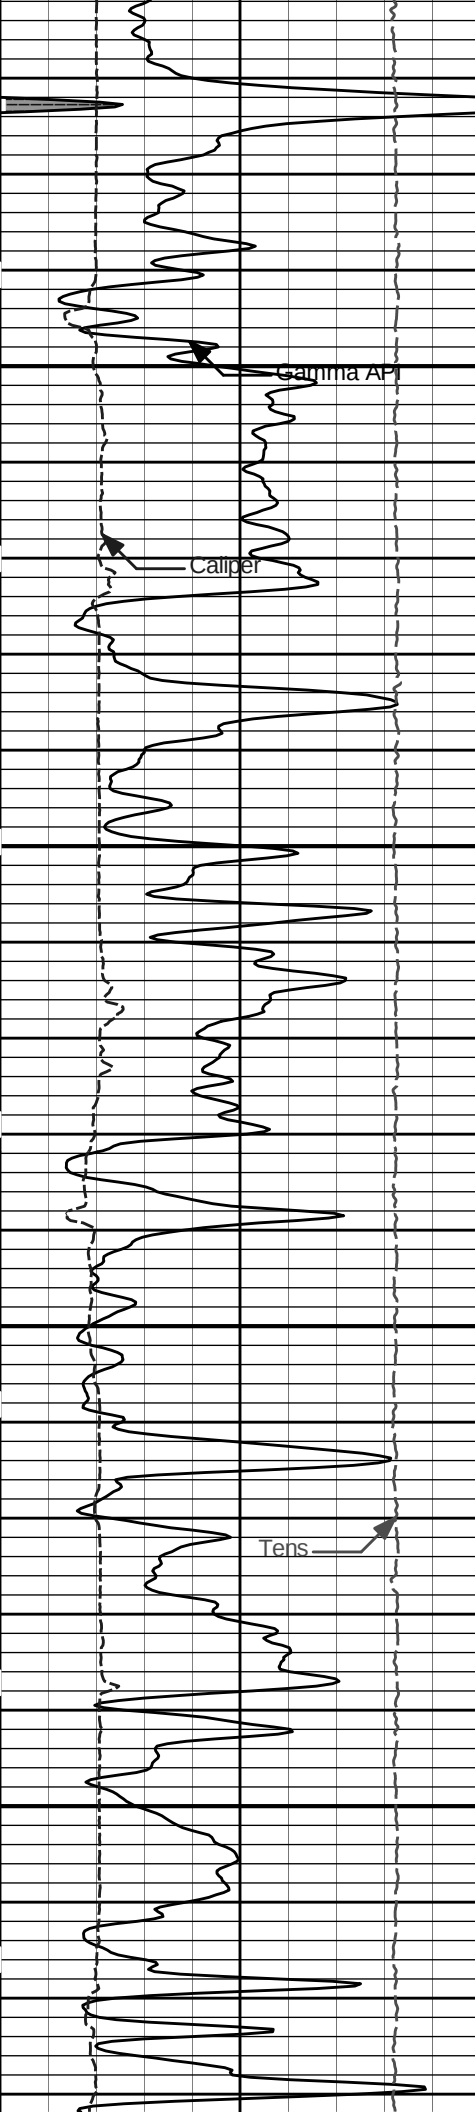

3000

3100

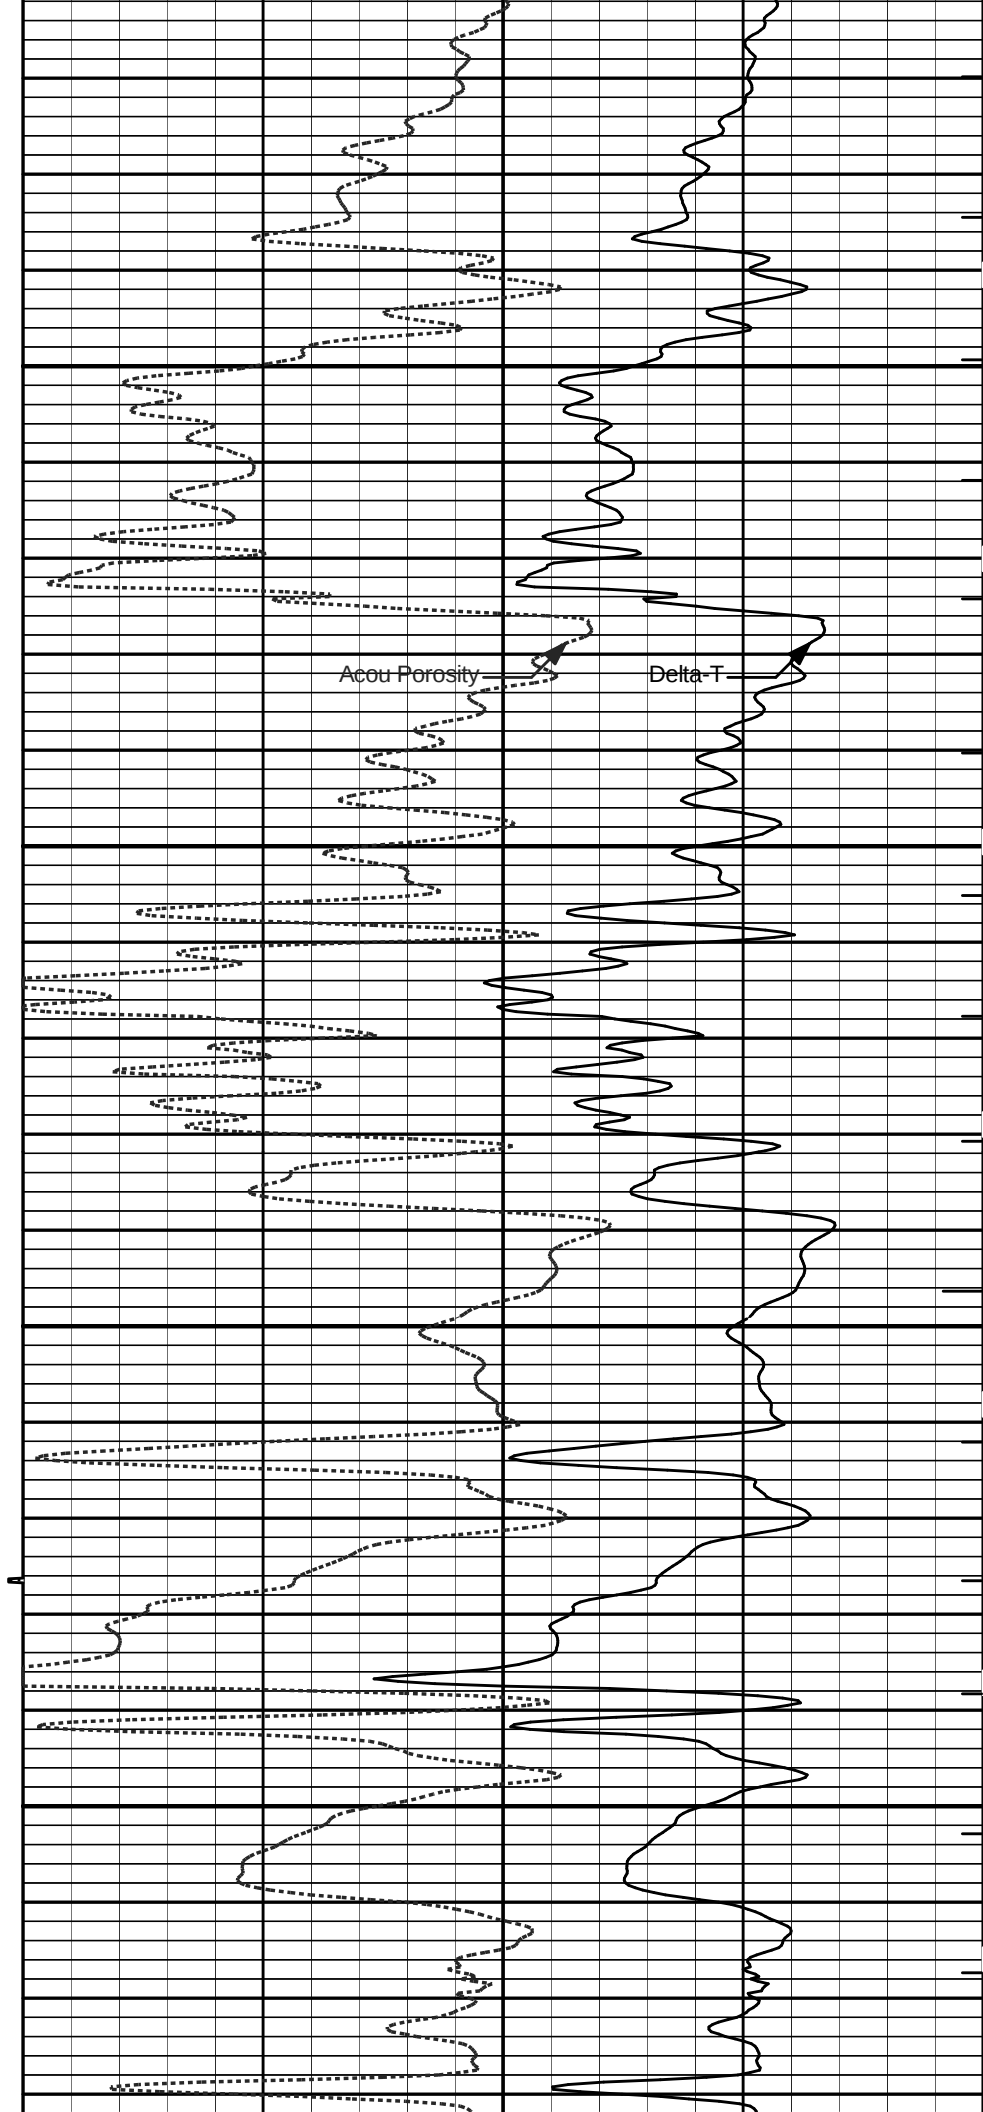


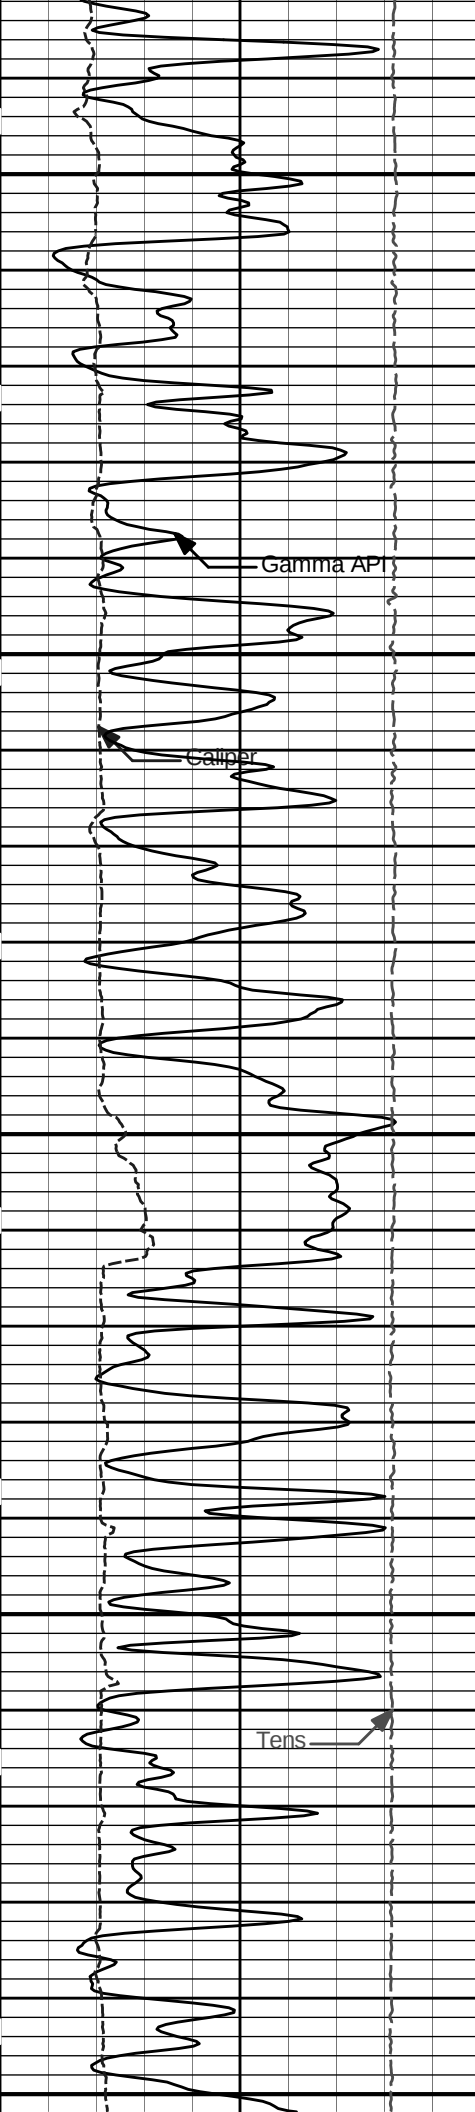


3200

3300


3400

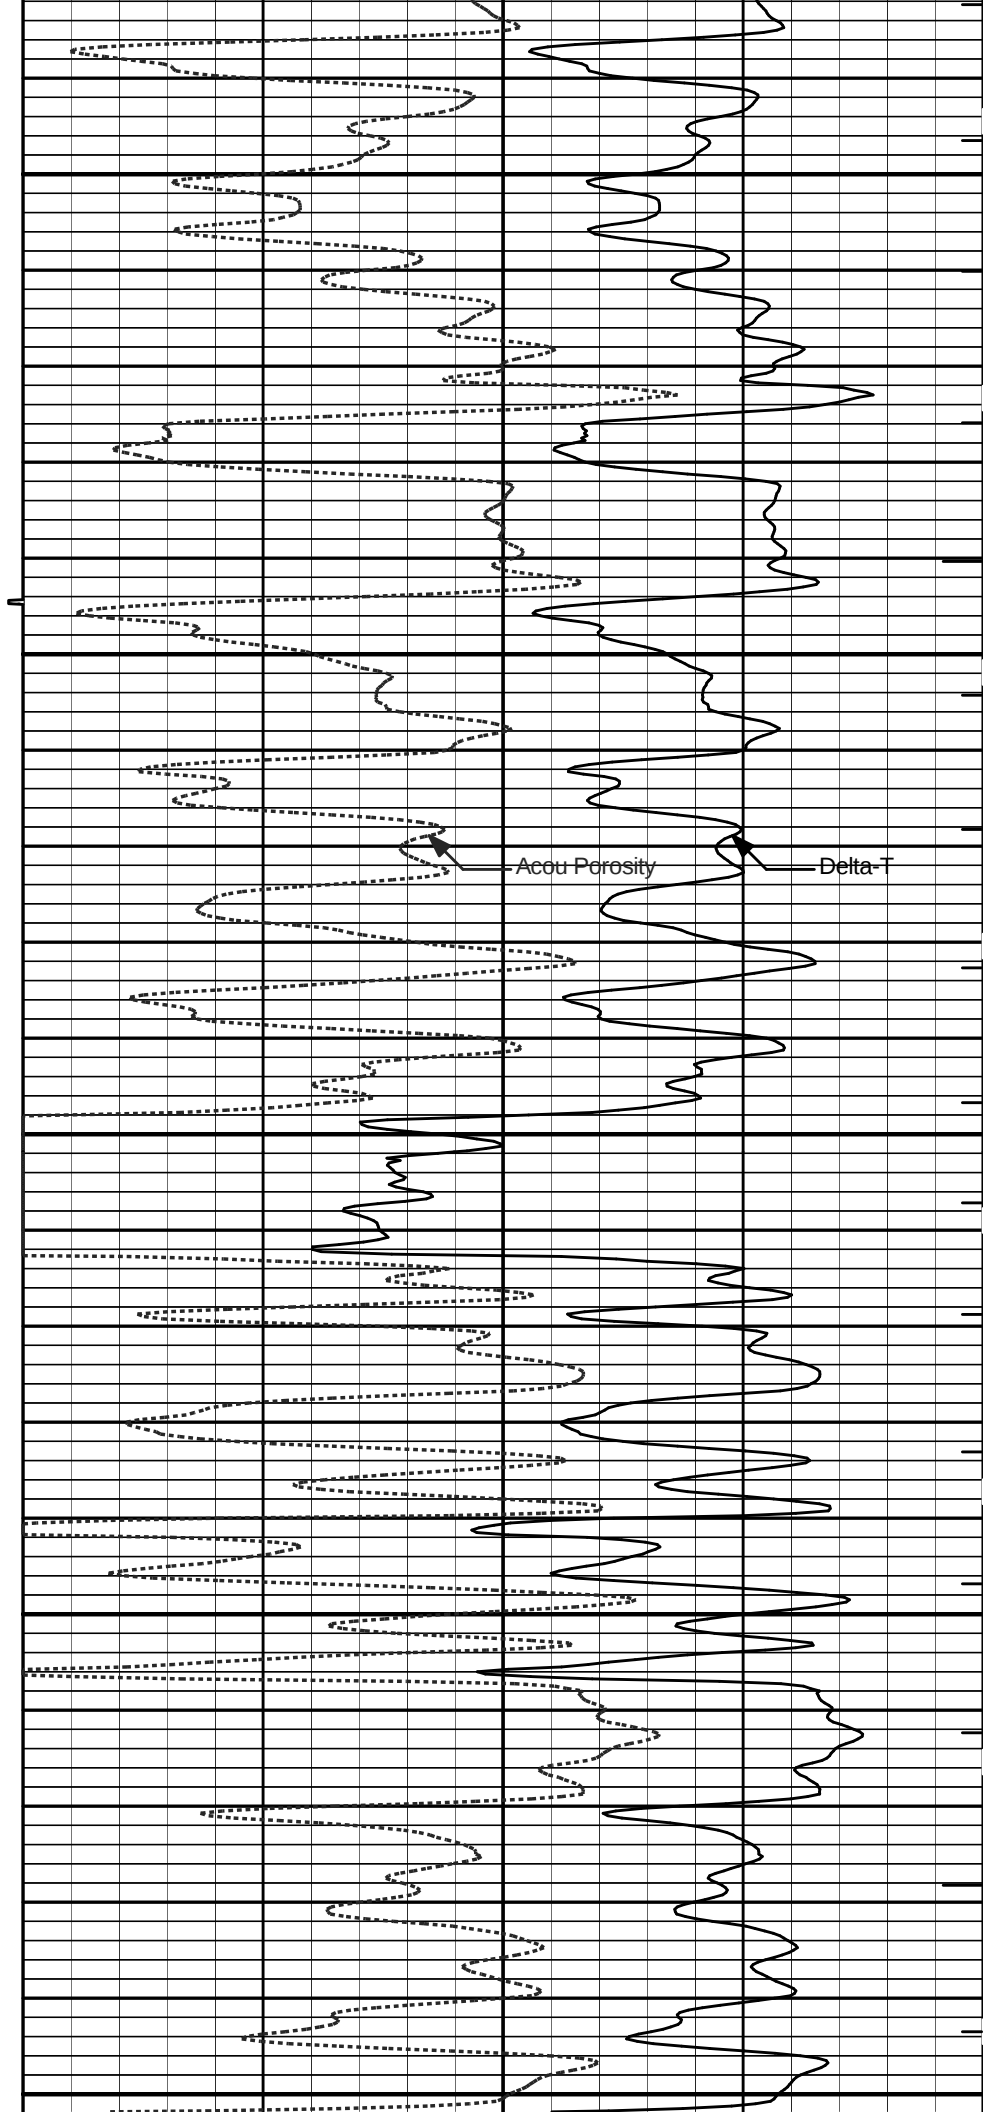


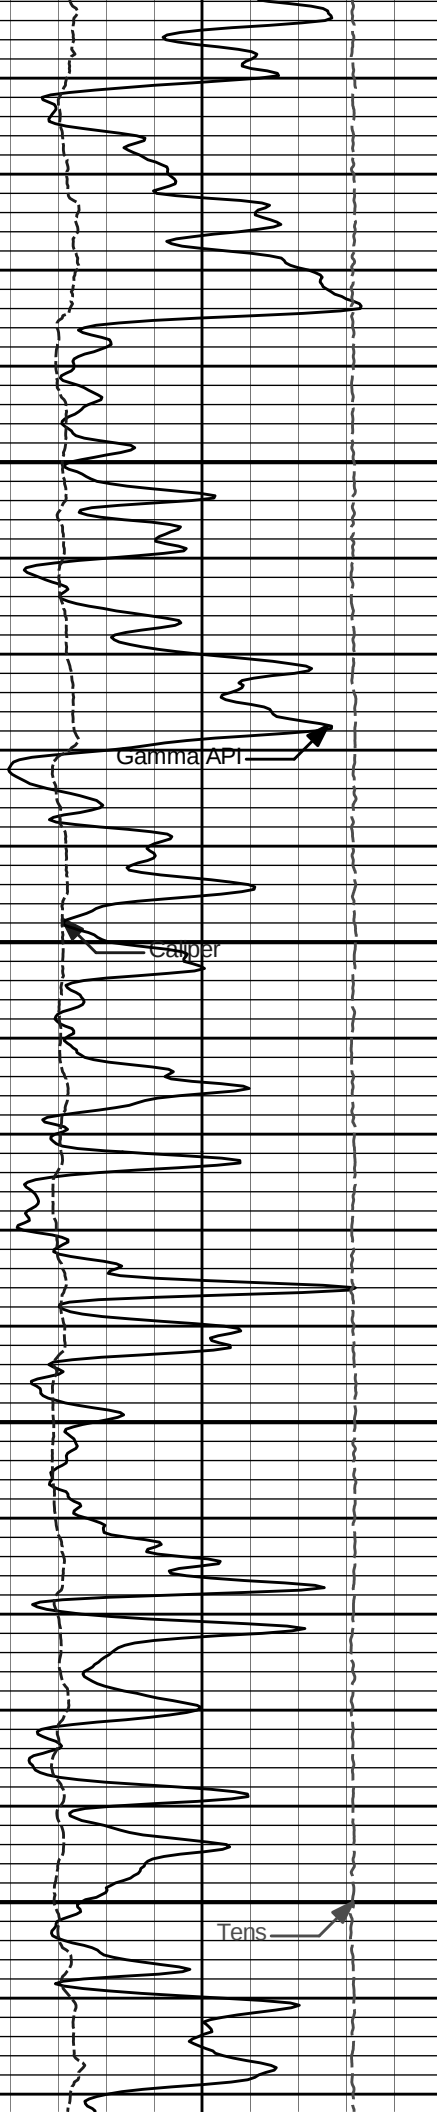

3500


3600

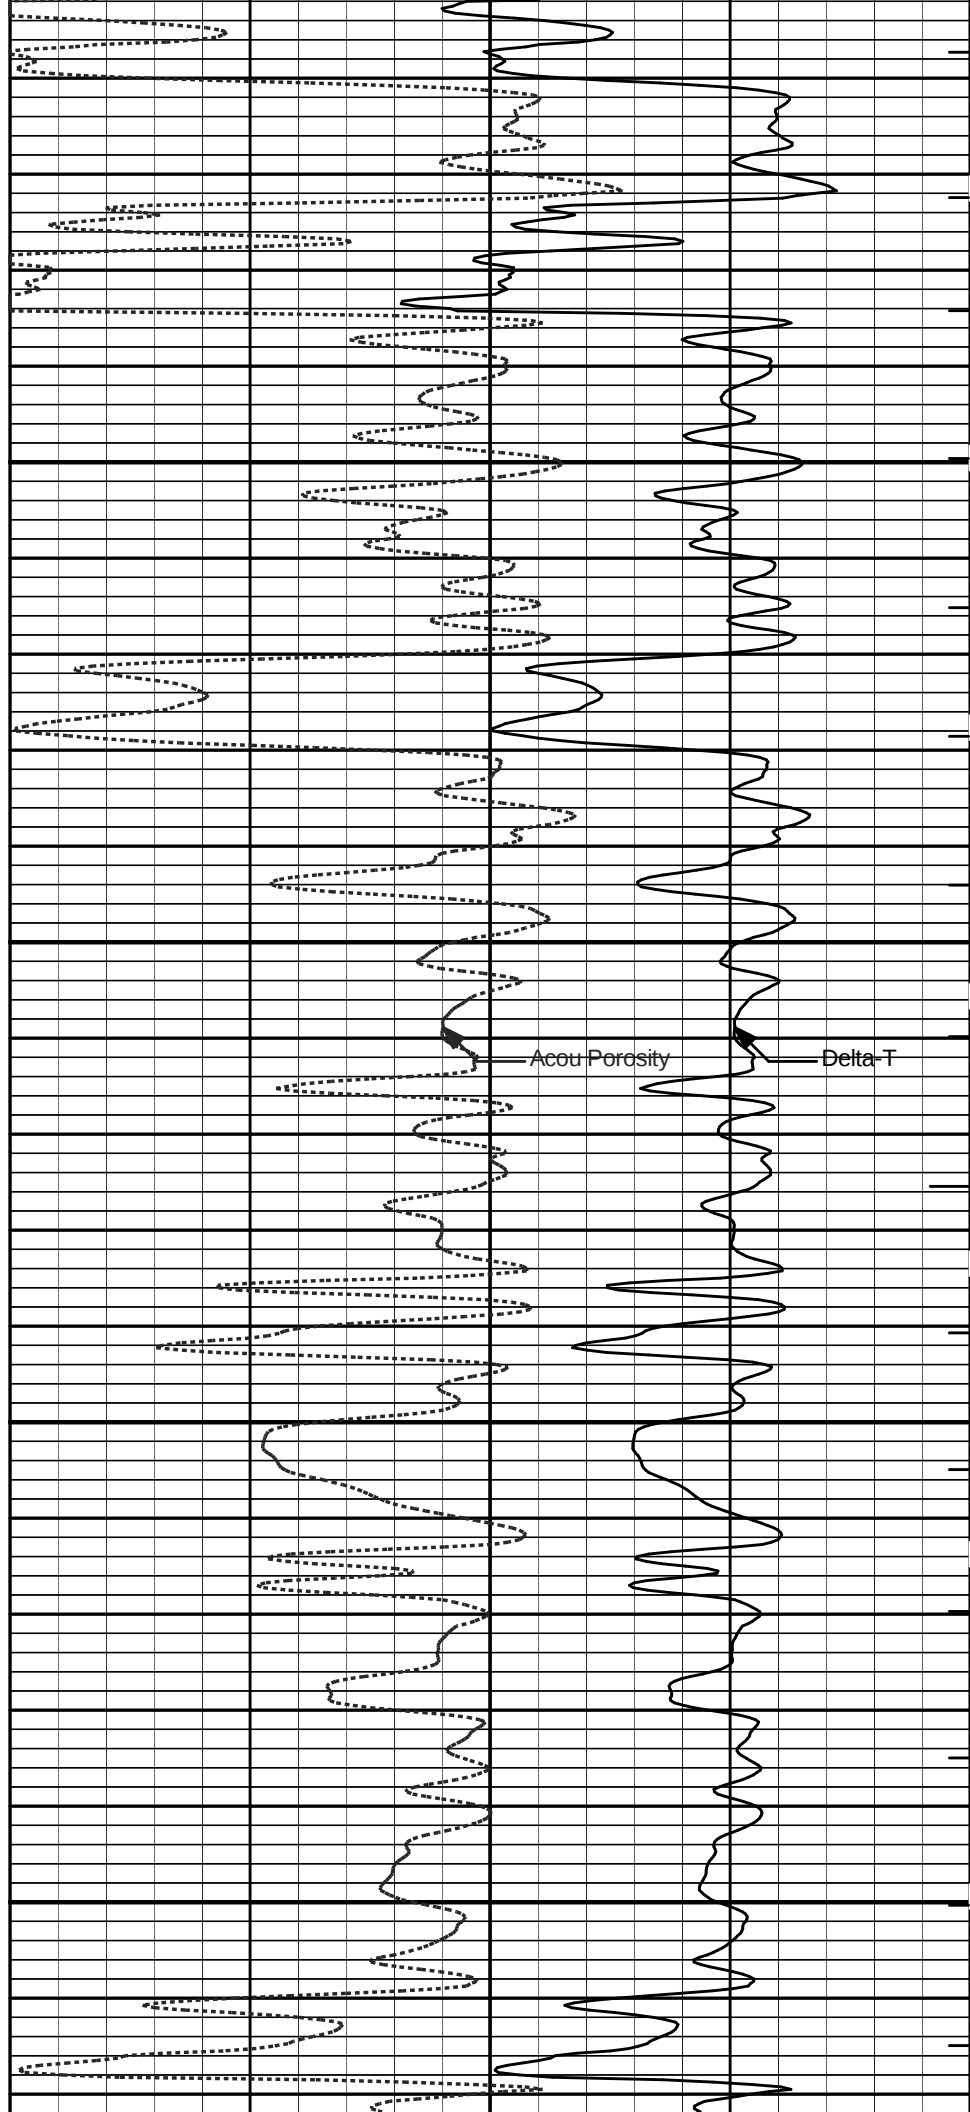


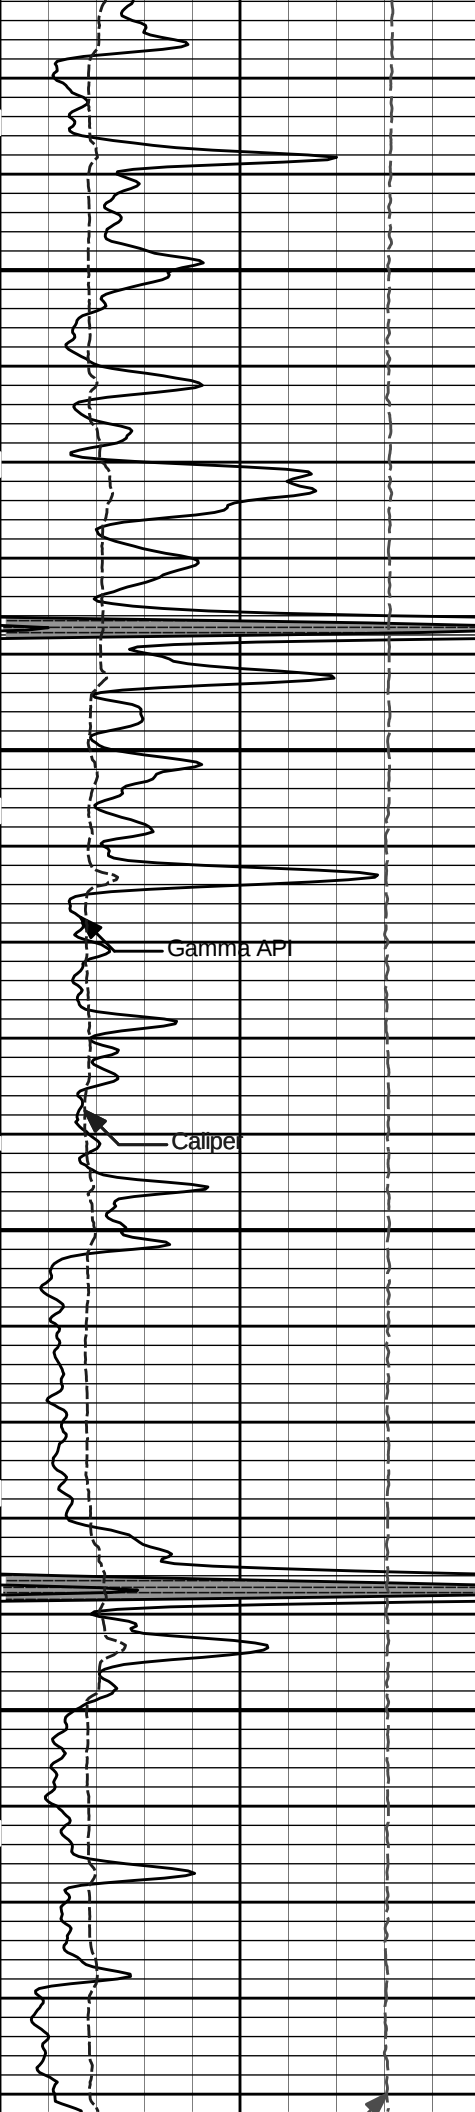

3700


3800

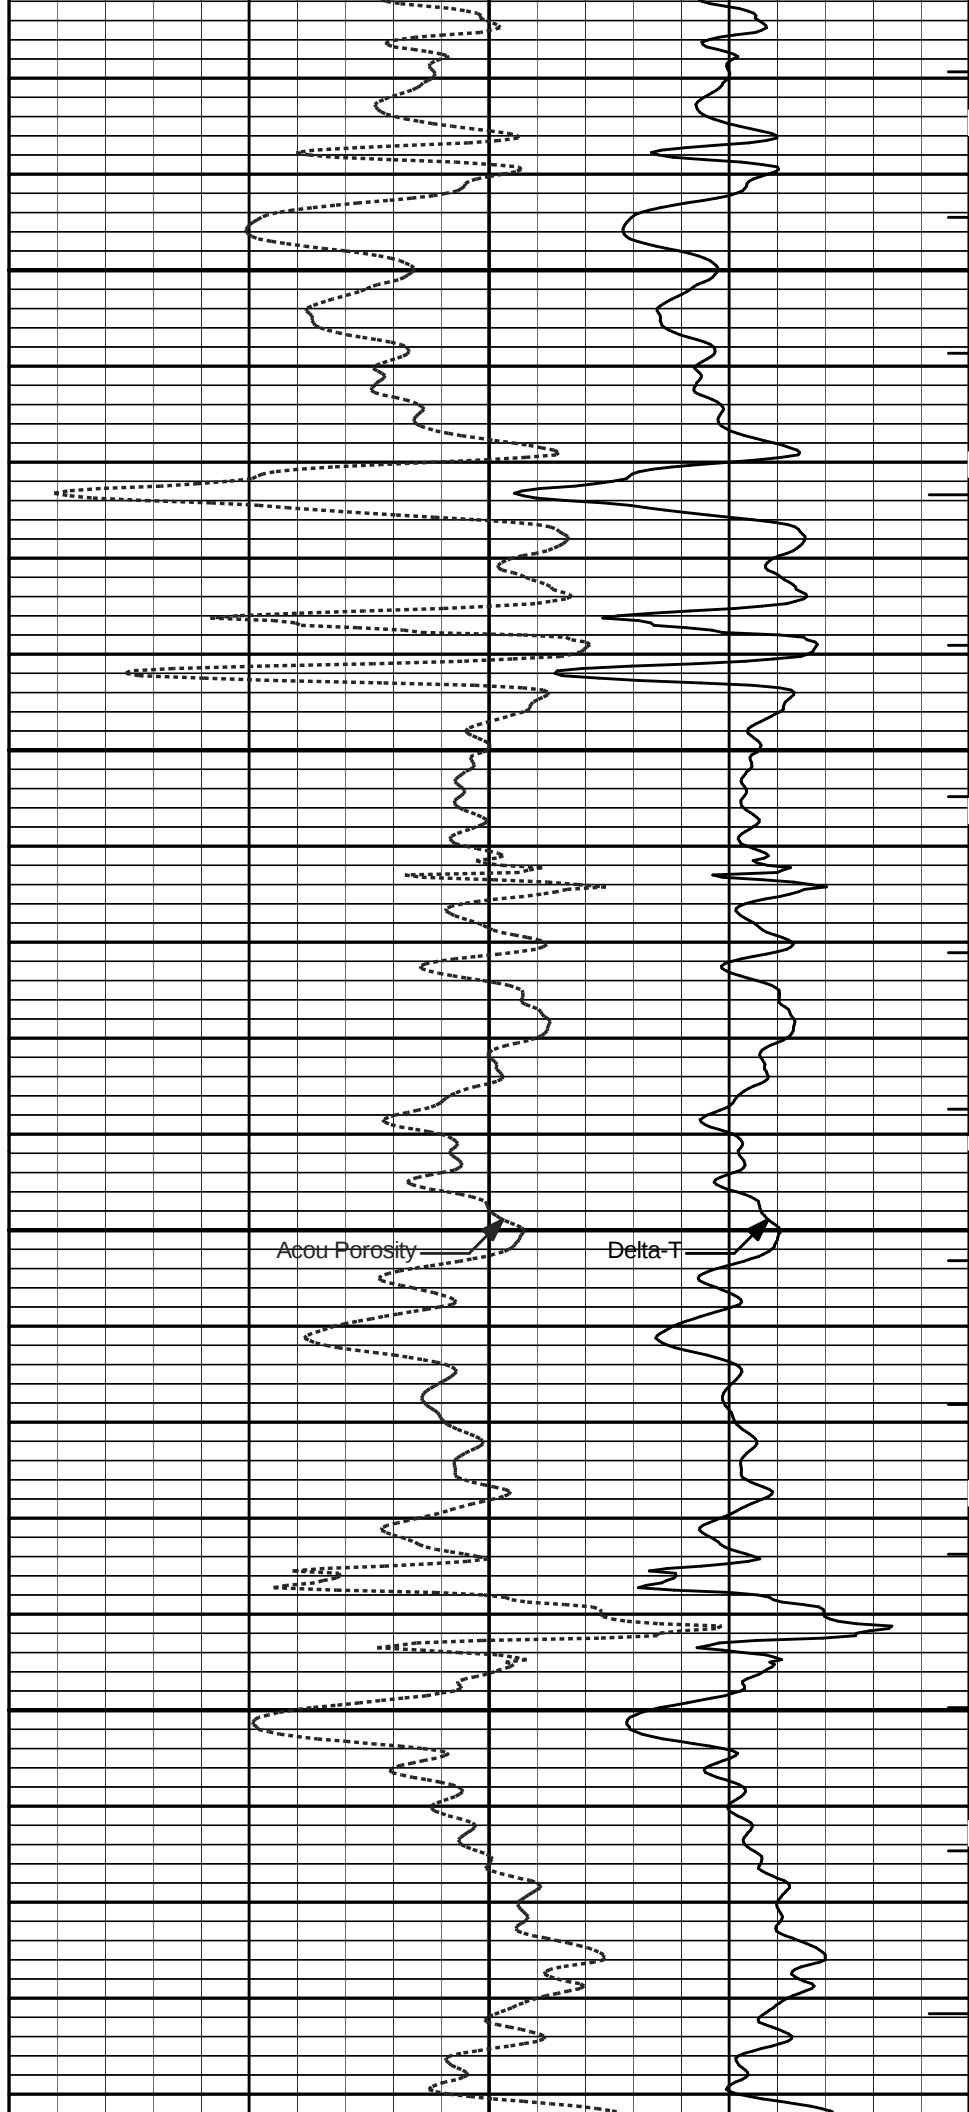

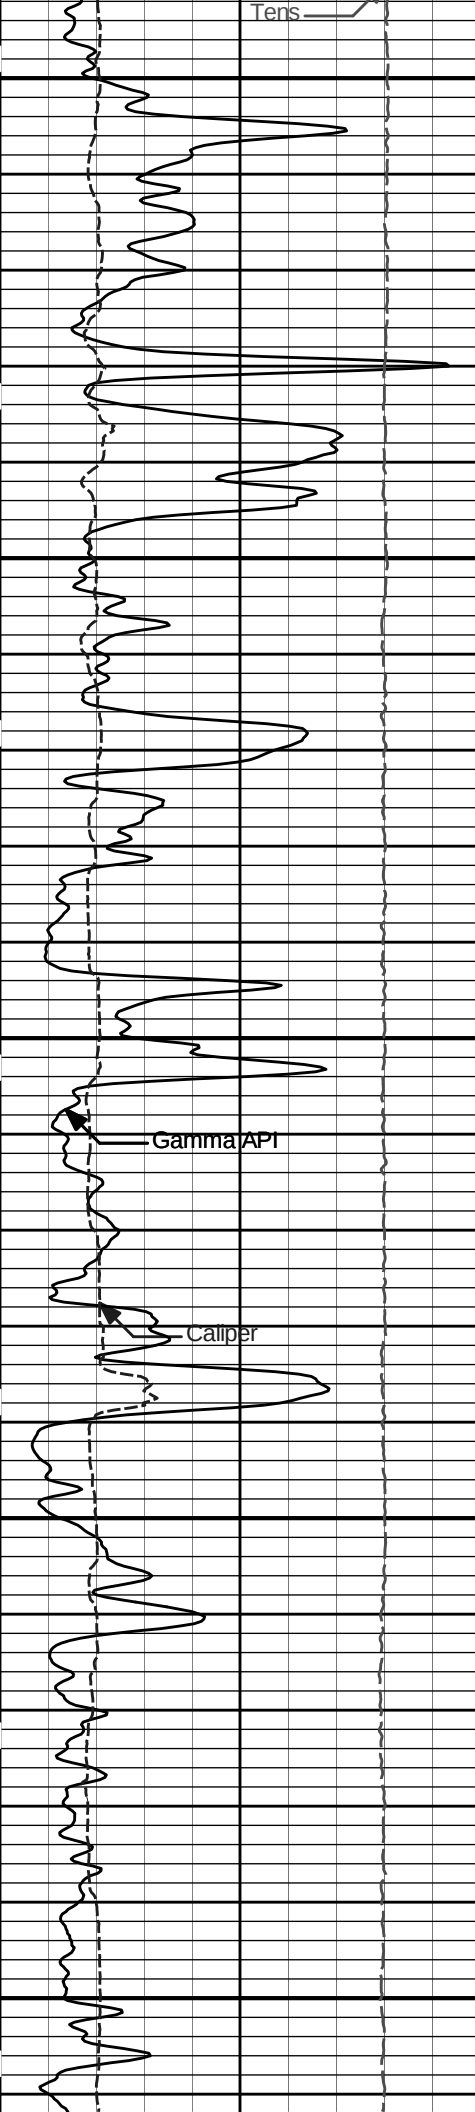

3900


4000

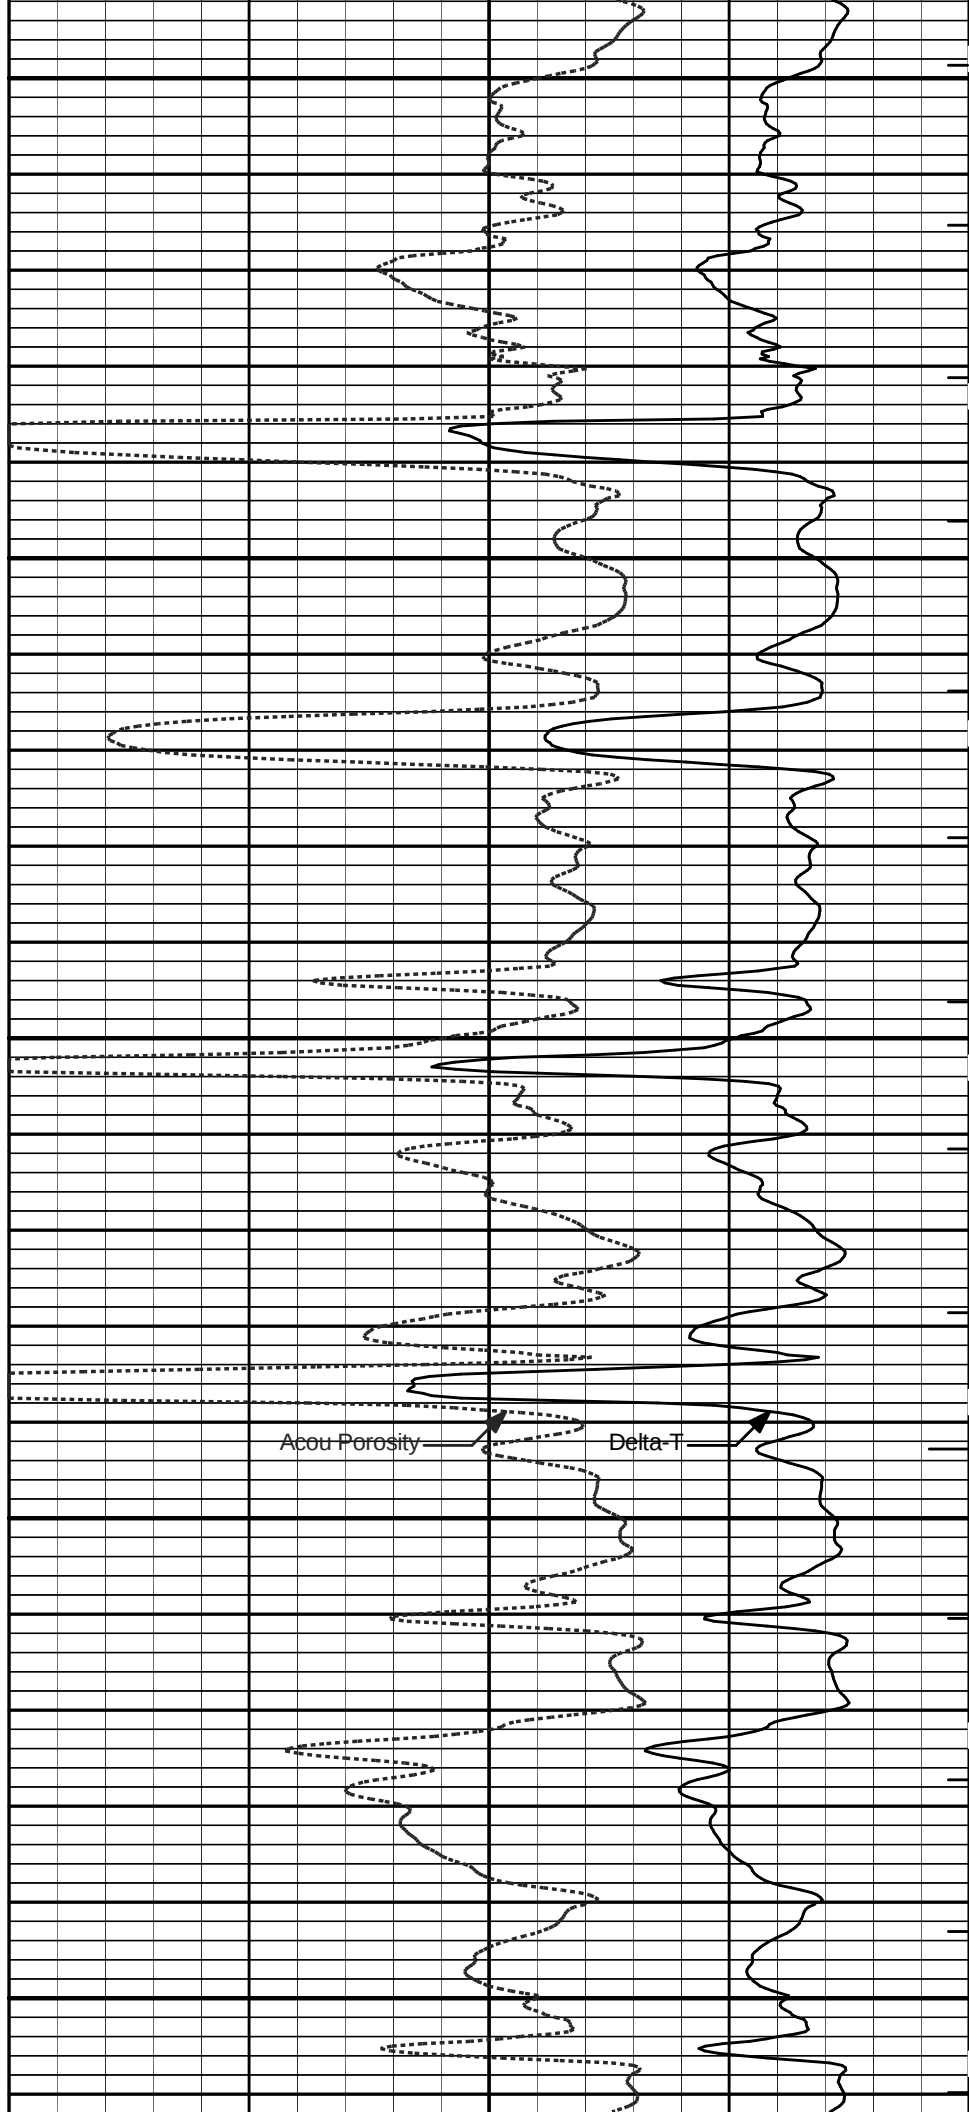




4100

4200

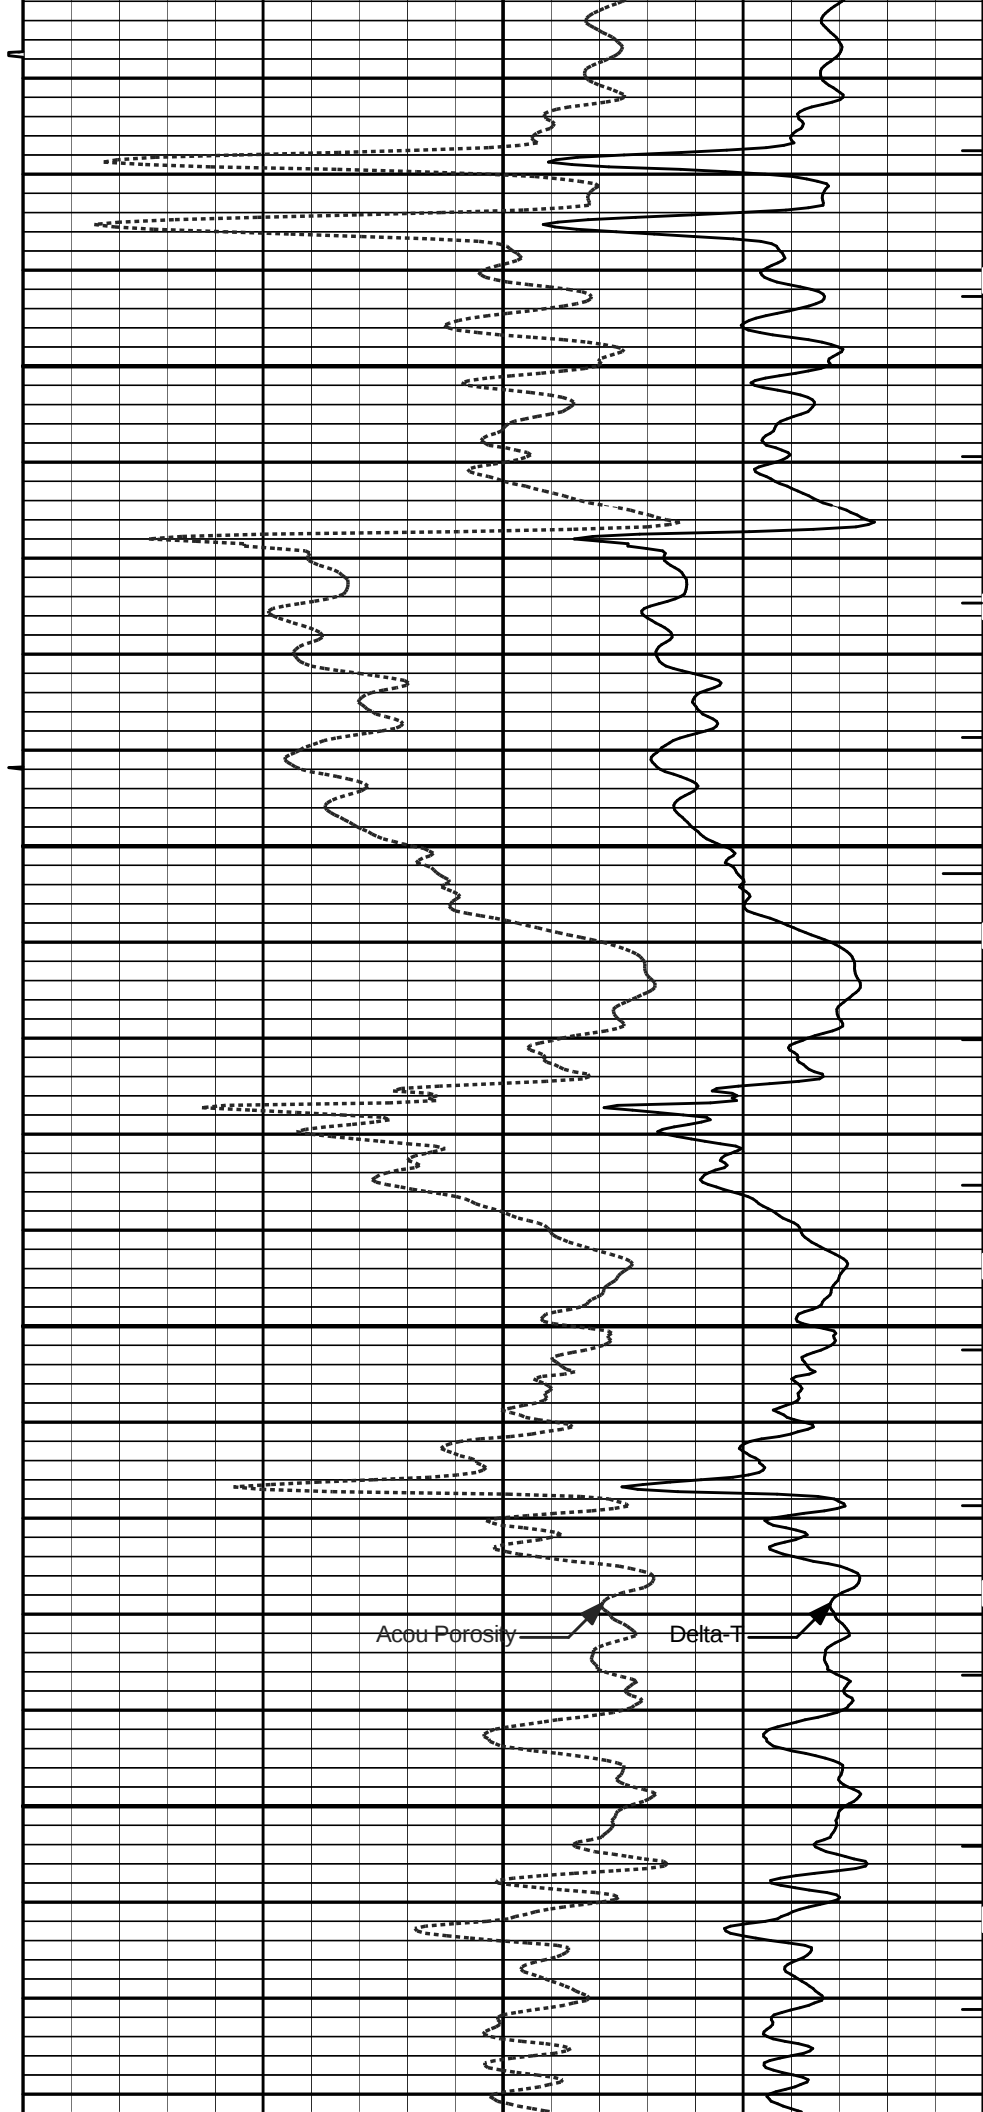


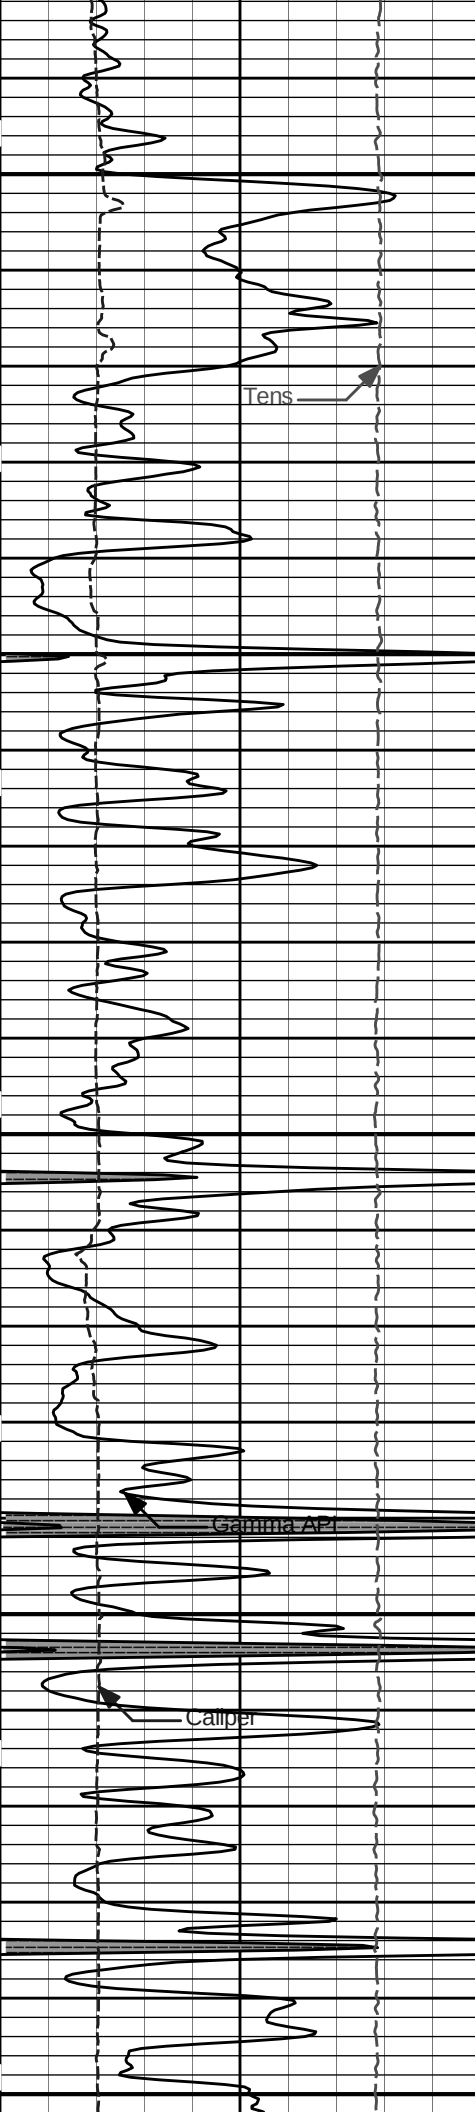


4300

4400


4500

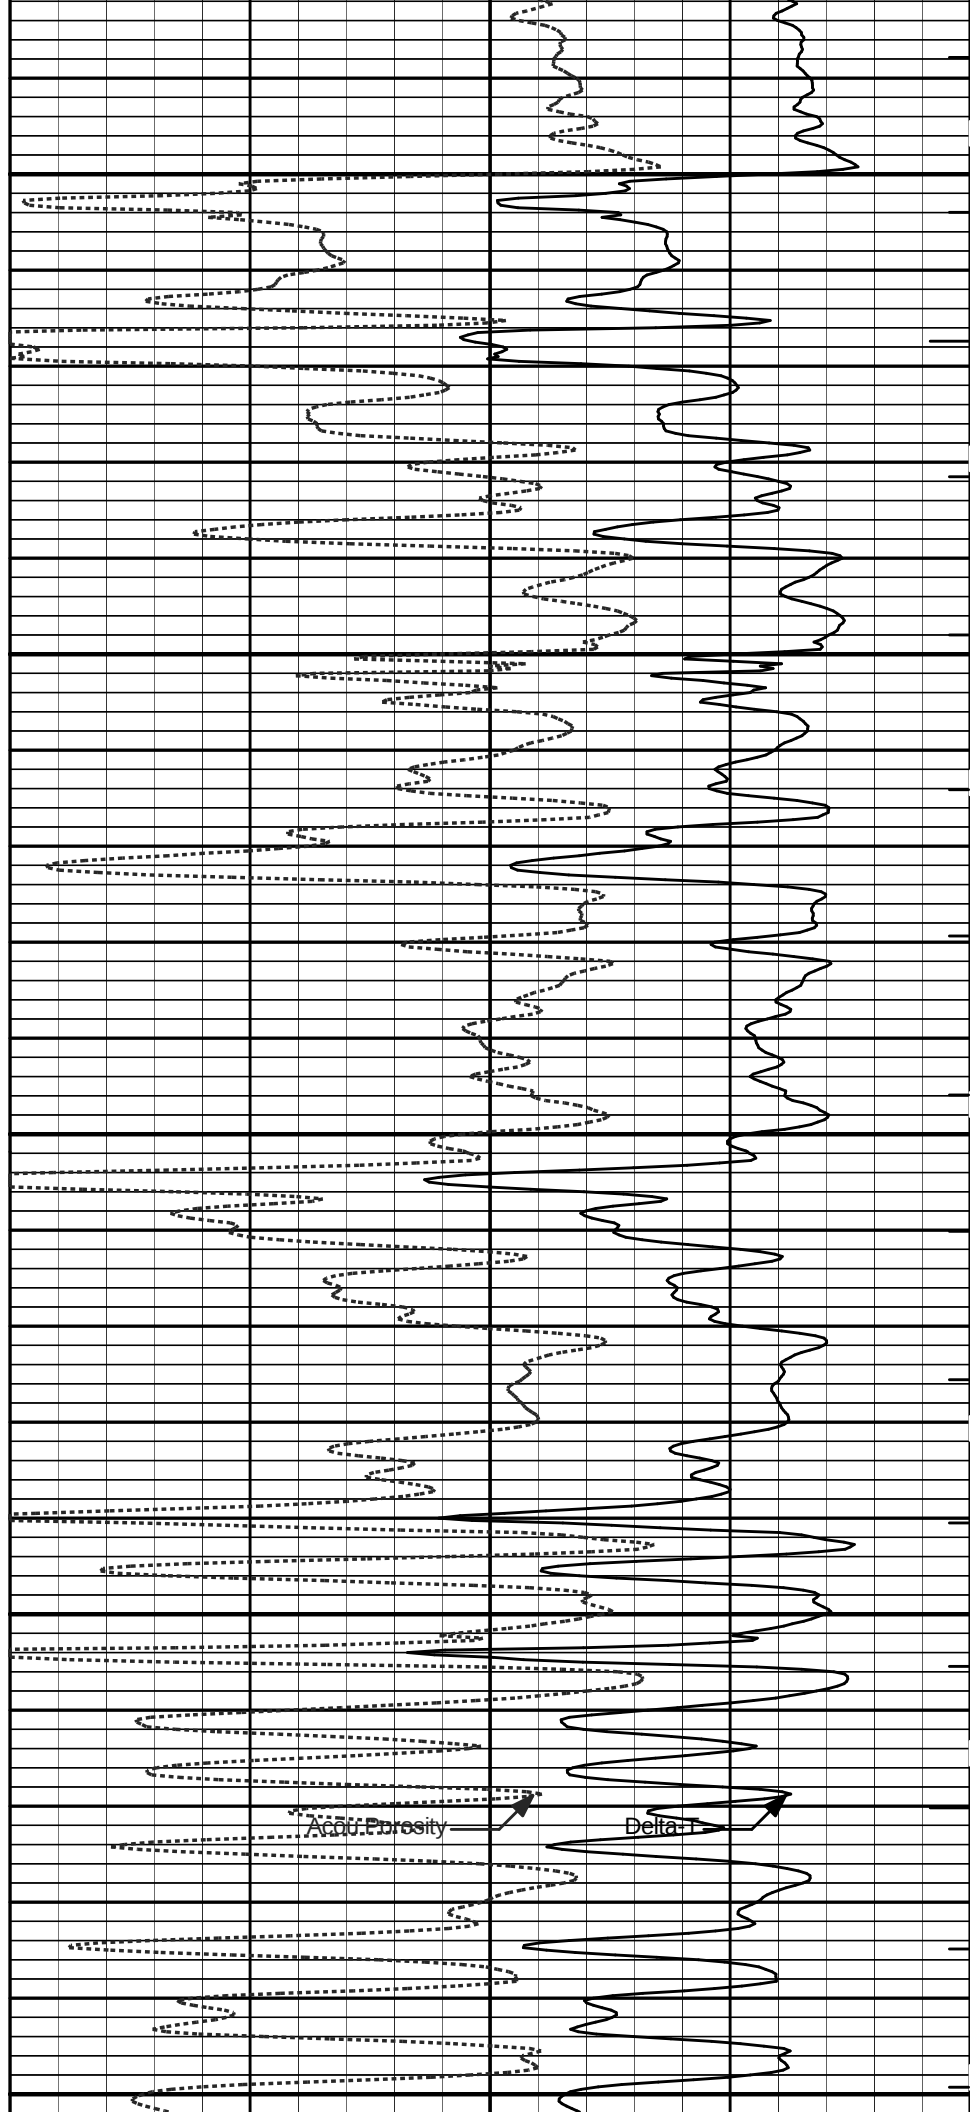

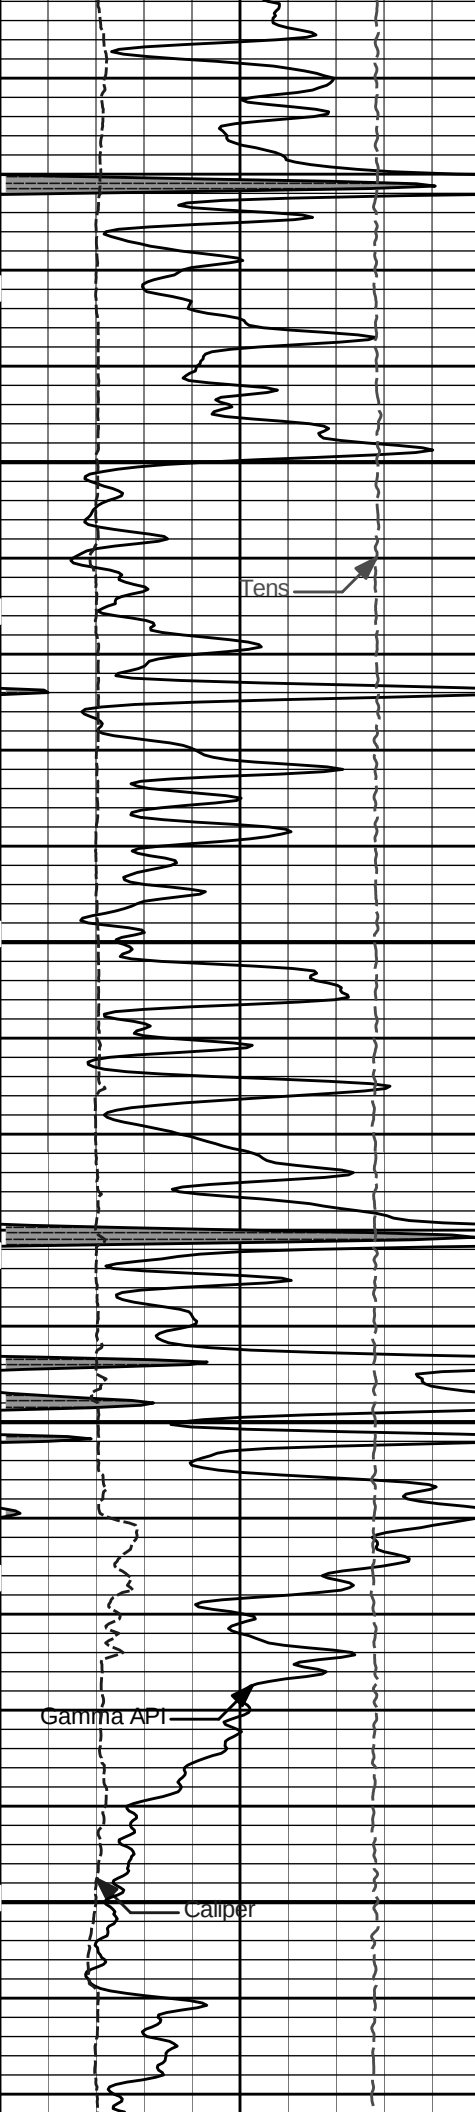


4600

4700

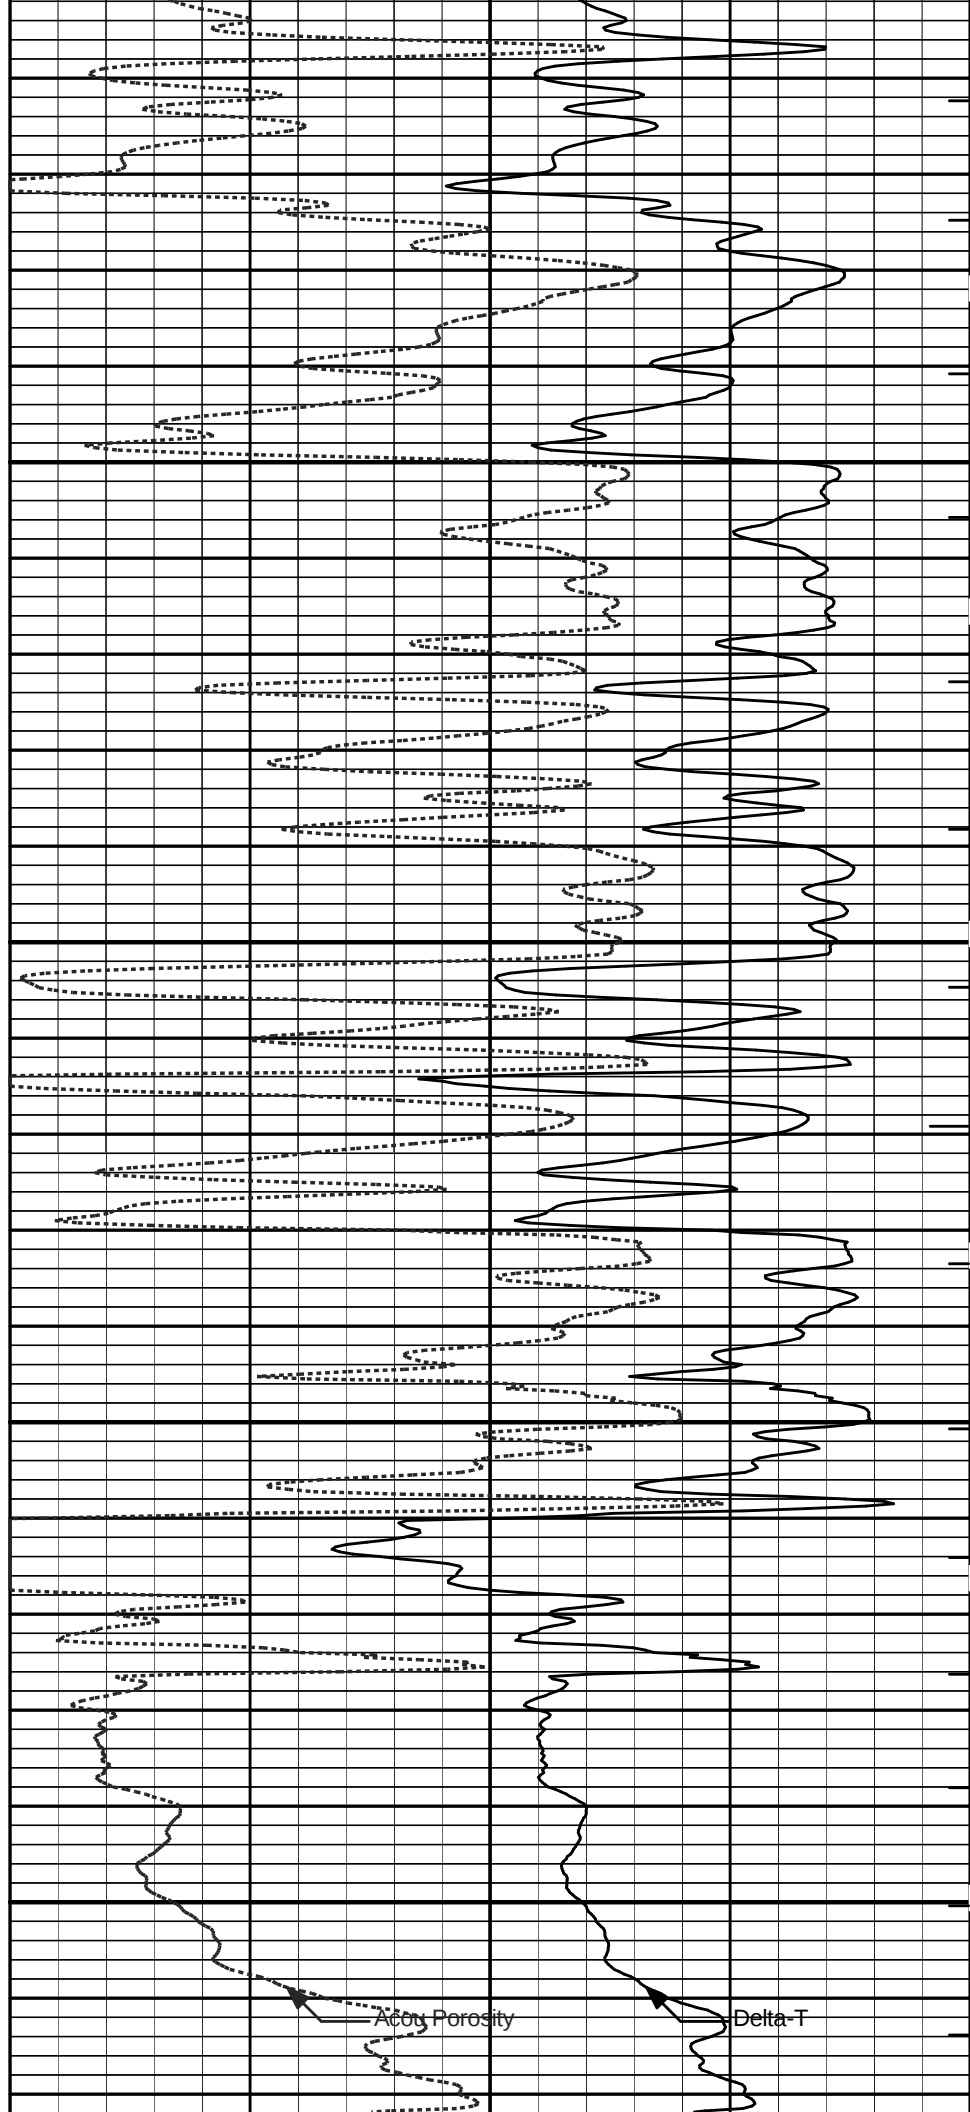


Acoustic Porosity


Delta-T

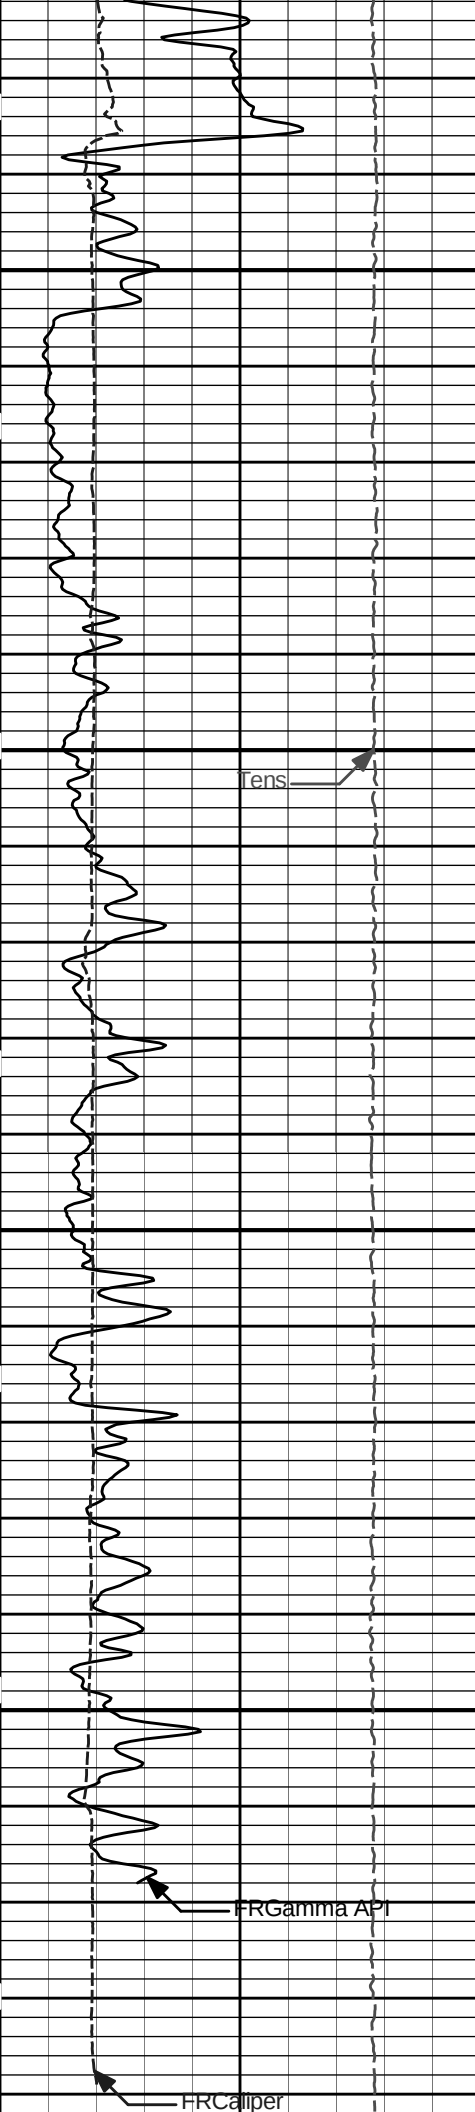

4800

4900

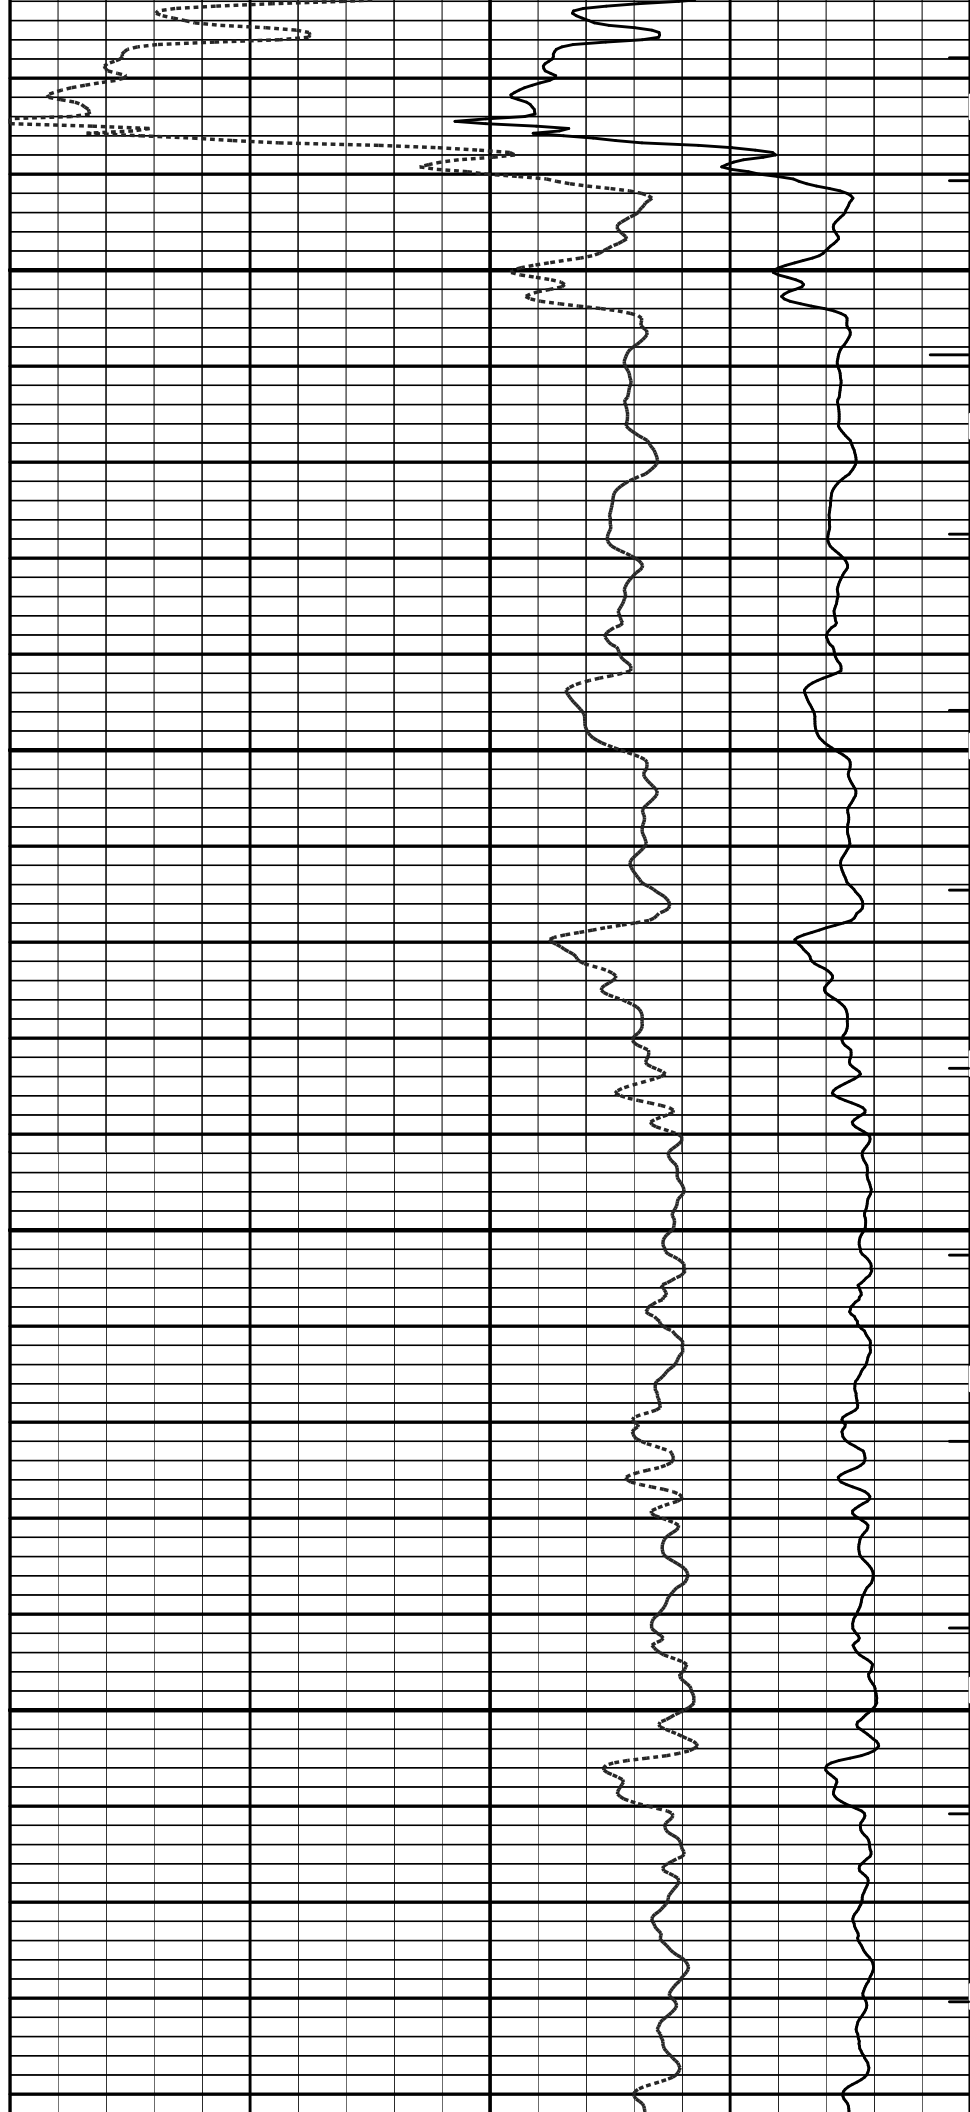

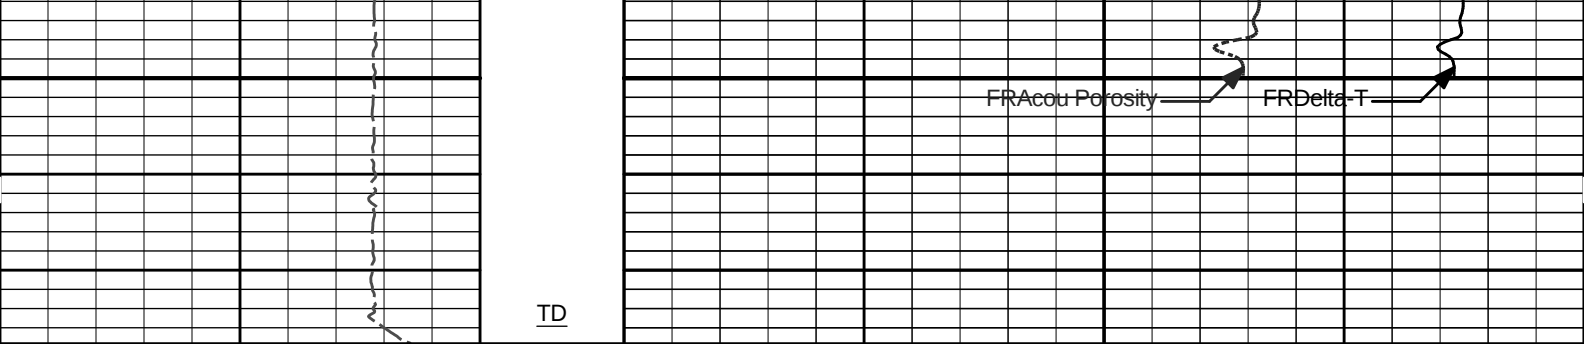

15K Tens 0		1 : 240 ft		ITTT —
pounds				
0	Gamma API 150	Tension Pull 10 0	140	Delta-T 40
api			microsec per ft	
6	Caliper 16	Tension Pull	30	Acou Porosity -10
inches			percent	
SHALE				

HALLIBURTON


Plot Time: 28-Apr-12 23:15:30
Plot Range: 1810 ft to 4977.67 ft
Data: SMU_319\Well Based\QUAD_CASING\
Plot File: \BSAT\BSAT_5_MAIN_LIB


5 INCH MAIN LOG

HALLIBURTON

Plot Time: 28-Apr-12 23:15:30
Plot Range: 4597.5 ft to 4977.92 ft
Data: SMU_319\Well Based\QUAD_REPEAT\
Plot File: \BSAT\BSAT_5_REP_LIB

REPEAT SECTION

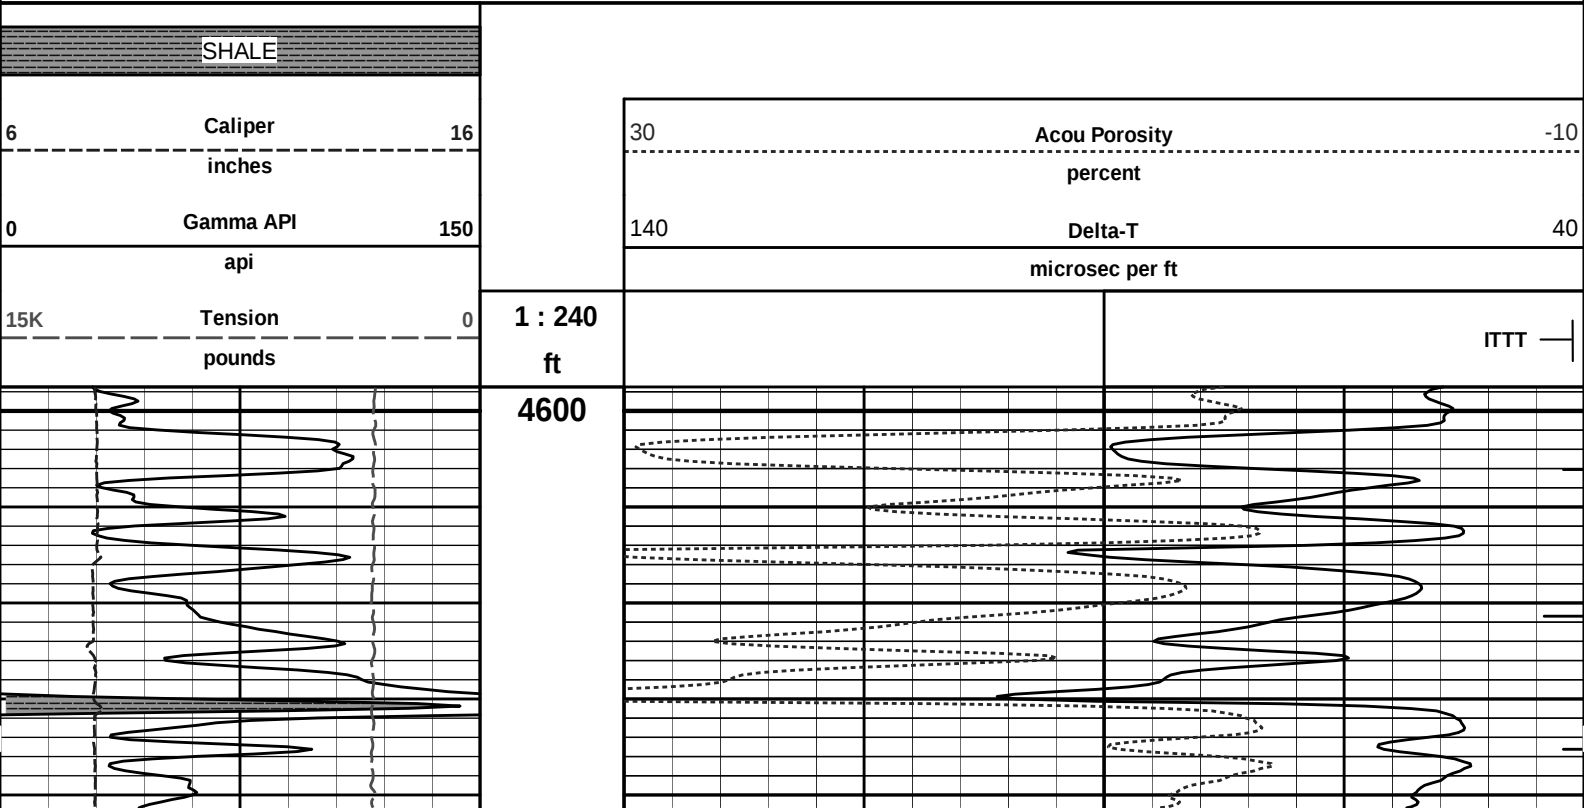

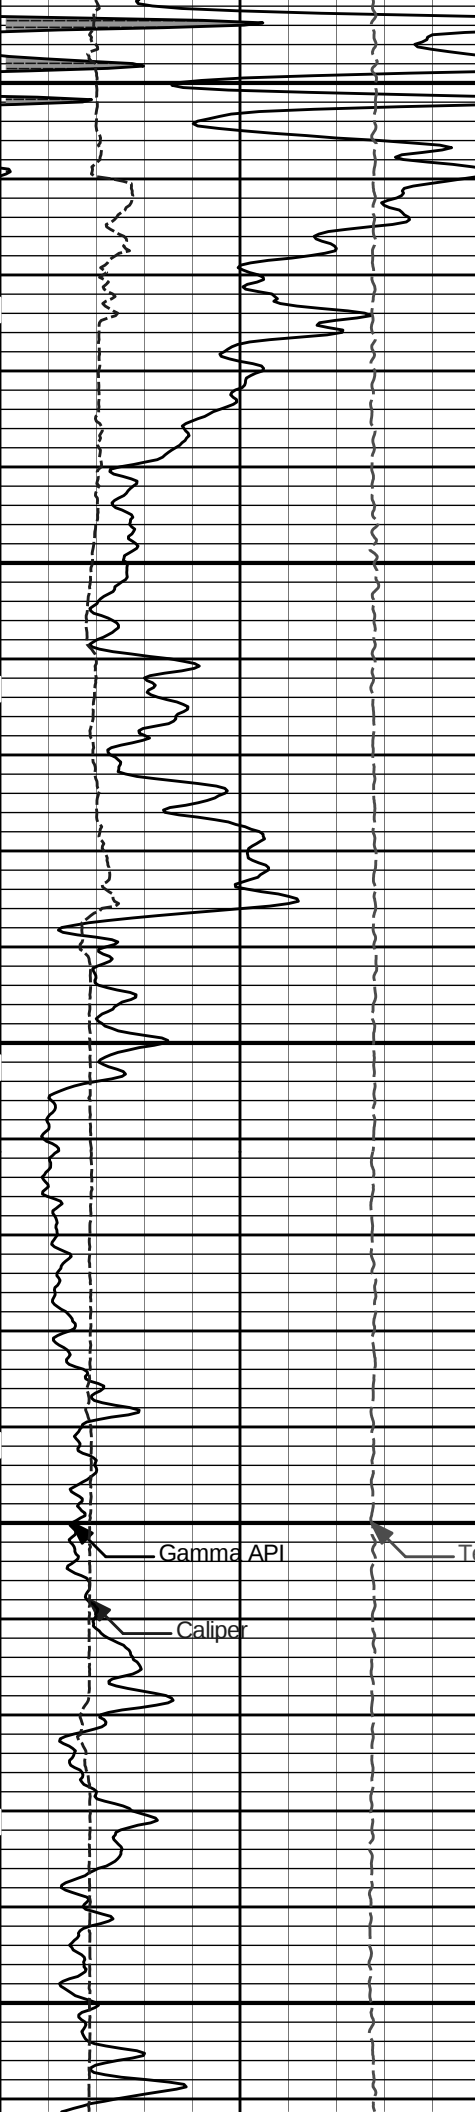


4700

4800

Gamma API


Caliper

Tension

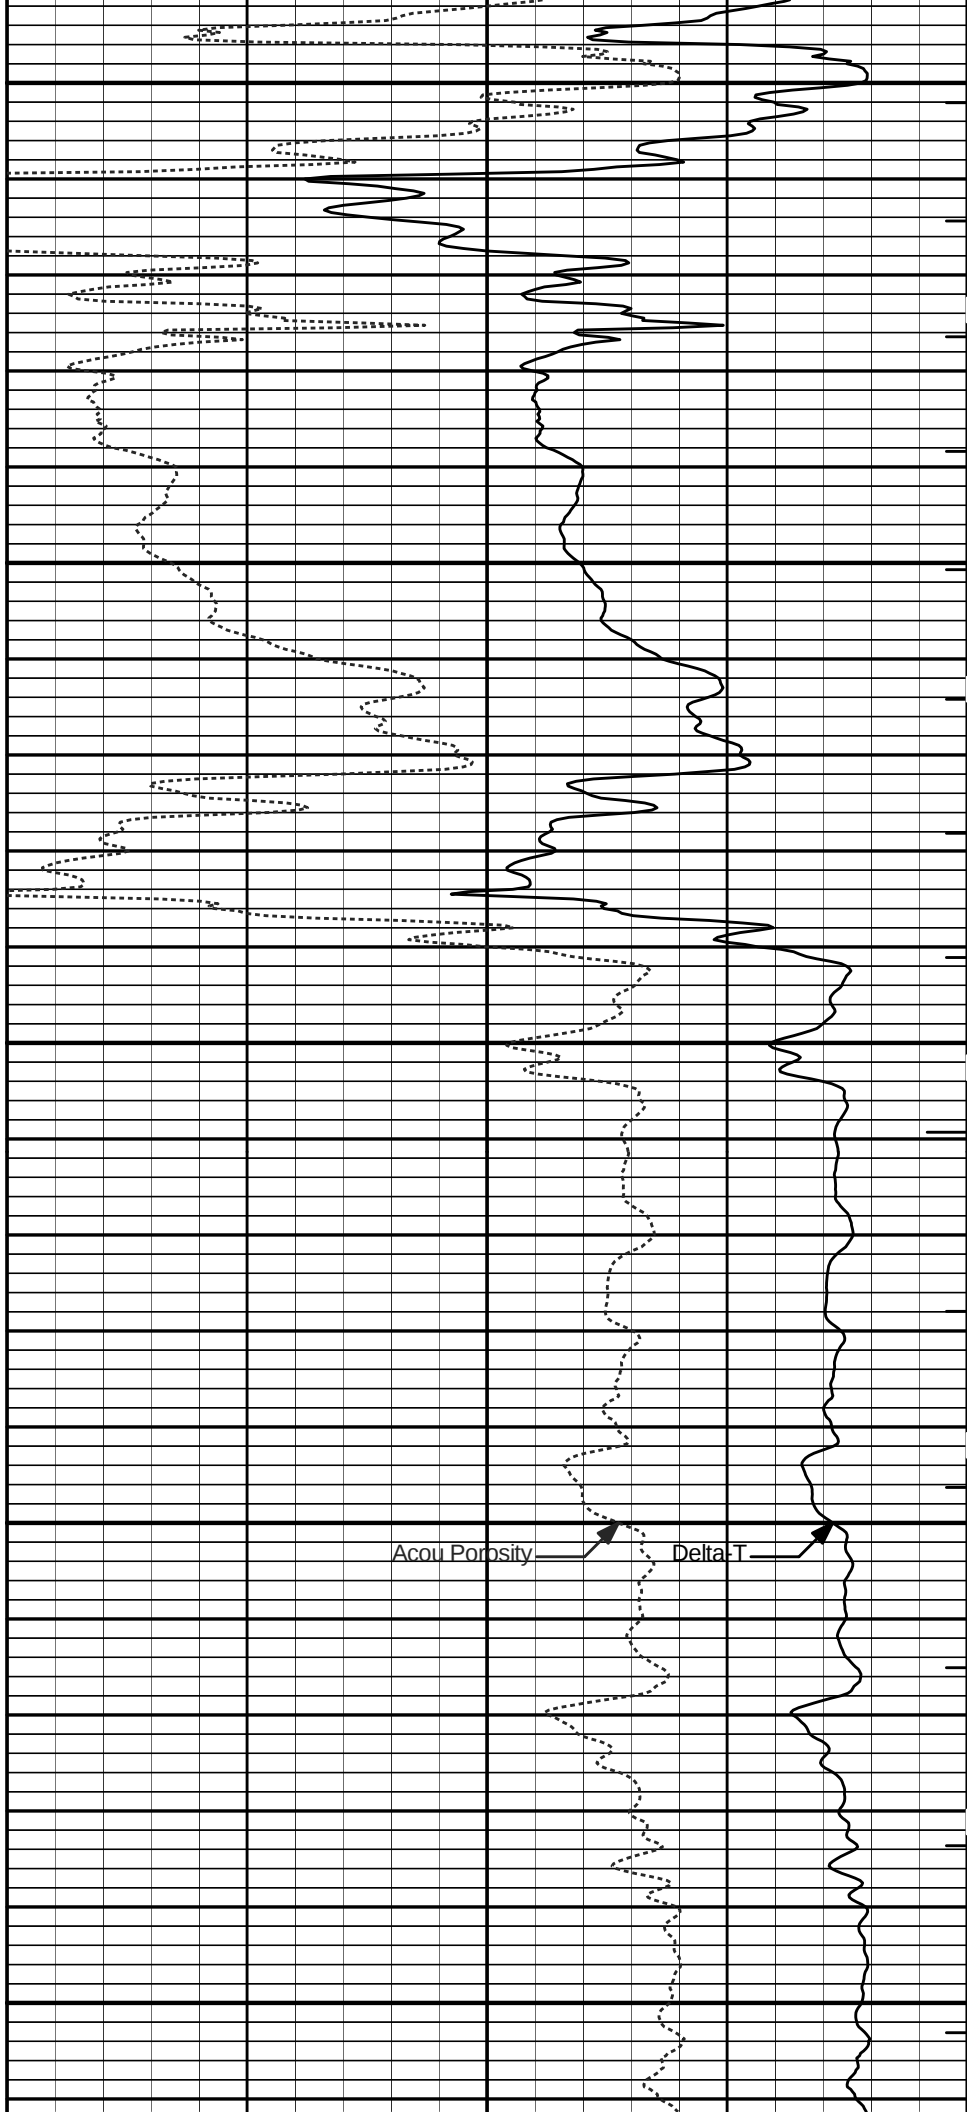

Acou Porosity

Delta-T

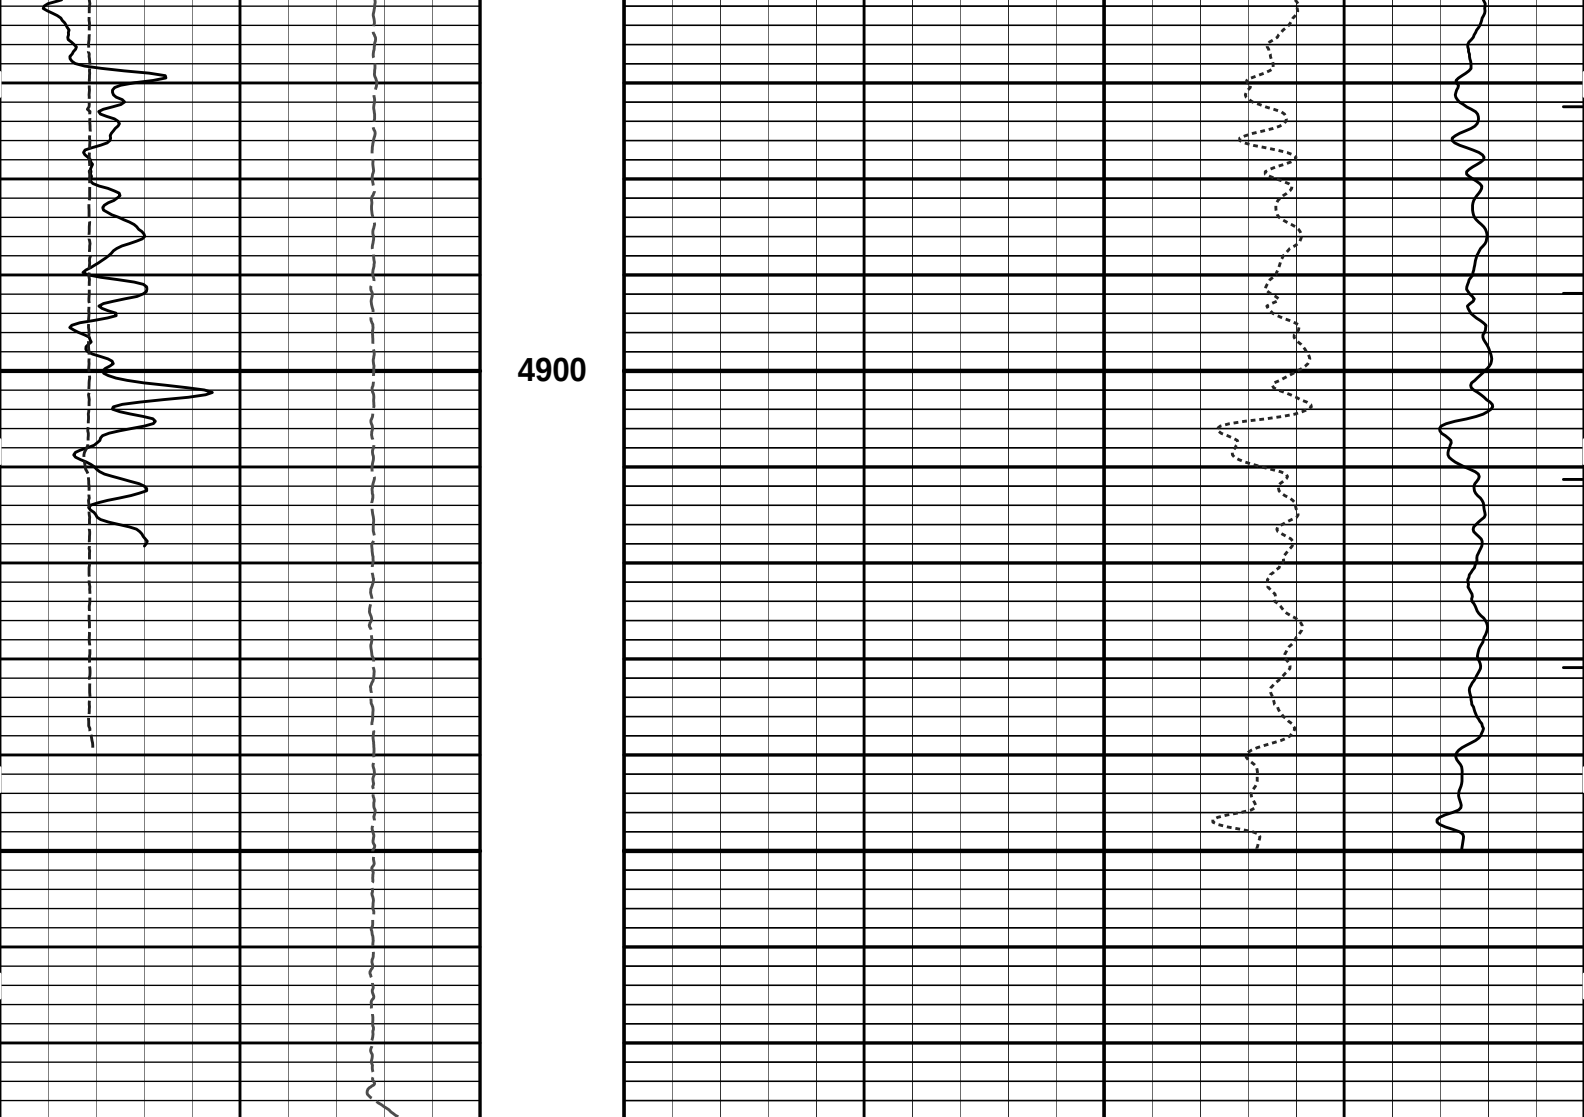

15K	Tension	0	1 : 240		ITTT
	pounds		ft		
0	Gamma API	150		140	Delta-T
	api				microsec per ft
6	Caliper	16		30	Acou Porosity
	inches				percent
SHALE					

HALLIBURTON


Plot Time: 28-Apr-12 23:15:33
Plot Range: 4597.5 ft to 4977.92 ft
Data: SMU_319\Well Based\QUAD_REPEAT\
Plot File: \\BSAT\BSAT_5_REP_LIB


REPEAT SECTION

HALLIBURTON

TOOL STRING DIAGRAM REPORT

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
Cable Head- PROT01		Ø 3.625 in			1.92 ft	70.28 ft

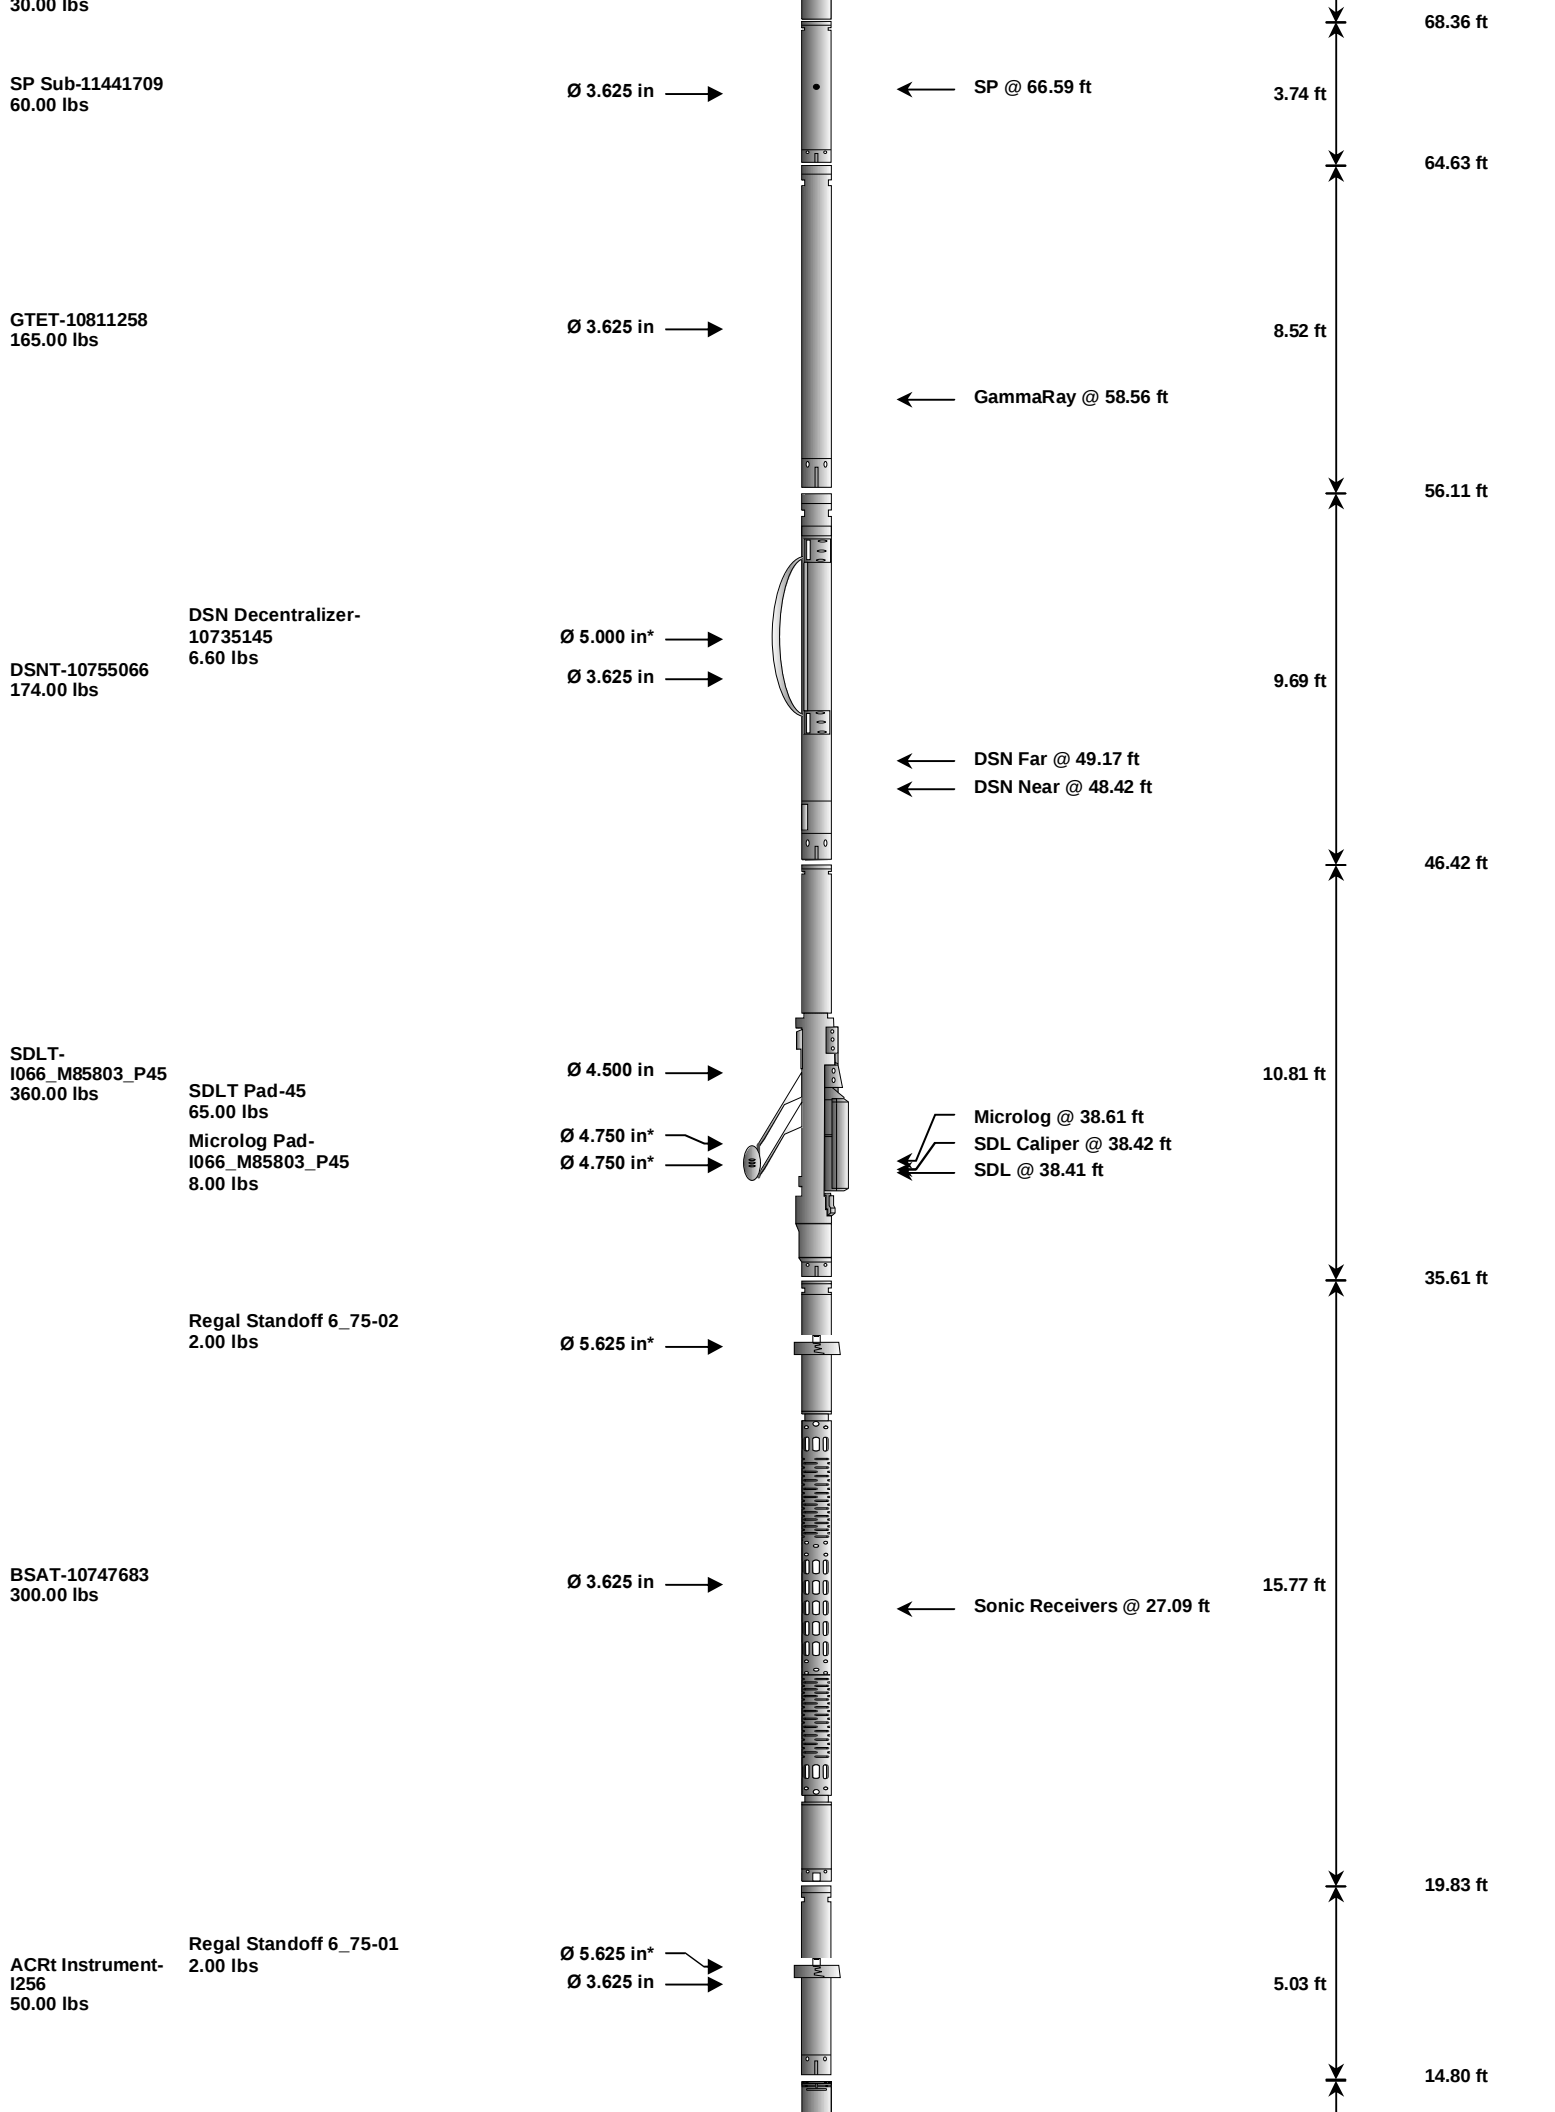

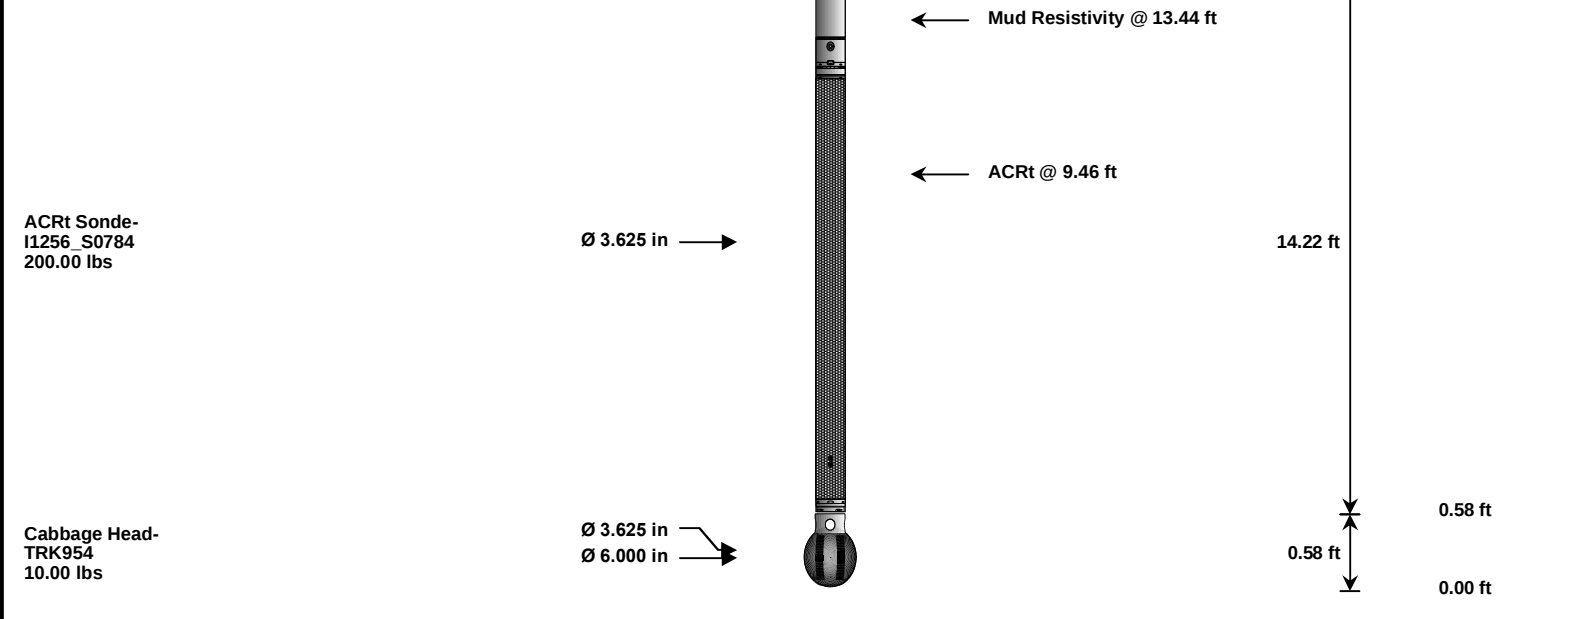

Mnemonic		Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max.Log. Speed (fpm)
CH	Standard OH Cable Head		PROT01	30.00	1.92	68.36	300.00
SP	SP Sub		11441709	60.00	3.74	64.63	300.00
GTET	Gamma Telemetry Tool		10811258	165.00	8.52	56.11	60.00
DSNT	Dual Spaced Neutron		10755066	174.00	9.69	46.42	60.00
DCNT	DSN Decentralizer		10735145	6.60	5.13	* 49.75	300.00
SDLT	Spectral Density Tool		I066_M85803_P45	360.00	10.81	35.61	60.00
MICP	Microlog Pad		I066_M85803_P45	8.00	1.00	* 38.11	60.00
SDLP	Density Insite Pad		45	65.00	2.55	* 37.82	60.00
BSAT	Borehole Sonic Array Tool		10747683	300.00	15.77	19.83	60.00
RSOF	Regal Standoff 6.75in		02	2.00	0.52	* 33.63	300.00
ACRt	Array Compensated True Resistivity Instrument Section		I256	50.00	5.03	14.80	300.00
RSOF	Regal Standoff 6.75in		01	2.00	0.52	* 17.40	300.00
ACRt	Array Compensated True Resistivity		I1256_S0784	200.00	14.22	0.58	300.00
CBHD	Cabbage Head		TRK954	10.00	0.58	0.00	300.00

Total				1,432.60	70.28	* Not included in Total Length and Length Accumulation.	
Data: SMU_319\0001 SP-GTET-DSN-SDL-BSAT-ACRT-CH\IDLE						Date: 28-Apr-12 19:37:04	

HALLIBURTON

PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	
	SHARED	MDWT	Borehole Fluid Weight	9.000	ppg
	SHARED	WAGT	Weighting Agent	Natural	
	SHARED	BSAL	Borehole salinity	1300.00	ppm
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
	SHARED	RMUD	Mud Resistivity	2.000	ohmm
	SHARED	TRM	Temperature of Mud	75.0	degF
	SHARED	CSD	Logging Interval is Cased?	No	
	SHARED	ICOD	AHV Casing OD	5.500	in
	SHARED	ST	Surface Temperature	75.0	degF

SHARED	ST	Surface Temperature	75.0	degF
SHARED	TD	Total Well Depth	4995.00	ft
SHARED	BHT	Bottom Hole Temperature	125.0	degF
SHARED	SVTM	Navigation and Survey Master Tool	NONE	
SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
SHARED	TEMM	Temperature Master Tool	NONE	
SHARED	BHSM	Borehole Size Master Tool	NONE	
Rwa / CrossPlot	XPOK	Process Crossplot?	No	
Rwa / CrossPlot	RMFR	Rmf Reference	0.10	ohmm
Rwa / CrossPlot	TMFR	Rmf Ref Temp	75.00	degF
Rwa / CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm
Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No	
GTET	GROK	Process Gamma Ray?	Yes	
GTET	GRSO	Gamma Tool Standoff	0.000	in
GTET	GEOK	Process Gamma Ray EVR?	No	
GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
DSNT	DNOK	Process DSN?	Yes	
DSNT	DEOK	Process DSN EVR?	No	
DSNT	NLIT	Neutron Lithology	Limestone	
DSNT	DSNO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
DSNT	DNTP	Temperature Correction Type	None	
DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
SDLT	CLOK	Process Caliper Outputs?	Yes	
SDLT Pad	DNOK	Process Density?	Yes	
SDLT Pad	DNOK	Process Density EVR?	No	
SDLT Pad	CB	Logging Calibration Blocks?	No	
SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT Pad	DTWN	Disable temperature warning	No	
SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc
SDLT Pad	DFL	Formation Density Fluid	1.000	g/cc
Microlog Pad	MLOK	Process MicroLog Outputs?	Yes	
BSAT	MBOK	Compute BCAS Results?	Yes	
BSAT	FLLO	Frequency Filter Low Pass Value?	5000	Hz
BSAT	FLHI	Frequency Filter High Pass Value?	27000	Hz
BSAT	DTFL	Delta -T Fluid	189.00	uspf
BSAT	DTMT	Delta -T Matrix Type	User define	
BSAT	DTMA	Delta -T Matrix	47.60	uspf
BSAT	DTSH	Delta -T Shale	100.00	uspf
BSAT	SPEQ	Acoustic Porosity Equation	Wylie	
ACRt Sonde	RTOK	Process ACRt?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	1.50	in
ACRt Sonde	TCS1	Temperature Correction Source	FP Lwr & FP Upr	
ACRt Sonde	TPOS	Tool Position	Free Hanging	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMIN	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	

BOTTOM

INPUTS, DELAYS AND FILTERS TABLE

Mnemonic	Input Description	Delay (ft)	Filter Type	Filter Length (ft)
Depth Panel				
TENS	Tension	0.00	NO	
SP Sub				
PLTC	Plot Control Mask	66.58	NO	
SP	Spontaneous Potential	66.58	BLK	1.250
SPR	Raw Spontaneous Potential	66.58	NO	
SPO	Spontaneous Potential Offset	66.58	NO	
GTET				
TPUL	Tension Pull	58.56	NO	
GR	Natural Gamma Ray API	58.56	TRI	1.750
GRU	Unfiltered Natural Gamma Ray API	58.56	NO	
EGR	Natural Gamma Ray API with Enhanced Vertical Resolution	58.56	W	1.416 , 0.750
ACCZ	Accelerometer Z	0.00	BLK	0.083
DEVI	Inclination	0.00	NO	
DSNT				
TPUL	Tension Pull	48.32	NO	
RNDS	Near Detector Telemetry Counts	48.42	BLK	1.417
RFDS	Far Detector Telemetry Counts	49.17	TRI	0.583
DNTT	DSN Tool Temperature	48.42	NO	
DSNS	DSN Tool Status	48.32	NO	
ERND	Near Detector Telemetry Counts EVR	48.42	BLK	0.000
ERFD	Far Detector Telemetry Counts EVR	49.17	BLK	0.000
ENTM	DSN Tool Temperature EVR	48.42	NO	
SDLT				
TPUL	Tension Pull	38.42	NO	
PCAL	Pad Caliper	38.42	TRI	0.250
ACAL	Arm Caliper	38.42	TRI	0.250
BSAT				
TPUL	Tension Pull	27.09	NO	
STAT	Status	27.09	NO	
DLYT	Delay Time	27.09	NO	
SI	Sample Interval	27.09	NO	
TXRX	Raw Telemetry 10 Receivers	27.09	NO	
FRMC	Tool Frame Count	27.09	NO	
ACRt Sonde				
TPUL	Tension Pull	2.97	NO	
F1R1	ACRT 12KHz - 80in R value	9.22	BLK	0.000
F1X1	ACRT 12KHz - 80in X value	9.22	BLK	0.000
F1R2	ACRT 12KHz - 50in R value	6.72	BLK	0.000
F1X2	ACRT 12KHz - 50in X value	6.72	BLK	0.000
F1R3	ACRT 12KHz - 29in R value	5.22	BLK	0.000
F1X3	ACRT 12KHz - 29in X value	5.22	BLK	0.000
F1R4	ACRT 12KHz - 17in R value	4.22	BLK	0.000
F1X4	ACRT 12KHz - 17in X value	4.22	BLK	0.000

F1R5	ACRT 12KHz - 10in R value	3.72	BLK	0.000
F1X5	ACRT 12KHz - 10in X value	3.72	BLK	0.000
F1R6	ACRT 12KHz - 6in R value	3.47	BLK	0.000
F1X6	ACRT 12KHz - 6in X value	3.47	BLK	0.000
F2R1	ACRT 36KHz - 80in R value	9.22	BLK	0.000
F2X1	ACRT 36KHz - 80in X value	9.22	BLK	0.000
F2R2	ACRT 36KHz - 50in R value	6.72	BLK	0.000
F2X2	ACRT 36KHz - 50in X value	6.72	BLK	0.000
F2R3	ACRT 36KHz - 29in R value	5.22	BLK	0.000
F2X3	ACRT 36KHz - 29in X value	5.22	BLK	0.000
F2R4	ACRT 36KHz - 17in R value	4.22	BLK	0.000
F2X4	ACRT 36KHz - 17in X value	4.22	BLK	0.000
F2R5	ACRT 36KHz - 10in R value	3.72	BLK	0.000
F2X5	ACRT 36KHz - 10in X value	3.72	BLK	0.000
F2R6	ACRT 36KHz - 6in R value	3.47	BLK	0.000
F2X6	ACRT 36KHz - 6in X value	3.47	BLK	0.000
F3R1	ACRT 72KHz - 80in R value	9.22	BLK	0.000
F3X1	ACRT 72KHz - 80in X value	9.22	BLK	0.000
F3R2	ACRT 72KHz - 50in R value	6.72	BLK	0.000
F3X2	ACRT 72KHz - 50in X value	6.72	BLK	0.000
F3R3	ACRT 72KHz - 29in R value	5.22	BLK	0.000
F3X3	ACRT 72KHz - 29in X value	5.22	BLK	0.000
F3R4	ACRT 72KHz - 17in R value	4.22	BLK	0.000
F3X4	ACRT 72KHz - 17in X value	4.22	BLK	0.000
F3R5	ACRT 72KHz - 10in R value	3.72	BLK	0.000
F3X5	ACRT 72KHz - 10in X value	3.72	BLK	0.000
F3R6	ACRT 72KHz - 6in R value	3.47	BLK	0.000
F3X6	ACRT 72KHz - 6in X value	3.47	BLK	0.000
RMUD	Mud Resistivity	12.76	BLK	0.000
F1RT	Transmitter Reference 12 KHz Real Signal	2.97	BLK	0.000
F1XT	Transmitter Reference 12 KHz Imaginary Signal	2.97	BLK	0.000
F2RT	Transmitter Reference 36 KHz Real Signal	2.97	BLK	0.000
F2XT	Transmitter Reference 36 KHz Imaginary Signal	2.97	BLK	0.000
F3RT	Transmitter Reference 72 KHz Real Signal	2.97	BLK	0.000
F3XT	Transmitter Reference 72 KHz Imaginary Signal	2.97	BLK	0.000
TFPU	Upper Feedpipe Temperature Calculated	2.97	BLK	0.000
TFPL	Lower Feedpipe Temperature Calculated	2.97	BLK	0.000
ITMP	Instrument Temperature	2.97	BLK	0.000
TCVA	Temperature Correction Values Loop Off	2.97	NO	
TIDV	Instrument Temperature Derivative	2.97	NO	
TUDV	Upper Temperature Derivative	2.97	NO	
TLDV	Lower Temperature Derivative	2.97	NO	
TRBD	Receiver Board Temperature	2.97	NO	
SDLT Pad				
TPUL	Tension Pull	38.41	NO	
NAB	Near Above	38.24	BLK	0.920
NHI	Near Cesium High	38.24	BLK	0.920
NLO	Near Cesium Low	38.24	BLK	0.920
NVA	Near Valley	38.24	BLK	0.920
NBA	Near Barite	38.24	BLK	0.920
NDE	Near Density	38.24	BLK	0.920
NPK	Near Peak	38.24	BLK	0.920
NLI	Near Lithology	38.24	BLK	0.920
NBAU	Near Barite Unfiltered	38.24	BLK	0.250
NLIU	Near Lithology Unfiltered	38.24	BLK	0.250

NELI	Near Lithology Unlimited	38.24	BLK	0.250
FAB	Far Above	38.58	BLK	0.250
FHI	Far Cesium High	38.58	BLK	0.250
FLO	Far Cesium Low	38.58	BLK	0.250
FVA	Far Valley	38.58	BLK	0.250
FBA	Far Barite	38.58	BLK	0.250
FDE	Far Density	38.58	BLK	0.250
FPK	Far Peak	38.58	BLK	0.250
FLI	Far Lithology	38.58	BLK	0.250
PTMP	Pad Temperature	38.42	BLK	0.920
NHV	Near Detector High Voltage	37.81	NO	
FHV	Far Detector High Voltage	37.81	NO	
ITMP	Instrument Temperature	37.81	NO	
DDHV	Detector High Voltage	37.81	NO	
Microlog Pad				
TPUL	Tension Pull	38.60	NO	
MINV	Microlog Lateral	38.60	BLK	0.750
MNOR	Microlog Normal	38.60	BLK	0.750
Data: SMU_319I0001 SP-GTET-DSN-SDL-BSAT-ACRT-CHIIDLE			Date: 28-Apr-12 19:37:35	

COMPANY	OXY USA INC		
WELL	SMU #319		
FIELD	SEQUOYAH MORROW UNIT		
COUNTY	FINNEY	STATE	KANSAS
HALLIBURTON		BOREHOLE COMPENSATED SONIC ARRAY LOG	