


15-179-05584-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

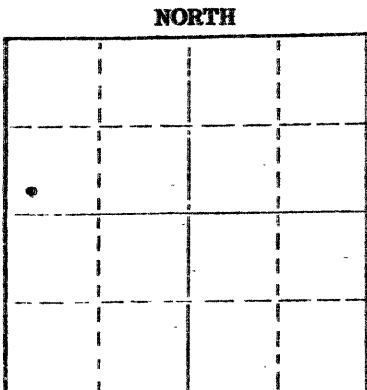

Locate well correctly on above Section Plat

Sheridan County. Sec. 12 Twp. 6 Rge. (E) 27 (W)
Location as "NE/CNW/SW" or footage from lines SW SW NW
Lease Owner Continental Oil Company
Lease Name Adell LKC Unit Well No. 205
Office Address 3535 NW 58th, Oklahoma City, Oklahoma 73112
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 19
Application for plugging filed October 21 19 74
Application for plugging approved October 22 19 74
Plugging commenced November 20 19 74
Plugging completed December 2 19 74
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols
Producing formation Depth to top Bottom Total Depth of Well 3870 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
			244'	10 3/4"	244'	none
			3869'	7"	3869'	997.01

RECEIVED
STATE CORPORATION COMMISSION
DEC 10 1974
CONSERVATION DIVISION
Wichita, Kansas

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded back to 3590' and dumped 6 sacks of cement.
Sun Cementing Company plugged well pumping in 5 sacks of hulls, 18 sacks of gel and 135 cu. feet of 50/50 poz. cement; 21 sacks of gel and 40 cu. feet of 50/50 poz. cement; 6 sacks of gel and 10 cu. feet of 50/50 poz. cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor
Address

STATE OF KANSAS COUNTY OF BARTON ss.
Evelyn Roth (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Evelyn Roth
Ellinwood, Kansas

SUBSCRIBED AND SWORN TO before me this 9th day of December 19 74

My commission expires
JENNY KASSELMAN
NOTARY PUBLIC
BARTON COUNTY, KANSAS
MY COMM. EXP. JULY 16, 1978

Jenny Kasselmann
Notary Public.

13-179-05584-00-00

WELL LOG

CONTINENTAL OIL COMPANY

Adell Low KC Unit #205

J. E. Leonard #5

Described as J. E. Leonard Well No.5
located in Section 12, Township 6 S.
Range 27 West, Sheridan County, Kansas.

FORMATION	FROM	TO
Surface and sand	0	40
Sand	40	272
Set: 240' of 10 3/4 S. W. casing		
Sand & Shale	272	775
Sand, shale & Shells	775	1045
Shale and shells, sand	1045	1288
Sand & Shale	1288	1614
Shale & Shells	1614	1914
Shale & Shells	1914	2196
Anhydrite	2196	2237
Shale & Shells	2237	2288
Lime & Shale	2288	2408
Lime & Shale	2408	2700
Lime & Iron	2700	2718
Shale & Lime	2718	2808
Lime	2808	2959
Shale & Lime	2959	3016
Lime	3016	3025
Shale & Lime	3025	3114
Shale	3114	3470
Lime	3470	3495
Shale & Lime	3495	3598
Lime	3598	3862
Lime & Shale	3862	3870
Total depth	3870'	



RECEIVED
STATE CORPORATION COMMISSION

OCT 29 1974

CONSERVATION DIVISION
Wichita, Kansas



246